

App Operation Guide

We recommend using app because it's easier to set and more convenient for future use.

1. Create an Account


Android: Search **Smart Life** on Google Play.

iOS: Search **Smart Life** on the App store.

OR: Scan the QR code below to download **Smart Life** App.

Sign up and log into your account with an email address.

Smart Life App

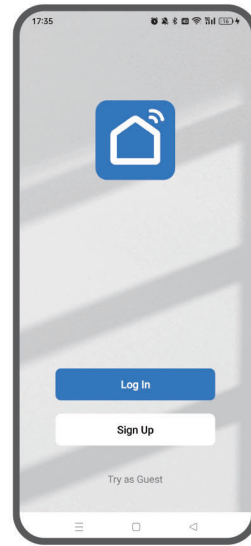


2. Pair Your Phone with the Smart Lock

Step 1: Press any key to wake up the lock, you will hear a voice prompt "Please add Bluetooth Administrator". If not, please reset the lock. Tap **Add Device**.

Step 2: Add the lock discovered.

Step 3: Name the lock and Tap **Done**.

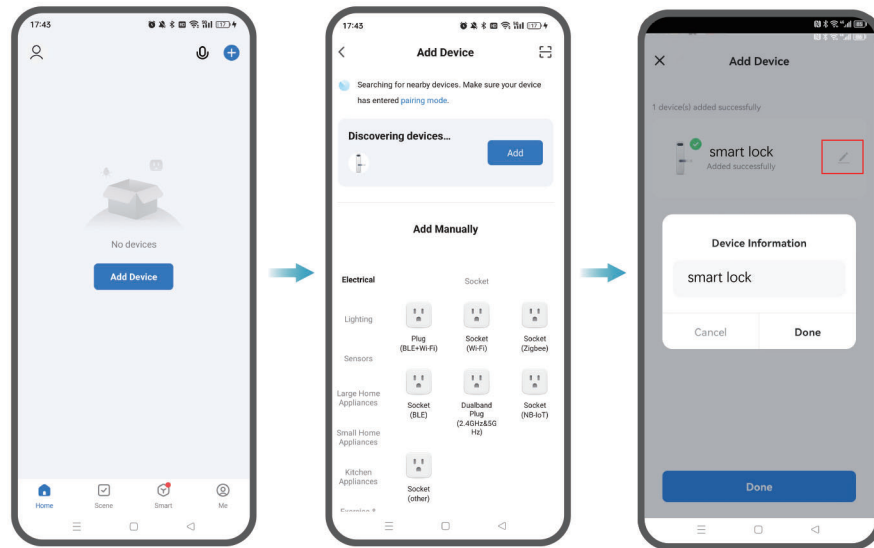


3. Change the Admin Passcode



Once the lock and your phone are paired, the default admin passcode 123456 is invalid.

Tap **Member Management** → **Admin** → **Add Code** → Enter a 6-9 digit password and set a code name.

Note: The first code you set is the admin passcode, it can be changed or deleted.

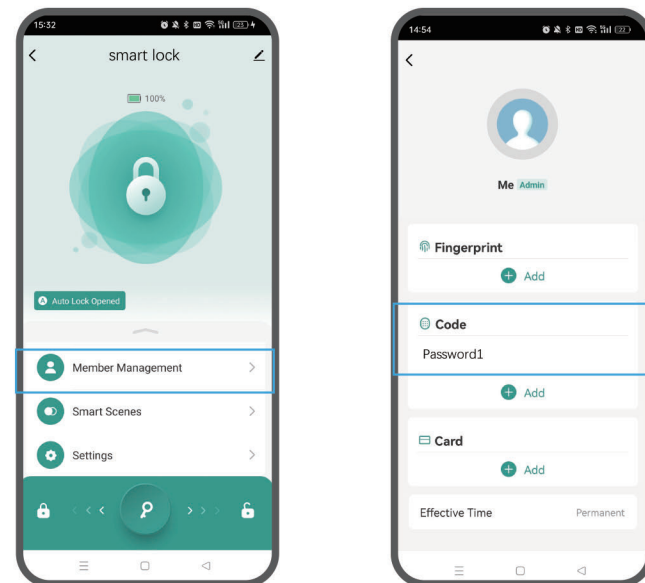

4. APP Homepage Overview

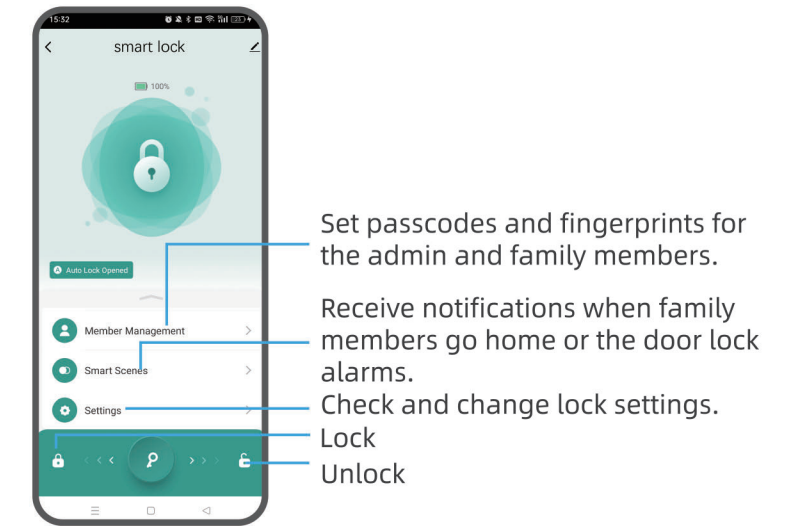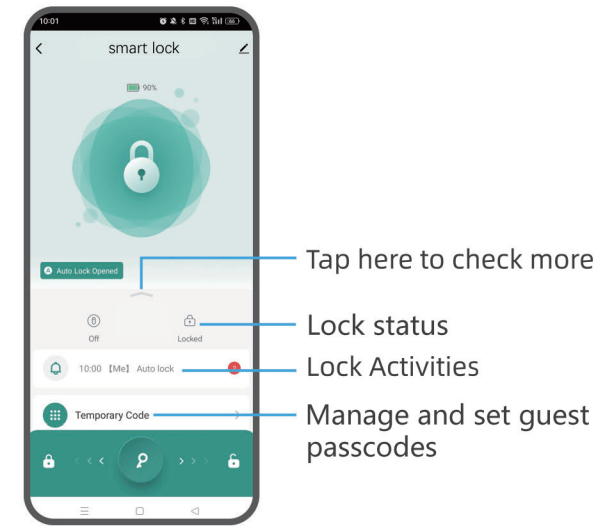


5. Temporary Code

Time-Limited	Use it at least once within 24 hours after it takes effect. Otherwise, it becomes invalid.
One-Time	Validity period: 6 hours. It can be used only once before it expires.
Clearing	Choose to clear one/all used time-limited codes. Validity period: 24 hours. Once entered on the lock, one/all used time-limited codes are cleared, the lock emits a short beep.
Custom	To set/generate a custom code, your phone must be within 5 meters of the lock if not paired with the gateway.

Note: Please remember the temporary codes you set, as temporary passwords cannot be checked once they have been set.

6. Set Fingerprints (up to 50)

Tap **Member Management** → **Admin** → **Add Fingerprint** → Follow the on-screen instructions to add a fingerprint.

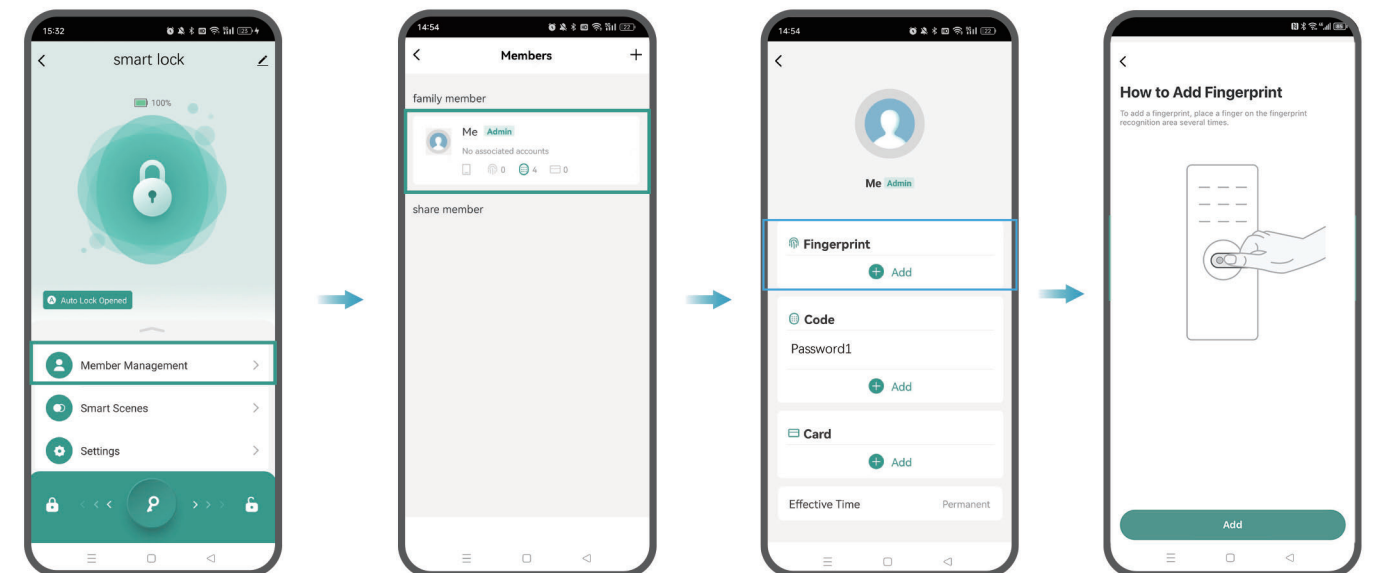


For the lock to better recognize your fingerprints:

1. Make sure the fingerprint sensor and your finger are clean and dry.
2. Place your finger on the fingerprint sensor. Move your finger around to capture different parts of it.

7. Set Card

Tap **Member**→**Admin**→**Add Card**→Follow the on-screen instructions to add a fingerprint.

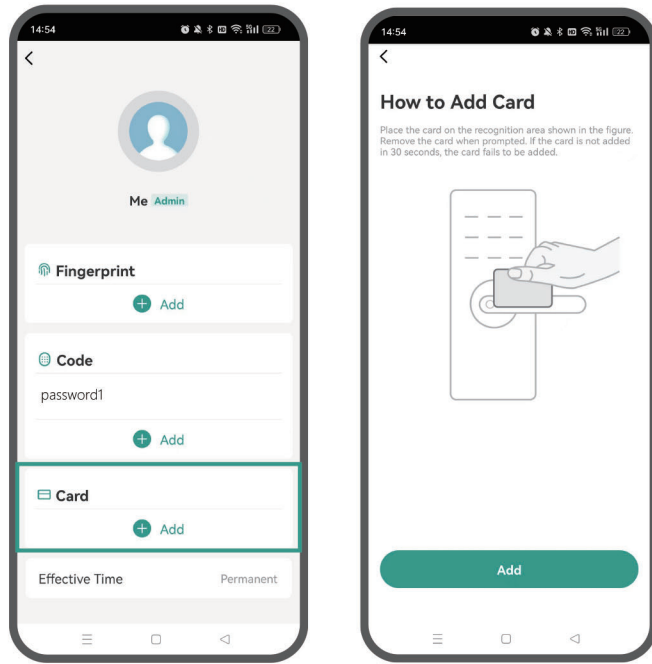


8. Auto Lock

Settings→**Auto Lock Delay**


(Change the interval time as needed)

Settings→**Remote Unlock**

Note: By default,the lock is set to automatically lock after 5seconds.

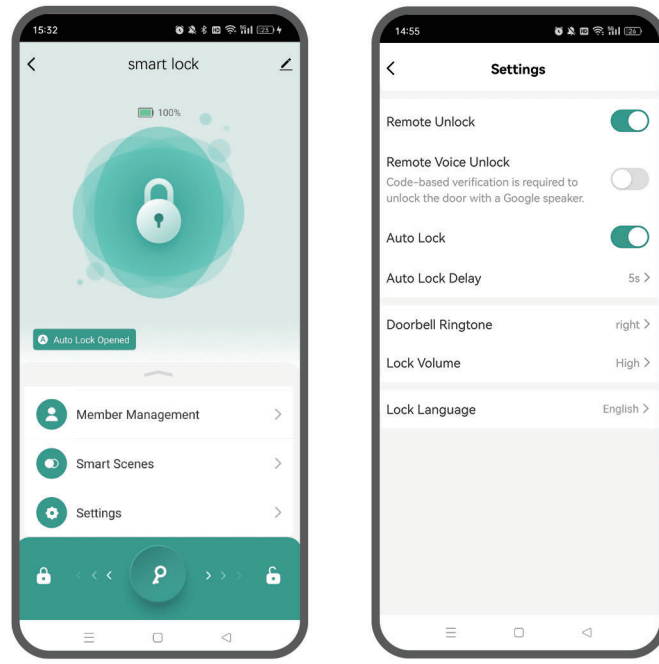

Or add it directly on this page

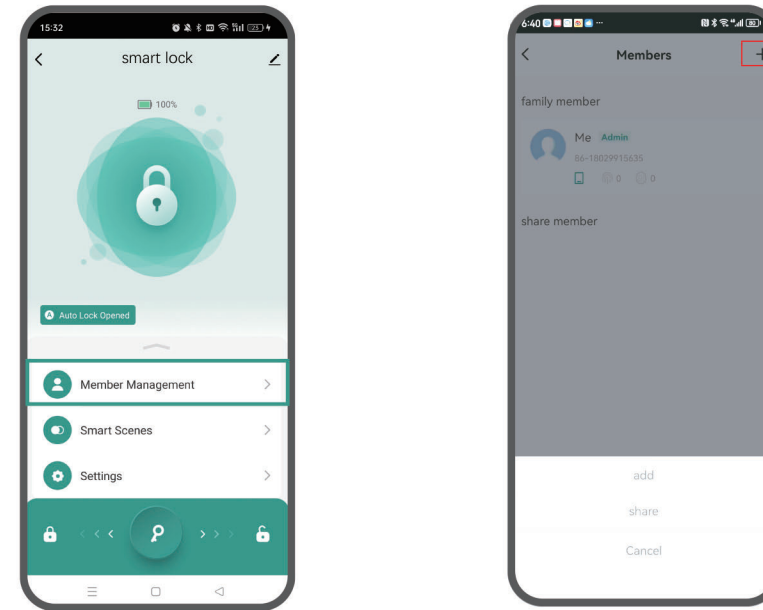

9. Add Member


1. The home owner taps **Me**→**Home Management**→**Your Home**→ **Add Member**→**Tap Copy/Messages** →Send the invitation code to the recipient.

2. The recipient taps **Me**→**Home Management**→**Join a Home** and enter the invitation code.

Once the recipient be a home member, you can change the family role of the recipient.

Common member: Use device, use smart setting.

Administrator: Manage device and room, manage smart setting, manage member.

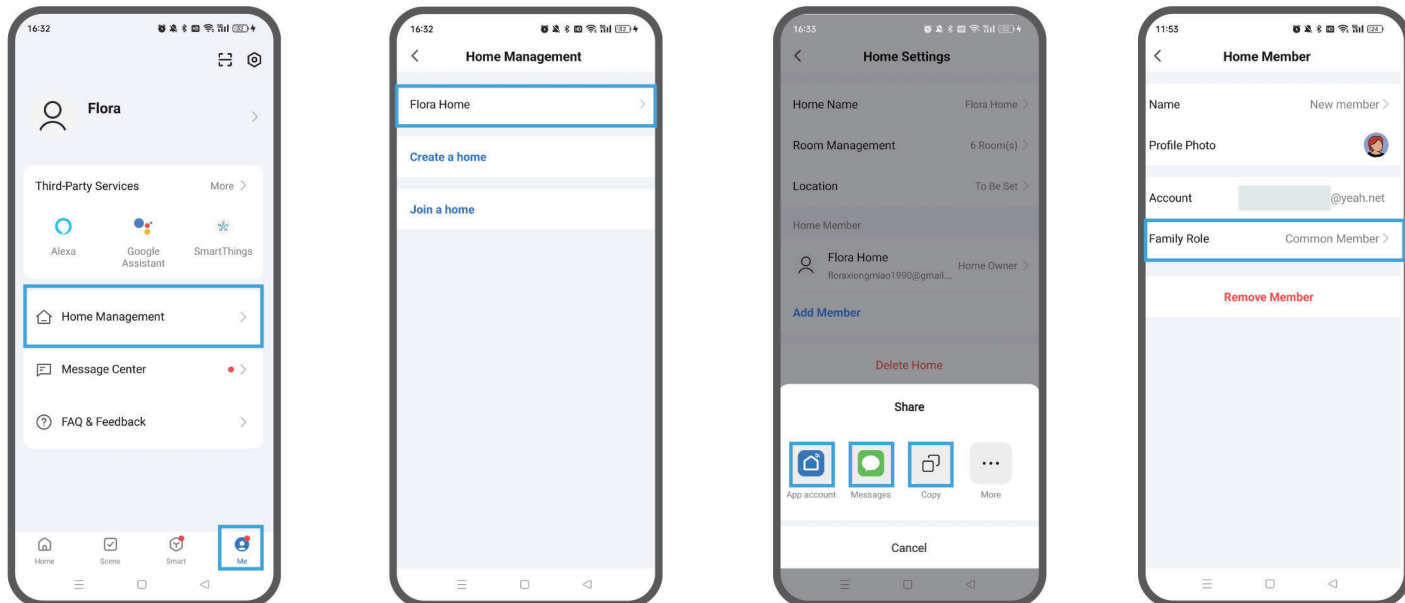

FQA

The solution for details of FQA, please refer to the InstructionsGuide. If necessary, please connect with our customer service.

Question	Answer
How to add fingerprints	Please go to fingerprints in the app, tap "+ Add" button and follow the voice instructions to add the fingerprint on the lock accordingly.
Can the lock sound be muted?	Stand nearby the lock, turn on your phone's Bluetooth and open the App,tap Settings->Lock Volume->Mute
How do I reset admin passcode on the APP?	Check the part (3.Change the admin passcode)
How do I set up auto lock?	Check the part (8.Auto lock)
Fingerprint recognition is not working.	Press in seconds will be better for fingerprint recognition.
How to get a Wi-Fi gateway?	You can purchase an additional gateway, and also to contact our customer service.
Does it support the Alexa function?	Yes, it supports Alexa APP but it needs matching with Wi-Fi Gateway.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.