

2. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the white breathing light flashes, and the gamepad enters the pairing state, then release the button.

128g铜版纸 折后尺寸:105*140mm 双面单色印刷 风琴折


735mm

105mm

140mm

PS4 gamepad

Operation Manual

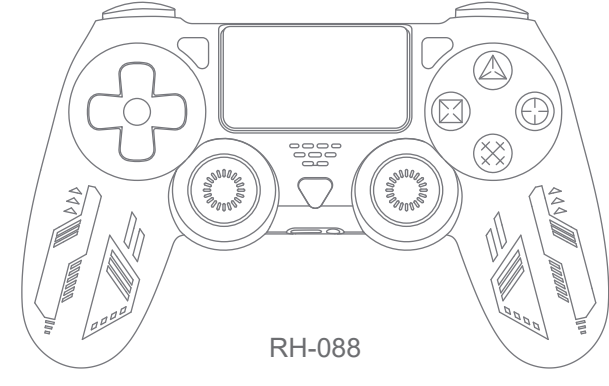

RH-088

Please read the manual carefully before use, and use it strictly according to the requirements of the manual. After reading, please keep it properly for future reference.

1. Product Introduction

This product perfectly supports all versions of PS4 consoles and console games, supports 40931 and above systems, supports Android, supports Apple computers, supports PC, and supports PS3 consoles. With touch functions, we can control, audio headset, music, RGB colored lights, connection method: wired and host pairing, Bluetooth wireless connection.

2. Product Parameters


Product Name: PS4 gamepad Rated voltage: DC 3V Rated current: 1000mA Working temperature: 0℃~40℃Storage temperature: -20℃~60℃

Transmit power: ≤20dBm(dBm) Battery capacity: 1000mAh Use distance: 10 meters Product size: 105*140*35mm Product net weight: 215g

3. Packing list







PS4 Bluetooth Controller X1 Operation manual X1 Type-C cable X1

4. Gamepad Concept



5. Function Introduction

On/Off

1. Power on: Short press the HOME button, the gamepad can be turned on.
2. Shutdown: Press and hold the HOME button for 10 seconds, the gamepad can be turned off, or the gamepad can be turned off by logging out of the host side.
Note: When pairing a new gamepad, the gamepad's indicator state is off.

Charging Tips

1. When the battery power of the gamepad is low, the host will display the battery level as 0 and flashing at this time when charging through the USB cable, the host will display the charging progress bar, and three grids will be displayed when it is fully charged.
2. When the gamepad is charged to the off state, the indicator light will display an orange breathing light, and it will be displayed in a cycle. When it is fully charged, the indicator light will shut off.

Sleep Function

1. When the gamepad is turned on and connected to the host, if the connection is not successful for more than 1 minute, the gamepad will automatically shut down.
2. When the gamepad is on, you can set the shutdown time of the gamepad through the host, usually 10 minutes / 30 minutes / 60 minutes / do not turn off the power.

Gamepad Vibration

The gamepad has corresponding vibration prompts according to the needs of different game scenarios.
Such as: "Call of Duty" series / "Battlefield" series shooting.

Touch Function

The gamepad implements corresponding touch functions according to the needs of different game scenarios.
For example, "Driving Club" moves the steering wheel, "Gravity Fantasy Different World 1/2" moves the perspective.

Six-axis function

According to the needs of different game scenarios, the gamepad realizes the corresponding analog function by pressing the L2/R2 key.
Such as: "Need for Speed" series / "GT racing" series of accelerator and brake strength.

Analog Function

The gamepad implements the corresponding speaker function according to the needs of different game scenarios.
Such as: "GTA5" when making a phone call, "Call of Duty 13" when the skill wheel is enabled.

6. Gamepad Connection

Android mobile platform (system version 5.0 and above)

1. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the gamepad enters the pairing state, and the white breathing light flashes.
2. Open the Android device and search for the Bluetooth name "Wireless Controller", click connect to connect the controller, the breathing light will show white.
3. If you need to close the gamepad, you can press and hold the HOME button for 10 seconds or turn off the Bluetooth of the device to close the gamepad.

4. If you need to reconnect to the last paired device without re-pairing, just turn on the Bluetooth of the device, short press the HOME button on the gamepad for 1 second, the indicator will flash, and the indicator will be on after connecting.
The game part of the platform that supports the gamepad is as follows:

1. Genshin Impact 6. Regenerate cells

2. Minecrafter 7. Soul Knight


3. Battle Arena 8. Famine Beach

4. Chicken Simulator 9. Asphalt 9

5. Hero of the Sea 10. Devil May Cry Peak Battle

System version iOS 13.0 or above

1. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the gamepad enters the pairing state, and the white breathing light flashes.
2. Open the settings of the iOS device, click the "Bluetooth" option, turn on the Bluetooth function, find "DUALSHOCK 4 Wireless Controller", click connect to connect, and the breathing light will display orange after connecting to the device.
3. If you need to close the gamepad, you can press and hold the HOME button for 10 seconds or turn off the Bluetooth of the device to close the gamepad.





4. If you need to reconnect to the last paired device without re-pairing, just turn on the Bluetooth of the device, short press the HOME button on the gamepad for 1 second, the indicator will flash, and the indicator will be on after connecting.
The game part of the platform that supports the gamepad is as follows:

1. Genshin Impact 6. Lost Castle

2. Minecrafter 7. Dungeon Hunter 5

3. Dark Wilderness 2 8. Asphalt 9

4. Soul Knight 9. Devil May Cry Summit

5. Light - Encounter 10. Slam Dunk

MAC Apple Computer Platform

1. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the gamepad enters the pairing state, and the white breathing light flashes.
2. Enter "System Preferences", select "Bluetooth", turn on the Bluetooth function, find "DUALSHOCK 4 Wireless Controller", click connect to connect, the breathing light will turn orange after connecting to the device.

5. If you need to close the gamepad, you can press and hold the HOME button for 10 seconds or turn off the Bluetooth of the device to close the gamepad.
4. If you need to reconnect to the last paired device, you don't need to re-pair, just turn on the device's Bluetooth, short press the HOME button on the gamepad for 1 second, the indicator will flash, and the indicator will be on after connecting.
5. When the gamepad is turned off, plug it into the USB and connect it to the Apple computer by wire.
The game part of the platform that supports the gamepad is as follows:

1. Minecrafter 5. Original Sin 2


2. Tomb Raider 9 6. Hollow Knight

3. Dark Wilderness 2 7. Cuphead

4. Asphalt 9 8. Dead Cell

PC computer platform


1. Wired connection
1.1 Use the USB cable to connect the gamepad to the computer, and the computer will automatically install the driver. After the driver is installed, the connection is successful. The indicator light will display an orange breathing light, and it will be displayed cyclically, and the indicator light will turn off when it is fully charged.
2. PC display name: Wireless Controller
2.1 Wireless connection
Bluetooth connection
1.1 Laptop: Press the key combination "Fn+F3" to turn on the Bluetooth function and let the computer search for Bluetooth devices.
1.2 PC computer: Please install and insert the USB wireless Bluetooth receiver on the PC side first. After plugging into the host, the receiver will automatically install the driver.



2. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the white breathing light flashes, and the gamepad enters the pairing state, then release the button.



3. Click "Start" in the lower left corner of the computer, select "Devices and Printers", click "Add Device" and search for Bluetooth devices.
4. The device name "Wireless Controller" will appear in the Bluetooth pairing list, click the device, and select "Next".
5. After selecting "Next", the computer will be paired with the controller automatically, and the driver will be installed automatically.
6. After the driver is installed, the breathing light will display white light, indicating that it has been connected to the computer via Bluetooth.
USB Dongle connection
Plug the USB Dongle into the computer, press and hold the pairing button for 2 seconds, and the gamepad enters pairing mode.

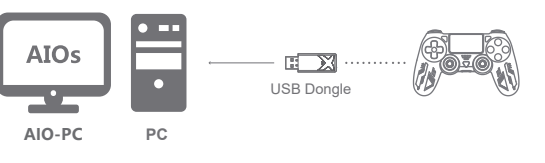

3. Connect the USB Dongle to the PC device, press and hold the pairing button for 3 seconds, the USB Dongle enters the pairing mode, and the blue light flashes quickly.
2. When the gamepad is off, first press and hold the SHARE button, then press the HOME button combination (SHARE+HOME), press and hold for 3 seconds, the white breathing light flashes, and the gamepad enters the pairing state, then release the button.
3. The gamepad is automatically connected to the computer. After the connection is successful, the default X input mode is used, and the channel light shows blue.
4. Press and hold the "Share" key combination for 3 seconds to automatically switch to D-input mode, the display name is "GamePad for PC", and the channel light is green.
5. After the gamepad is turned off, short press the HOME button to connect to the USB Dongle for operation without re-pairing.

PS4 Platform

1. When the gamepad has not been connected with the current PS4 host, and needs to be paired with the current host, first you need to use a USB cable for wired communication with the host. During the communication process, the gamepad and the host are automatically paired, and the game is played.
Press the HOME button, and the gamepad can be connected by Bluetooth for wireless communication. PS4 can only support Bluetooth connection, and a maximum of 4 gamepads can be connected at the same time.
2. When the gamepad is turned off, use the USB cable to connect with the host. After about 2 seconds, the gamepad is paired with the host successfully.
3. After the gamepad is connected to the host, the gamepad light will display white light, and the gamepad and the host only need to be paired once, and the subsequent connection can be connected to the host by pressing the HOME button to power on.
5. When the host is turned off, press the HOME button of the gamepad to wake up the host and connect it back.

PS3 Platform

1. The gamepad is connected to the PS3 host with a USB cable, the host will automatically recognize the gamepad, and the gamepad indicator light will display an orange breathing light. If the wired connection is successful, and it will be displayed in a loop.
2. The function of the PS3 platform is the same as the original gamepad, no vibration/be six-axis touch function, and the HOME button has no function.

7. Wired upgrade

When the gamepad is off, first press and hold the "Fn+ESC" key combination, and then use the USB cable to insert the PC, the gamepad enters the wired upgrade mode, open the upgrade tool, then select "Wireless", and click Update to upgrade. The upgrade platform supports Windows/Android/MacOS.


8. Reset button

When there is an abnormality in the gamepad, such as disordered keys, crash, failure to connect, etc., you can try to restart the gamepad.
Reset method:
Insert a slender object into the Reset hole on the back of the gamepad, and press the Reset button to reset the gamepad state.


Precautions

Please do not store this product in a humid or high-temperature place;
Do not knock, beat, scratch, or attempt to disassemble the product, to avoid unnecessary damage to the product.
This product has a built-in battery, do not drop the Gamepad into the fire, and do not throw it away with garbage.
Avoid water or other liquids entering the Gamepad, which may affect the function of the Gamepad.
Do not place heavy objects on this product.
Do not touch the port with your hands, and do not put foreign objects into the port.
Non-professionals should not disassemble this product, otherwise it will not be covered by the after-sale warranty.
Children should use this product under the supervision of an adult.

Troubleshooting

1. Why is the controller not recognized on smart Android TV?
2. Confirm whether the smart Android TV USB interface is working properly.
3. The power supply of the smart Android TV is insufficient, resulting in unstable USB voltage.
3. Try to unplug the smart Android TV USB port and try another USB port.
4. Why can't the controller be used in the game?
1. The game itself does not support controller peripherals.
2. You need to set the Gamepad in the game before you can use it.
4. Why can't the Gamepad vibrate?
1. The game itself does not support vibration.
2. The vibration function is not turned on in the game settings.
5. Other
1. When it cannot be turned on, the built-in battery may be dead. Please use the USB cable to charge the Gamepad before turning it on.
2. When the Gamepad crashes or drops unexpectedly, please keep the distance from the device as far as possible or reconnect.

Warranty Card

Product name: Purchase date:

Dealer: Username:

Contact number: E-mail:

User address:

Warranty record

Username	Fault description	Maintenance date	Signature

Certificate

Inspector:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.