


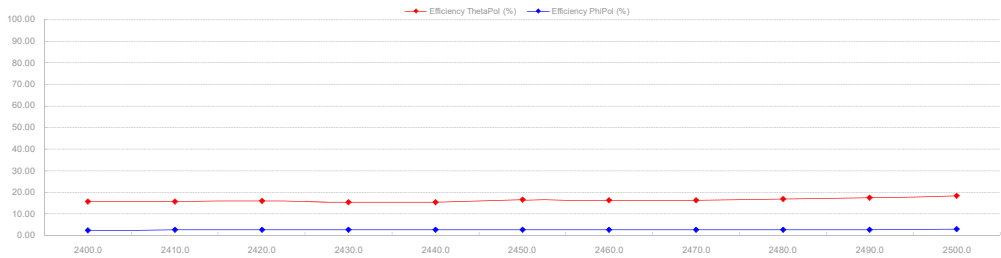


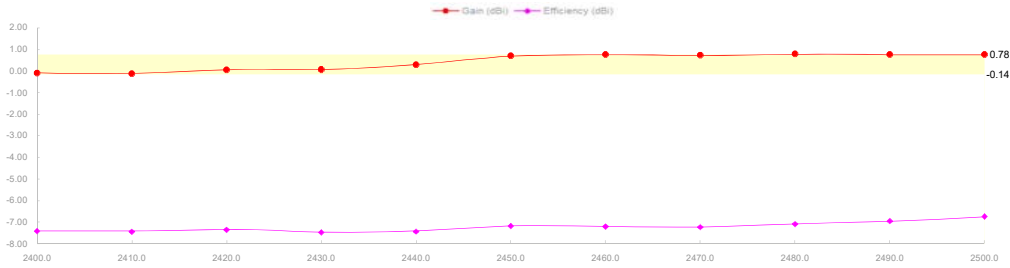



Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-7.41	-7.44	-7.35	-7.47	-7.43	-7.18	-7.21	-7.23	-7.09	-6.96	-6.75
Gain (dBi)	-0.11	-0.14	0.04	0.06	0.28	0.69	0.76	0.72	0.78	0.76	0.76
Efficiency (%)	18.14	18.05	18.41	17.89	18.06	19.14	19.03	18.93	19.56	20.12	21.13
Directivity (dB)	7.30	7.30	7.39	7.53	7.72	7.87	7.97	7.95	7.86	7.72	7.51
Peak Gain Position (Theta)	143.00	143.00	143.00	144.00	144.00	144.00	144.00	145.00	145.00	146.00	146.00
Peak Gain Position (Phi)	28.00	29.00	31.00	31.00	31.00	31.00	31.00	30.00	30.00	28.00	28.00
Efficiency ThetaPol (%)	15.71	15.57	15.83	15.34	15.48	16.43	16.37	16.30	16.89	17.43	18.37
Efficiency PhiPol (%)	2.44	2.47	2.57	2.56	2.58	2.70	2.66	2.62	2.67	2.69	2.77
Upper Hem. Efficiency (%)	4.24	4.23	4.24	4.06	4.02	4.20	4.24	4.37	4.74	5.16	5.69
Lower Hem. Efficiency (%)	13.90	13.81	14.16	13.83	14.05	14.93	14.79	14.55	14.82	14.96	15.44
T90(H)角度	2.65	2.54	2.56	2.76	2.81	2.90	3.15	3.55	3.98	4.23	4.20
Gain 15deg (dBi)											
E1(XZ)波瓣宽度	26.00	27.00	26.00	26.00	26.00	26.00	25.00	25.00	24.00	24.00	24.00
E1(XZ)前后比	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
E2(YZ)波瓣宽度	47.00	46.00	45.00	45.00	45.00	45.00	44.00	44.00	44.00	45.00	45.00
E2(YZ)前后比	1.04	0.94	0.75	0.56	0.37	0.20	0.08	0.00	0.00	0.00	0.00
最大增益处轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
仰角10度处轴比(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Hc(XY)波瓣宽度	360.00	360.00	360.00	360.00	360.00	354.00	291.00	210.00	212.00	212.00	265.00
Hc(XY)前后比	0.92	0.86	0.84	0.89	0.89	0.88	1.20	1.44	1.46	1.23	0.91
Empty											

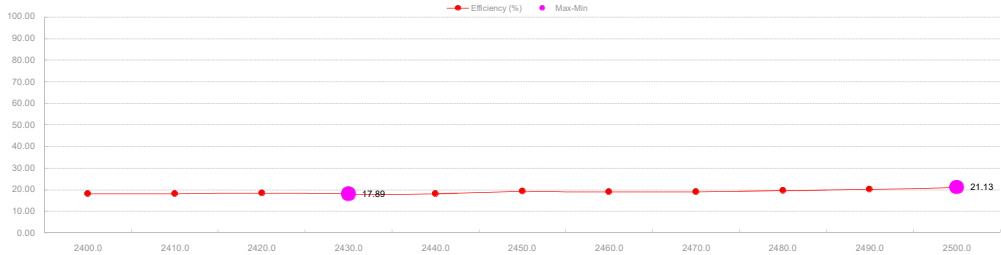


2400.0MHz H+V, Eff: 18.1%




Back View

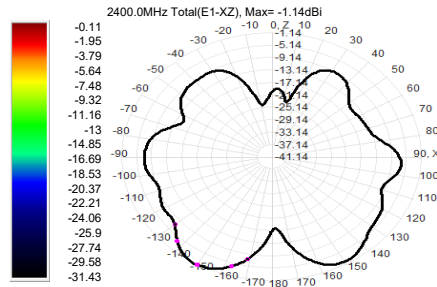


2400.0MHz Total(E2-YZ), Max=-4.10dBi





Total(H-XY), Max=-5.76dBi, CirD=2.65

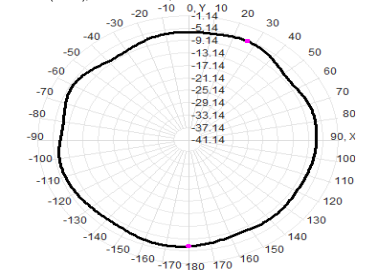


2410.0MHz H+V, Eff: 18.0%




Back View

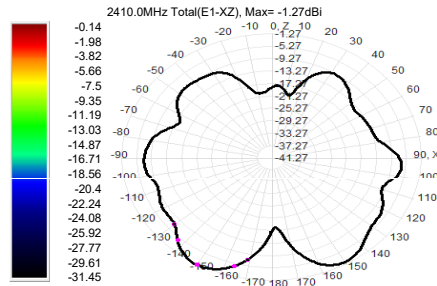


2410.0MHz Total(E2-YZ), Max=-3.93dBi





Total(H-XY), Max=-5.99dBi, CirD=2.54

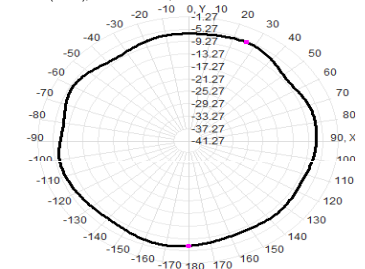


2420.0MHz H+V, Eff: 18.4%




Back View

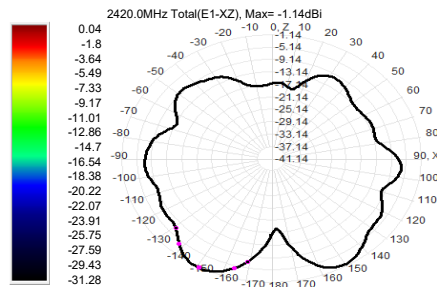


2420.0MHz Total(E2-YZ), Max=-3.55dBi





Total(H-XY), Max=-6.21dBi, CirD=2.56

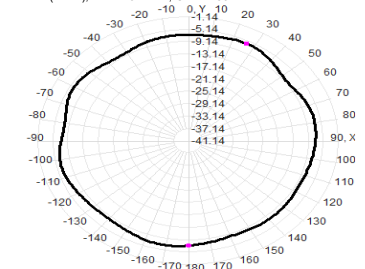


2430.0MHz H+V, Eff: 17.9%



Back View

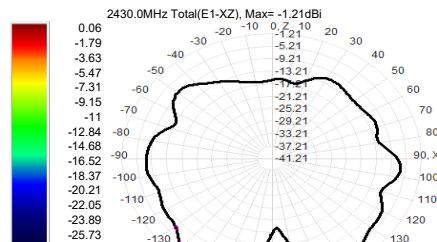

2430.0MHz Total(E2-YZ), Max=-3.37dBi



Total(H-XY), Max=-6.63dBi, CirD=2.76

