

RGB Light Show Wireless Speaker



User Manual

Model:V40

FEATURES

- IPX7 water resistance.
- Dual passive radiators provide superior deep bass.
- True Wireless Stereo (TWS) for stereo surround sound.
- Built-in rechargeable lithium battery supports up to 18 hours of play time on a single charge.
- Rhythmic RGB Light show.
- Plug and Play music easily from a TF card.


PACKAGE CONTENTS

- 1 x V40 Bluetooth speaker
- 1 x 3.5mm audio cable
- 1 x Type-C charging cable
- 1 x User manual
- 1 x Lanyard

SPECIFICATIONS

Model	V40
Bluetooth Version	5.0
Bluetooth profile	A2DP V 1.3, AVRCP V1.4, HFP V1.6
Bluetooth transmission	Up to 20m/66ft (open area)
Water resistance	IPX7
Output power	24 W
Power supply	DC5V/ 1.0 A
Frequency range	80HZ-18000HZ
Battery	4000mAh
Playtime	Up to 18 hours (on a 30% volume)
Talk time	Up to 20 hours (on a 50% volume)
Standby	About 24 months
Charging time	5 hours
Functions	Hands-free , Aux-in, TF/Micro SD card, Bluetooth
Dimension	195*70*70mm

BUTTON CONFIGURATION

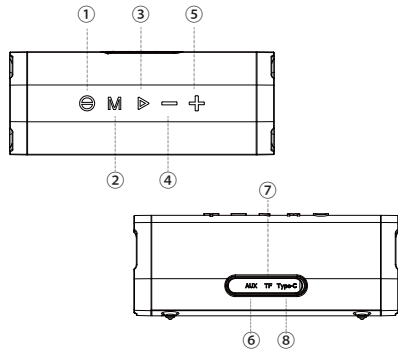

- 1.Power On/Off, TWS,
- 2.Mode Switch, Light Mode , Reset
- 3.Play/Pause button,Bluetooth disconnected
- 4.Previous track, Volume down
- 5.Next track, Volume Up
- 6.Aux-in port;
- 7.TF/Micro SD card slot
- 8.Charging interface

Key	Operation	Functions
⏻	Long press 2S	Power on/off
	Double press quickly	TWS pairing TWS Disconnect
M	Short press	Mode Switch (TF/Aux/BT)
	Double press quickly	RGB Light Mode
	Long Press 8 s	Reset
⏮	Short Press	Volume down
	Long Press	Choose previous track
▶	Short Press	Play/Pause (in music playing state) Answer/hang up the call
	Long Press 3s	Disconnect bluetooth
	Double press quickly	Redial the last phone call
⏭	Short Press	Volume up
	Long Press	Choose next track

HOW TO USE

1. Bluetooth Mode

- Turn on the " V40 " speaker and automatically enter the Bluetooth mode(The blue light is flashing, waiting for pairing).
- Turn on the Bluetooth of your phone.Find the "V40" in the available devices.
- Click on " V40 " for Bluetooth pairing

2. TWS Mode

What is TWS?

TWS is true wireless stereo which means two Bluetooth speakers are able to be paired together to play music simultaneously to provide 3D stereo surround sound.

How to operate TWS in Bluetooth mode?

- Turn on the two speakers (Firstly disconnect the speaker from the other Bluetooth device).
- Take one of the speakers and double press the " ⏻ " button,you will hear the prompt tone, blue indicator will quick flash and enter the TWS pairing mode; The blue indicator will be off for slave speaker when the connection is successful.
- Turn on the Bluetooth of the device (mobile phone) . Find the " V40 " in the available devices and click on " V40 " for Bluetooth pairing.
- In TWS mode, only the master speaker (left channel speaker) has hands-free function, while the right channel speaker is silent.

3.TF Card Mode

Insert the TF card (User-supplied) into the speaker, the Bluetooth speaker automatically enter TF card mode, automatically play the audio in the card.
Note: TF card supports play WAV/FLAC/APE/MP3 format, with capacity smaller than or equal to 64 GB.

4.AUX-in Mode

Simply connect the speaker with your non-Bluetooth device via the 3.5 mm audio jack cable.

Note 1: After plugging in an audio cable, the speaker will automatically switch to Aux-in Mode

Note 2: The USB power supply of the most computers does not meet the standards of speakers. Please do not allow the computer to charge the speakers when the speaker is working in Aux-in mode.

5.RGB Ligth Mode:

- The default light mode is rhythmic after turn on the speaker.
- Quick double press the "M" key switch to breathing mode.
- Or double press again "M" key can turn off the RGB light

6. Auto Power Off

The speaker will power off automatically after 20 minutes if it does not pair with any device through Bluetooth or does not play any sound after pairing. When in low battery,the speaker will power off automatically as well.

7. Charging

Red indicator on	Charging
Red indicator off	Charging completion

Care & Maintenance

Do not use any form of detergents or cleaning material to clean the product as any type of chemical may make this device unusable. Do not disassemble this product. It contains no user serviceable parts. Do not drop or jump on it and treat it with care for the best performance. Keep the product in a dry location. Dust, dirt & moisture from humidity can accumulate on the body of the product if kept at an unfriendly place. Do not dispose this product in fire or batteries may explode or leak.

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.