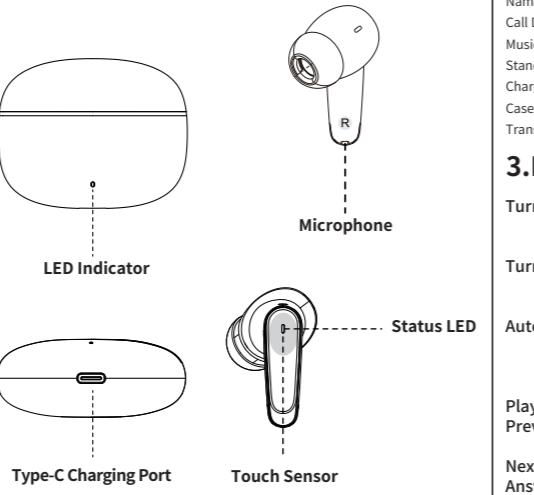
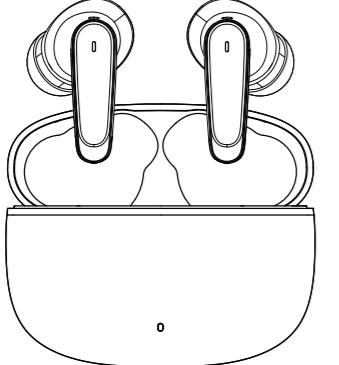
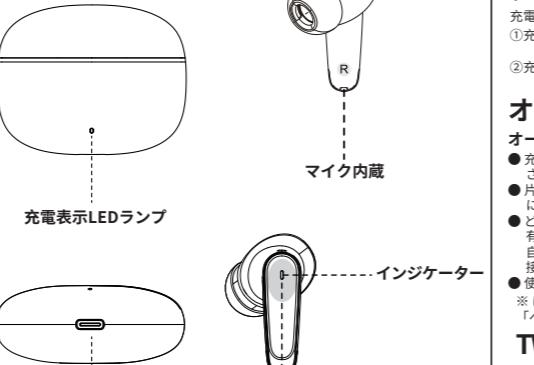
 <p>TWS HEADSET ACA-i22</p>	<p>1.Appearance</p> 	<p>2.Parameters</p> <p>Model: ACA-i22 Bluetooth Version: V5.2 Name: ACA-i22 Call Duration: About 5.5H Standby Time: About 126 Day Case Can Recharge Earbuds: 3 Times Transmission Range: >10 m</p> <p>Control Type: Touch Sensor Charging Port: USB Type-C Battery: 40mAh/3.7V; 380mAh/3.7V Voltage/Current: DC 5V, 80mA; DC 5V, 300mA Case Dimension: About 60.7x48x25mm Net Weight: About 40g Charge Time: About 40 Minutes Water Resistant Level: IPX4 Supported Profile: a2dp avctp avdtp avrcp hfp</p> <p>3.Instructions</p> <p>Turn On: ① Open case for auto turn on. ② If case not nearby, press & hold MFB button for 3s, white LED flash 1s, you will hear voice prompt "power on".</p> <p>Turn Off: Put earbuds back to case, close cover. (Earbud will automatically turn off after 5 minutes if not connecting nor putting back to case, press MFB button 3s to turn it on.)</p> <p>Auto Paring: ① Open charging case cover. ② Find and click ACA-i22 on the Bluetooth list of your device for one-step pairing, then you will hear "connected". ③ Next time, simply open charging case cover for auto connection to the last paired device.</p> <p>Play/Pause: Double click MFB button (left or right) when listening to music.</p> <p>Previous Track: Press and hold Left earbud 1.5s (No previous track if only use 1 earbud).</p> <p>Next Track: Press and hold Right Earbud 1.5s.</p> <p>Answer Call: Double click (left or right) MFB button.</p> <p>Reject Call: Press and hold MFB button (left or right) for about 3s.</p> <p>Hang Up: Double click (left or right) MFB button.</p> <p>Game Mode: Continuously click (left or right) earbud 4 times.</p> <p>Voice Assistant: Triple click FBM button 3 times (left or right earbud)</p>	<p>4.Indicator</p> <p>Charge Earbud: White light on for 4s after you put earbuds into case for charging. Lights out when the earbuds are fully charged. Red light flashes every 4s if case at low power, then please charge the case ASAP.</p> <p>Charge Case: White flashes Red light while charging. Red light stays on when fully charged. After you pull off the charging cable, White light on for 4s then out.</p> <p>Paring Mode: Right earbud flashes white light quickly every 0.3s, left earbud flashes white light every 5s, lights out when earbuds are successfully connected to device.</p> <p>Low Power: Red light flashes every 8s, and there will be voice prompt "battery low" every 5 minutes.</p> <p>Warm Tip: Please fully charge the headset for first time use to prolong the lifespan.</p> <p>Reset: First click Forget This Device on mobile, then press and hold FBM button for both earbuds 5s till white light turns to red. Red light out and white light flashes, reset successful and ready for pairing again. Note: Left and right earbuds are locked as a pair, won't pair with earbud from another headset.</p>	<p>please let it dry naturally before use.</p> <p>2. If the consumer violates the product manual and uses it improperly, the personal and property damage caused by it will bear all the consequences, and the company will not bear any legal responsibility.</p> <p>3. Non-professionals are strictly prohibited from disassembling this product.</p> <p>4. Avoid using electrical appliances or loads that exceed the output current of this product (the circuit will be protected, no output).</p> <p>5. Avoid strong physical effects, including knocking, throwing, trampling, squeezing, etc.</p>	<p>7.Contact US</p> <p>Have problem about this order? Let us know!</p> <p>Login Amazon Account > Your Orders > Problem with Order > Choose the specific issue > Contact seller</p> <p>Anmelden Amazon-Konto>Meine Bestellungen>Problem bei Bestellung>Wählen Sie das spezifische Problem>Verkäufer kontaktieren</p> <p>Iniciar sesión cuenta de Amazon>Sus pedidos> Problema con el pedido> Elija el problema específico>Comuníquese con el vendedor</p> <p>Identifiez le problème spécifique>Communiquez avec le vendeur</p> <p>Accedi account Amazon>I miei ordini>Problema con l'ordine>Scegli il problema specifico> Contatta il venditore</p> <p>6.Frequently Q & A</p> <ol style="list-style-type: none"> Why can't the headset be turned on? When using for the first time, make sure that the headset is fully charged. If there is no power, the product will not be able to be turned on. There is no sound when playing a song after connecting? Check whether the playback device and the headset have established a valid connection. If the audio device fails to connect normally, please reconnect. Adjust phone volume at the same time to an appropriate volume level. The mobile phone cannot search for the Bluetooth headset, the Bluetooth connection is unstable or the mobile phone is disconnected during use, and the sound is stuck/interrupted? <p>Answer:</p> <ol style="list-style-type: none"> Please do not exceed the Bluetooth connection distance of the mobile phone by 10 meters to avoid interference by the wall or the human body; Please make sure the headset has enough power; Please reset the headset to factory settings, and then turn on the Bluetooth of the mobile phone to search for pairing connection; Please ensure that there is no strong interference signal such as wifi/cell tower/radio frequency in the surrounding environment If the above operation still cannot connect, please contact customer service.
---	---	---	--	---	--

 <p>ワイヤレスイヤホン取扱説明書 ACA-i22</p>	<p>各部の名称</p> 	<p>充電のしかた</p> <p>初めてお使いになるときは、充電ケース、イヤホンともに十分に充電してください。</p> <p>ケースを充電する場合:</p> <p>充電ケースのUSB Type-C端子とパソコンなどのUSB端子を付属の充電コードで接続します。</p> <ol style="list-style-type: none"> 充電中: ケースの赤充電LEDランプが点滅します 充電完了: イヤホンの赤充電LEDランプが消灯します <p>ケースでイヤホンを充電する場合:</p> <p>充電ケースにイヤホンをセッティングすると、自動で充電が始めます。</p> <ol style="list-style-type: none"> 充電中: イヤホンの赤インジケーターが点灯し、ケースの白充電LEDランプが4秒間点灯します 充電完了: ケースの赤充電LEDランプが点灯し、USB Type-Cケーブルを抜くと、白充電LEDランプが4秒間点灯し、その後消灯します <p>オートペアリングと電源のオン/オフについて</p> <p>オートペアリング</p> <ul style="list-style-type: none"> 充電ケースからイヤホンを2つとも取り出すと自動で電源が入り、双方がTWS接続されると、ペアリングモードになります。初期登録が完了すると、ペアリングモードになります。 片方だけ取り出した場合も自動で電源があり、シングル接続でのペアリングモードになります。 どちらの場合も、ペアリング済の機器に近くにあり、その機器のBluetooth機能が自動でペアリングしない場合があります。そのため、接続する機器の仕様により自動でペアリングしない場合があります。そのため機器付属の取扱説明書に従い、接続してください。 使用後、充電ケースにイヤホンを戻すと自動で電源が切れます。 <p>はじめてお使いときは、Bluetooth機器（相手側機器）とのペアリングが必要です。「ペアリング（初期登録）のしかた」を参照して操作してください。</p> <p>TWS（True Wireless Stereo）機能について</p> <p>TWSは2つのイヤホンをBluetoothによりペアリングすることで、左右独立したステレオサウンドを実現する機能です。</p> <p>本製品は、左側いずれかのイヤホンを単独で使う（シングル接続）</p> <ul style="list-style-type: none"> 2つのイヤホンをステレオイヤホンとして使う（TWS接続） <p>のいずれの使い方にも対応しています。</p> <p>ペアリング（初期登録）のしかた</p> <p>充電ケースからイヤホンを取り出します。</p> <ul style="list-style-type: none"> シングル接続で使うときは左側いずれかのイヤホンを取り出します（どちらでも可） 	<p>●正しくBluetooth接続されていますか。</p> <p>●Bluetooth機器で再生などの操作を行いましたか。</p> <p>●Bluetooth機器の電量が最も低くなっていますか。</p> <p>●Bluetooth機器との間に障害物があったり、双方の距離が外れすぎていませんか。</p> <p>●ペアリングができない</p> <p>●Bluetooth機器の電源は入っていますか。</p> <p>●Bluetooth機器との間に障害物があったり、双方の距離が外れすぎていませんか。</p> <p>●ペアリングモードでイヤホン（どちらでも可）を5秒間長押しします</p> <p>●ペアリングモードでスマートフォンに接続します</p> <p>●Bluetooth機器との間に障害物があったり、双方の距離が外れすぎていませんか。</p> <p>●Bluetooth機器が他の機器と通信しているかもしれません。</p> <p>●Bluetooth機器との間に障害物があったり、双方の距離が外れすぎていませんか。</p> <p>修理について</p> <p>ご注意</p> <ul style="list-style-type: none"> ●初期不良の交換はご購入されたから7日以内です。 ●無償修理期間はご購入から6ヶ月です。 ※バッテリー、イヤーバッド、USBケーブルは無償修理対象外です。 ●本製品の故障、またはその使用によって生じた直接、間接の障害については当社はその責任を負わないものとします。 ●修理品のご持参、お持ち帰りの交通費、または送付される場合の送料、取り付け、取り外し費用及び諸掛かりはお客様のご負担となります。
--	--	---	---

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.