



Zhongming Antennas

Address: B3, Shengli Building, No.101 Yuantai Third Road, Jiangnan Hitech Industry, Nanhuan Road, Licheng District, Quanzhou, Fujian, China.


ANO-012

ANO-012


ANO-012




Antenna

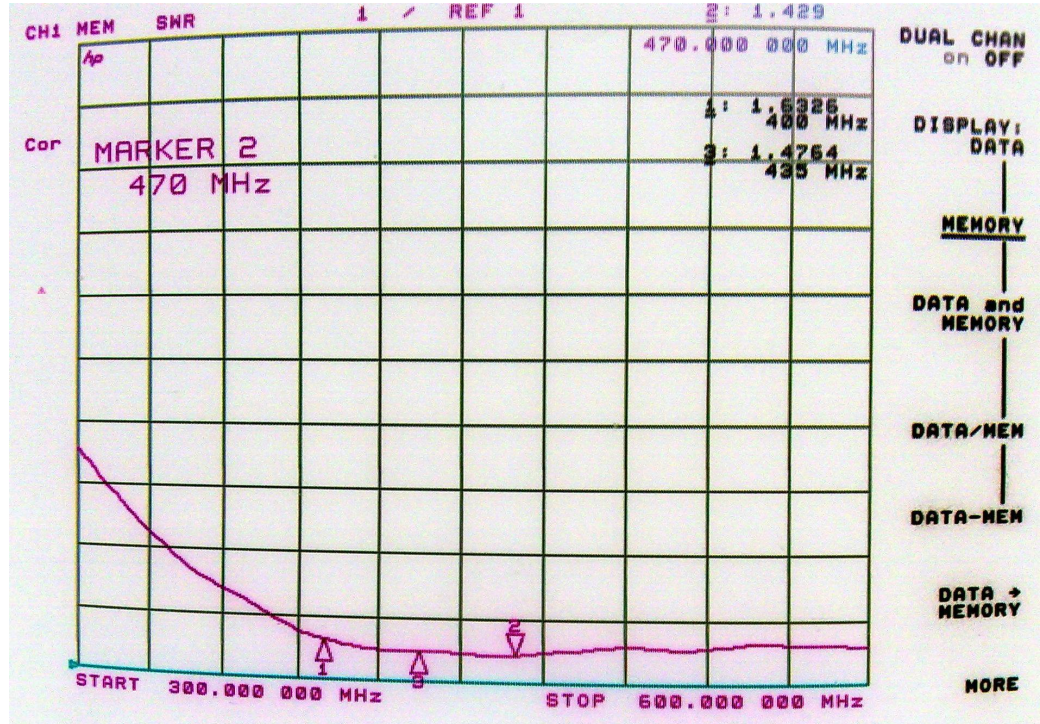

电气参数	ELECTRICAL SPECIFICATIONS	机械特性	MECHANICAL SPECIFICATIONS
频率范围	400-520MHz	高度	12CM
Frequency Range		Height	
输入阻抗	50 Ω	接头	SMA.K
Impedance		Termination	
驻波比	<1.5 (462-467MHz)	天线罩材料	ABS
VSWR		Radome Material	
增益	2.15dBi	天线罩颜色	黑色
Gain		Radome Color	Black
极化方式	垂直 Vertical		
Polarization			
辐射方向	全向 Omni		
Radiation			

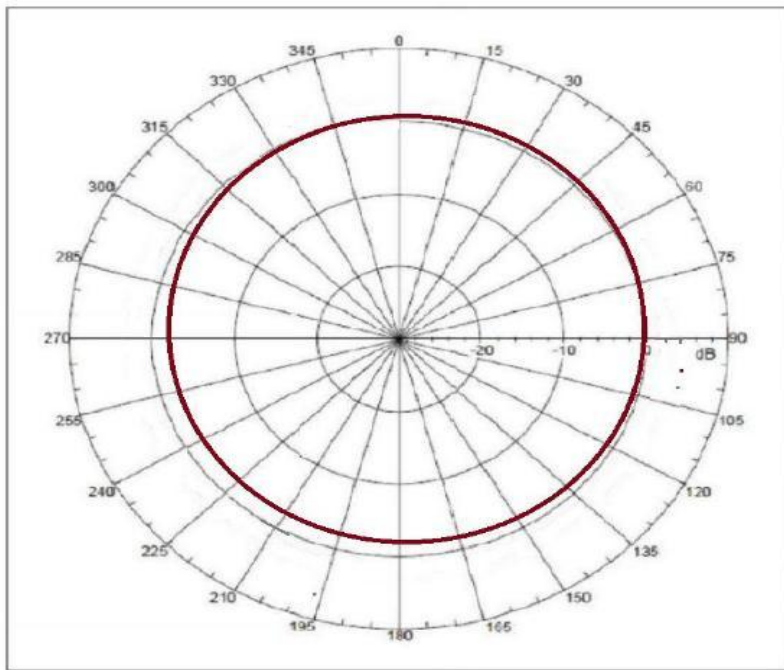

462.5625MHz

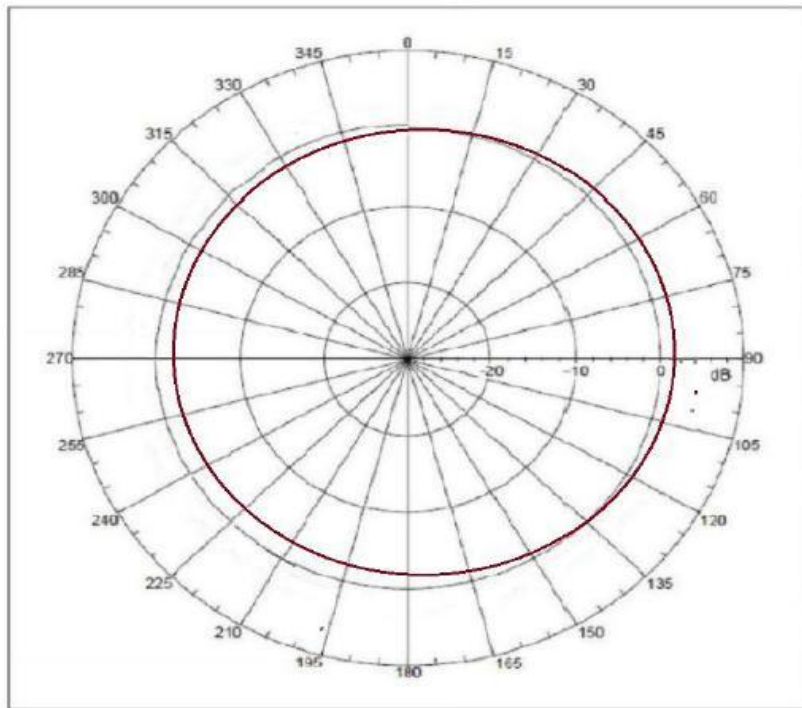

467.6375MHz