

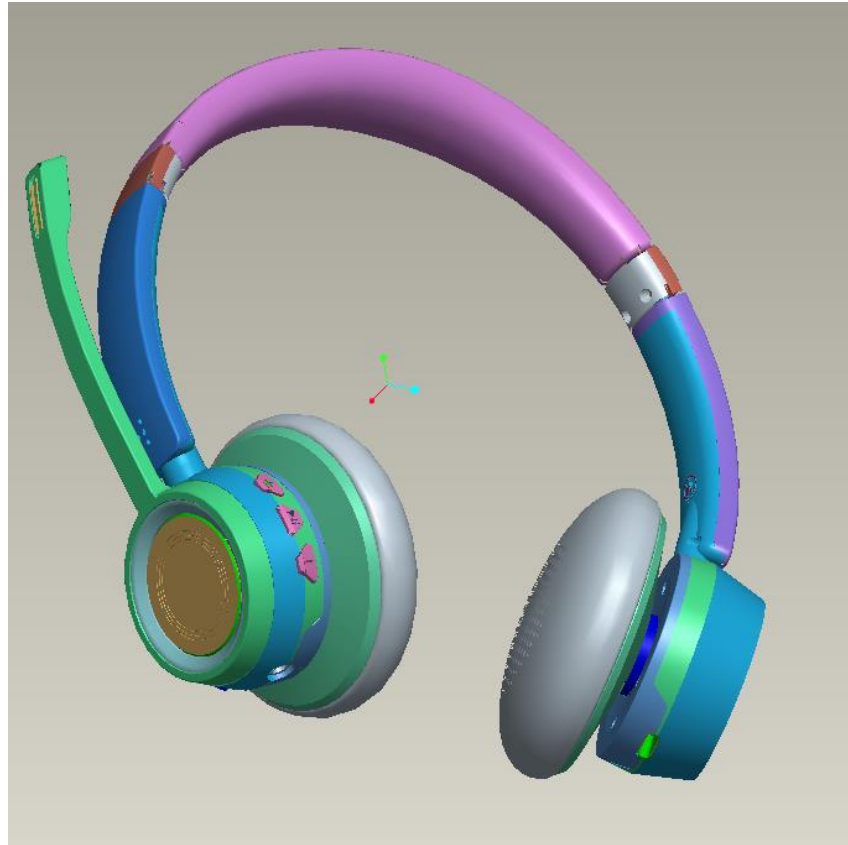


User Manual

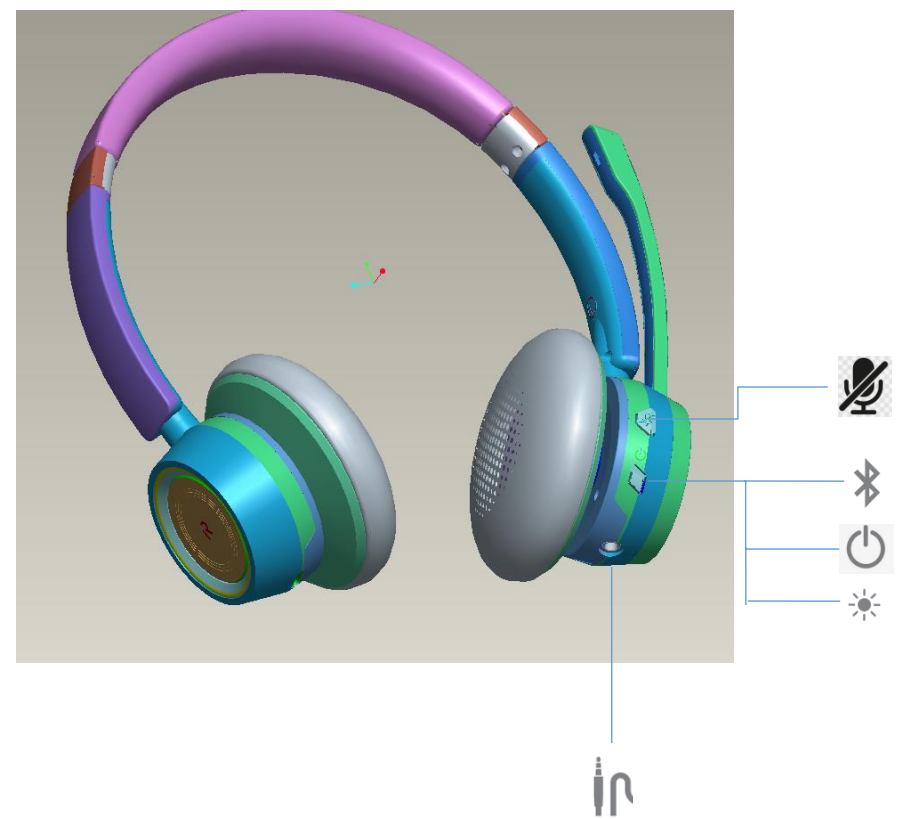


Model : BH58

Diagram

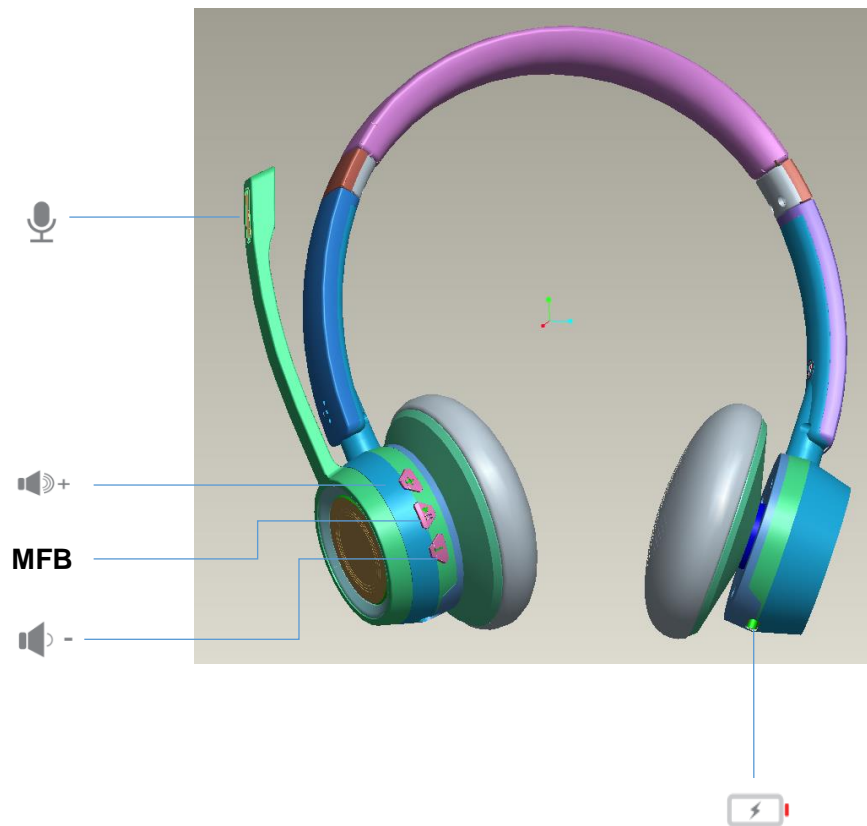

Power On/Off

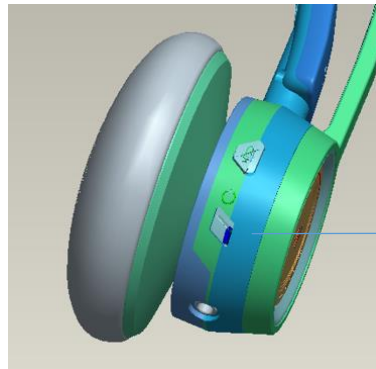

Push the button to the top,
press and hold for 3
seconds (The headset
enters the cellphone
pairing mode)

LED

The blue light
flashes for 3
seconds, then the
red light and blue
light flash
alternately.

Voice Prompt

Power On



Push the button to the
middle position (The
headset enters the
Bluetooth transmitter
pairing mode.)

The blue light flashes
for 3 seconds, then
the red light and
green light flash
alternately.

Power On




Push the button to the
bottom, the headset will be
turned off.

Go out

Power Off

How to Connect The Bluetooth Transmitter

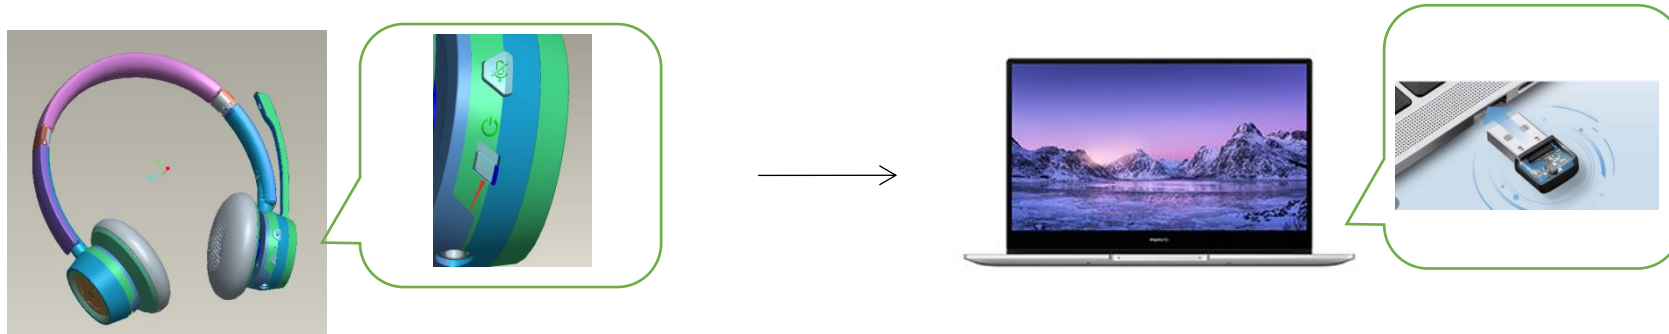

Step 1: Push up the power button to turn on the headset. The headset indicator light is blue and flashes for about 3 seconds, and then turns into red and green light flashing alternately.

Step 2: Plug the Bluetooth transmitter into the device. The indicator light of Bluetooth transmitter is blue and flashes for about 3 seconds, and then turns into red and blue light flashing alternately. You will hear the "Pairing" voice prompt, and the Bluetooth transmitter will automatically search and connect to the headset.

Step 3: After the connection is successful, the headset indicator light flashes blue every 30 seconds, and the indicator light of Bluetooth transmitter is solid blue. When there is a connection record, the Bluetooth transmitter will automatically reconnect to the headset after powering on.




Note:


If the device does not work normally after the connection is successful, please check whether the sound settings of the device are selected correctly.

Operation Steps: Open the 'sound settings' of the device, find 'Playback and Recording Devices', and select 'BTD-Q2'.

How to Connect Your Cellphone

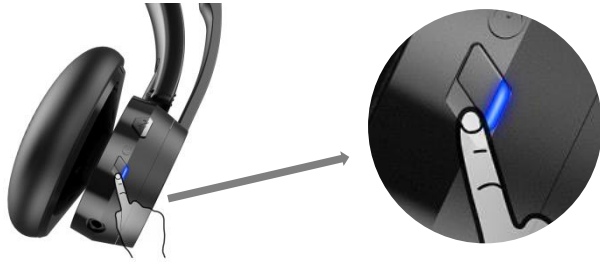

Step 1: Push the power button up to the top, press and hold for 3 seconds, then release. The blue light flashes for 3 seconds, then the red and blue lights flash alternately. You will hear the "Pairing" voice prompt.

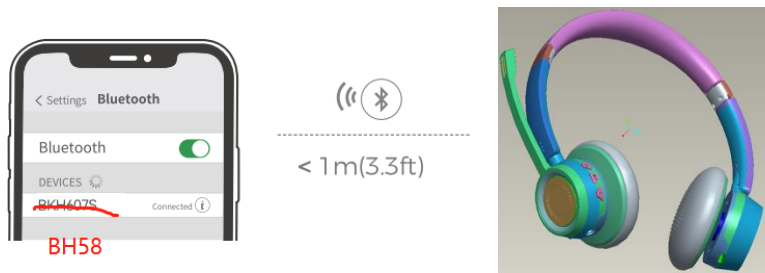


Step 2: Turn on the Bluetooth of your cellphone, find "BH58" and click to connect. When you hear the 'connected' voice prompt, it means the connection is successful.


Note:

When there is a connection record, the headset will automatically connect to the cellphone after powering on. When both the headset and the transmitter have connection records, the transmitter will be connected first.

Answer/Hang Up/Redial Last Phone Number/Reject A Call/Voice Assistant/Microphone Mute



MFB



Answer



Click once

Hang up



Click once during a call

Reject a call



Press and hold for 2 seconds during a call

Redial last phone number



Press and hold for 2 seconds when not in a call

Voice assistant




Double-click when not in a call

Microphone mute




Click once to turn on/off during a call

Volume Control/Music Control

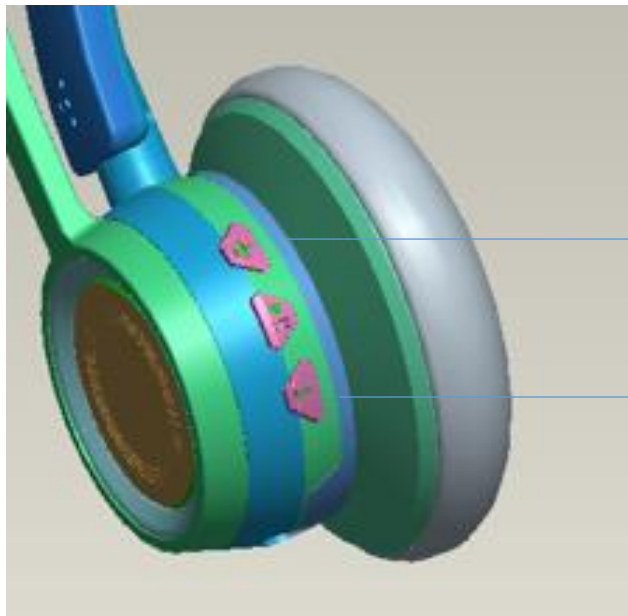

- | | | |
|------|---|------------------------------|
| • 🔊+ | 👉 | Click once |
| • ⏮⏮ | 👉 | Press and hold for 2 seconds |
| • 🔊- | 👉 | Click once |
| • ⏭⏭ | 👉 | Press and hold for 2 seconds |

Restore Factory Settings

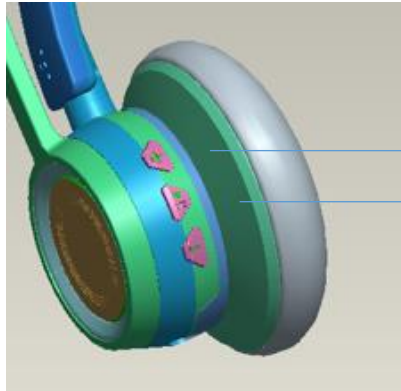

Press and hold for 6 seconds
at the same time


Headset: If you encounter connection problems during use, you can press and hold the volume + and MFB buttons at the same time for 6 seconds, the headset will re-enter the pairing mode, and you will hear the voice prompt of 'dudu'.



按住3秒后松手

Bluetooth Transmitter: If you encounter connection problems during use, please press and hold the button for 3 seconds in the power-on state. The Bluetooth transmitter will re-enter the pairing mode, and the indicator light flashes red and blue alternately at this time.

Charging Indications

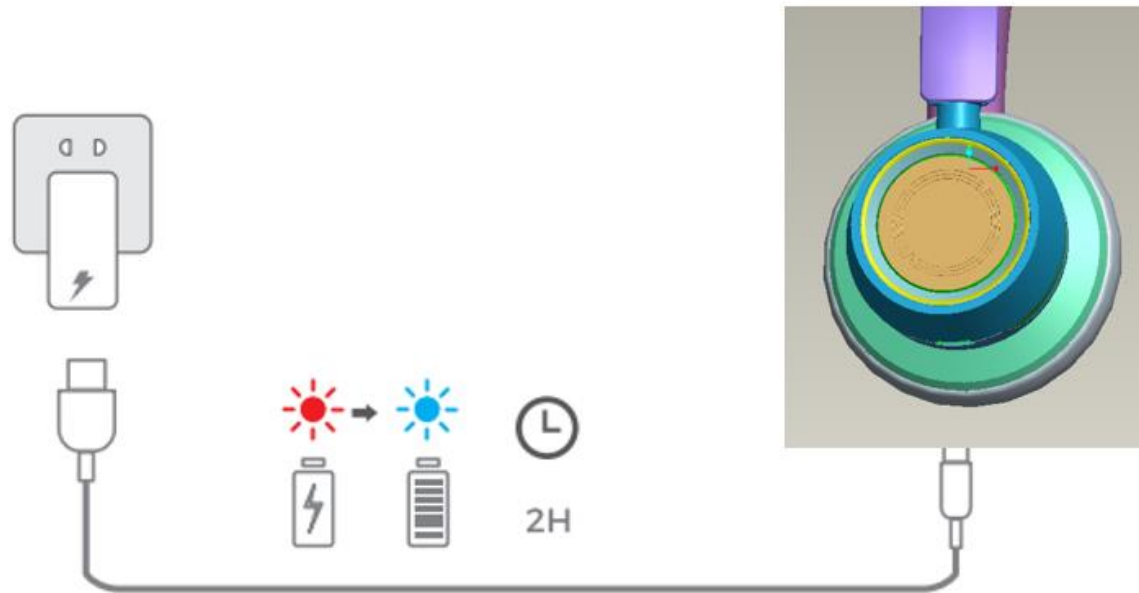

1.In charging:Red light stays on. Fully charged: Blue light stays on.

2.Charging time: about 2 hours

Common Problems

1. Low battery may cause disconnection, in order not to affect normal use, please charge the headset in time.
2. If the headset fails to turn on, please try to charge it up first, and turn it on after fully charged.
3. If the battery runs out or has not been used for a long time, there may be no signal lights at the beginning of charging, but the indicator will normally light up in red after a few minutes.
4. No Sound from the headset:
 - Make sure the headset connects to the electronic device successfully.
 - Make sure the effective distance of headset and electronic device is within 10 meters in between.
 - Make sure you choose this Bluetooth device for music playback.
 - Make sure your electronic device is within a range of strong signal without external interference.
 - Check whether your electronic device has been connected to other Bluetooth devices.
5. The model of this headset can not be searched.
 - Make sure the headset is in the pairing mode you want (Phone/Bluetooth Transmitter)
 - There may be a program error on the headset and device. Please reset the headset. (In the power-on state, press and hold the MFB and the volume "+" button for 6 seconds to restore the factory settings.)
6. No sound can be heard from the headset when in a call.

- Make sure your headset and device are connected successfully.
- Make sure the call is selected in the state of the Bluetooth device.

Safety Notes

1. Please use original accessories provided for this product, otherwise, it may cause low performance, headphone damage, or a short circuit, and all of these are out of our warranty support.
2. Disassembling personally may damage the headset and this is not covered by warranty.
3. Do not use the product in a dusty environment.
4. Please clean the headset with a clean, soft, and dry cloth.
5. Do not place the product in an extreme environment, otherwise, it may be temporarily unavailable for use. The normal use temperature is -10°C to 45°C.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

FCC ID: 2A6TNBH58