




STAGE sound



Stage SingFree

Karaoke Microphone System

User Manual

SPECIFICATION

Model	Stage SingFree
Output Wattage	RMS: 7.5W MAX: 10W
Power Supply	3.7V / 2500mAh
Frequency Response	50 Hz - 20k Hz
Driver Diameter	52mm
Microphone Capsule	9.7mm Condenser Mic
USB Charging	Type-C 5V/1A
Charging Time	3 Hours
Battery Life	5 Hours (Max Volume) 10 Hours (Half Volume)
Dimension	7.9x2.8x2.6 inch / 20x7x6.5cm
Weight	0.73lb / 0.33kg

For more latest products, please visit:

www.coolmetech.com




For any assistance, please Email us:

service@coolmetech.com



Made in China

DIAGRAM

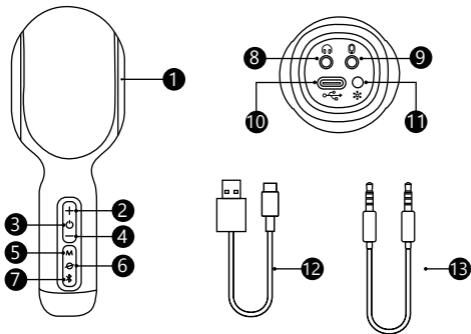


- 1 RGB Lights
- 2 VOL+ Button
- 3 Power ON/OFF; Music/MIC Volume Switch Button
- 4 VOL- Button
- 5 Sound Effects Button
- 6 Voice Cancelling/Back Button
- 7 Bluetooth / TWS Button
- 8 3.5mm Headphones Port
- 9 3.5mm Aux-in Port
- 10 Type-C Charging Port
- 11 Lighting Switch Button
- 12 Type-C Charging Cable
- 13 3.5mm Aux Cable

MAIN FUNCTION

1. Bluetooth speaker for audio output.
2. Karaoke singing & voice recording.
3. Bedside lamp for sleeping atmosphere.

CHARGING










The status of the red indicator on power button:
On: Charging
Off: Fully charged
Flash: Low battery $\leq 5\%$

NOTE:

1. Please charge with power bank, computer USB port or power adapter (type: 5V 1A).
2. Do not charge in a sub-zero environment, charging below zero may cause damage to the battery.
3. Do not use the microphone while charging, the ourputpower is lower than normal working status.
4. When the battery is continuously detected to be low battery ($\leq 30\%$), the power of microphone will automatically reduced to protect the battery, and avoid voice distortion.


OPERATING INSTRUCTION

Button	Operation	Function
	Short press	Volume up
	Long press for 2s	Previous track
	Short press	Switch Music volume/Karaoke volume
	Long press for 2s	Power ON/OFF
	Short press	Volume down
	Long press for 2s	Next track
	Short press	Switch sound effects
	Long press for 2s	Suppress the vocal in music
	Long press for 2s/ short press again	Restore the vocal in music
	Short press	Disconnect the paired Bluetooth device
	Long press for 3s	Get into TWS mode, search for another SingFree to connect
	Short press	Switch LED lighting
	Long press for 2s	Turn on/off the LED lighting

NOTE:

1. Please short press the power button to switch music or karaoke volume before control the corresponding volume.
2. There are 4 sound effects on microphone: Karaoke, Professional, Speech, Original Sound. Karaoke is the default effect.
3. There are 4 LED lighting can be switched: Dynamic, Breathing Dynamic, RGB, Single.

AUX MODE

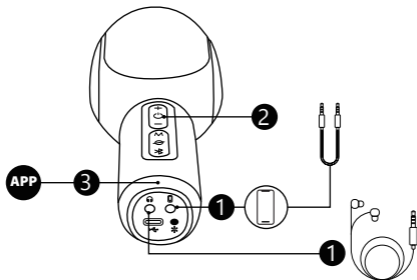


How it works:

1. Insert the AUX cable and 3.5mm headphones to connect SingFree with your device.
2. Power on the microphone.
3. Turn on the karaoke / music applications on your device and start your singing or recording.

NOTE:

1. The AUX Mode is for voice recording, and supports original sound effect only.
2. The audio won't play through the microphone, please insert the 3.5mm headphones as well.
3. Unplug the AUX cable, the microphone will change to Bluetooth Mode automatically.

BLUETOOTH MODE

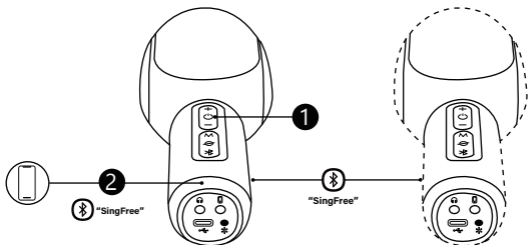

How it works:


1. Power on the microphone.
2. Search "SingFree" from your device and click to connect.
3. Turn on the karaoke / music applications on your device and start your singing or recording.

NOTE:

1. How to connect two SingFree microphones with your device:

- 1) Connect the first microphone as above, then long press the Bluetooth button for 3 seconds to search for connection.
 - 2) Power on the second microphone, both now are in TWS mode and ready to connect.
 - 3) Search **SingFree** from the Bluetooth list your device and click to connect.
2. In TWS mode, turn off one microphone, the other one will shut down automatically. The microphones connected before will connect together again after turn them on.
 3. The microphone will shut down automatically 20 minutes later if there is no single input.

HEADPHONE MODE

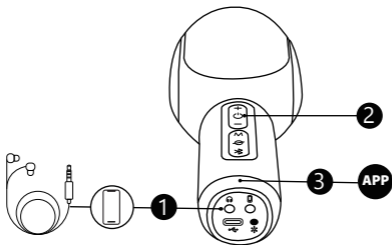


How it works:

1. Power on the microphone and connect it with your device via Bluetooth.
2. Insert the 3.5mm headphones to the headphones port.
3. Turn on the karaoke / music applications on your device and start your singing or recording.

NOTE:

1. The Headphone Mode only supports original sound effect.
2. The audio and your singing will play through the headphones instead of microphone in this mode. Enjoy your private singing time!

FM / PARTY MODE



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment