


Meander Line Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4GANT					
Center Frequency	Horizontal			Vertical		
	2402MHz	2450MHz	2480MHz	2402MHz	2450MHz	2480MHz
	0.88	0.81	0.76	0.92	1.00	0.86
MAX. Gain	1.0dB					
Polarization	Horizontal and Vatical					
Azimuth Beam Pattern	Omni-directional					
Impedance	8.45 \pm 22.5					
Antenna Lengdi						
Manufacture	SHEN ZHEN VMART ELECTRONICS SCIENCE AND TECHNOLOGY LTD					

Antenna Photo & Length (mm)

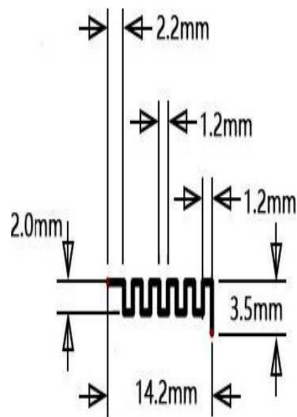


Horizontal: 2400 MHz 2450 MHz 2500 MHz


Power (dBm)

Max: 0 Min: -40 Scale: 5/div

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2402	0.88	-7.9	
2450	0.81	-7.9	
2480	0.76	-7.5	

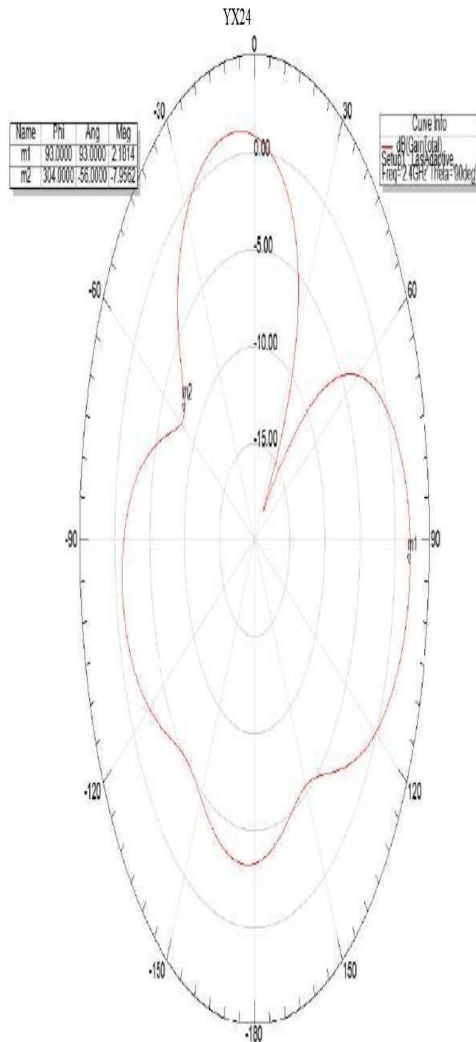


Name	Phi	Ang	Mag
m1	90.0000	90.0000	2.2138
m2	304.0000	-58.0000	-7.9013

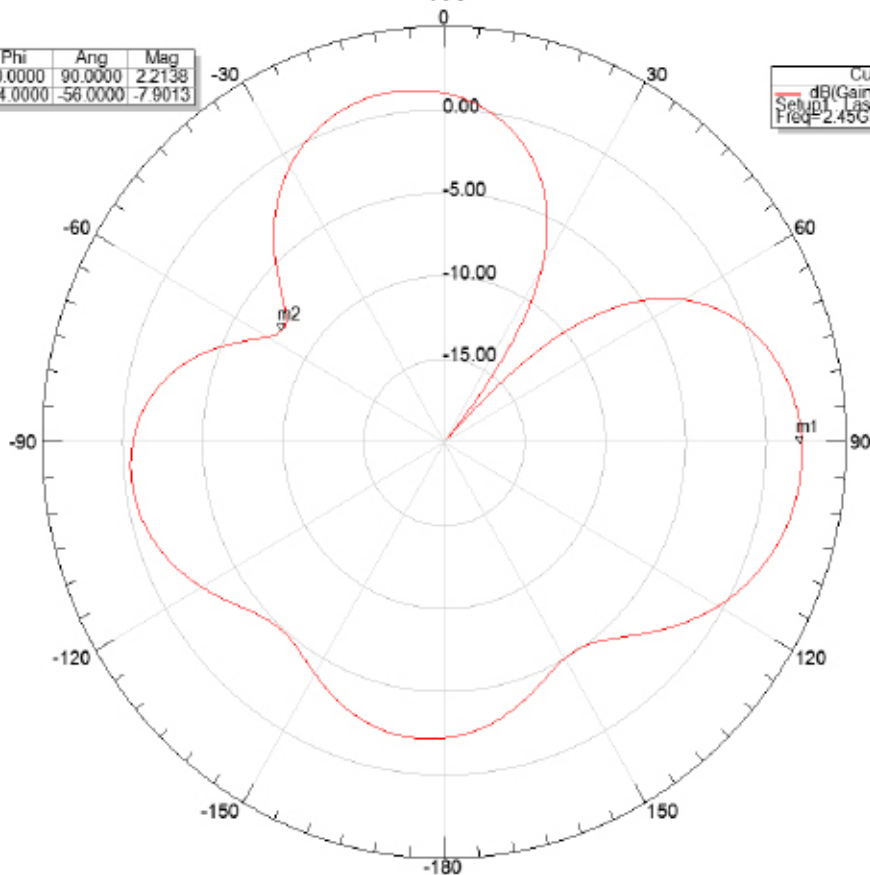

Radiation Pattern 2

Name	Phi	Ang	Mag
m1	90.0000	90.0000	2.1778
m2	305.0000	-55.0000	-7.5484

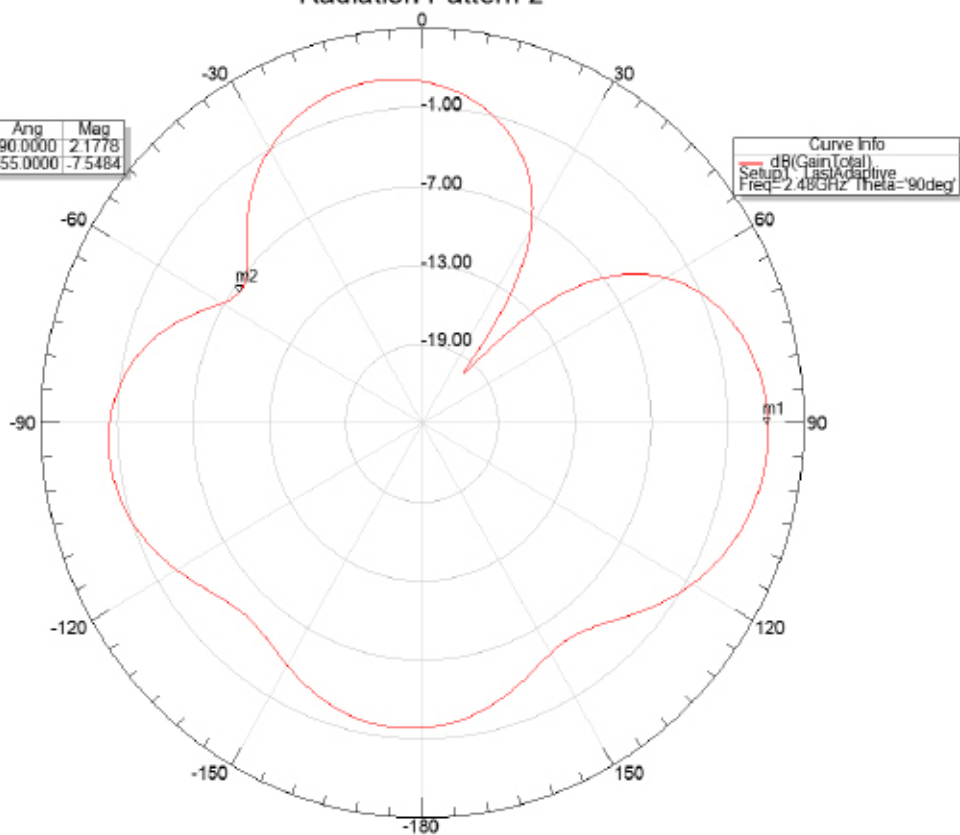


Vertical: 2400 MHz 2450 MHz 2500 MHz


Power (dBm)

Max: 0 Min: -30 Scale: 5/div

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2402	0.92	-1.46	
2450	1.00	-1.07	
2480	0.86	-1.32	

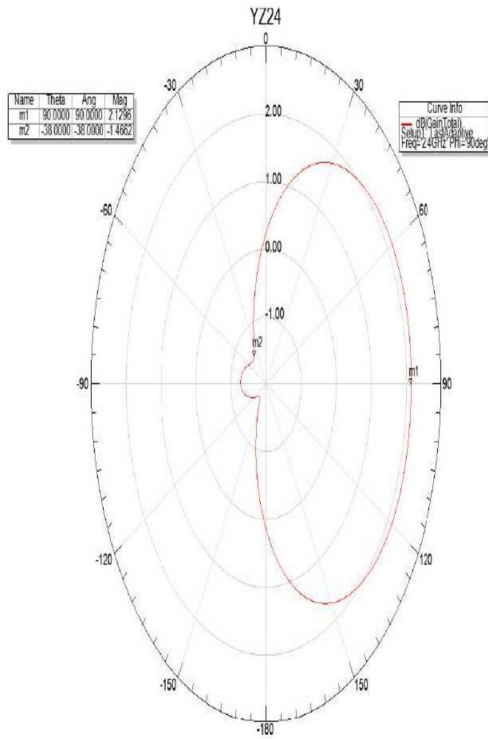



Name	Theta	Ang	Mag
m1	90.0000	90.0000	2.2138
m2	-31.0000	-31.0000	-1.0792

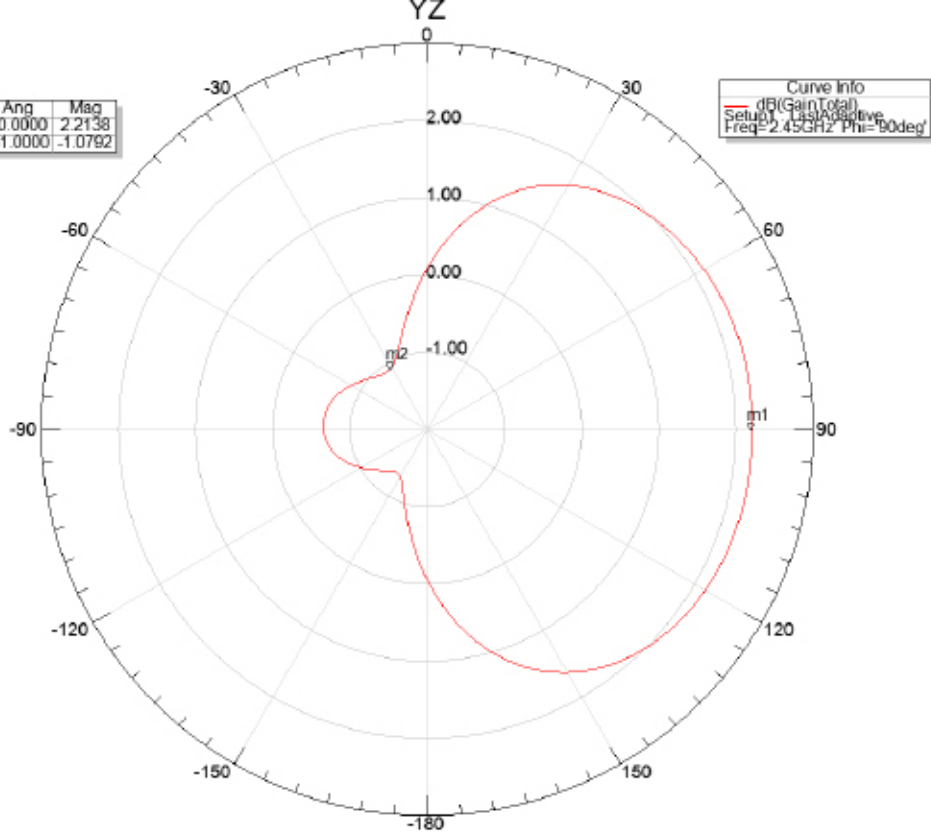

Radiation Pattern 1

Name	Theta	Ang	Mag
m1	90.0000	90.0000	2.1778
m2	-152.0000	-152.0000	-1.3277

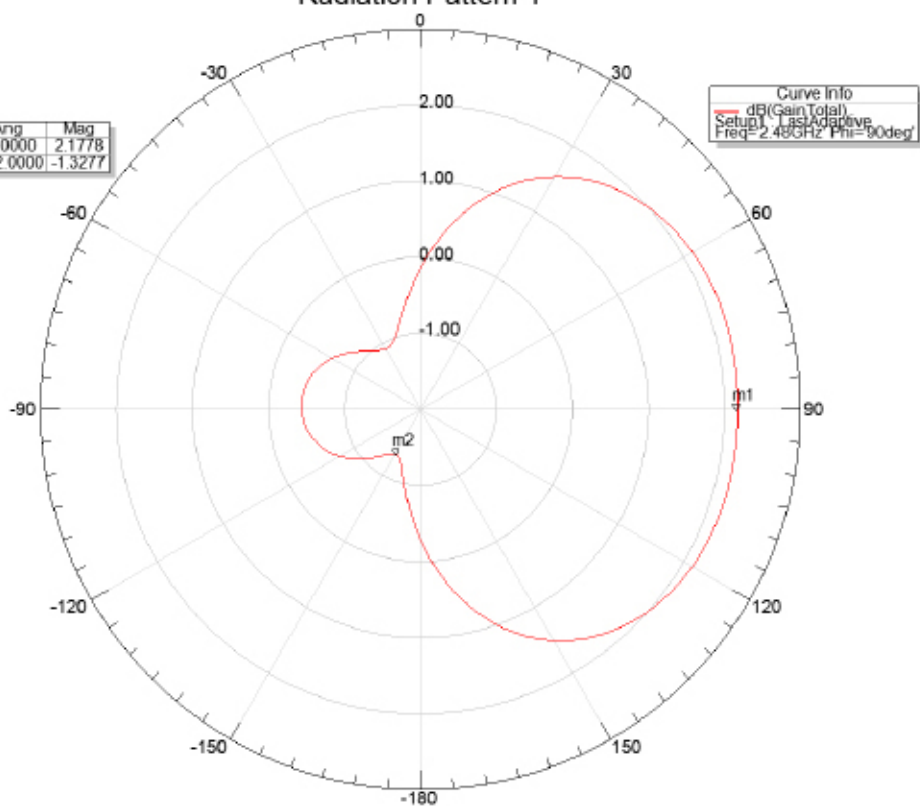

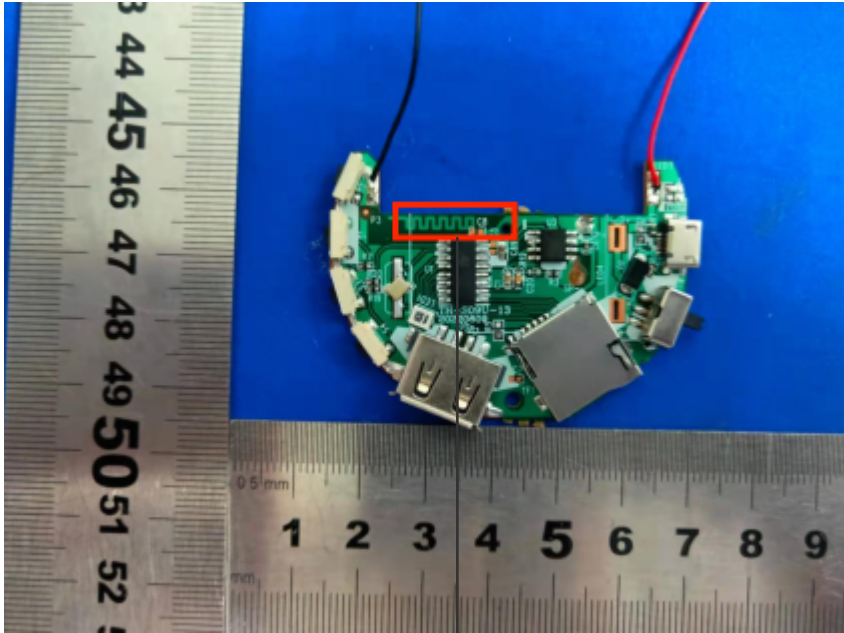

ant