


中

MONSTER



Monster Maxstar MQT36

真无线蓝牙耳机
使用说明书


产品参数

- 蓝牙版本 V5.4
传输距离 10m
喇叭直径 13mm
喇叭阻抗 32Ω±15%
灵敏度 106±3.0dB
频响范围 20Hz-20kHz
电池容量(充电盒) 300mAh 3.7V
电池容量(耳机) 30mAh 3.7V
充电时间(充电盒) ≈1.5小时
播放时间(耳机) ≈4小时
配合充电盒播放时间 ≈16小时

包装清单


Table listing contents: 耳机 *2, 充电盒 *1, 使用说明书 *1, Type-C充电线 *1, 耳帽 S*2, 耳帽 L*2

产品示意图

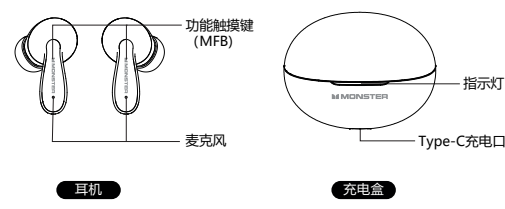

给充电盒充电

用Type-C充电线连接充电盒到5V电源适配器。

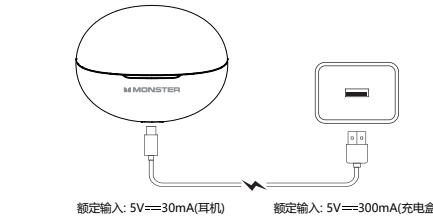

温馨提示: 当关闭充电盒盖, 充电盒指示灯呈冰蓝色闪烁, 请给充电盒充电。

指示灯指南


Table with 3 columns: Mode, Description, Sound Prompt. Includes Power on/off, Pairing, Connected, Disconnected, and Battery low indicators.

产品操作说明

- 1. 开机: 方式一: 打开充电盒盖, 耳机自动开机。方式二: 长按功能触摸键3秒, 耳机开机。
2. 关机: 方式一: 将耳机放回充电盒, 关上充电盒盖, 耳机关机。方式二: 与蓝牙设备断开连接3分钟后, 耳机自动关机。

3. 配对

- 步骤一: 打开充电盒盖, 耳机自动开机; 步骤二: 打开智能设备的蓝牙列表, 搜索 "Monster Maxstar MQT36" 进行配对, 连接成功后, 你会听到提示音 "Connected"

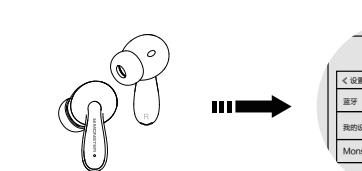

注意:

- * 如果产品长时间不使用, 应先充满电, 并确保设备处于关机状态。
* 充电完成后, 请将充电线拔出, 避免长时间充电造成设备损坏。

触控键操作


常规模式

- 语音助手: 长按2秒左/右耳机MFB
音量+: 单击右耳机MFB
音量减: 单击左耳机MFB

3. Pairing

- Step one: Open the charging case, the headphones will start pairing automatically.
Step two: Open the Bluetooth list of smart devices, search for "Monster Maxstar MQT36" to pair, and the connection is successful. After that, you will hear the "Connected" tone

* Headphones will try reconnecting to the device within 3 minutes when connection is lost.

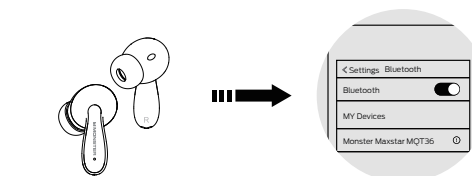

NOTE:

- * Fully charge the headphones and power off before an intended not-in-use period.
* Unplug the charging cable after charging

Operation

Normal

- Voice Assistant: Long press left/right headset MFB for 2 seconds
Volume +: Click right MFB
Volume -: Click left MFB

音乐播放模式

- 暂停/播放: 双击左/右耳机MFB
上一曲: 三击左耳机MFB
下一曲: 三击右耳机MFB

电话免提

- 接听: 双击左/右耳机MFB
挂断: 双击左/右耳机MFB
拒接: 长按2秒左/右耳机MFB

恢复出厂设置

开机未连接状态: 连击左/右耳机5次后左/右耳机关机(清除配对和连接的所有信息)。

Music playback

- Pause/Play: Double click Left/Right MFB
Last song: Triple click left MFB
Next song: Triple click right MFB

Phone

- Answer: Double click the left/right MFB
Hang up: Double click the left/right MFB
Reiect: Press left/right MFB for 2 seconds

Restore factory settings

Power-on disconnected state: Click the left/right headset 5 times and turn off the left/right ear (clear all pairing and connection information).

注意

- 1. 充电盒盖后, 不需做任何按键, 耳机自动开机, 配对并连接; 耳机放入充电盒并合盖后, 充电盒将自动给耳机充电, 耳机关机。
2. 常清洁, 寿命长, 如长期不用, 建议15天充电1次, 延长电池寿命, 耳机尾塞充电部分经常用棉签酒精擦拭, 能够预防充电触点, 避免接触不良, 影响使用体验。
3. 锂电池油渍或电池组合! 不得暴露在强烈阳光或高温环境中, 禁止拆解, 撞击, 挤压或投入火中, 若出现产重鼓胀, 切勿继续使用, 切勿置于高温环境中, 浸水后禁止使用。
4. 由于本产品采用无线连接方式, 在日常使用过程中, 受到环境, 手机品牌, 使用行为等因素影响, 可能在播放音乐过程中, 会出现短暂, 轻微的声音卡顿属于正常现象。

警告

- 1. 长时间以高音量使用耳机可能会损害您的听力, 建议只使用适当音量收听, 通话和听音乐。
2. 不要将本产品放入水中, 以免造成故障。
3. 不要自行拆卸产品及配件, 以免导致损坏及保修失效。
4. 请勿使产品受到强烈冲击或震动以免损坏。
5. 请勿使用化学溶剂或清洁剂清洗本产品。

Hazardous Substances table with columns for Name of Parts, Pb, Hg, Cd, Cr(VI), PBB, PBDE and rows for Housing, Loudspeakers, PCBAs, Accessories.

This table is compiled according to SJ/T 11364. 本表格依据SJ/T 11364的规定编制。

- O: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

Precautions

- 1. Headphones will turn on automatically (needless to press any button) pair and connect the device when the charging case is opened. After placing the headphones in the charging case, they will turn off and automatic charging will start when the cover is closed.
2. Charging every 15 days will extend battery life when not in use often. Cleaning off dirt on the charging contacts by cotton swabs with alcohol will maintain a good contact for charging.
3. Keep battery (battery pack) away from inflammables or excessive heat such as direct sunlight. Do not disassemble, hit, squeeze or fire. Medium. If severe swelling occurs, do not continue using. Do not place in high temperature environment. Do not use after soaking water.
4. Intermittent is normal during playback for wireless products due to environmental factors, device brand, users' behavior, etc.
Warnings
1. Do not use headphones at high volume for an extended period of time.
2. Keep the headphones away from dust and water.
3. Do not disassemble the headphones and accessories, otherwise warranty will be voided.
4. Keep headphones away from any impact or vibration.
5. Do not use any chemical solvents or cleaning agent on the headphones.

Hazardous Substances table with columns for Name of Parts, Pb, Hg, Cd, Cr(VI), PBB, PBDE and rows for Housing, Loudspeakers, PCBAs, Accessories.

This table is compiled according to SJ/T 11364. 本表格依据SJ/T 11364的规定编制。

- O: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.
X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

FCC 声明

根据FCC规则第15部分, 本设备经过测试, 符合B类数字设备的限制。这些限制旨在提供合理的住宅设施中的有害干扰防护。该设备产生使用并可辐射射频能量, 如果未按照安装和使用该设备可能会对无线电通信造成有害干扰。然而, 有不能保证在特定安装中不会发生干扰。如果这个设备有对无线电或电视接收造成有害干扰, 可通过转动来确定设备, 关闭和打开时, 鼓励用户尝试通过一个或多个以下更多措施:

- 重新定向或重新定位接收天线。
-- 增加设备和接收器之间的间距。
-- 设备连接到与接收器不同的电路上的插座已连接。
-- 请咨询经销商或经验丰富的无线电/电视技术人员以获得帮助。

此设备符合FCC规则的第15部分, 操作受以下两个条件限制条件。

- (1) 本装置不得引起有害干扰。
(2) 本装置必须接受任何接收到的干扰, 包括可能导致意外操作的干扰。未经合规责任方明确批准的变更或修改可能使用用户对设备的操作权限失效。

FCC ID: 2ABPV-Q5MMQT36

Environment Friendly Use Period (EFUP) 环保使用年限

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical products will not leach or mutate so that the use of these [substances] will not result in any severe environmental pollution, any bodily injury or damage to any assets.

Environment Friendly Use Period (EFUP) 环保使用年限

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical products will not leach or mutate so that the use of these [substances] will not result in any severe environmental pollution, any bodily injury or damage to any assets.

保修卡

尊敬的用户, 本保修卡是您将来申请保修的凭证, 请您配合销售商填写并妥善保管备用!


User information table with fields for Name, Contact info, Address.

产品信息

Product information table with fields for Name, Model, Barcode.

销售商信息

Seller information table with fields for Name, Address, Contact info, Date, Remarks.



Warranty Service

Dear user, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill it out and keep it for future use!


User info table with fields for Name, Email, Contact number, Postal code, Address.

Product information

Product information table with fields for Name, Number, Barcode.

Vendor information


Vendor information table with fields for Name, Address, Contact number, Sales date, Remark.



This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.

英

MONSTER



Monster Maxstar MQT36

True wireless Bluetooth headphone
instruction manual


Product parameters

- Bluetooth version V5.4
Transmission distance 10m
Driver diameter 13mm
Driver impedance 32Ω±15%
Sensitivity 106±3.0dB
Frequency response 20Hz-20kHz
Battery capacity(Charging case) 300mAh 3.7V
Battery capacity(Headphone) 30mAh 3.7V
Charging time(Charging case) ≈1.5 hours
Music playtime(Headphone) ≈4 hours
Music playtime with charging case ≈16 hours

Product Schematic Description


Table listing contents: Headphone *2, Charging case *1, Instructions Manual *1, Type-C Charging Cable *1, Silicone Eartips S *2, Silicone Eartips L *2

Product Schematic Description

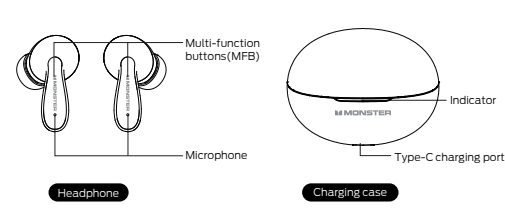

Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.

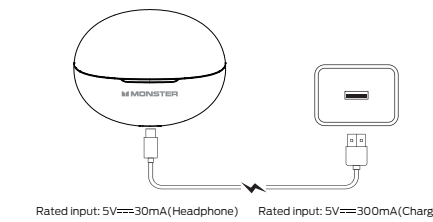

Warm tip: When the charging box cover is closed, the charging box indicator light flashes ice blue, please charge the charging box.

Indicator guide

Table with 3 columns: Mode, Describe, Sound prompt. Includes Power On/off, Pairing, Connected, Disconnected, Low Battery, Charging case indicators.

Product operating instructions

- 1. Power on: Method 1: Open the charging case, the headphones will turn on automatically. Method 2: Long touch the MF button of the headphones for 3s to turn on the headphones.
2. Power off: Method 1: Put the headphones into the charging case and close the cover. Method 2: After disconnected from the Bluetooth device for 3 minutes.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.