


Monster Airmars XKT03说明书

尺寸：73X93mm 材质：80克双胶 单黑 6折7页



Airmars XKT03


BLUETOOTH WIRELESS HEADPHONES


INSTRUCTIONS MANUAL


Product parameters


Transmission distance ----- ≥10m
Driver diameter ----- Ø13mm
Driver impedance ----- 32Ω ±15%
Sensitivity ----- 115 ±1.5dB
Frequency response range ----- 20Hz~20kHz
Battery capacity(charging case) ----- 3.7V 300mAh
Battery capacity (Headphone) ----- 3.7V 30mAh
Charging time (charging case) ----- ≈1.5 hours
Music playtime (headphone) ----- ≈4 hours
Music playtime with charging case ----- ≈24 hours

Packing list


Headphone*2

charging case*1


Instructions Manual*1

Type-C charging cable*1


Product Schematic Description



Indicator light
Multi-function buttons (MFB)




Battery compartment Charging case indicator charging indicator



Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.

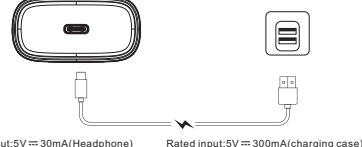

Rated input:5V = 30mA(Headphone) Rated input:5V = 300mA(charging case)

Tips: When the ice blue indicator flashes while closing the cover, please charge in time.

Indicator guide

Mode	Describe	Sound prompt
Power On	Headphone ice blue indicator flash for 1 second	"Power on"
Power off	---	"Power off"
Pairing	Headphone ice blue indicator flashes	"Pairing"
Connected	Headphone ice blue indicator flashes	"Conneced"
Disconnected	Headphone ice blue indicator flashes	"Disconnected"
Low Battery	---	"Low Battery"
Headphones placed in charging case	The headphone indicator light is always on, when fully charged it goes out.	---
Charging case low power	Ice blue indicator flashes	---
Charging case charged	Red indicator flashes	---
Charging case fully charged	Red indicator lights up	---

Product operating instructions

1. Power on

Open the charging case, the headphones will turn on automatically.


2. Power off

Method 1: put the headphone/s into the charging case and close the cover.
Method 2: after disconnected from the Bluetooth device for 3 minutes.

3. Pairing

Method 1: open the charging case, the headphones will start pairing automatically.
Method 2: search and click for "Monster Airmars XKT03" on the Bluetooth list of the smart device, and when connection is successful, "Connected" will be heard.

* Headphones will try reconnecting to the device with in 3 minutes when connection is lost.

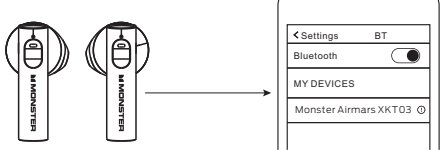

Note:

- * Fully charge the headphones and power off before an intended not-in-use period.
- * Unplug the charging cable after charging.

Operation

Normal

Voice assistant:Press the left MFB for 2 seconds

Volume +: Click right MFB

Volume -: Click left MFB

Music playback

Pause/Play: Double click Left/Right MFB

Last song: Triple click left MFB

Next song: Triple click right MFB

Phone

Answer: Double click the left/right MFB

Reject: Press left/right MFB for 2 seconds

Hang up: Double click the left/right MFB

Game/music switching: device connected

Press right MFB for 2 seconds to enter game mode

Press right MFB for 2 seconds to enter music mode

Restore factory settings

Either headphones is not connected to the bluetooth device when turned on, click the MFB 5 times to clear the previous pairing information and turn off.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FC: ID:2APV QSMKE03

Precautions

1. Headphones will turn on automatically (needless to press any button) pair and connect the device when the charging case is opened. After placing the headphones in the charging case, they will turn off and automatic charging will start when the cover is closed.

2. Charging every 15 days will extend battery life when not in use often. Cleaning off dirt on the charging contacts by cotton swabs with alcohol will maintain a good contact for charging.

3. keep battery (battery pack) away from inflammables or excessive heat such as direct sunlight.

4. Intermittent is normal during dayback for wireless products due to environmental factors, device brand, user's behavior, etc.

Warnings

1. Do not use headphones at high volume for an extended period of time.

2. Keep the headphones away from dust and water.

3. Do not disassemble the headphones and accessories, otherwise warranty will be voided.

4. Keep headphones away from any impact or vibration.

5. Do not use any chemical solvents or cleaning agent on the headphones.

Name of the Parts	Hazardous Substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Housing	○	○	○	○	○	○
Loudspeakers	○	○	○	○	○	○
PCBA	X	○	○	○	○	○
Accessories	X	○	○	○	○	○

This table is compiled according to SJ/T 11364.

○: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.

X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

Environment Friendly Use Period (EFUP)

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical products will not leak or migrate so that the use of these substances will not result in any severe environmental pollution, any bodily injury or damage to any assets.

Warranty Service

Dear user, this warranty card is the proof of your future warranty application with the seller to fill it out and keep it for future use!

User information

User name

Email

Contact number

Postal code

Mailing address

Product information

Product name

Product number

Product barcode/Serial number/Batch number

Vendor information

Name

Address

Contact number

Postal code

Sales date

Invoice number

Remark

MONSTER

Certificate of Approval

Product No. _____

Production Time: _____

QC: _____