






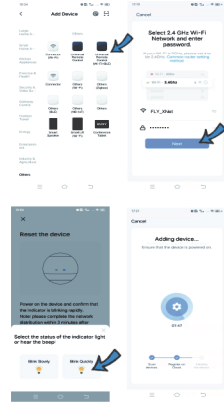










Size : 90*50 MM

<p>Mini Smart IR Remote Control</p> <p>USER MANUAL</p>  <p>Model: S18</p>	<p>Thanks for choosing our product !</p> <p>Say goodbye to use remote controls for each of the IR home appliances such as TV, Air-conditioner, TV box, light, Fan, Audio, etc.. You can remotely control these devices with the tap of your finger on the mobile App.</p> <p>Please read the user manual carefully before usage and keep it for future reference.</p> <p>Presentation</p> 	<p>Product Specification</p> <p>Size: \varnothing 40*14mm</p> <p>Cable: 1.0M length</p> <p>Input: DC 5V/1A</p> <p>LED Indicator: Blue</p> <p>IR Frequency: 38KHz</p> <p>IR Range: \leq 12 Meters</p> <p>Wi-Fi Protocol: 2.4GHz</p> <p>Wi-Fi Standard: IEEE 802.11 b/g/n</p> <p>Working Temperature: 0C ~ 55 C</p> <p>Working Humidity: 10%RH~85% RH</p> <p>Storage Temperature: 0C ~ 70 C</p> <p>Storage Humidity: 5%RH~95%RH</p>	<p>Checklist before using the device:</p> <ol style="list-style-type: none"> Your smartphone has connected to 2.4GHz Wi-Fi network. Input the correct Wi-Fi password. Your smartphone must be Android 4.4 + or iOS 8.0 + . If the numbers of devices connected to the Wi-Fi router reach the limit, you can try to disable a device to vacate the channel or try with another router. 	<p>How to set up:</p> <ol style="list-style-type: none"> Use your smartphone to scan below QR code, or search "Smart Life" app in Google Play Store or APP Store to download and install.  <ol style="list-style-type: none"> Create an account with your mobile number and authentication code. 	<ol style="list-style-type: none"> Connect your mobile to your Wi-Fi router, supply power to the IR remote control with Type-C charging cable, click "+" in the upper right corner of homepage or click "Add Device" . 
<ol style="list-style-type: none"> 1) Bluetooth Mode: The app will advise you to turn on the bluetooth in your mobile, then you choose the device to add. Enter Wi-Fi name and password, it will connect the network automatically. 	<ol style="list-style-type: none"> 2) WiFi Mode: Select "Universal Remote Control [Wi-Fi+BLE]" from "Others", enter Wi-Fi password, select "Blink Quickly", make sure the LED indicator is blinking rapidly, if not, hold the reset button for about 5s till indicator blink rapidly, it will connect. 	<p>You can also select "Blink Slowly", make sure the LED indicator is blinking slowly, if not, hold the reset button for about 5s till indicator blink slowly. Connect your mobile to the device's hotspot: "SmartLife-XXXX", then click to return to App interface, it will connect automatically, configuration complete.</p> 	<p>Reset the device</p> 	<p>Connect your mobile phone to the device's hotspot</p> 	<ol style="list-style-type: none"> 5. Tap "Smart IR", then click "Add", select the device and its brand you need control, you can click "Quick Match" or "Manual Mode" to match the buttons, please match at least 3 buttons to check if the device reacts properly, if yes, then match successfully, you can control the device now. 

<ol style="list-style-type: none"> 6. After adding the device, if you want to edit the device name, For Android, long press the box, it will pop up "Rename", click it to edit. For iOS, slide the box towards the left, choose "Rename" to edit. 	 <p>Step 1 Step 2 Step 3 Step 4 Step 5 Step 6</p>	<ol style="list-style-type: none"> 8. You can click "+" to continue to copy other buttons or click "Finish". <p>Notes:</p> <ol style="list-style-type: none"> 1. It only support 38KHz frequency, if the IR remote unable to receive command from the IR device, it is likely that the frequency of IR device does not match, unable to study commands. 2. DIY does not support voice control. 	<p>Functions</p> <ol style="list-style-type: none"> 1. Customize Scenario Create smart scene for IR devices, click "Scene" page, then click "Create scene" to set conditions and tasks. 	<ol style="list-style-type: none"> 2. Remote control After you matched the buttons for the home appliances successfully, you can control them remotely on the mobile. 3. Set Schedule Select "Tap to Run" or "Automation" in "Scene" page, tap "+" to select "Schedule" to set power on/off time for your appliances. 	<ol style="list-style-type: none"> 4. Share devices You can share your added devices with your family members, so they can also control the devices. 5. Third-party Voice Control Works with amazon alexa and google assistant. (Notes: DVD, Camera, light don't support) 
---	--	--	---	---	---

<p>FAQ</p> <ol style="list-style-type: none"> 1. What voltage of adapter should I use? Please ONLY use 5V power adapter to supply power, and make sure the current of adapter is full 1A. Otherwise, the smart IR Remote will not work properly. 2. What should I do when device configuration process fail? <ol style="list-style-type: none"> 1) Check whether IR remote is powered on or not. 2) Check whether your mobile phone is connected to 2.4GHz wifi network. 3) Check your network connectivity, make sure the Wi-Fi router is working properly. 4) Make sure the wifi password is correct. 3. The IR remote can go through walls or be used to control devices in upstairs/downstairs rooms? IR can not penetrate walls, so make sure there is no obstacle between IR remote and the IR devices. 4. What should I do if the device is often offline? 	<ol style="list-style-type: none"> 1) Check whether the router is powered off or disconnected from the network. 2) Check whether the router has been replaced, or Wi-Fi name or password has been changed. 3) Please confirm whether the device has just updated the firmware. The device will be disconnected from the network when the firmware is updated, and will automatically connect to the network after update completed. 4) The Wi-Fi signal of the device is too poor. 5) The location of the device is too far away from the router. 6) If the device goes offline after a period of use, but after restarting the router or re-networking the device, the device returns to normal. Indicating the router is overloaded due to long-term high-load use, you need to replace it with a more powerful one, or reduce the number of devices connected to the router. 7) You can also use phone hotspot to check whether it is the problem of network. 	<p>FCC Statement</p> <p>This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on,</p>	<p>The user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> -Reorient or relocate the receiving antenna. -Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help. <p>To assure continued compliance, any changes or modifications not expressly approved by the party. Responsible for compliance could void the user's authority to operate this equipment. (Example-use only shielded interface cables)</p>	<p>This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <ol style="list-style-type: none"> (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. <p>FCC Radiation Exposure Statement: The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.</p>	
---	---	---	--	--	--