

GEARDON[®]

Technical support:
geardonservice@gmail.com

FC CE   
Made in china

USER MANUAL

GEARDON[®]

GD-SG10



SOLFEGGIO G10 KARAOKE MACHINE


(Please read this manual before using the detailed)

FC CE   
Made in china

What's included...

- 1x GEARDON Karaoke Machine
- 2x Rechargeable Wireless Microphones
- 1x 2.4g Remote Control
- 1x (DC16V) Power Adapter
- 1x USB-C Charging Cable and Adapter for Microphone
- 1x Performer's Manual

RAPID GUIDE

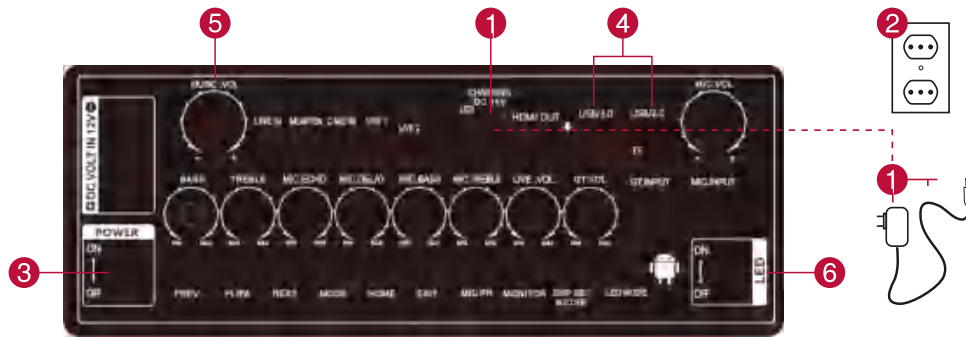

1- DC INPUT

To charge the GEARDON Solfeggio G10 karaoke machine, insert the socket of the battery charger included in the package here.

2- POWER SOCKET

Plug the battery charger into a power socket(100V-240V) and start the charging process. Check that the CHARGER indicator is red: it means the equipment is being charged. It takes about 3-4 hours to fully charge the system.

3- POWER ON/OFF

Press the switch to turn on (and then turn off) the equipment.

4- USB/3.0 AND USB/2.0


Insert a flash drive into the USB port, you can select files from the screen or from the control panel buttons.

5- VOLUME

Use the knobs to adjust volume, treble and bass, as desired.

6- LED

Turn on the switch to start the multicolour lights.

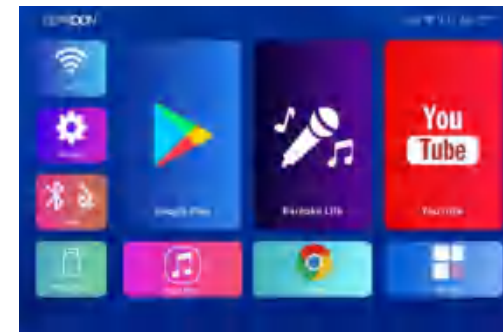

HOME PAGE


Solfeggio G10 settings icon is displayed on the Homepage. Use the UP/DOWN/RIGHT/LEFT buttons on the remote control to choose the desired function on the HOME PAGE, then press OK, or directly touch the icon on the screen and follow the instructions. No Internet connection is needed for Bluetooth,AUX, USB Flash Drive and TF Card to work.

A Wi-Fi/Internet connection is required to run YouTube, Google Play and any other apps in the "My Apps" section.

TECHNICAL FEATURES:

SCREEN DIMENSION	15"
SPEAKER POWER	40W RMS
SPEAKER	10" WOOFER + 3" MID+ 3" TWEETER

CONTROL PANEL

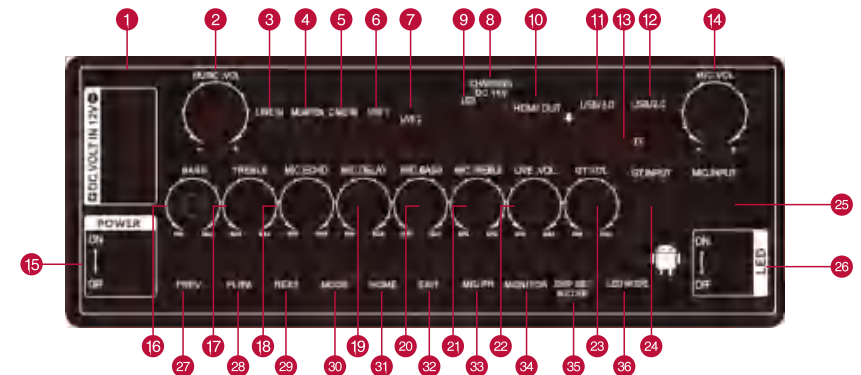

1.DC VOLT IN 12V: Car Charging Port

2.MUSIC VOL: Use this knob to adjust the main volume. Turn to the left to lower the volume, and to the right to raise it.

3.LINE IN: 3.5mm AUX Line in.

4.MONITOR:3.5mm jack port for headphone or audio out.

5.C.MIN IN: Wired microphone input with 3.5 mm jack.

6.LIVE 1: 3.5mm live audio port.

7.LIVE 2: USB type C live audio port.

8.DC 16V Charging port: Charging interface. Plug in the battery charger when the GEARDON audio-video system has a low battery level.

- 9. Charging Indicator Light:** It is red if the device is charging. The indicator light will automatically turn off when charging is complete. Approximate charging time: 3-4 hours.
- 10. HDMI OUTPUT:** HDMI output allows to connect the GEARDON device to the TV.
- 11. USB/3.0:** Play audio/video files via USB media.
- 12. USB/2.0:** Play audio/video files via USB media.
- 13. TF:** TF card port. Insert a TF card to play audio and video files.
- 14. MIC VOL:** Use this knob to adjust the microphone volume. Turn to the left to lower the volume, and to the right to raise it.
- 15. POWER ON/OFF:** Press the switch to turn on (and then turn off) the equipment.
- 16. BASS:** Use this knob to adjust the volume of the BASS. Turn it to the left to lower the volume, or to the right to raise it.
- 17. TREBLE:** Use this knob to adjust the volume of the TREBLE. Turn it to the left to lower the volume, or to the right to raise it.
- 18. MIC. ECHO:** Use this knob to adjust the ECHO effect of the microphone. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the microphone).
- 19. MIC. DELAY:** Use this knob to adjust the DELAY effect of the microphone. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the microphone).
- 20. MIC. BASS:** Use this knob to adjust the BASS of the microphone. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the microphone).
- 21. MIC. TREBLE:** Use this knob to adjust the TREBLE of the microphone. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the microphone).
- 22. LIVE. VOL:** Use this knob to adjust the volume of the LIVE. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the LIVE1/LIVE 2 port).
- 23. GT. VOL:** Use this knob to adjust the volume of the GT. Turn to the left to reduce it, and to the right to increase it. (Useful only when using the GT.INPUT port).
- 24. GT. INPUT:** Guitar input with 6.35 mm jack.
- 25. MIC. INPUT:** Microphone input with 6.35 mm jack.
- 26. LED ON/OFF:** Press ON to turn on the lights, and OFF to turn them off.
- 27. PREV:** Directional key to select a previous music.
- 28. PL/PA:** Play or Pause the music.
- 29. NEXT:** Directional key to select a next music.
- 30. MODE:** Bluetooth mode and AUX mode activation.
- 31. HOME:** Return to home page.
- 32. EXIT:** Key to return to the previous page.
- 33. MIC PR:** Button to prioritize the microphone. By activating this mode, if you use the microphone while a song is playing, the music will automatically turn down to let you hear what is amplified by the microphone. As soon as you stop talking, playback will resume normally.
- 34. MONITOR:** Set mute speaker enable/ disable, headphone/ extra speaker will keep working while using MONITOR 3.5mm jack port.
- 35. DSP SE/MIC SE:** Adjust music effects and voice effects.
- 36. LED MODE:** Select LED effect, 6 LED effects are available.



WI-FI CONFIGURATION

Touch the WIFI icon on the home screen, or press the UP-DOWN-LEFT-RIGHT keys on the remote control, until you reach the desired icon, then press the OK key. After selecting WIFI, scroll down the list of functions to Wi-Fi and press OK (or select the function by touching the screen). Select the desired network and enter the password required, if any, for connection.

BLUETOOTH® CONNECTION (Solfeggio G10)

Touch the MODE icon from the Home screen, or press the MODE button to start the Bluetooth connection. Open your device settings in the Bluetooth section and select the "Solfeggio G10" device. Select the setting that allows to connect the 2 devices. You can now listen to music files on your device through the Solfeggio G10 device. Press the PREV/NEXT buttons to choose tracks. Press the PL/PA key to pause or restart a paused track. Press the EXIT key to exit Bluetooth mode.

DEVICE SETTINGS

To access, use the UP-DOWN-LEFT-RIGHT buttons on the remote control or directly touch the SETTINGS icon on the screen. Press the exit key or the arrow icon in the bottom right corner to exit a function. You can adjust some functions of the device in the settings section by following the directions on the screen.

DATE and TIME SETTING:

Connecting the machine to wi-fi, date and time will automatically update. If this not happens, due to connection problems, you can follow these steps:

- 1 - From the home page, touch "SETTINGS" icon and select DATE & TIME;
- 2 - Tap "Select time zone" and look for the time zone of your country. If you can't find it, select a city that has the same time zone of your Country.
- 3 - Before going back to the home page, tap "automatic date & time" .

LANGUAGE SETTING:

select "Languages and Input," then "Languages." Continue with "more language", and choose the desired language. The language will automatically change.

To back up your data and files, or go to factory data reset, go to Reset options.

Youtube, Google Play ,Google Chrome are pre-installed apps and cannot be uninstalled.

To uninstall other apps, push the icon and follow the instructions.

USING APPLICATIONS

From the Homepage, select the MY APPS icon. This section contains all the apps installed on the equipment.

Apps can be downloaded from Google Play with a dedicated account.

Warning! Some Apps may not be compatible with the Android version installed on the equipment and, therefore, you might not be able to either download or update them.

Explorer: Select EXPLORER in MY APPS, to check the available storage and the files available on solfeggio G10, USB or TF device.

WIFIDisplay: with this App is possible to start mirroring function on Solfeggio G10 device, audio/video files contained in another Android operated devices.

WIFIDisplay can work only if Solfeggio G10 and the other device are both connected to the same wi-fi connection.

REMOTE CONTROL

Product icon



- 1. POWER:** Turn on/off standby mode.
- 2. PLAY/PAUSE:** Play or Pause the music.
- 3. OK(Enter/Select/Mouse Left):** Key to confirm the selection, like mouse left key.
- 4. Mouse on/off:** Press to open air mouse function, press it again to close.
- 5. UP:** Key to up.
- 6. DOWN:** Key to down.
- 7. LEFT:** Key to left.
- 8. RIGHT:** Key to right.
- 9. HOME/RETURN:** Go back to the home, like mouse right key.
- 10. MENU:** Open menu options.
- 11. PAGE UP:** Pull the page up. (Useful only when using the website or some files).
- 12. PAGE DOWN:** Pull the page down. (Useful only when using the website or some files).
- 13. VOLUME+:** Key to increase the main volume.
- 14. VOLUME-:** Key to decrease the main volume.
- 15. BACKSPACE:** Delete inputted content
- 16. MUTE:** Mute volume.

Air Mouse has 3 levels of cursor speed.

From slow to fast:

Press and hold "OK" and "Volume+" buttons.
The speed adjusts one level when LED light on.

From fast to slow:

Press and hold "OK" and "Volume-" buttons.
The speed adjusts one level when LED light on.

Low battery reminder:

The red light flashes slowly when the AAA battery power of the product is lower than 2v.
It means that the battery need to be replaced at this time.

UHF MICROPHONE

- Press the switch on the microphone, the microphone to turn on or off.
- The microphones will connect the Solfeggio G10 device automatically.
- The microphones are rechargeable.

Troubleshooting Guide

1. Machine is not turning on.

The battery is depleted. Be sure to charge the machine after each use.

2. Microphone is not turning on.

The Microphone battery is low or depleted. Recharge the batteries for the microphone.

3. Touch screen is not turning on.

Turn off the power and then turn it back on.

4. USB or TF mode is not working.

Ensure that the touch screen is set to the right mode by going to the Media Player app and pressing the icon for your selected input. Alternatively, try unplugging either the USB or TF from the machine and turning it off. Turn the machine back on, plug the USB or TF back in, enter the Media Player app on the touch screen, and press the icon for your selected input.

5. Machine powers on and then shuts down.

Please charge the machine.

6. No sound is playing from the speaker.

Ensure that the volume on the machine, remote, and your device (if applicable) are all turned to an audible level. Also check to see whether you are on MUTE by pressing MONITOR on the control panel.

7. Button or knob on the machine/remote control is not working properly.

Power off the machine and turn it back on.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.