



TX900-BLG-55

TX900-BLG-55



物理参数

TX900-BLG-55

NO.	Parameter	Parameter details
1	Antenna size	550mm
2	Overall weight	235g
3	diameter	Φ20mm
4	material	Fiber-reinforced plastic (FRP)
5	Interface mode	N-J
6	temperature	-40℃~+85℃
7	Storage temp.	-40℃~+85℃

电气参数

TX900-BLG-55

NO.	Parameter	Parameter details
1	frequency range	860-940MHz
2	antenna gain	8dBi
3	VSWR	≤1.5
4	polarization	vertical polarization
5	radiation direction	omnidirection
6	input impedance	50Ω
7	Capacity	100W

Specifications and dimensions


TX900-BLG-55




Antenna characteristics

TX900-BLG-55

1. High transmitting efficiency and high receiving sensitivity.

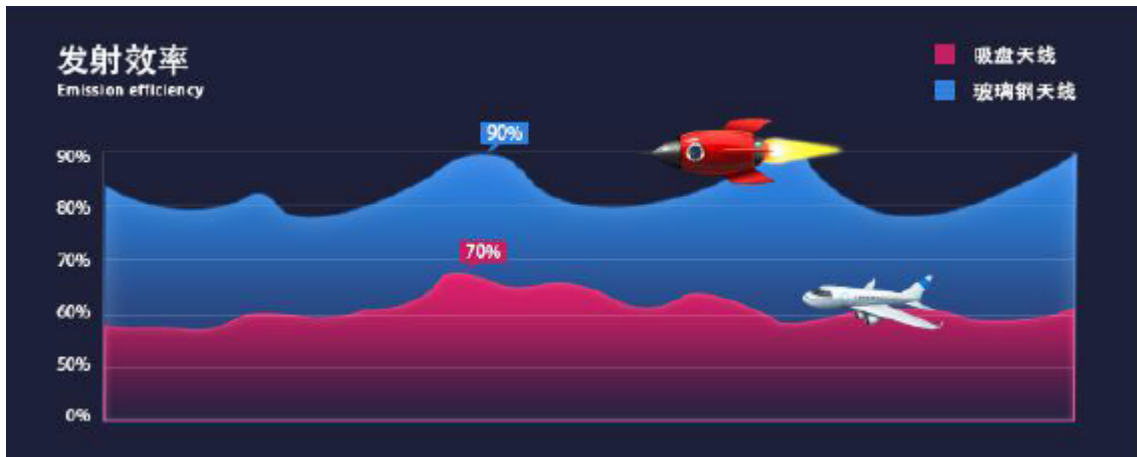

2.Contains pure copper vibrator, with long communication distance.

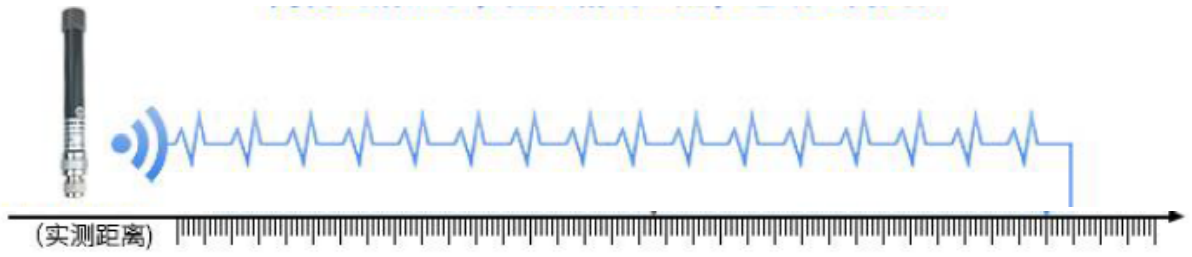


3.High protection level



[test instrument]: agilent E5071C

[Current temperature]: 26°C

1、VSWR

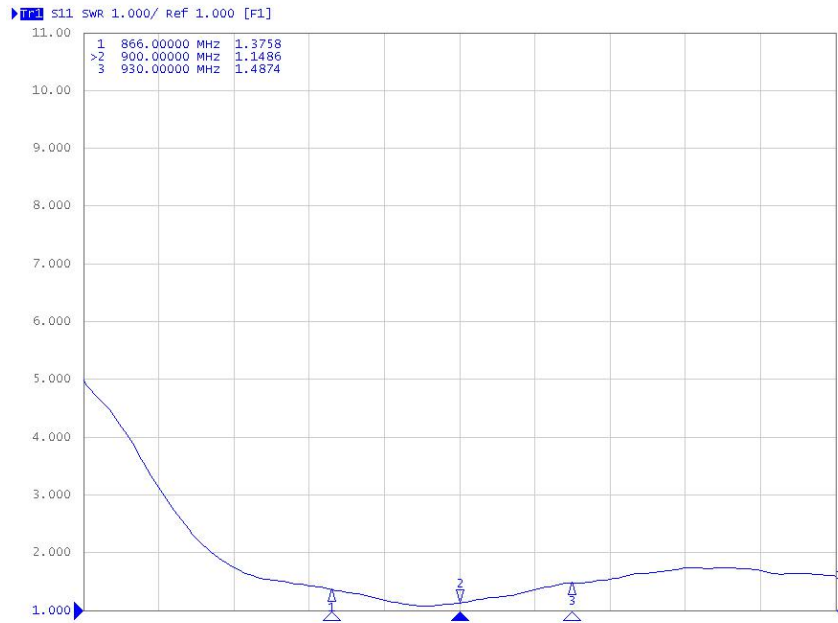

2、Smith

