

 **Bluetooth**

# Stereo Headphone

## KBJ-261N

User's Manual



## **Contents**

Introduction . . . . .	10
Guide . . . . .	11
Instructions . . . . .	12 - 16
Tips . . . . .	17
Project Specification and Instruction . . . . .	18

Thank you for selecting our latest Bluetooth headphone, please read this Manual User carefully before you operate this headphone, and please save this Manual for further reference. Before operating, please read all the Safety notice to make sure the safe and appropriate use.



### Safety Notice:


- Please observe the rules of the Country or Region which you are in while driving.
- Do not disassemble or modify the headphone at any reason, otherwise, It may damage or burn the headphone
- If there is any quality problem, please send the headphone to authorized service center for repairing.
- Please keep the equipment along with all the accessories out of the reach of children and pets. It will cause suffocation and serious injury.
- Do not put the device under the environment which the temperature is too low or too high ( Below 0°C or over 45°C).
- Extreme temperatures will cause the device deformation, reduce the charging capacity and shorten the working life.
- Please do not wet the device, for the liquid can cause serious damage to the device. Please do not touch the device by wet hands. It is out of the maintenance range for the damage caused by water.
- Please avoid closing to the eyes of children and pets when using the flash indicator of the device.
- Please do not operate the device in thunderstorm weather.




It will damage your hearing if you listen with high volume for a long time. It is recommended that only use the lowest volume which is necessary for speaking and listening to music.


## 1. Guide

### ■ Headphone introduction

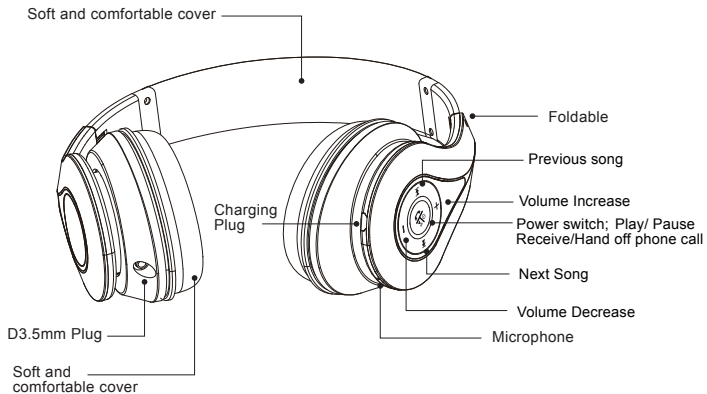



Foldable



Retractable

USB Charging Cable:










3.5mm Audio Cable:



※ Accessory Contents: Bluetooth Headphone, USB Charging Cable, 3.5mm Audio Cable,  
User's Manual

## 2. Instruction

### ■ Key Function

 Power switch	Switch on : Press 3 seconds to switch on , the Blue indicator will be in (It will appear voice prompts in English). When the red and blue indicators take turns to flash, it enters into Pairing mode, (It will appear the voice prompts when no devices to connect) . Switch off : Press 3 seconds to switch off , the Red indicator flashes two times means the device is switched off.
 Receive/Hand off phone call	Press "Function Key" to receive phone call, press it again to end the phone call. Press the key by twice continuously to re-dial the last phone number. Press the key for 2 seconds to reject the phone call.
 Play/ Pause	In Music Mode, press it for 1 time to pause, and press it again to play. (when phone call comes, the music will be off. When phone call is off, the music will continue)
 Previous song	In Music Mode, press it to play previous song.
 Next Song	In Music Mode, press it to play next song.
 Volume Increase	Short press "Volume increase" key for 1 time to increase volume with one point, long press to increase volume all the time. The voice prompts will appear when the volume up to Maximum.
 Volume Decrease	Short press "Volume Decrease" key for 1 time to decrease volume with one point, long press to decrease volume all the time. The voice prompts will appear when the volume down to Minimum.

## ■ Voice Prompt Function

Voice Prompt	Status
Power on	When you turn the headphone on
Phone 1 connected	When you connect the first mobile phone
Phone 2 connected	When you connect the second mobile phone
Your headphone is disconnected	When you have no devices to connect
Your headphone is disconnected	When you disconnect the headphone from the first mobile phone
Your headphone is disconnected	When you disconnect the headphone from the second mobile phone
Incoming call	When a call comes in
Maximum volume	When the volume up to the maximum
Mute	When the volume down to the minimum
Power off	When you turn the headphone off

### 3.How to connect with two Bluetooth mobile phone

Turn on the multi-function key, the headphone will be connected with the mobile phones  
( **There will be voice prompts in each step** )

- (1) Turn off the bluetooth of the first mobile phone.
  - (2) The red and blue indicators take turns to flash for searching connection automatically.
  - (3) Turn on the bluetooth of the second mobile phone and search for headphone.
  - (4) Find the headphone KBJ-261N from the device list of the second mobile phone, and make the connection.
  - (5) Input the password 0000 if needed and the connection will be made (voice prompts).
  - (6) Turn off the bluetooth headphone, and disconnect the second mobile phone automatically.
  - (7) Reactivate the bluetooth functions of both mobile phones, and turn on the Bluetooth headphone again. The headphone will make connection with two mobile phones automatically.
- ※ When the headphone is connected with two mobile phones, some fuctions of the mobile phones cannot work normally.

#### 4. Bluetooth Indicator Status

Work Status	Indicator Light Status	Remark
Switch on	Blue indicator flash 3 times	Voice prompts in English
Switch off	Red indicator flash 2 seconds	Voice prompts in English
No connection	Blue indicator will flash 1 time every 12 seconds	
Connection	Blue indicator will flash 1 time every 6 seconds	
Phone call	Blue indicator will flash 1 time every 6 seconds	
Play Music	Red indicator will flash 1 time every 6 seconds	
Low battery warning	Red indicator will flash 1 time every 5 Minutes	With " Du,Du,Du" warning sound
Charging	Red indicator is on all the time when charing; Red indicator is off when battery is full.	



## 5.Headphone Charging

This headphone is equipped with built-in non-detachable and rechargeable battery.

Please make sure that the battery is charged full for the first time use

- Connect the adapter to the charging plug.
- Insert the power adapter into the standard power plug. During the charging, indicator will turn to Red. If without charging, please plug out the travel charger first, then connect it again.
- After full charging, red indicator will be off. Please plug out the travel charger from the power plug and headphone.

### Process of Use

It will reduce the battery performance after long time / repeatable charge and dis-charge. And it is normal phenomenon for all the rechargeable battery. Please do not dial or receive phone call when charging, and please plug out the charger from the headphone,then receive the phone call. When the battery is low, the headphone will appear the prompt and the red indicator will flash.

If the headphone shut down without battery during the phone call, it will switch to mobile phone automatically. When someone call, press " Function key" for 1-2 seconds to reject the call, you will hear " Call termination". If there are two calls from two mobile phone, you only can reject the call from the main mobile phone.

## 6. Line in connection

Insert 3.5mm audio input cable into headphone 3.5mm plug, the other part into audio output device ( MP3/PC), then you can enjoy music. If the bluetooth headphone is in "ON" status, insert Line in cable will switch off bluetooth headphone power.

## 7. Tips

- Question: Which devices will disturb phone call when using headphone ?

Answer: The devices such as cordless mobile phone and wireless network equipment will cause interference, it sounds like static normally. In order to reduce interference, please do not put the headphone close to other devices which use or send out wireless radio.

- Question: Will the headphone disturb the electronic devices in the car, radio or computer ?

Answer: The power from the headphone is far lower than the power from the common mobile phone. Besides, the signal is completely complied with international bluetooth standard. Therefore, Please do not worry about that it will disturb the standard consumer electronic devices.

- Question: Will other bluetooth mobile phone user hear my phone call ?

Answer: When connecting the headphone and bluetooth mobile phone, it will only establish close link between the two bluetooth devices. As for the transit frequency power, bluetooth wireless signal is far lower than the signal power of the common mobile phones, therefore, it will be difficult for the third party to monitor the wireless bluetooth technology of the headphone.

- Question: Why we can hear the echo during the phone call ?

Answer: Adjust the headphone volume, or move to other region to try again.

- Question: How to clean the headphone ?

Answer: Clean it by dry soft cloth.

- Question: The headphone can not be charged fully?

Answer: The headphone and travel charger may not connect well. Please apart the headphone and travel charger, then re-connect them to charge for the headphone.

## 8. Project Specification and Instruction

- Bluetooth Version : 2.1
- The supported devices: Bluetooth mobile phones, Bluetooth speakers  
Bluetooth PC and other Bluetooth devices
- The Maximum work range: 33 Feet (10 Meters)
- Standby time: Around 300 Hours
- Music play/Talk time: Around 15 Hours
- Charging time: 4 Hours
- Charging Voltage: DC 5V
- Work Voltage: 3.7V
- Sensitivity: 113±3DB
- Frequency Response: 20Hz~20KHz

※ The actual time may vary from mobile phone types and functions.

# Stereo Headphone

[www.compoka.com](http://www.compoka.com)

## FCC Certification Requirements

Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.