


Levven Audio

SOUL PLAY

Model Number: LA-SY40

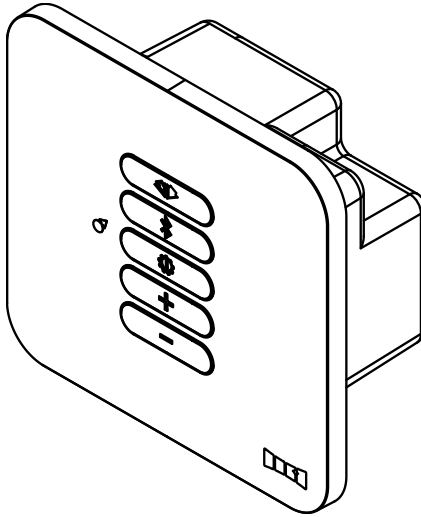

Operating Instructions

A product by
levven™ 

Revised: 2018-11-29

TABLE OF CONTENTS

1	IMPORTANT SAFETY INSTRUCTIONS.....	3
2	BOX CONTENTS.....	6
3	GETTING STARTED	6
3.1	PRECAUTIONS	6
3.2	PLACEMENT	6
3.3	NOTABLE PRODUCT FEATURES	7
3.4	FRONT PANEL	8
3.5	AC POWER INPUT	10
3.6	POWER ON	10
4	USING SOUL PLAY.....	10
4.1	MODES	10
4.2	BLUETOOTH PAIRING	11
4.3	PHONE OR TABLET DEVICE SETUP.....	11
4.4	USING THE SKAA BOND BUTTON.....	12
4.5	PLAYING AUDIO FROM A PHONE OR TABLET DEVICE	12
4.6	PLAYING AUDIO FROM A MAC.....	13
4.7	PLAYING AUDIO FROM A WINDOWS PC	13
4.8	THE GREEN LIST	13
4.9	LISTEN TO A DIFFERENT SKAA TRANSMITTER	14
4.10	RESET / CLEAR ALL SETTINGS.....	15
4.11	USE WITH OTHER LEVVEN AUDIO RECEIVERS	15
5	TROUBLESHOOTING	16
6	SPECIFICATIONS	17
7	CERTIFICATIONS AND AGENCY APPROVALS	18
8	WARRANTY.....	19
9	FCC STATEMENT	20
10	INDUSTRY CANADA STATEMENT	21
11	CONTACT INFORMATION	22



1 IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any of the ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Only use attachments/accessories specified by the manufacturer.
10. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
11. To reduce the risk of electric shock, do not open the equipment. For safety reasons, only allow qualified safety personnel to open the equipment.
12. **WARNING:** to reduce the risk of electric shock, do not expose this apparatus to rain or moisture, dripping, or splashing. Do not place on the apparatus any objects filled with liquids.

-
1. Lisez ces instructions.
 2. Conservez ces instructions.
 3. Tenez compte de tous les avertissements.
 4. Suivez toutes les instructions.
 5. N'utilisez pas cet appareil près de l'eau.
 6. Nettoyez uniquement avec un chiffon sec.
 7. Ne bloquez aucune des ouvertures de ventilation. Installez conformément aux instructions du fabricant.
 8. Ne l'installez pas près de sources de chaleur telles que radiateurs, bouches de chaleur, poêles ou autres appareils (y compris les amplificateurs) produisant de la chaleur.
 9. Utilisez uniquement les pièces jointes / accessoires spécifiés par le fabricant.
 10. Confiez toute réparation à un personnel qualifié. Un entretien est nécessaire lorsque l'appareil a été endommagé de quelque


manière que ce soit, tel qu'un cordon d'alimentation ou une fiche endommagée, un liquide renversé ou des objets tombés dans l'appareil, une exposition à la pluie ou à l'humidité, ne fonctionne pas normalement , ou a été abandonné.

11. Afin de réduire les risques d'électrocution, n'ouvrez pas l'appareil. Pour des raisons de sécurité, n'autorisez que du personnel de sécurité qualifié à ouvrir l'équipement.
12. AVERTISSEMENT: afin de réduire les risques d'électrocution, n'exposez pas cet appareil à la pluie ni à l'humidité, aux égouttements ou aux éclaboussures. Ne placez pas d'objets remplis de liquides sur l'appareil.

	<p>This symbol is intended to alert you that uninsulated voltage within this product may have sufficient magnitude to cause electric shock. Therefore, it is dangerous to make any kind of contact with any inside part of this product.</p> <p>Ce symbole a pour but d'alerter toute personne qu'un contact avec une pièce interne de ce produit, sous tension et non isolée, pourrait être suffisant pour provoquer un choc électrique. Il est donc dangereux d'être en contact avec toute pièce interne de ce produit.</p>
	<p>This symbol is intended to alert you of the presence of important operating and maintenance (servicing) instructions in the literature accompanying this product.</p> <p>Ce symbole a pour but de vous avertir qu'une documentation importante sur le fonctionnement et l'entretien accompagne ce produit.</p>



TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.
AFIN DE PREVENIR TOUT INCENDIE ET ELECTROCUTION, N'EXPOSEZ PAS CETTE UNITE A LA PLUIE ET L'HUMIDITE.



DOUBLE INSULATION
When servicing only
use identical parts

2 BOX CONTENTS

- (1) Soul Play base unit
- (1) Soul Play cover plate
- (1) Operating instruction manual
- (4) Wire-splice connectors

3 GETTING STARTED

Thank you for purchasing Soul Play. This product is yours for an unlimited source of enjoyment. Soul Play provides great audio performance with low noise, low distortion, and is the perfect sidekick to other Levven Audio products – for example, Soul Sub and Soul Bar.

Soul Play is easy to install and operate. If you have experience with other audio amplifiers, you will find the installation and operation very simple and easy.

3.1 PRECAUTIONS

Please read this manual carefully. In addition to basic installation and operating instructions, it provides valuable information on various Soul Play system configurations as well as general information that will help you get optimum performance from your system. Please contact your authorized Levven Audio dealer or retailer for answers to any questions you might have. In addition, all of us at Levven welcome your questions and comments.

3.2 PLACEMENT

The product shall be installed inside a 33 cubic inch (540 ml) 2-gang plastic outlet electrical box.

SKAA transmitters send audio to an 80-foot (25-metre) diameter and Bluetooth devices send audio to a 30-foot (10-metre) diameter. Install your Soul Play inside this transmitting range. When deciding the best location for Soul Play, include the distance needed to transmit from outside spaces like the back yard or patio. For optimum wireless reception range, mount your Soul Play vertically on a wall.

3.3 WIRING

Use a listed Type CL3, CL3R, or CL3P 300V-rated speaker wire to comply with local building and electrical installation codes. For more information on these codes, contact a licensed electrician.

3.3.1 USA

Follow National Electric Code Article 725.136(D) where Class 3 circuit conductors in enclosures are permitted to be installed with power circuits where they are used solely to connect the equipment connected to Class 3 circuits and where power is routed to maintain a minimum of 6 mm (0.25 in.) separation from the conductors and cables of Class 3 circuits; or the circuit conductors operate at 150 volts or less to ground and are installed using Type CL3, CL3R, or CL3P wire.

3.3.2 CANADA

Follow Canadian Electrical Code Section 16-114 where conductors of different circuits in the same enclosure may occupy the same enclosure, provided that all conductors are insulated for the maximum voltage of any conductor in the enclosure. Power supply conductors and other conductors are permitted in the same enclosure when connected to the same equipment and all conductors are insulated for the maximum voltage of any conductor in the enclosure.

3.4 NOTABLE PRODUCT FEATURES

- a) Soul Play can receive audio from any Bluetooth device and play the audio to its internal speakers. This is called Bluetooth receive mode.
- b) Soul Play can receive audio from any Bluetooth device, play the audio to its internal speakers, and rebroadcast the audio stream to up to 4 additional SKAA receivers. This is called Bluetooth relay mode.
- c) Soul Play can receive audio from any SKAA transmitter and play the audio to its internal speakers. This is called SKAA receive mode.
- d) Soul Play can receive audio from any SKAA transmitter, play the audio to its internal speakers, and rebroadcast the audio stream to up to 4 additional SKAA receivers. This is called SKAA relay mode.

- e) Soul Play remembers your favorite Bluetooth devices. The Bluetooth paired list holds up to eight devices which have successfully paired with Soul Play. Note that if you pair a ninth device, it will replace the device on the list which has least recently connected.
- f) Soul Play remembers your favorite SKAA transmitters. The SKAA green list holds up to ten favorite transmitters.
- g) Soul Play automatically enters a low power state when not in use. It wakes from its low power state when a SKAA transmitter connects, a Bluetooth device connects, or a button is pressed on the front panel.

3.5 FRONT PANEL

3.5.1 SKAA BOND BUTTON



This button allows several interactions with the SKAA receiver. See section 4.4 for more details.

3.5.2 SKAA BOND LED



This red-green dual color LED indicates several states of the SKAA receiver. See section 4.4 for more details.

3.5.3 BLUETOOTH BUTTON




Click this button to attempt a connection to a Bluetooth device. Hold this button for 2 to drop the active Bluetooth connection and enter the Bluetooth pairing state. A ten-second hold will clear the Bluetooth paired list and enter the Bluetooth pairing state.

3.5.4 BLUETOOTH LED



When on solid and bright, this blue LED indicates Soul Play is in Bluetooth receive mode and has an active connection. When flashing, it indicates a Bluetooth pairing is in progress. When on solid and dim, it indicates Soul Play is attempting to connect to a Bluetooth device.

3.5.5 GEAR BUTTON



Hold this button to power off Soul Play. Click this button to wake Soul Play from off or standby state.


When Soul Play is awake, click this button to cycle through the modes – SKAA receive, SKAA relay, Bluetooth, Bluetooth relay. See section 4 for more details.

3.5.6 POWER LED




When on solid and bright, this red LED indicates Soul Play is powered and awake. When this LED is off, it indicates Soul Play is powered off. When on solid and dim, it indicates Soul Play is in low power standby mode.

3.5.7 RELAY LED




When on, this white LED indicates Soul Play is in SKAA relay mode or Bluetooth relay mode. When this LED is off, it indicates either SKAA receive mode or Bluetooth receive mode.

3.5.8 VOLUME UP (+) BUTTON



Click this button to increase Soul Play's receiver volume.

3.5.9 VOLUME DOWN (-) BUTTON



Click this button to decrease Soul Play's receiver volume.

3.6 AC POWER INPUT

Soul Play will operate between 90 – 270 AC line voltage with a line frequency of either 50 Hz or 60 Hz. There is no need to convert or adjust the unit in any way.

3.7 POWER ON

1. The power LED will indicate that it is powered.
2. Press the gear button to bring the unit out of standby.
3. Either the SKAA Bond LED will be lit dimly or the Bluetooth LED will be lit dimly indicating the unit is ready to receive a wireless signal from a SKAA transmitter or Bluetooth device.

4 USING SOUL PLAY

4.1 MODES

Soul Play has 4 modes of operation. Click the gear button to cycle between modes.



1. SKAA Receive Mode

In this mode, Soul Play will receive audio from any SKAA transmitter.

2. SKAA Relay Mode

In this mode, Soul Play works the same as SKAA receive mode and rebroadcasts the audio to up to 4 additional SKAA receivers.

3. Bluetooth Receive Mode

In this mode, Soul Play will receive audio from any Bluetooth device including smartphones, tablets, TVs, PCs, and many others. Soul Play works as an ordinary Bluetooth speaker. Click the Bluetooth button to pair with your phone. Hold the Bluetooth button to clear the paired list.


4. Bluetooth Relay Mode

In this mode, Soul Play works the same as Bluetooth receive mode and rebroadcasts the audio to up to 4 additional SKAA receivers.

4.2 BLUETOOTH PAIRING

Follow these instructions to setup this feature:

1. Set Soul Play in Bluetooth receive or Bluetooth relay mode by clicking the gear button.



2. Start playing audio on the Bluetooth sending device.
3. Click the Bluetooth button.



4. Pair your Bluetooth device to Soul Play.

For more information on pairing Bluetooth devices refer to your device's manual or support website.

4.3 PHONE OR TABLET DEVICE SETUP

Soul Play can also play audio from any SKAA transmitter.

- a) Insert a SKAA transmitter into your device.
- b) Play some audio on your device.

- c) Double-click the SKAA Bond button on Soul Play. The SKAA Bond LED will be lit bright amber and you will hear your audio playing on Soul Play.



- d) Press and hold the SKAA Bond button for 3 seconds to add your SKAA transmitter to Soul Play's green list. The SKAA Bond LED will be lit bright green.
- e) Press the bond button four times to put Soul Play into swing mode. The LED will be lit bright red.

4.4 USING THE SKAA BOND BUTTON



Single-Click	Playing or waiting to play from a SKAA transmitter on the green list.	Amber (dim) = waiting Amber (bright) = playing
Double-Click	Playing or waiting to play from a SKAA transmitter that has not yet been added to the green list.	Green (dim) = waiting Green (bright) = playing
Hold	Add or remove a SKAA transmitter from the green list by pressing and holding the bond button for 4 seconds.	Amber to Green = added Favorite Red(flash) = deleted
4-Click	*RECOMMENDED: swing mode to play from any green-listed SKAA transmitter without manually pressing bond button each time.	Red (dim) = waiting Red (bright) = playing
6-Click	Clear the green list and reset volume settings.	Red (flash) = list reset

4.5 PLAYING AUDIO FROM A PHONE OR TABLET DEVICE

- a) Insert a SKAA transmitter into your smart device.
- b) Open the SKAA cmd app.
- c) Start playing audio on the device. At this point, the device is transmitting audio via the SKAA transmitter.

- d) If the SKAA transmitter is the only one transmitting and it has been added to the green list, then you will hear your audio playing.
- e) If the SKAA transmitter has not added to the green list, follow the instructions in previous sections to add your SKAA transmitter to the green list.
- f) If the SKAA transmitter is not the only one transmitting and your Soul Play is playing audio from another source, follow the instructions ahead to hear audio from a different SKAA transmitter.

4.6 PLAYING AUDIO FROM A MAC

- a) Insert the Ursula SKAA transmitter into the Mac's USB port.
- b) Play some audio on the device.
- c) Click the Apple in the top left corner of the screen and choose "System Preferences".
- d) Click on "Sound".
- e) In the Sound settings screen, click the "Output" tab.
- f) Select "SKAA Transmitter" from the list of audio output devices.
- g) Adjust the volume to desired level.
- h) Play an audio file on your Mac and follow the green list process in Section 3.6 to add this Ursula SKAA transmitter to the green list.
- i) After you add Ursula to the green list, press the bond button four times to return Soul Play into swing mode.

4.7 PLAYING AUDIO FROM A WINDOWS PC

- a) Insert the Ursula SKAA transmitter into the Windows device. It will automatically install the required drivers and enable wireless audio transmission.
- b) Play some audio on the device.
- c) Adjust the volume on the device to desired level.
- d) Follow Section 3.6 to add this Ursula SKAA transmitter to the green list.
- e) After you add the Ursula SKAA transmitter to the green list, press the bond button four times to return Soul Play into swing mode.

4.8 THE GREEN LIST

Soul Play can save a list of favorite SKAA transmitters in its green list. If a SKAA transmitter is not on the green list, Soul Play may not play your audio.

- a) To add your SKAA transmitter to the green list, connect the SKAA transmitter to a device and start playing audio.

- b) The SKAA Bond LED on Soul Play should be a dim amber or dim green to indicate that it is looking for new SKAA transmitters. Double click the SKAA Bond button on Soul Play to search for the transmitting, non-favorite SKAA transmitter. The LED indicator will flash bright amber when it discovers the SKAA transmitter signal.
- c) When you hear your audio playing, press and hold the SKAA Bond button for four seconds to save your SKAA transmitter in the green list.
- d) The SKAA Bond LED will turn solid green to indicate audio is playing from the green list transmitter.
- e) After you add Ursula to the green list, press the bond button four times to return Soul Play into swing mode.

4.8.1 TIPS WHEN USING THE GREEN LIST

- a) Soul Play can save up to ten SKAA transmitters in its green list.
- b) Soul Play will auto-add a SKAA transmitter to its green list if you play from it for 30 minutes.
- c) The SKAA cmd app identifies the available receivers your device can play to (via its SKAA transmitter). Go to the Apple App Store or Google Play Store and search "SKAA" to download the app.

4.8.2 SWING MODE

Swing mode is the easiest way to use a Levven Audio receiver when you have more than one SKAA transmitter in your space. After you add or remove a SKAA transmitter from a Soul Play's green list, press the bond button four times to put that Soul Play in swing mode. The LED status indicator will turn red. Now Soul Play will automatically play from any transmitting SKAA transmitter in its green list without having to manually press the bond button. Disconnect the first SKAA transmitter when you want a Soul Play to detect and play audio from a second SKAA transmitter.

4.9 LISTEN TO A DIFFERENT SKAA TRANSMITTER

What can you do if you want to listen to a different SKAA transmitter when another is already playing?

- a) The easiest way to change the SKAA transmitter you are listening to – power off or disconnect the SKAA transmitter from the first device, then connect and play from a second device.
- b) Activate swing mode so Soul Play will automatically play from any transmitting SKAA transmitter in the green list.
- c) To manually control audio playback from Soul Play:

- i. Single-click the bond button to switch to the next transmitting favorite SKAA transmitter or
- ii. Double-click on the bond button to switch to the next transmitting non-favorite SKAA transmitter.

4.10 RESET / CLEAR ALL SETTINGS

To clear all saved SKAA transmitters from the green list, press the bond button six times. The LED status indicator will flash red, Soul Play's green list will be cleared, and volume settings reset. This lets you add new SKAA transmitters to the green list.

4.11 USE WITH OTHER LEVVEN AUDIO RECEIVERS

Soul Play works well with other Levven Audio products like Soul Sub, Soul Bar, AR5, and RE1. Check out the combinations on our website.

5 TROUBLESHOOTING

Mostly the issues in audio systems are result of poor or wrong connections, or improper control settings. If you encounter problems, isolate the area of difficulty, check the control settings, determine the cause of the fault and make the necessary changes. If you are unable to get sound from Soul Play, refer to given suggestions for following conditions:

5.1.1 POWER LED IS NOT ON

No main power to Soul Play. Check AC power connections at the amplifier and the AC outlet.

5.1.2 NO SOUND

If the product is getting AC power, but is producing no sound, check the power LED. If Soul Play's SKAA Bond LED is dim, it means that Soul Play is seeking connection, check the following conditions,

- Is Soul Play bonded to a wireless streaming device?
- Is the streaming device turned on?
- Is audio playing on the wireless streaming device?
- Is the streaming device on mute?
- Is the volume on the streaming device set too low?
- Is audio playing on the wired device?
- Is the volume on the wired device set too low?

Note: Soul Play allows only one connection at a given time to play music. If a device is already bonded with Soul Play and you are trying to play music from another source, disconnect the device which is currently bonded with Soul Play before bonding the desired device with Soul Play to play music.

If the SKAA Bond LED is on bright solid, it means Soul Play has successfully bonded with a device, check all connections and control settings on associated components.

5.1.3 TROUBLE WITH SKAA

<https://skaa.com/tlc> can help you on issues with SKAA receivers, troubleshooting, SKAA transmitters, and the SKAA cmd app.

6 SPECIFICATIONS

Continuous Output Power	40 watts at 8 ohms 20 watts per channel, 2 channels
Frequency Response	20 Hz to 20 KHz, -3dB
Speaker Impedance	8 to 4 ohms
Input Power Requirements	100 to 240 VAC, 50 to 60 Hz, max 2 A
Dimensions (WxHxD)	120 x 112 x 60 mm 4.72 x 4.41 x 2.36 in
Weight (net)	330 grams (0.72 lbs)
Power cord	Tinned wire leads 18 AWG, black and white

All specifications are accurate at the time of printing. Levven reserves the right to make improvements without notice.

7 CERTIFICATIONS AND AGENCY APPROVALS

- CAN/CSA C22.2 No. 62368-1: 2014
- UL 62368-1, Second Edition 2014
- IEC 62368-1
- FCC Part 15 Class B
- Industry Canada ICES-3(B)/NMB-3(B)

FCC ID: 2AA9N-LASY40

Industry Canada ID: 11506A-LASY40

All specifications are accurate at the time of printing. Levven reserves the right to make improvements without notice.

8 WARRANTY

1-YEAR LIMITED WARRANTY

Levven Electronics Ltd. ("Levven") warrants that Soul Play you have purchased shall be free of any defects in parts and workmanship if used under normal operating conditions for a period of one (1) year from the date of purchase, except this warranty shall apply only to the original purchaser.

PLEASE RETAIN YOUR SALES RECEIPT, AS IT IS YOUR PROOF OF PURCHASE COVERING YOUR LIMITED WARRANTY.

THIS WARRANTY IS VOID WITHOUT SUCH PROOF OF PURCHASE.

Defective units will be repaired or replaced without charge, at Levven's discretion, with a like or comparable product by the Dealer if presented with proof of purchase to the Authorized Levven Audio Dealer from whom Soul Play was purchased. Any repair or service performed by any person or entity other than Levven is not covered by this limited warranty. Transportation costs are not included in this warranty. This limited warranty becomes void if the product has been damaged by alteration, misuse, accident, or neglect; or the product has been repaired or serviced by persons not authorized by Levven. THE FOREGOING CONSTITUTES THE ONLY WARRANTY MADE BY LEVVEN WITH RESPECT TO THE PRODUCT AND IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED. Any implied warranties, including without limitation, any implied warranties of merchantability or fitness for any particular purpose, imposed under state law are limited to the duration of this limited warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not be applicable to you.

This warranty is void if the Soul Play enclosure has been opened.

LEVVEN ASSUMES NO LIABILITY FOR PROPERTY DAMAGE RESULTING FROM NEITHER FAILURE OF THIS PRODUCT NOR ANY LOSS OF INCOME, SATISFACTION OR DAMAGES ARISING FROM THE LOSS OF USE OF SAME DUE TO DEFECTS OR AVAILABILITY OF SAME DURING SERVICE.

NOTE: This warranty applies only to products purchased and serviced within the U.S.A. and Canada. Warranties outside these countries are as defined by the authorized Levven Audio Distributor for your country or region and may vary from the above in terms and/or length.

Thank you again! We hope you enjoy your Soul Play. Visit <http://levven.com> and share your stories with us!

9 FCC STATEMENT

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

10 INDUSTRY CANADA STATEMENT

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- 1) This device may not cause interference, and
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1) l'appareil ne doit pas produire de brouillage, et
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

11 CONTACT INFORMATION

Leven
9741 – 54 Ave NW
Edmonton, Alberta T6E 5J4
Canada

Leven Audio customer service:
+1 (780) 391-3000



The SKAA Compatible Badge as well as the graphics-only version of it, the SKAA Icon, both found on the product itself, certify that this product has been tested and is fully compliant with all the requirements of the SKAA Standard. This SKAA-compliant product will work seamlessly with the SKAA ecosystem of audio transmitting and receiving devices. For more information on the SKAA Standard, please visit www.SKAA.com. The SKAA® name as well as its associated marks, logos and icons are trademarks or registered trademarks of Eleven Engineering Incorporated.