

Report No.: ATE20171834

Page 1 of 41

APPLICATION CERTIFICATION On Behalf of LEEDARSON LIGHTING CO., LTD

Arrival Sensor

Model No.: 6aB-SS-AG-C0

FCC ID: 2AB2Q-6AB-SS-AG-C0

Prepared for : LEEDARSON LIGHTING CO., LTD

Address : Xingda Road, Xingtai Industrial Zone, Changtai County,

Zhangzhou, Fujian, China.

Prepared by : Shenzhen Accurate Technology Co., Ltd.

Address : 1/F., Building A, Changyuan New Material Port, Science

& Industry Park, Nanshan District, Shenzhen, Guangdong,

P.R. China

Tel: (0755) 26503290 Fax: (0755) 26503396

Report Number : ATE20171834

Date of Test : Aug. 08--Sep. 01, 2017

Date of Report : Sep. 01, 2017






TABLE OF CONTENTS

Descri	ption	Page
Test R	eport Certification	
1. Gl	ENERAL INFORMATION	4
1.1.	Description of Device (EUT)	
1.1.	Special Accessory and Auxiliary Equipment	
1.3.	Test Facilities	
1.4.	Measurement Uncertainty	
	EASURING DEVICE AND TEST EQUIPMENT	
	PERATION OF EUT DURING TESTING	
3.1.	Operating Mode	
3.1.	Configuration and peripherals	
	EST PROCEDURES AND RESULTS	
5. PC	OWER LINE CONDUCTED MEASUREMENT	
5.1.	Block Diagram of Test Setup	
5.2.	Power Line Conducted Emission Measurement Limits	
5.3.	Configuration of EUT on Measurement	
5.4.	Operating Condition of EUT	
5.5.	Test Procedure	
5.6.	Power Line Conducted Emission Measurement Results	
	DB BANDWIDTH MEASUREMENT	
6.1.	Block Diagram of Test Setup	
6.2.	The Requirement For Section 15.215(c)	
6.3.	Operating Condition of EUT	
6.4. 6.5.	Test Procedure Test Result	
	AND EDGE COMPLIANCE TEST	
7.1.	Block Diagram of Test Setup (Conducted Band Edge)	
7.1. 7.2.	The Requirement For Section 15.249	
7.2.	EUT Configuration on Measurement	
7.4.	Operating Condition of EUT	
7.5.	Test Procedure	
7.6.	Test Result	
8. RA	ADIATED SPURIOUS EMISSION TEST	22
8.1.	Block Diagram of Test Setup	
8.2.	The Limit For Section 15.249	
8.3.	Restricted bands of operation	
8.4.	Configuration of EUT on Measurement	
8.5.	Operating Condition of EUT	
8.6.	Test Procedure	
8.7.	The Field Strength of Radiation Emission Measurement Results	
9. Al	NTENNA REQUIREMENT	41
9.1.	The Requirement	41

Antenna Construction41

9.2.



Report No.: ATE20171834 Page 3 of 41

Test Report Certification

Applicant: LEEDARSON LIGHTING CO., LTD.

Address : Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou,

Fujian, China

Manufacturer : LEEDARSON LIGHTING CO., LTD.

Address : Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou,

Fujian, China

Product : Arrival Sensor

Model No. : 6aB-SS-AG-C0

Trade name : n.a

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249 ANSI C63.10: 2013

The EUT was tested according to FCC 47CFR 15.249 for compliance to FCC 47CFR 15.249 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test:

Date of Report:

Prepared by:

Approved & Authorized Signer:

(Sean Liu, Manager)



Report No.: ATE20171834

Page 4 of 41

1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : Arrival Sensor

Model Number : 6aB-SS-AG-C0

Power Supply : DC 3.7V via Li-thium battery

DC 5V via USB port

Modulation: : FSK

Operation Frequency: 908.4MHz @ 40kbps

908.42MHz @ 9.6kbps 916MHz @ 100kbps

Type of Antenna : Integral antenna

Max antenna gain : 1.91dBi

Applicant : LEEDARSON LIGHTING CO., LTD.

Address : Xingda Road, Xingtai Industrial Zone, Changtai County,

Zhangzhou, Fujian, China.

Manufacturer : LEEDARSON LIGHTING CO., LTD.

Address : Xingda Road, Xingtai Industrial Zone, Changtai County,

Zhangzhou, Fujian, China.

Date of sample : Aug. 08, 2017

received

Date of Test : Aug. 08, 2017-Sep. 01, 2017

1.2. Special Accessory and Auxiliary Equipment

PC Manufacturer: LENOVO

M/N: 4290-RT8

S/N: R9-FW93G 11/08





1.3.Test Facilities

EMC Lab: Recognition of accreditation by Federal Communications

Commission (FCC)

The Designation Number is CN1189 The Registration Number is 708358

Listed by Innovation, Science and Economic Development

Canada (ISEDC)

The Registration Number is 5077A-2

Accredited by China National Accreditation Service for

Conformity Assessment (CNAS)

The Registration Number is CNAS L3193

Accredited by American Association for Laboratory

Accreditation (A2LA)

The Certificate Number is 4297.01

Name of Firm: Shenzhen Accurate Technology Co., Ltd

Site Location: 1/F., Building A, Changyuan New Material Port, Science &

Industry Park, Nanshan District, Shenzhen, Guangdong,

P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded = 2.23dB, k=2

Uncertainty

Radiated emission expanded uncertainty = 3.08dB, k=2


(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2

(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2

(Above 1GHz)






2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Туре	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 07, 2017	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	1 Year
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 07, 2017	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	1 Year





Page 7 of 41

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode


The mode is used: **Transmitting mode**

Low Channel: 908.4MHz High Channel: 916.0MHz

3.2.Configuration and peripherals

EUT


Figure 1 Setup: Transmitting mode





4. TEST PROCEDURES AND RESULTS


FCC Rules	Description of Test	Result		
Section 15.215(c)	20dB Bandwidth	Compliant		
Section 15.249(d)	Band Edge Compliance Test	Compliant		
Section 15.205(a), Section 15.209(a), Section 15.249, Section 15.35	Radiated Spurious Emission Test	Compliant		
Section 15.207	AC Power Line Conducted Emission Test	Compliant		
Section 15.203	Antenna Requirement	Compliant		





5. POWER LINE CONDUCTED MEASUREMENT

5.1.Block Diagram of Test Setup

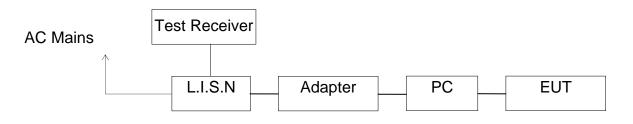

(EUT: Arrival Sensor)

5.2. Power Line Conducted Emission Measurement Limits

Frequency	Limit dB(μV)					
(MHz)	Quasi-peak Level	Average Level				
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *				
0.50 - 5.00	56.0	46.0				
5.00 - 30.00	60.0	50.0				

NOTE1: The lower limit shall apply at the transition frequencies.

NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3.Let the EUT work in test mode and measure it.



Report No.: ATE20171834

Page 10 of 41

5.5.Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 500hm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


5.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.





CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson

Operating Condition: Charging&z-wave operation

Test Site: 1#Shielding Room

Operator: WADE

Test Specification: N 120V/60Hz Comment: Mains Port Start of Test: 8/20/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer


Frequency Frequency Width Time Bandw.

9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008

Average

150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

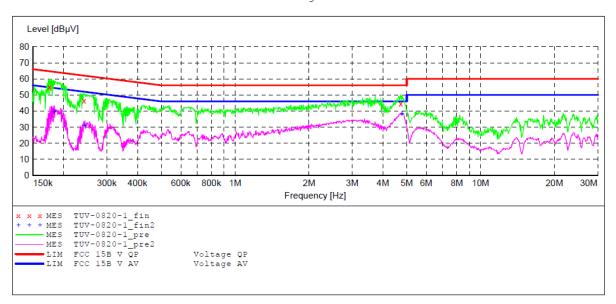


MEASUREMENT RESULT: "TUV-0820-1 fin"

8/20/2017 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.175269 0.242179 4.720838	54.90 46.40 44.70	10.6	62	9.8 15.6 11.3	QP	N N N	GND GND GND

MEASUREMENT RESULT: "TUV-0820-1 fin2"

8/20/2017							
Frequency	Level dBuV			Margin dB	Detector	Line	PE
MHz	авич	dB	dΒμV	ав			
0.183137	39.50	10.5	54.3	14.8	AV	N	GND
0.244120	31.00	10.6	52	21.0	AV	N	GND
4.777715	38.20	11.1	46	7.8	AV	N	GND





CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson

Operating Condition: Charging&z-wave operation

Test Site: 1#Shielding Room

Operator: WADE

Test Specification: L 120V/60Hz Comment: Mains Port Start of Test: 8/20/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer


Frequency Frequency Width Time Bandw.

9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008

Average

150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008

Average

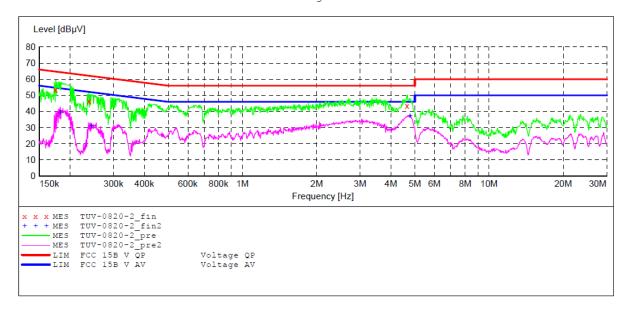

MEASUREMENT RESULT: "TUV-0820-2 fin"

8/20/2017 Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.238343		10.6	62	15.8	QP	L1 L1	GND GND
4.646054	43.60	11.1	56	12.4	QP	L1	GND

MEASUREMENT RESULT: "TUV-0820-2_fin2"

8/20/2017							
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.182408	39.40	10.5	54.4	15.0	AV	L1	GND
0.244120	31.00	10.6	52	21.0	AV	L1	GND
4.777715	37.10	11.1	46	8.9	AV	L1	GND




Report No.: ATE20171834

Page 13 of 41

6. 20DB BANDWIDTH MEASUREMENT

6.1.Block Diagram of Test Setup



6.2. The Requirement For Section 15.215(c)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

6.3. Operating Condition of EUT


- 6.3.1. Setup the EUT and simulator as shown as Section 6.1.
- 6.3.2. Turn on the power of all equipment.
- 6.3.3.Let the EUT work in TX mode then measure it.

6.4. Test Procedure

- 6.4.1.Place the EUT on the table and set it in transmitting mode.
- 6.4.2.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 6.4.3.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz, Detector function=peak, Trace=max hold, Sweep=auto.
- 6.4.4.Set the measured low and high frequency and test 20dB bandwidth with spectrum analyzer.

6.5. Test Result


Channel	Frequency(MHz)	20 dB Bandwidth(MHz)
Low	908.4	0.3314
High	916.0	0.3575






The spectrum analyzer plots are attached as below.

Low channel:

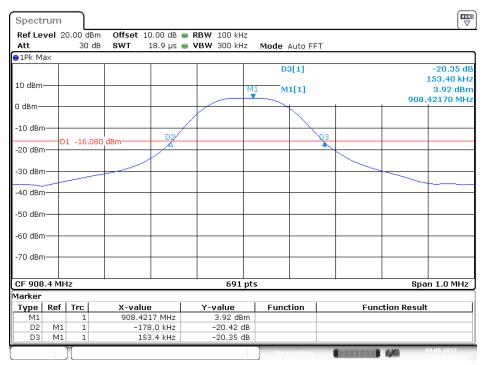

Date: 9.AUG.2017 14:20:29

High channel:

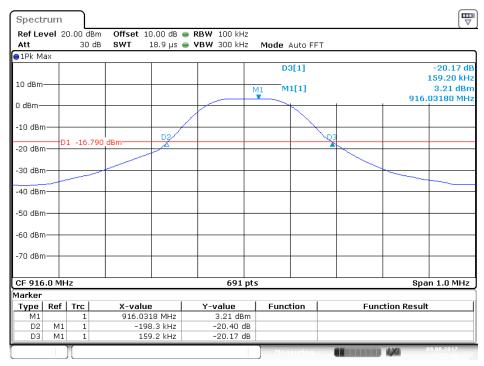

Date: 9.AUG.2017 14:23:01



Report No.: ATE20171834 Page 15 of 41

7. BAND EDGE COMPLIANCE TEST

7.1.Block Diagram of Test Setup (Conducted Band Edge)



7.2. The Requirement For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

- 7.4.1. Setup the EUT and simulator as shown as Section 7.1.
- 7.4.2. Turn on the power of all equipment.
- 7.4.3.Let the EUT work in TX mode then measure it.

7.5. Test Procedure

Conducted Band Edge:

- 7.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.
- 7.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.



Report No.: ATE20171834 Page 16 of 41

Radiated Band Edge:

Note:

- 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
- 2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

During the radiated emission test, the spectrum analyzer was set with the following configurations:


- 1. The resolution bandwidth of test receiver/spectrum analyzer is 100KHz and video bandwidth is 300KHz for peak measurement with peak detector at frequency Below 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 100KHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency Below 1GHz
- 3. All modes of operation were investigated and the worst-case emissions are reported.

7.6.Test Result


Pass



Conducted Band Edge Result

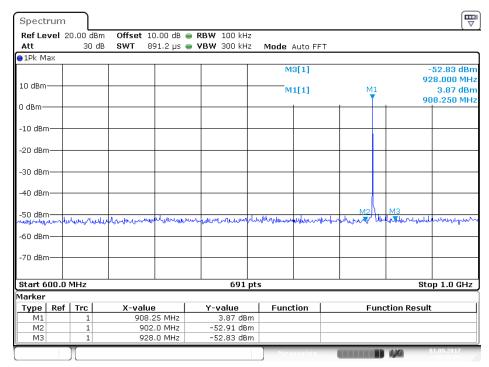

Date: 1.SEP.2017 10:36:15

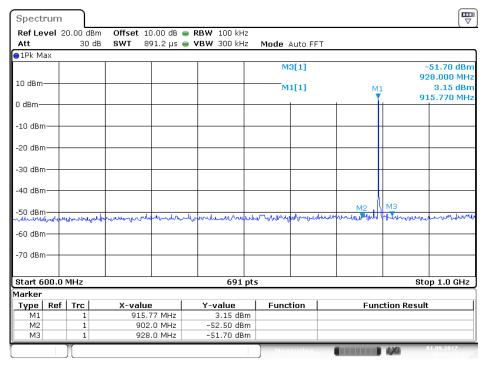

Date: 1.SEP.2017 10:38:32



Report No.: ATE20171834 Page 18 of 41

Site: 2# Chamber

Tel:+86-0755-26503290

Radiated Band Edge Result



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park, Nanshan Shenzhen, P.R. China

Fax:+86-0755-26503396 Polarization: Horizontal Power Source: DC 3.3V

Date: 17/08/20/

Time:


Engineer Signature: WADE

Distance: 3m

Job No.: LGW2017 #3816 Standard: FCC (Band Edge) Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Arrival Sensor Mode: TX 908.4MHz Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

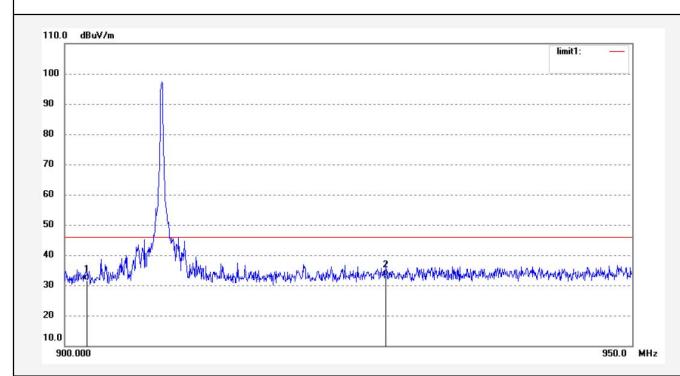

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)		Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	902.0000	29.35	2.18	31.53	46.00	-14.47	QP			
2	928.0000	30.41	2.73	33.14	46.00	-12.86	QP			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Page 19 of 41

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Report No.: ATE20171834

Polarization: Vertical
Power Source: DC 3.3V

Date: 17/08/20/

Time:

Engineer Signature: WADE

Distance: 3m


Job No.: LGW2017 #3815 Standard: FCC (Band Edge) Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 % EUT: Arrival Sensor

Mode: TX 908.4MHz

Model: 6aB-SS-AG-C0

Manufacturer: Leedarson

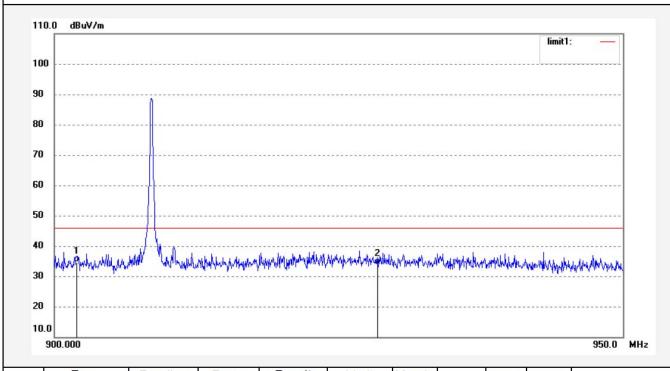

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	902.0000	32.41	2.18	34.59	46.00	-11.41	QP			
2	928.0000	31.07	2.73	33.80	46.00	-12.20	QP			





F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 2# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Report No.: ATE20171834

Page 20 of 41

Job No.: LGW2017 #3821 Polarization: Horizontal Standard: FCC Class B 3M Radiated Power Source: DC 3.3V


Test item: Radiation Test Date: 17/08/20/

Temp.(C)/Hum.(%) 23 C / 48 % Time:

EUT: Arrival Sensor Engineer Signature: WADE

Mode: TX 916MHz Distance: 3m

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

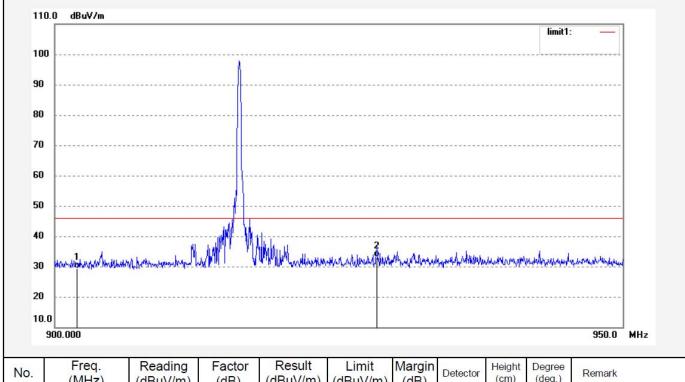

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	902.0000	27.14	2.18	29.32	46.00	-16.68	QP			
2	928.0000	30.34	2.73	33.07	46.00	-12.93	QP			





F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park, Nanshan Shenzhen, P.R. China

Site: 2# Chamber Tel:+86-0755-26503290

Fax:+86-0755-26503396

Report No.: ATE20171834

Page 21 of 41

Polarization: Vertical

Date: 17/08/20/

Time:

Engineer Signature: WADE

Distance: 3m


Job No.: LGW2017 #3822 Standard: FCC Class B 3M Radiated Power Source: DC 3.3V

Test item: Radiation Test


Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Arrival Sensor Mode: TX 916MHz

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

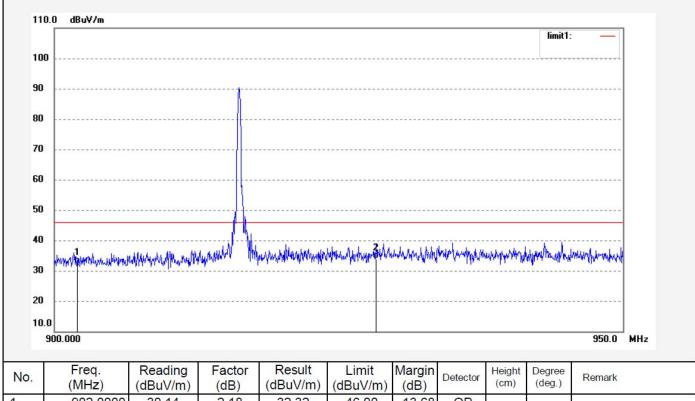

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	902.0000	30.14	2.18	32.32	46.00	-13.68	QP			
2	928.0000	31.22	2.73	33.95	46.00	-12.05	QP			






8. RADIATED SPURIOUS EMISSION TEST

8.1.Block Diagram of Test Setup


8.1.1.Block diagram of connection between the EUT and peripherals

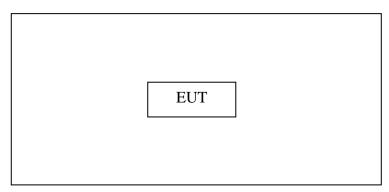

Setup: Transmitting mode

(EUT: Arrival Sensor)

8.1.2.Semi-Anechoic Chamber Test Setup Diagram

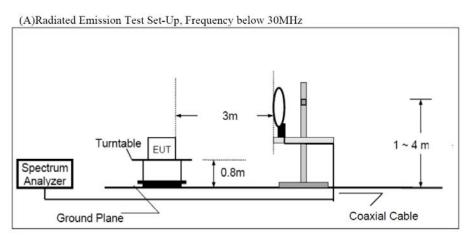


(B)Radiated Emission Test Set-Up, Frequency 30-1000MHz

Turntable
Spectrum
Analyzer
Ground Plane

Coaxial Cable



(C) Radiated Emission Test Set-Up, Frequency above 1GHz

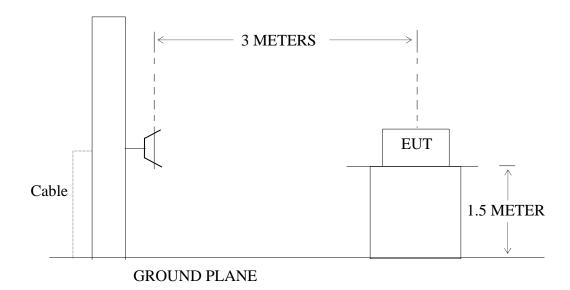

8.2. The Limit For Section 15.249

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50 50 50 250	500 500 500 2500



Report No.: ATE20171834 Page 24 of 41

8.3. Restricted bands of operation

8.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	$\binom{2}{}$
13.36-13.41			

Until February 1, 1999, this restricted band shall be 0.490-0.510

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

8.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.5. Operating Condition of EUT

- 8.5.1. Setup the EUT and simulator as shown as Section 8.1.
- 8.5.2. Turn on the power of all equipment.
- 8.5.3.Let the EUT work in TX mode then measure it.

²Above 38.6



Report No.: ATE20171834

Page 25 of 41

8.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The frequency range from 30MHz to 10000MHz is checked.

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.



Report No.: ATE20171834 Page 26 of 41

8.7. The Field Strength of Radiation Emission Measurement Results **PASS.**

Low channel(Fundamental frequency):

Frequency	Reading	Reading	Factor	Result(dBµV/m)		Limit(dBµV/m)		Margin(dB)		Polarization
(MHz)	(dBµV/m)	(dBµV/m)	Corr.							
	PEAK	AV	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
908.4	95.88	88.23	2.24	90.47	98.12	94.0	114.0	-3.53	-15.88	Horizontal
908.4	84.60	76.37	2.24	78.61	86.84	94.0	114.0	-15.39	-27.16	Vertical

High channel(Fundamental frequency):

Frequency	Reading	Reading	Factor	Result(dBµV/m)		Limit(dBµV/m)		Margin(dB)		Polarization
(MHz)	(dBµV/m)	(dBµV/m)	Corr.							
	PEAK	AV	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
916.0	92.97	85.01	2.40	87.41	95.37	94.0	114.0	-6.59	-18.63	Horizontal
916.0	86.83	79.39	2.40	81.79	89.23	94.0	114.0	-12.21	-24.77	Vertical

High channel:

Note:

- 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
- 2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

- 3. The spectral diagrams display the measurement of peak values.
- 4. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.
- 5. The EUT is tested radiation emission in three axes(X,Y,Z). The worst emissions are reported in three axes.



Report No.: ATE20171834

Page 27 of 41

Low channel:

ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson
Operating Condition: TX 908.4MHz
Test Site: 2# Chamber

Operator: WADE Test Specification: DC 3.7V

Comment: X


Start of Test: 2017-8-21 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

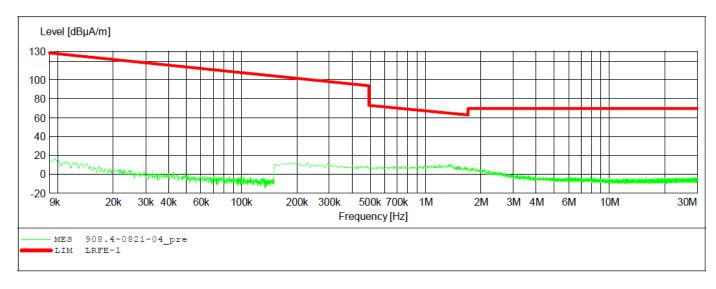



Report No.: ATE20171834 Page 28 of 41

FCC Class B 3m Radiated

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson
Operating Condition: TX 908.4MHz
Test Site: 2# Chamber

Operator: WADE Test Specification: DC 3.7V

Comment: Y


Start of Test: 2017-8-21 /


SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

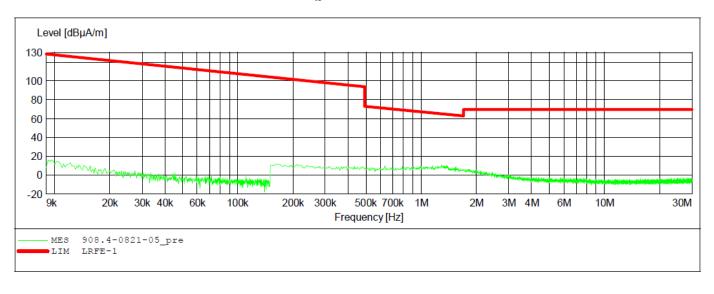





FCC Class B 3m Radiated

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson
Operating Condition: TX 908.4MHz
Test Site: 2# Chamber

Operator: WADE Test Specification: DC 3.7V

Comment: Z


Start of Test: 2017-8-21 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

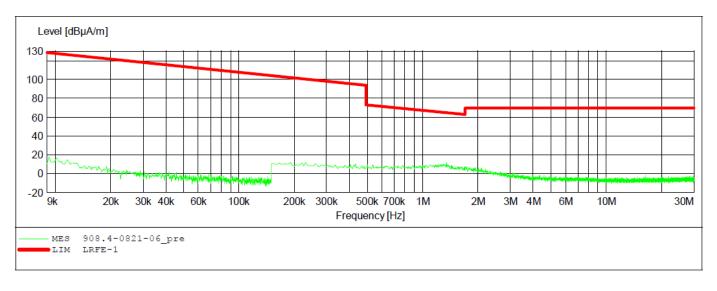



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park, Nanshan Shenzhen, P.R. China

Site: 2# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Horizontal

Report No.: ATE20171834

Page 30 of 41

Job No.: LGW2017 #3813 Polarization: Standard: FCC Class B 3M Radiated Power Source: DC 3.7V

Date: 17/08/20/ Test item: Radiation Test


Temp.(C)/Hum.(%) 23 C / 48 % EUT: Arrival Sensor Mode: TX 908.4MHz

Distance: 3m

Engineer Signature: WADE

Time:

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

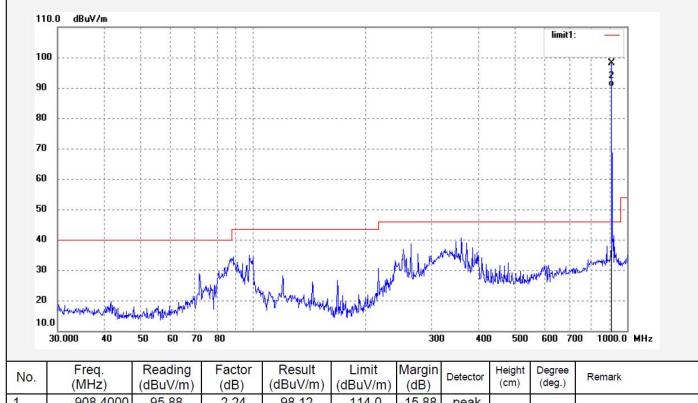

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	908.4000	95.88	2.24	98.12	114.0	-15.88	peak			
2	908.4000	88.23	2.24	90.47	94.00	-3.53	AVG			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park, Nanshan Shenzhen, P.R. China

Site: 2# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Report No.: ATE20171834

Page 31 of 41

Job No.: LGW2017 #3814 Polarization: Vertical Power Source: DC 3.7V Standard: FCC Class B 3M Radiated

Test item: Radiation Test Date: 17/08/20/


Temp.(C)/Hum.(%) 23 C / 48 % EUT:

Mode: TX 908.4MHz 6aB-SS-AG-C0 Model:

Manufacturer: Leedarson

Note:

Time: Arrival Sensor Engineer Signature: WADE Distance: 3m

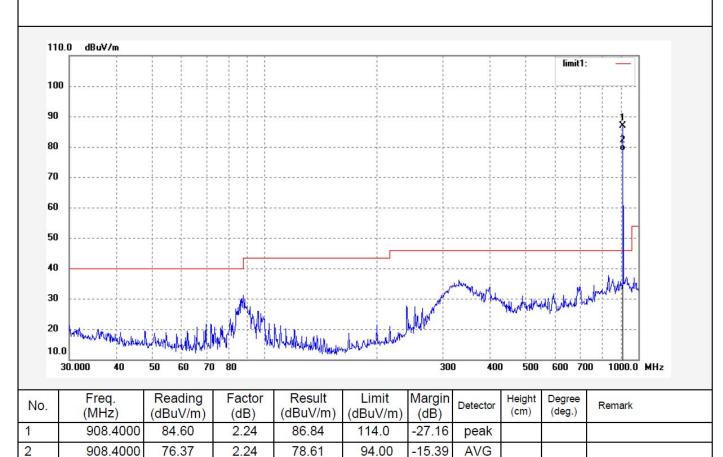



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park, Nanshan Shenzhen, P.R. China

Page 32 of 41 Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Report No.: ATE20171834

Polarization: Horizontal Power Source: DC 3.7V

Date: 17/08/20/

Time:

Engineer Signature: WADE


Distance: 3m

Job No.: LGW2017 #3817 Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Arrival Sensor Mode: TX 908.4MHz Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

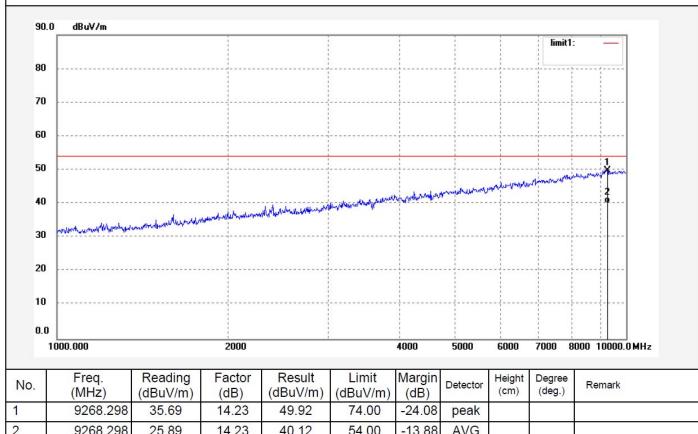



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Page 33 of 41
Site: 2# Chamber

Report No.: ATE20171834

Tel:+86-0755-26503290 Fax:+86-0755-26503396


Job No.: LGW2017 #3818 Polarization: Vertical Standard: FCC Class B 3M Radiated Power Source: DC 3.7V


Test item: Radiation Test Date: 17/08/20/

Temp.(C)/Hum.(%) 23 C / 48 % Time:

EUT: Arrival Sensor Engineer Signature: WADE Mode: TX 908.4MHz Distance: 3m

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

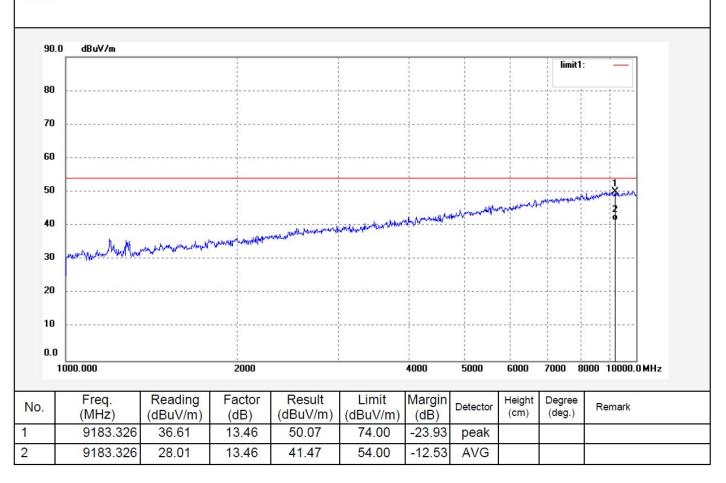





High channel:

ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson
Operating Condition: TX 916MHz
Test Site: 2# Chamber

Operator: WADE Test Specification: DC 3.7V

Comment: X


Start of Test: 2017-8-21 /

SCAN TABLE: "LFRE Fin"
Short Description:

Short Description: SUB STD VTERM2 1.70

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

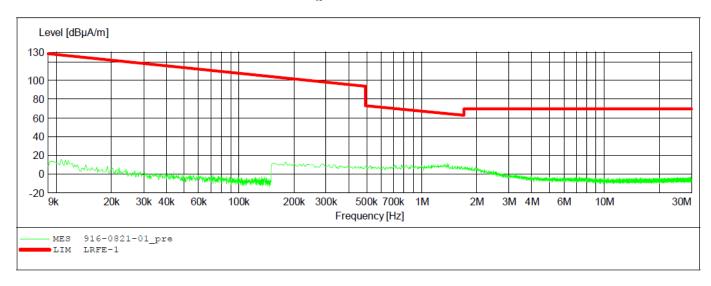



Report No.: ATE20171834 Page 35 of 41

ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson Operating Condition: TX 916MHz 2# Chamber Test Site:

Operator: WADE Test Specification: DC 3.7V

Comment:


2017-8-21 / Start of Test:

SCAN TABLE: "LFRE Fin"

_SUB_STD_VTERM2 1.70 Short Description:

Start Detector Meas. ΙF Stop Transducer Step

Frequency Frequency Width Time Bandw.

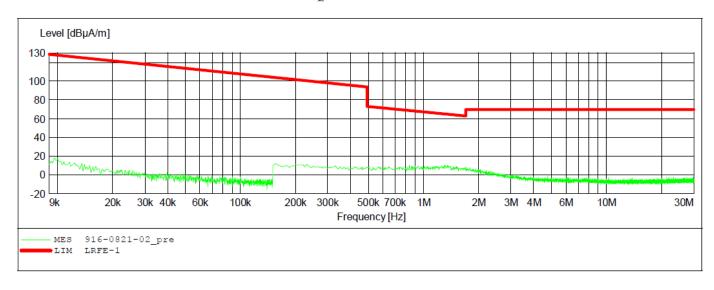



Report No.: ATE20171834 Page 36 of 41

ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

Arrival Sensor M/N:6aB-SS-AG-C0

Manufacturer: Leedarson Operating Condition: TX 916MHz Test Site: 2# Chamber

Operator: WADE DC 3.7V Test Specification:


Comment:

Start of Test: 2017-8-21 /

SCAN TABLE: "LFRE Fin" Short Description: SUB STD VTERM2 1.70

Stop Step Start Detector Meas. ΙF Transducer

Frequency Frequency Width Time Bandw.

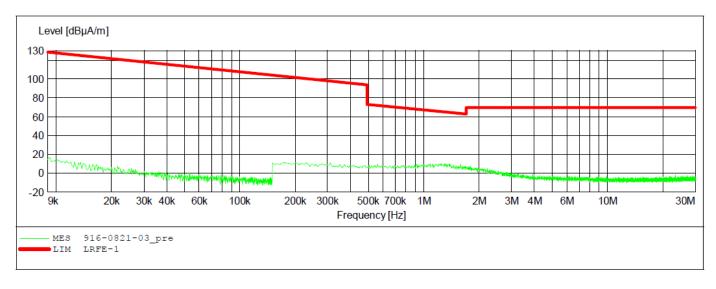



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Site: 2# Chamber Tel:+86-0755-26503290 Fax:+86-0755-26503396

Report No.: ATE20171834

Page 37 of 41

Job No.: LGW2017 #3820 Polarization: Horizontal Standard: FCC Class B 3M Radiated Power Source: DC 3.7V

Date: 17/08/20/

Time:


Engineer Signature: WADE

Distance: 3m

Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Arrival Sensor Mode: TX 916MHz

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

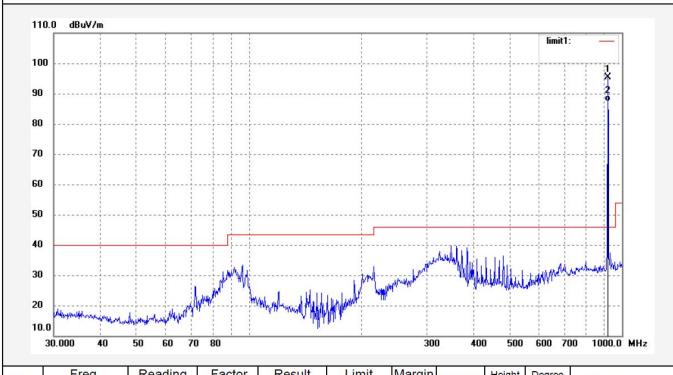

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	And the second s	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	916.0000	92.97	2.40	95.37	114.0	-18.63	peak			
2	916.0000	85.01	2.40	87.41	94.00	-6.59	AVG			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China Page 38 of 41
Site: 2# Chamber

Report No.: ATE20171834

Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: LGW2017 #3819 Polarization: Vertical Standard: FCC Class B 3M Radiated Power Source: DC 3.7V


Test item: Radiation Test Date: 17/08/20/

Temp.(C)/Hum.(%) 23 C / 48 % Time:

EUT: Arrival Sensor Engineer Signature: WADE

Mode: TX 916MHz Distance: 3m

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson

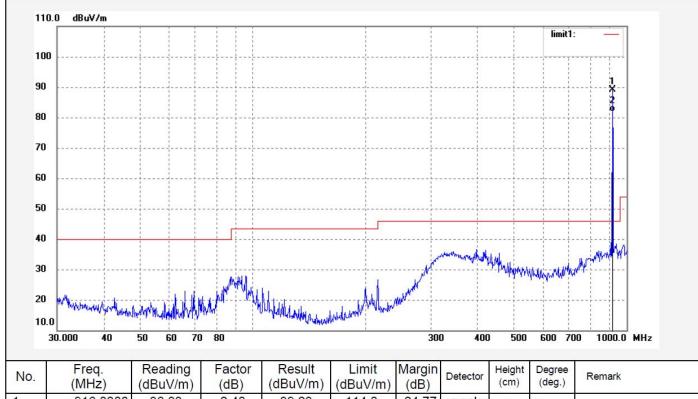



., **LTD.** Site: 2# Chamber
yuan Rd, Tel:+86-0755-26503290
P.R.China Fax:+86-0755-26503396

Report No.: ATE20171834

Page 39 of 41

F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China

Job No.: LGW2017 #3824 Polarization: Horizontal Standard: FCC Class B 3M Radiated Power Source: DC 3.7V

Test item: Radiation Test Date: 17/08/20/

Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Arrival Sensor

EUT: Arrival Sensor


Mode: TX 916MHz

Model: 6aB-SS-AG-C0

Manufacturer: Leedarson

Time:
Engineer Signature: WADE

Distance: 3m

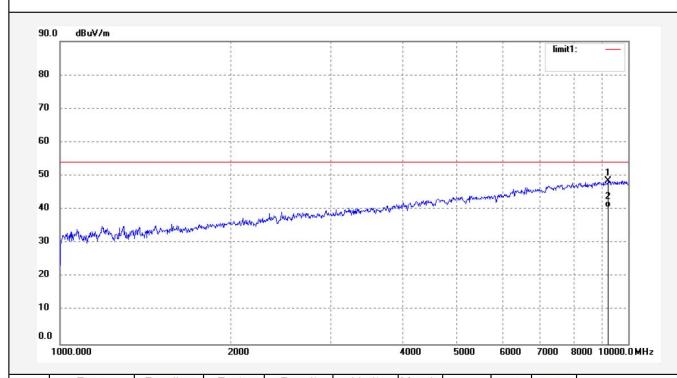

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	9225.714	34.68	13.81	48.49	74.00	-25.51	peak			
2	9225.714	26.73	13.81	40.54	54.00	-13.46	AVG			



F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China

Page 40 of 41
Site: 2# Chamber

Report No.: ATE20171834

Tel:+86-0755-26503290 Fax:+86-0755-26503396

Job No.: LGW2017 #3823

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Arrival Sensor Mode: TX 916MHz

Model: 6aB-SS-AG-C0 Manufacturer: Leedarson Polarization: Vertical


Power Source: DC 3.7V

Date: 17/08/20/

Time:

Engineer Signature: WADE

Distance: 3m

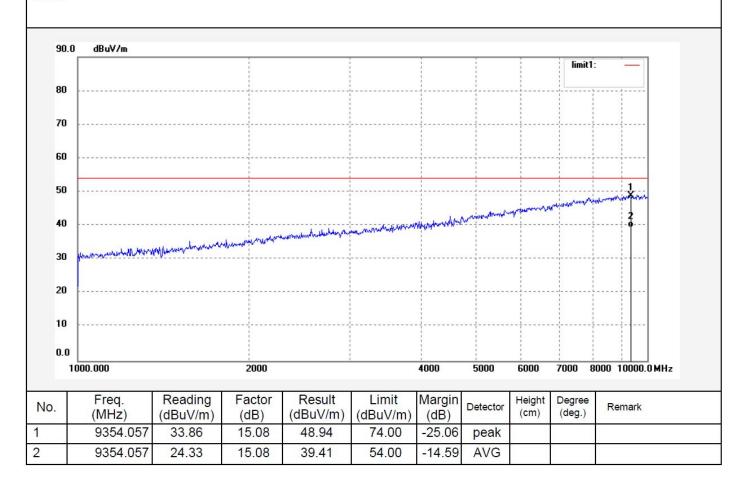



Report No.: ATE20171834

Page 41 of 41

9. ANTENNA REQUIREMENT

9.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 1.91dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

FCC ID: 2AB2Q-6AB-SS-AG-C0