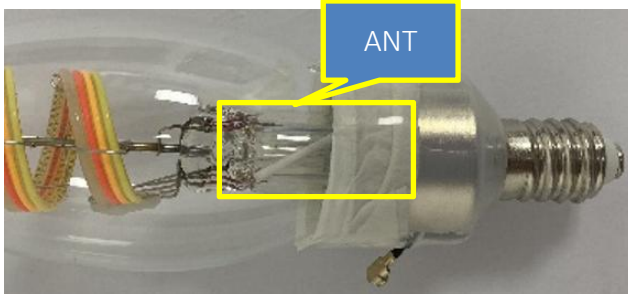
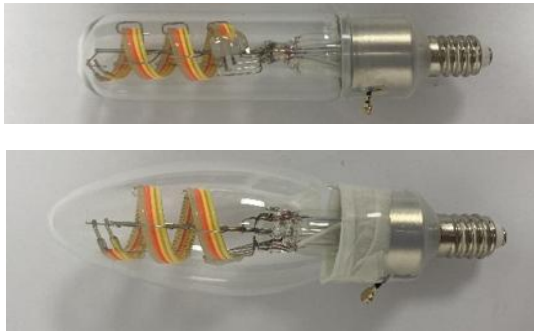


Antenna Specification

Antenna picture	
Antenna Type	monopole antenna
Antenna Peak Gain	-2.39 dBi
Operating Band	2400 MHz ~ 2483.5 MHz
Test laboratory name and Address	IoT Antenna Test Laboratory, 11 / F, LEEDARSON LIGHTING CO., LTD. Xingtai Industrial Park, Changtai Economic Development Zone, Zhangzhou, 363900, China
Antenna Manufacturer	LEEDARSON LIGHTING CO., LTD.
Model name	B11/T6 灯丝灯
DUT photo	
Test Date	2024-11-6
Test Conductor	Xiaokun Lin

OTA measurement

Test System

The SY-16 OTA system and RayZone2800 OTA system are anechoic chambers, which can measure antenna passive data such as antenna efficiency, antenna gain, and 2D&3D pattern. The systems are shown as follows:



Figure 1 SY-16 OTA system

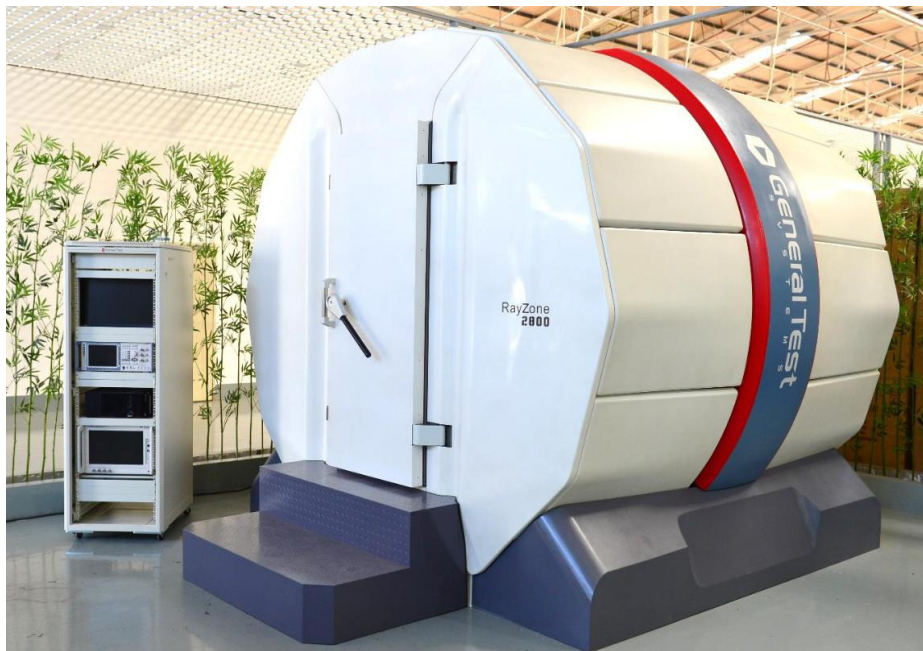


Figure 2 RayZone2800 OTA system

Equipment List

Table 1 Equipment List

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
☒	Network Analyzer	Keysight	E5071C	MY46527808	2024/1/9	2025/1/8
☐	Network Analyzer	Keysight	E5071C	MY46108051	2024/4/19	2025/4/18
☒	Anechoic Chamber	Sunyield	SY-16	SI1727	2024/4/28	2025/4/27
☐	Anechoic Chamber	General Test System	RayZone2800	CT10121244 B5079	2024/5/10	2025/5/9

Test Method

Table 2 Test Method

Name	Antenna Performance				
Parameter	Radiation Efficiency				
Test Method	IEEE Standard Test Procedures for Antennas				
Standard No.	ANSI/IEEE Std 149-2021				
Test Software	PMS-V2.8.5	☒	MaxSign-V1.4.3	☐	

Test Result

Efficiency and Gain

Table 3 Antenna Efficiency and Gain

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-3.47	-7.55	17.59
2410	-3.32	-7.46	17.93
2420	-2.91	-7.12	19.40
2430	-2.96	-7.18	19.12
2440	-2.85	-7.09	19.54
2450	-2.56	-6.78	20.97
2460	-2.39	-6.56	22.09
2470	-2.60	-6.67	21.53
2480	-2.55	-6.53	22.24
2490	-2.45	-6.34	23.23
2500	-2.70	-6.49	22.43

Radiation Pattern

Table 4 Product coordinates

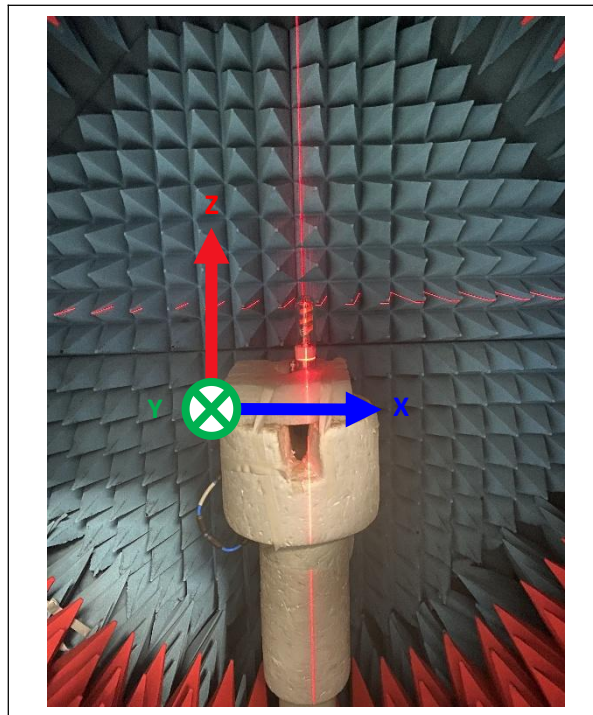


Table 5 3D radiation pattern

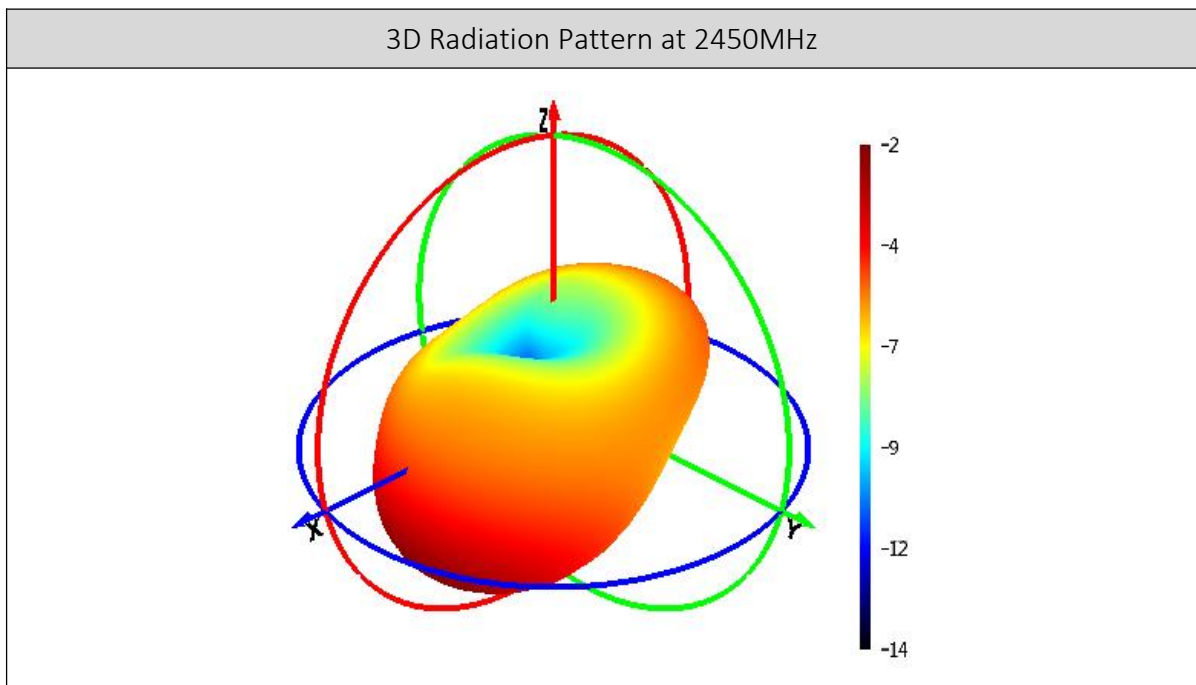


Table 6 Radiation pattern in XY Plane

2D Radiation Pattern ($\theta = 90^\circ$, XY Plane)

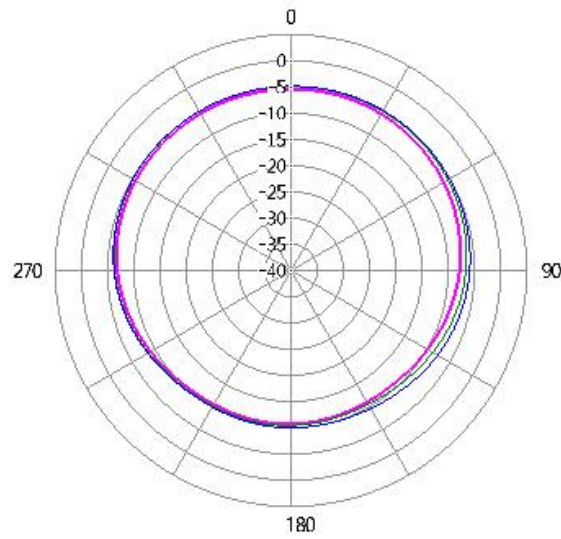


Table 7 Radiation pattern in XZ Plane

2D Radiation Pattern ($\phi = 0^\circ$, XZ Plane)

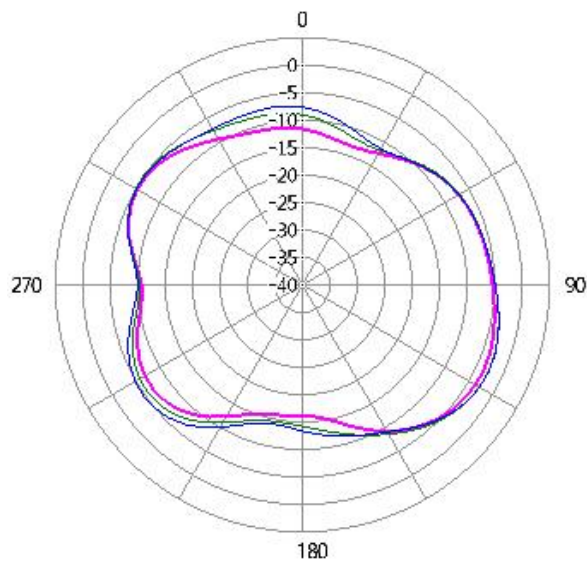


Table 8 Radiation pattern in YZ Plane

2D Radiation Pattern ($\phi = 90^\circ$, YZ Plane)

