




BT700 Bluetooth Headset User Manual



BT700 is V.4.0 bluetooth mono headset, with high level and business steady shape. With charging base ,for charging,and saving batter energy, meet 100days standby time,your best choice used in the car.

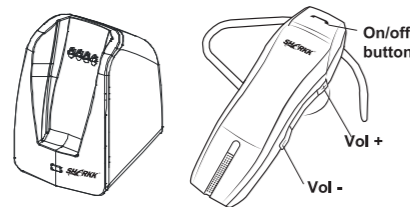

BASIC OPERATIONS

Turning the headset on/off

1.To turn the headset on

- Using the headset separately and the headset is turned off, press On/Off button once, the blue indicator of the headset will flash for 1 second, now the headset is turned on.
- When using the headset with the charging dock together, take the headset off the charging dock, the blue indicator of the headset will flash for 1 second, now the headset is turned on.

2.To turn the headset off

- Using the headset separately and the headset is turned on, press and hold On/Off button until the red indicator of the headset flashes, and you will hear a voice "Power off", now the headset is turned off.
- When using the headset with the charging dock together, put the headset on the charging dock, the red indicator of the headset will flash, and you will hear a voice "Power off", now the headset is turned off.

3.When the blue indicator flashes red during standby mode, it means the headset is on low battery and you will hear a voice "Battery Low", please charge the headset. When charging, the indicate of the headset will flash red. When fully chargerd, no light flashes.



Pairing

Before using your headset for the first time, you must pair it with your Bluetooth enabled phone.

- Ensure that the headset is off (see "To turn the headset off" section).And the mobile phone Bluetooth setting is activated.
- Press and hold On/Off button until the indicator light alternately flashes blue and red, and you will hear a voice "Pairing", now the headset is under pairing mode.
- Searching the headset by press the "searching" button on your mobile phone.
- Your phone will find the "BT700" and ask if you want to pair with it. Confirm this by pressing the "Yes" or "OK" key.
- When the mobile phone shows connected successfully and hear the voice "Connected", it means the headset pairs with the mobile phone successfully. If the mobile phone is below Bluetooth V2.1, you need to enter password "0000".

IMPORTANT: If the pairing can't be completed within 90 seconds while the pairing mode is activated, which means the

activated, which means the pairing is unsuccessful, please repeat Step 1 to Step 5 to pair the headset and the mobile phone again.

Pairing Your Headset with Two Mobile Phones (Multipoint connecting)

- Follow the pairing procedure as instructed in "Pairing" section to pair the headset with the first mobile phone.
- Turn off the headset.
- Repeat the same pairing procedure on the second mobile phone.
- On the first mobile phone's menu, activate its Bluetooth connection with the headset.

Sleep Mode

Put the headset on the charging dock, the red indicator of the headset will flash, then the headset is in the sleep mode. Take the headset off the charging dock, the blue indicator of the headset will flash, then the headset will connect with the mobile phone automatically. If there is a call coming, we can answer the call automatically.

Making a call

Dial number on the keypad or select the contact name from the contact list of your mobile phone.

Voice Dialing

Please ensure your mobile phone support voice dialing function and the voice tag assigned for this feature.

- Press On/Off button once and you'll then hear a voice "Voice Dial", say the name of the person you wish to call.
- Shortly press On/Off button once to stop the voice dial.

Note: Depending on your phone type, the actual operation may be different.

Ending a call

Shortly press On/Off button once to end a call.

Answering a call

Connected with one mobile phone:

Using the headset separately and coming a call, shortly press On/Off button once to answer a call.

If the headset is on the charging dock, just take the headset off the

charging dock to answer a call after 5 seconds.

Connected with two mobile phones:

- Press and hold On/Off button for 2 seconds to reject the second call but go on the first call when there is a call on the first mobile phone and there is another call coming from the second mobile phone.
- Press On/Off button once to answer the second call and keep the first call when there is a call on the first mobile phone and there is another call coming from the second mobile phone.
- Press On/Off button twice to transfer the two calls when there is a call on the first mobile phone and there is call kept on the second call.

- Press On/Off button once to end the first call but go on the second call when there is a call on the first mobile phone and there is call kept on the second call.

Last number redialing

Connected with one mobile phone:

Press On/Off button twice to make the last number redial, and you will hear a voice "Last Number Redial"

Connected with two mobile phones:

Press On/Off button twice to make the last number redial, and you will hear a voice "Last Number Redial"
This feature will be available on only one mobile phone which it's firstly connected with the headset.

Note: Depend on your phone type, the actual operation may vary.

Rejecting an incoming call

Press and hold On/Off button for 2 seconds to reject a call.

Adjusting the volume

Press Vol+ button to increase the volume level and you will hear prompt tone if the volume is the maximum.

Press Vol - button to decrease the volume level and you will hear prompt tone if the volume is the minimum.

Transferring a call

Headset to phone: Press and hold On/Off button until you hear prompt tone, then the phone call would be transferred from headset to phone.

Phone to Headset: Press and hold On/Off button until you hear prompt tone, then the phone call would be transferred from phone to headset.

Note: For different mobile phone setting, you could only transfer a call by press the mobile phone's keypad. Depend on your phone type, the actual operation may vary.

Muting the Microphone

You can put a call on hold by muting the microphone.

To turn on/turn off the Muting Microphone function: Press Vol+ button and Vol- button at the same time.

Deleting the pairing records

Press and hold Vol+ button and Vol- button at the same time for 4 seconds until the indicator light alternately flashes blue and red to delete the pairing records.

DFU Upgrading Mode

Turn off mode and plug the USB cable into the charging port of the headset, press and hold Vol+ button and Vol- button at the same time for 4 seconds until the red indicator is off to get into DFU upgrading mode.

Charging

- Charge the headset by plugging the USB cable into the charging port of the headset
- Charge the headset by putting the headset on the charging dock

Using way for the iron holder

Product Specifications

Bluetooth Version 4.0

Micro USB charging port

Support HFP, HSP and A2DP

Connect with two Bluetooth devices at the same time

Operating Range: Up to 30 feet (10 meters)

Frequency: 2.402 ~ 2.486GHz
Built in lithium-Ion rechargeable battery
Talk time: 4 hours
Play time: 4 hours
Standby time: 100 days
Charging time: about 2 hours
Headset Size: H58*W20*D10mm
Headset Weight: 4g

Indicate the battery of the headset in iPhone

Support voice prompt for MMI:

power on/power off/pairing/last number

redial/connected/disconnected/voice dial/battery low

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.