




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

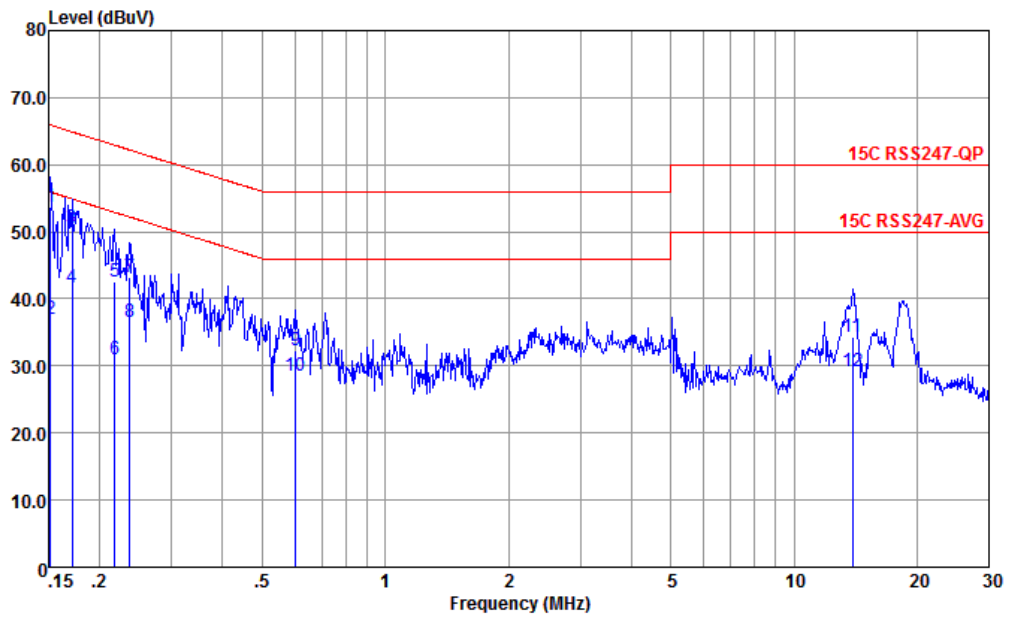


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	53.77	-12.14	65.91	43.30	0.05	10.42	QP
2	0.152	37.07	-18.84	55.91	26.60	0.05	10.42	Average
3	0.171	50.66	-14.24	64.90	40.20	0.04	10.42	QP
4	0.171	41.66	-13.24	54.90	31.20	0.04	10.42	Average
5	0.217	42.63	-20.29	62.92	32.21	0.03	10.39	QP
6	0.217	31.03	-21.89	52.92	20.61	0.03	10.39	Average
7	0.237	43.21	-19.01	62.22	32.80	0.03	10.38	QP
8	0.237	36.61	-16.61	52.22	26.20	0.03	10.38	Average
9	0.604	32.32	-23.68	56.00	22.19	-0.05	10.18	QP
10	0.604	28.62	-17.38	46.00	18.49	-0.05	10.18	Average
11	13.915	34.21	-26.79	60.00	23.20	-0.13	11.14	QP
12	13.915	29.21	-20.79	50.00	18.20	-0.13	11.14	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

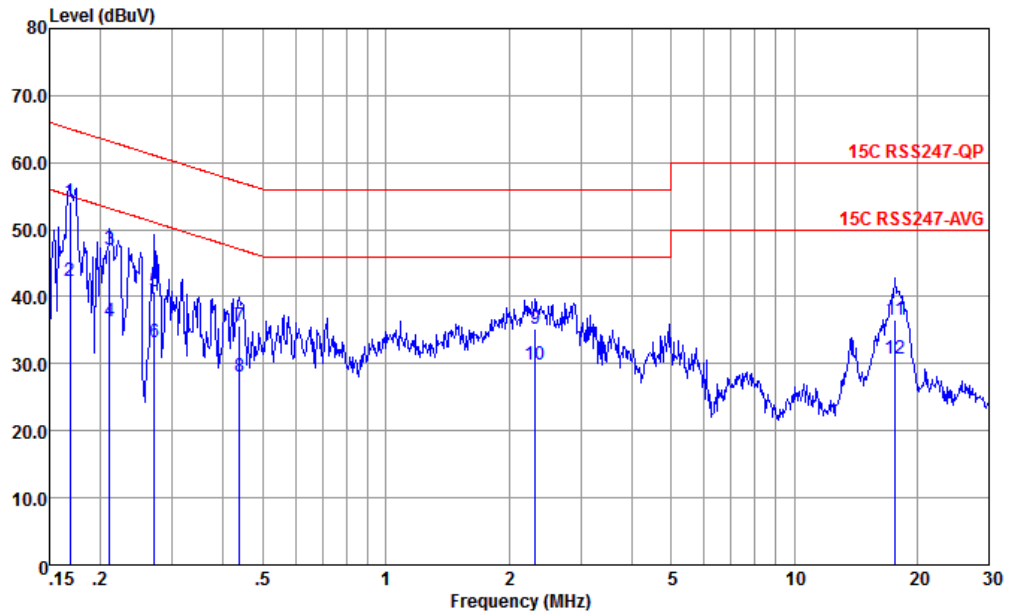

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.169	54.06	-10.97	65.03	43.60	0.04	10.42	QP
2	0.169	42.36	-12.67	55.03	31.90	0.04	10.42	Average
3	0.211	47.04	-16.14	63.18	36.60	0.04	10.40	QP
4	0.211	36.34	-16.84	53.18	25.90	0.04	10.40	Average
5	0.272	40.83	-20.24	61.07	30.50	-0.02	10.35	QP
6	0.272	33.23	-17.84	51.07	22.90	-0.02	10.35	Average
7	0.437	35.69	-21.42	57.11	25.49	-0.06	10.26	QP
8	0.437	27.99	-19.12	47.11	17.79	-0.06	10.26	Average
9	2.321	35.15	-20.85	56.00	25.20	-0.12	10.07	QP
10	2.321	29.75	-16.25	46.00	19.80	-0.12	10.07	Average
11	17.661	36.59	-23.41	60.00	25.51	-0.20	11.28	QP
12	17.661	30.69	-19.31	50.00	19.61	-0.20	11.28	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission

Test Engineer :	Ryan Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
	2400-2483.5	802.11n HT20	01	2412	MCS0	-	LF
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	802.11g	2	2417	6Mbps	-	-
Mode 11	2400-2483.5	802.11g	9	2452	6Mbps	-	-
Mode 12	2400-2483.5	802.11g	10	2457	6Mbps	-	-
Mode 13	2400-2483.5	802.11n HT20	2	2417	MCS0	-	-
Mode 14	2400-2483.5	802.11n HT20	10	2457	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.92	52.54	54.00	-1.46	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	50.80	54.00	-3.20	V	AVERAGE	Pass	Harmonic
2	802.11b	06	2483.56	49.29	54.00	-4.71	H	AVERAGE	Pass	Band Edge
2	802.11b	06	7311.00	50.59	54.00	-3.41	H	AVERAGE	Pass	Harmonic
3	802.11b	11	2487.76	52.47	54.00	-1.53	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	50.30	54.00	-3.70	V	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	52.08	54.00	-1.92	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	43.69	54.00	-10.31	V	AVERAGE	Pass	Harmonic
5	802.11g	06	2483.56	47.68	54.00	-6.32	V	AVERAGE	Pass	Band Edge
5	802.11g	06	7311.00	50.50	54.00	-3.50	H	Average	Pass	Harmonic
6	802.11g	11	2483.51	52.06	54.00	-1.94	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	46.16	54.00	-7.84	H	AVERAGE	Pass	Harmonic
7	802.11n HT20	01	2389.95	52.69	54.00	-1.31	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	44.23	74.00	-29.77	V	PEAK	Pass	Harmonic
7	802.11n HT20	01	754.59	33.73	46.00	-12.27	H	PEAK	Pass	LF
8	802.11n HT20	06	2483.56	47.26	54.00	-6.74	V	AVERAGE	Pass	Band Edge
8	802.11n HT20	06	7311.00	45.39	54.00	-8.61	H	AVERAGE	Pass	Harmonic
9	802.11n HT20	11	2483.51	52.27	54.00	-1.73	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	45.91	74.00	-28.09	V	PEAK	Pass	Harmonic
10	802.11g	2	2389.95	51.19	54.00	-2.81	H	AVERAGE	Pass	Band Edge
10	802.11g	2	4834.00	48.96	54.00	-5.04	V	AVERAGE	Pass	Harmonic
11	802.11g	9	2483.50	52.53	54.00	-1.47	H	AVERAGE	Pass	Band Edge
11	802.11g	9	7356.00	43.35	54.00	-10.65	H	AVERAGE	Pass	Harmonic
12	802.11g	10	2483.50	52.27	54.00	-1.73	H	AVERAGE	Pass	Band Edge
12	802.11g	10	4914.00	50.84	54.00	-3.16	V	AVERAGE	Pass	Harmonic
13	802.11n HT20	2	2389.95	52.60	54.00	-1.40	V	AVERAGE	Pass	Band Edge
13	802.11n HT20	2	4834.00	48.84	54.00	-5.16	V	AVERAGE	Pass	Harmonic
14	802.11n HT20	10	2483.50	52.39	54.00	-1.61	H	AVERAGE	Pass	Band Edge
14	802.11n HT20	10	4914.00	50.42	54.00	-3.58	V	AVERAGE	Pass	Harmonic



1																																																																																								
Band Edge																																																																																								
2400-2483.5_802.11b_CH01_2412MHz																																																																																								
Mode																																																																																								
Pol.																																																																																								
	Horizontal																																																																																							
	Fundamental																																																																																							
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a peak at approximately 2412 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 75 dBuV/m. The measured peak level is significantly above this limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.44</td> <td>63.69</td> <td>74.00</td> <td>-10.31</td> <td>51.26</td> <td>32.01</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>262</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.44	63.69	74.00	-10.31	51.26	32.01	6.60	32.18	6.00	262	0 PEAK	<p>Peak Fundamental Spectrum Plot. The plot shows a sharp peak at 2412 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 75 dBuV/m. The measured peak level is above this limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>117.50</td> <td>-----</td> <td>-----</td> <td>104.79</td> <td>32.27</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>262</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	117.50	-----	-----	104.79	32.27	6.63	32.19	6.00	262	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2386.44	63.69	74.00	-10.31	51.26	32.01	6.60	32.18	6.00	262	0 PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	117.50	-----	-----	104.79	32.27	6.63	32.19	6.00	262	0 PEAK																																																																													
Avg	<p>Average Horizontal Spectrum Plot. The plot shows the average level across the frequency range. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 55 dBuV/m. The average level is below this limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.92</td> <td>52.54</td> <td>54.00</td> <td>-1.46</td> <td>40.12</td> <td>32.00</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>262</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.92	52.54	54.00	-1.46	40.12	32.00	6.60	32.18	6.00	262	0 AVERAGE	<p>Average Fundamental Spectrum Plot. The plot shows the average level across the frequency range. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 55 dBuV/m. The average level is below this limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.41</td> <td>-----</td> <td>-----</td> <td>95.70</td> <td>32.27</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>262</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	108.41	-----	-----	95.70	32.27	6.63	32.19	6.00	262	0 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2385.92	52.54	54.00	-1.46	40.12	32.00	6.60	32.18	6.00	262	0 AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	108.41	-----	-----	95.70	32.27	6.63	32.19	6.00	262	0 AVERAGE																																																																													



		1																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.53</td> <td>58.99</td> <td>74.00</td> <td>-15.01</td> <td>46.58</td> <td>32.00</td> <td>6.60</td> <td>32.19</td> <td>6.00</td> <td>371</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.53	58.99	74.00	-15.01	46.58	32.00	6.60	32.19	6.00	371	311	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>115.26</td> <td>-----</td> <td>-----</td> <td>102.55</td> <td>32.27</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>371</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	115.26	-----	-----	102.55	32.27	6.63	32.19	6.00	371	311	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2385.53	58.99	74.00	-15.01	46.58	32.00	6.60	32.19	6.00	371	311	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2412.00	115.26	-----	-----	102.55	32.27	6.63	32.19	6.00	371	311	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.92</td> <td>48.44</td> <td>54.00</td> <td>-5.56</td> <td>36.02</td> <td>32.00</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>371</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.92	48.44	54.00	-5.56	36.02	32.00	6.60	32.18	6.00	371	311	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>106.42</td> <td>-----</td> <td>-----</td> <td>93.71</td> <td>32.27</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>371</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	106.42	-----	-----	93.71	32.27	6.63	32.19	6.00	371	311	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2385.92	48.44	54.00	-5.56	36.02	32.00	6.60	32.18	6.00	371	311	AVERAGE																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2412.00	106.42	-----	-----	93.71	32.27	6.63	32.19	6.00	371	311	AVERAGE																																																																														



Mode	1																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>53.98</td> <td>96.30</td> <td>-42.32</td> <td>75.49</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>55.68</td> <td>74.00</td> <td>-18.32</td> <td>73.28</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>309</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>50.80</td> <td>54.00</td> <td>-3.20</td> <td>68.40</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>309</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7245.00</td> <td>54.55</td> <td>96.30</td> <td>-41.75</td> <td>67.69</td> <td>35.78</td> <td>11.66</td> <td>60.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>9660.00</td> <td>52.96</td> <td>96.30</td> <td>-43.34</td> <td>63.66</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	53.98	96.30	-42.32	75.49	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	55.68	74.00	-18.32	73.28	34.20	9.47	61.27	0.00	309	0	PEAK	3	4824.00	50.80	54.00	-3.20	68.40	34.20	9.47	61.27	0.00	309	0	AVERAGE	4	7245.00	54.55	96.30	-41.75	67.69	35.78	11.66	60.58	0.00	---	---	Peak	5	9660.00	52.96	96.30	-43.34	63.66	36.92	13.57	61.19	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>49.31</td> <td>93.86</td> <td>-44.55</td> <td>70.82</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>53.99</td> <td>74.00</td> <td>-20.01</td> <td>71.59</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>108</td> <td>139</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>48.90</td> <td>54.00</td> <td>-5.10</td> <td>66.50</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>108</td> <td>139</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7245.00</td> <td>55.37</td> <td>93.86</td> <td>-38.49</td> <td>68.51</td> <td>35.78</td> <td>11.66</td> <td>60.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>9660.00</td> <td>50.56</td> <td>93.86</td> <td>-43.30</td> <td>61.26</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	49.31	93.86	-44.55	70.82	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	53.99	74.00	-20.01	71.59	34.20	9.47	61.27	0.00	108	139	PEAK	3	4824.00	48.90	54.00	-5.10	66.50	34.20	9.47	61.27	0.00	108	139	AVERAGE	4	7245.00	55.37	93.86	-38.49	68.51	35.78	11.66	60.58	0.00	---	---	Peak	5	9660.00	50.56	93.86	-43.30	61.26	36.92	13.57	61.19	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	3225.00	53.98	96.30	-42.32	75.49	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																														
2	4824.00	55.68	74.00	-18.32	73.28	34.20	9.47	61.27	0.00	309	0	PEAK																																																																																																																																																																														
3	4824.00	50.80	54.00	-3.20	68.40	34.20	9.47	61.27	0.00	309	0	AVERAGE																																																																																																																																																																														
4	7245.00	54.55	96.30	-41.75	67.69	35.78	11.66	60.58	0.00	---	---	Peak																																																																																																																																																																														
5	9660.00	52.96	96.30	-43.34	63.66	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	3225.00	49.31	93.86	-44.55	70.82	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																														
2	4824.00	53.99	74.00	-20.01	71.59	34.20	9.47	61.27	0.00	108	139	PEAK																																																																																																																																																																														
3	4824.00	48.90	54.00	-5.10	66.50	34.20	9.47	61.27	0.00	108	139	AVERAGE																																																																																																																																																																														
4	7245.00	55.37	93.86	-38.49	68.51	35.78	11.66	60.58	0.00	---	---	Peak																																																																																																																																																																														
5	9660.00	50.56	93.86	-43.30	61.26	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																														



2

Mode

Band Edge - L



2400-2483.5_802.11b_CH06_2437MHz

Pol.

Horizontal

Fundamental



Peak

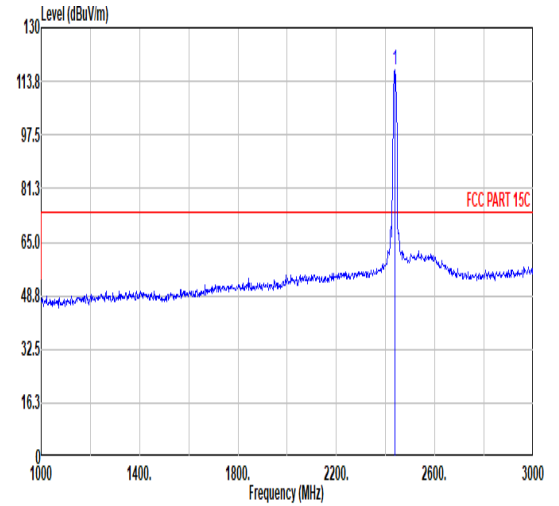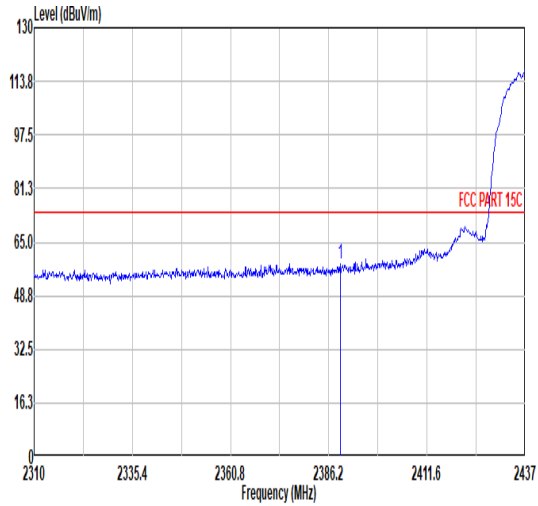

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2389.12	58.43	74.00	-15.57	45.96	32.05	6.60	32.18	6.00	227	0	PEAK

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2437.00	117.03	-----	-----	104.13	32.43	6.67	32.20	6.00	227	0	PEAK

Avg

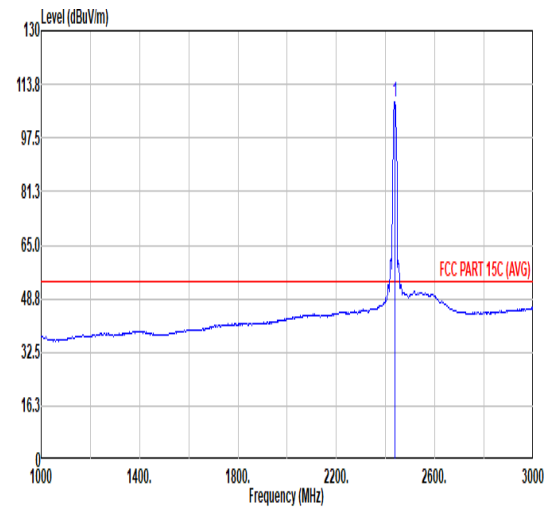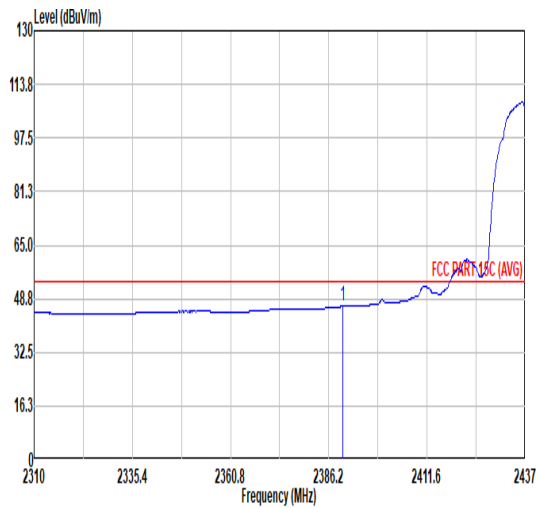

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2389.88	46.47	54.00	-7.53	33.99	32.06	6.60	32.18	6.00	227	0	AVERAGE

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2437.00	108.50	-----	-----	95.60	32.43	6.67	32.20	6.00	227	0	AVERAGE



		2																																											
Mode	Band Edge - R																																												
	2400-2483.5_802.11b_CH06_2437MHz																																												
Pol.	Horizontal		Fundamental																																										
Peak			Blank																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.38</td> <td>61.27</td> <td>74.00</td> <td>-12.73</td> <td>47.99</td> <td>32.78</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>227</td> <td>0 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.38	61.27	74.00	-12.73	47.99	32.78	6.73	32.23	6.00	227
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2484.38	61.27	74.00	-12.73	47.99	32.78	6.73	32.23	6.00	227	0 PEAK																																		
Avg			Blank																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>49.29</td> <td>54.00</td> <td>-4.71</td> <td>36.02</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>227</td> <td>0 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.56	49.29	54.00	-4.71	36.02	32.77	6.73	32.23	6.00	227
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.56	49.29	54.00	-4.71	36.02	32.77	6.73	32.23	6.00	227	0 AVERAGE																																		







		2																																																																				
Mode		Band Edge - L																																																																				
		2400-2483.5_802.11b_CH06_2437MHz																																																																				
Pol.	Vertical										Fundamental																																																											
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2308.11</td> <td>56.51</td> <td>74.00</td> <td>-17.49</td> <td>44.06</td> <td>32.03</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>364</td> <td>304 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2308.11	56.51	74.00	-17.49	44.06	32.03	6.60	32.18	6.00	364	304 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>115.60</td> <td>-----</td> <td>-----</td> <td>102.70</td> <td>32.43</td> <td>6.67</td> <td>32.20</td> <td>6.00</td> <td>364</td> <td>304 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2437.00	115.60	-----	-----	102.70	32.43	6.67	32.20	6.00	364	304 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																												
1	2308.11	56.51	74.00	-17.49	44.06	32.03	6.60	32.18	6.00	364	304 PEAK																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																												
1	2437.00	115.60	-----	-----	102.70	32.43	6.67	32.20	6.00	364	304 PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2310.00</td> <td>44.70</td> <td>54.00</td> <td>-9.30</td> <td>32.61</td> <td>31.82</td> <td>6.48</td> <td>32.21</td> <td>6.00</td> <td>364</td> <td>304 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2310.00	44.70	54.00	-9.30	32.61	31.82	6.48	32.21	6.00	364	304 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.44</td> <td>-----</td> <td>-----</td> <td>93.54</td> <td>32.43</td> <td>6.67</td> <td>32.20</td> <td>6.00</td> <td>364</td> <td>304 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2437.00	106.44	-----	-----	93.54	32.43	6.67	32.20	6.00	364	304 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																												
1	2310.00	44.70	54.00	-9.30	32.61	31.82	6.48	32.21	6.00	364	304 AVERAGE																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																												
1	2437.00	106.44	-----	-----	93.54	32.43	6.67	32.20	6.00	364	304 AVERAGE																																																											



		2																																						
Mode	Band Edge - R																																							
	2400-2483.5_802.11b_CH06_2437MHz																																							
Pol.	Vertical	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.95</td> <td>59.03</td> <td>74.00</td> <td>-14.97</td> <td>45.67</td> <td>32.85</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>364</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2493.95	59.03	74.00	-14.97	45.67	32.85	6.75	32.24	6.00	364	304	PEAK	Blank	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																	
1	2493.95	59.03	74.00	-14.97	45.67	32.85	6.75	32.24	6.00	364	304	PEAK																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>46.46</td> <td>54.00</td> <td>-7.54</td> <td>33.19</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>364</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.56	46.46	54.00	-7.54	33.19	32.77	6.73	32.23	6.00	364	304	AVERAGE	Blank	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																	
1	2483.56	46.46	54.00	-7.54	33.19	32.77	6.73	32.23	6.00	364	304	AVERAGE																												

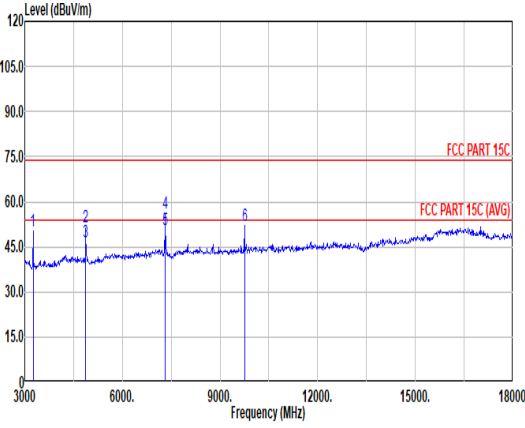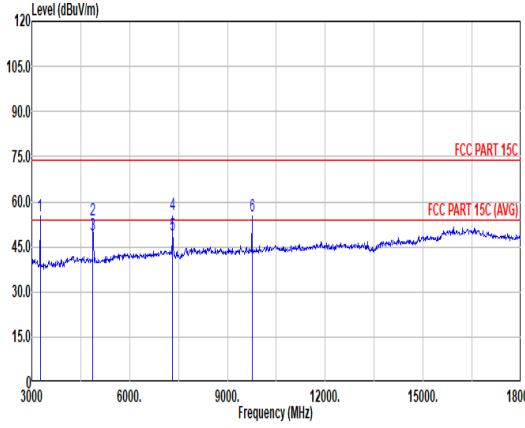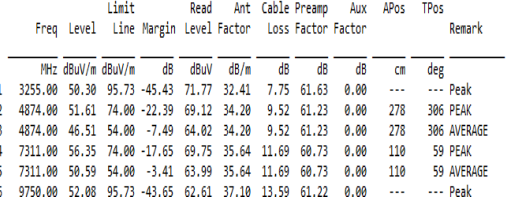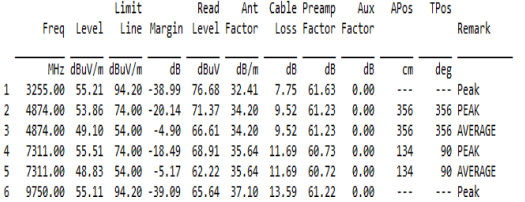

Mode	2																																																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																																		
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>50.30</td> <td>95.73</td> <td>-45.43</td> <td>71.77</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>69.12</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>278</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>46.51</td> <td>54.00</td> <td>-7.49</td> <td>64.02</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>278</td> <td>306</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>56.35</td> <td>74.00</td> <td>-17.65</td> <td>69.75</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>110</td> <td>59</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>50.59</td> <td>54.00</td> <td>-3.41</td> <td>63.99</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>110</td> <td>59</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>52.08</td> <td>95.73</td> <td>-43.65</td> <td>62.61</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	50.30	95.73	-45.43	71.77	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	51.61	74.00	-22.39	69.12	34.20	9.52	61.23	0.00	278	306	PEAK	3	4874.00	46.51	54.00	-7.49	64.02	34.20	9.52	61.23	0.00	278	306	AVERAGE	4	7311.00	56.35	74.00	-17.65	69.75	35.64	11.69	60.73	0.00	110	59	PEAK	5	7311.00	50.59	54.00	-3.41	63.99	35.64	11.69	60.73	0.00	110	59	AVERAGE	6	9750.00	52.08	95.73	-43.65	62.61	37.10	13.59	61.22	0.00	---	---	Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>55.21</td> <td>94.20</td> <td>-38.99</td> <td>76.68</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>53.86</td> <td>74.00</td> <td>-20.14</td> <td>71.37</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>356</td> <td>356</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>49.10</td> <td>54.00</td> <td>-4.90</td> <td>66.61</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>356</td> <td>356</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>55.51</td> <td>74.00</td> <td>-18.49</td> <td>68.91</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>134</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>48.83</td> <td>54.00</td> <td>-5.17</td> <td>62.22</td> <td>35.64</td> <td>11.69</td> <td>60.72</td> <td>0.00</td> <td>134</td> <td>90</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>55.11</td> <td>94.20</td> <td>-39.09</td> <td>65.64</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	55.21	94.20	-38.99	76.68	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	53.86	74.00	-20.14	71.37	34.20	9.52	61.23	0.00	356	356	PEAK	3	4874.00	49.10	54.00	-4.90	66.61	34.20	9.52	61.23	0.00	356	356	AVERAGE	4	7311.00	55.51	74.00	-18.49	68.91	35.64	11.69	60.73	0.00	134	90	PEAK	5	7311.00	48.83	54.00	-5.17	62.22	35.64	11.69	60.72	0.00	134	90	AVERAGE	6	9750.00	55.11	94.20	-39.09	65.64	37.10	13.59	61.22	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	50.30	95.73	-45.43	71.77	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	51.61	74.00	-22.39	69.12	34.20	9.52	61.23	0.00	278	306	PEAK																																																																																																																																																																																																								
3	4874.00	46.51	54.00	-7.49	64.02	34.20	9.52	61.23	0.00	278	306	AVERAGE																																																																																																																																																																																																								
4	7311.00	56.35	74.00	-17.65	69.75	35.64	11.69	60.73	0.00	110	59	PEAK																																																																																																																																																																																																								
5	7311.00	50.59	54.00	-3.41	63.99	35.64	11.69	60.73	0.00	110	59	AVERAGE																																																																																																																																																																																																								
6	9750.00	52.08	95.73	-43.65	62.61	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	55.21	94.20	-38.99	76.68	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	53.86	74.00	-20.14	71.37	34.20	9.52	61.23	0.00	356	356	PEAK																																																																																																																																																																																																								
3	4874.00	49.10	54.00	-4.90	66.61	34.20	9.52	61.23	0.00	356	356	AVERAGE																																																																																																																																																																																																								
4	7311.00	55.51	74.00	-18.49	68.91	35.64	11.69	60.73	0.00	134	90	PEAK																																																																																																																																																																																																								
5	7311.00	48.83	54.00	-5.17	62.22	35.64	11.69	60.72	0.00	134	90	AVERAGE																																																																																																																																																																																																								
6	9750.00	55.11	94.20	-39.09	65.64	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>50.30</td> <td>95.73</td> <td>-45.43</td> <td>71.77</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>69.12</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>278</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>46.51</td> <td>54.00</td> <td>-7.49</td> <td>64.02</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>278</td> <td>306</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>56.35</td> <td>74.00</td> <td>-17.65</td> <td>69.75</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>110</td> <td>59</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>50.59</td> <td>54.00</td> <td>-3.41</td> <td>63.99</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>110</td> <td>59</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>52.08</td> <td>95.73</td> <td>-43.65</td> <td>62.61</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	50.30	95.73	-45.43	71.77	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	51.61	74.00	-22.39	69.12	34.20	9.52	61.23	0.00	278	306	PEAK	3	4874.00	46.51	54.00	-7.49	64.02	34.20	9.52	61.23	0.00	278	306	AVERAGE	4	7311.00	56.35	74.00	-17.65	69.75	35.64	11.69	60.73	0.00	110	59	PEAK	5	7311.00	50.59	54.00	-3.41	63.99	35.64	11.69	60.73	0.00	110	59	AVERAGE	6	9750.00	52.08	95.73	-43.65	62.61	37.10	13.59	61.22	0.00	---	---	Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>55.21</td> <td>94.20</td> <td>-38.99</td> <td>76.68</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>53.86</td> <td>74.00</td> <td>-20.14</td> <td>71.37</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>356</td> <td>356</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>49.10</td> <td>54.00</td> <td>-4.90</td> <td>66.61</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>356</td> <td>356</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>55.51</td> <td>74.00</td> <td>-18.49</td> <td>68.91</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>134</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>48.83</td> <td>54.00</td> <td>-5.17</td> <td>62.22</td> <td>35.64</td> <td>11.69</td> <td>60.72</td> <td>0.00</td> <td>134</td> <td>90</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>55.11</td> <td>94.20</td> <td>-39.09</td> <td>65.64</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	55.21	94.20	-38.99	76.68	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	53.86	74.00	-20.14	71.37	34.20	9.52	61.23	0.00	356	356	PEAK	3	4874.00	49.10	54.00	-4.90	66.61	34.20	9.52	61.23	0.00	356	356	AVERAGE	4	7311.00	55.51	74.00	-18.49	68.91	35.64	11.69	60.73	0.00	134	90	PEAK	5	7311.00	48.83	54.00	-5.17	62.22	35.64	11.69	60.72	0.00	134	90	AVERAGE	6	9750.00	55.11	94.20	-39.09	65.64	37.10	13.59	61.22	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	50.30	95.73	-45.43	71.77	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	51.61	74.00	-22.39	69.12	34.20	9.52	61.23	0.00	278	306	PEAK																																																																																																																																																																																																								
3	4874.00	46.51	54.00	-7.49	64.02	34.20	9.52	61.23	0.00	278	306	AVERAGE																																																																																																																																																																																																								
4	7311.00	56.35	74.00	-17.65	69.75	35.64	11.69	60.73	0.00	110	59	PEAK																																																																																																																																																																																																								
5	7311.00	50.59	54.00	-3.41	63.99	35.64	11.69	60.73	0.00	110	59	AVERAGE																																																																																																																																																																																																								
6	9750.00	52.08	95.73	-43.65	62.61	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	55.21	94.20	-38.99	76.68	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	53.86	74.00	-20.14	71.37	34.20	9.52	61.23	0.00	356	356	PEAK																																																																																																																																																																																																								
3	4874.00	49.10	54.00	-4.90	66.61	34.20	9.52	61.23	0.00	356	356	AVERAGE																																																																																																																																																																																																								
4	7311.00	55.51	74.00	-18.49	68.91	35.64	11.69	60.73	0.00	134	90	PEAK																																																																																																																																																																																																								
5	7311.00	48.83	54.00	-5.17	62.22	35.64	11.69	60.72	0.00	134	90	AVERAGE																																																																																																																																																																																																								
6	9750.00	55.11	94.20	-39.09	65.64	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								





		3																																																											
Mode		Band Edge																																																											
		2400-2483.5_802.11b_CH11_2462MHz																																																											
Pol.		Horizontal				Fundamental																																																							
Peak	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.99</td> <td>64.34</td> <td>74.00</td> <td>-9.66</td> <td>51.04</td> <td>32.80</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>192</td> <td>360</td> <td>PEAK</td> <td colspan="4"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark		MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg					1	2487.99	64.34	74.00	-9.66	51.04	32.80	6.74	32.24	6.00	192	360	PEAK				
			Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																												
MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																	
1	2487.99	64.34	74.00	-9.66	51.04	32.80	6.74	32.24	6.00	192	360	PEAK																																																	
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>117.07</td> <td>74.00</td> <td>43.07</td> <td>103.99</td> <td>32.60</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>192</td> <td>360</td> <td>PEAK</td> <td colspan="4"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark		MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg					1	2462.00	117.07	74.00	43.07	103.99	32.60	6.70	32.22	6.00	192	360	PEAK					
		Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																													
MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																	
1	2462.00	117.07	74.00	43.07	103.99	32.60	6.70	32.22	6.00	192	360	PEAK																																																	
Avg	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.76</td> <td>52.47</td> <td>54.00</td> <td>-1.53</td> <td>39.17</td> <td>32.80</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>192</td> <td>360</td> <td>AVERAGE</td> <td colspan="4"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark		MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg					1	2487.76	52.47	54.00	-1.53	39.17	32.80	6.74	32.24	6.00	192	360	AVERAGE				
			Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																												
MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																	
1	2487.76	52.47	54.00	-1.53	39.17	32.80	6.74	32.24	6.00	192	360	AVERAGE																																																	
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>108.00</td> <td>54.00</td> <td>54.00</td> <td>94.92</td> <td>32.60</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>192</td> <td>360</td> <td>AVERAGE</td> <td colspan="4"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark		MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg					1	2462.00	108.00	54.00	54.00	94.92	32.60	6.70	32.22	6.00	192	360	AVERAGE					
		Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																													
MHz	Level	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																	
1	2462.00	108.00	54.00	54.00	94.92	32.60	6.70	32.22	6.00	192	360	AVERAGE																																																	







		3																																												
Mode		Band Edge																																												
		2400-2483.5_802.11b_CH11_2462MHz																																												
Pol.		Vertical					Fundamental																																							
Peak	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.27</td> <td>63.69</td> <td>74.00</td> <td>-10.31</td> <td>50.42</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2484.27	63.69	74.00	-10.31	50.42	32.77	6.73	32.23	6.00	395	304	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2484.27	63.69	74.00	-10.31	50.42	32.77	6.73	32.23	6.00	395	304	PEAK																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>115.04</td> <td>-----</td> <td>-----</td> <td>102.76</td> <td>32.60</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	115.04	-----	-----	102.76	32.60	6.70	32.22	6.00	395	304	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2462.00	115.04	-----	-----	102.76	32.60	6.70	32.22	6.00	395	304	PEAK																																		
Avg	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>51.76</td> <td>54.00</td> <td>-2.24</td> <td>38.49</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2483.51	51.76	54.00	-2.24	38.49	32.77	6.73	32.23	6.00	395	304	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2483.51	51.76	54.00	-2.24	38.49	32.77	6.73	32.23	6.00	395	304	AVERAGE																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>106.90</td> <td>-----</td> <td>-----</td> <td>93.82</td> <td>32.60</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2462.00	106.90	-----	-----	93.82	32.60	6.70	32.22	6.00	395	304	AVERAGE	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2462.00	106.90	-----	-----	93.82	32.60	6.70	32.22	6.00	395	304	AVERAGE																																		

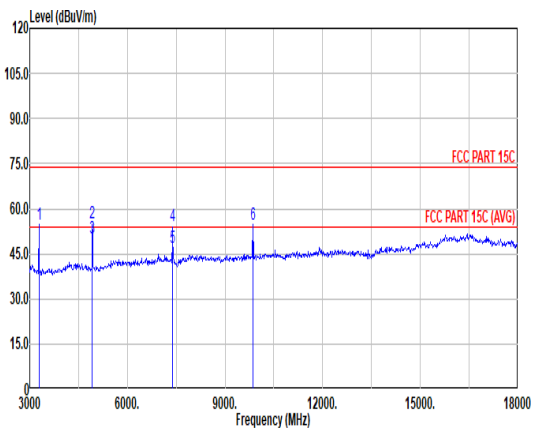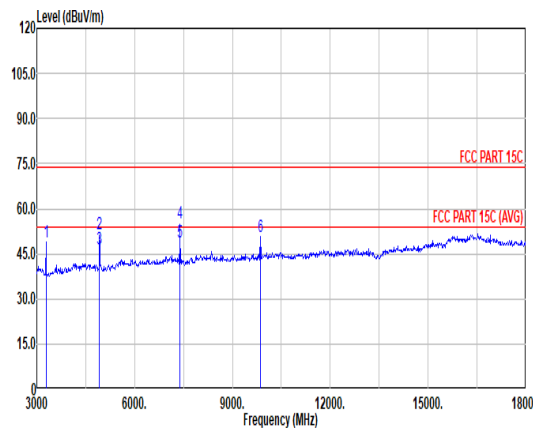

Mode	3																																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																																																																																										
Peak																																																																																																																																																																																																																												
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3285.00</td> <td>54.86</td> <td>95.77</td> <td>-40.91</td> <td>76.19</td> <td>32.47</td> <td>7.79</td> <td>61.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>55.12</td> <td>74.00</td> <td>-18.88</td> <td>72.54</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>374</td> <td>354</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>50.30</td> <td>54.00</td> <td>-3.70</td> <td>67.72</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>374</td> <td>354</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>54.17</td> <td>74.00</td> <td>-19.83</td> <td>67.61</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>165</td> <td>5</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>46.97</td> <td>54.00</td> <td>-7.03</td> <td>60.41</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>165</td> <td>5</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9855.00</td> <td>54.87</td> <td>95.77</td> <td>-40.90</td> <td>65.25</td> <td>37.21</td> <td>13.67</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3285.00	54.86	95.77	-40.91	76.19	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	55.12	74.00	-18.88	72.54	34.20	9.57	61.19	0.00	374	354	PEAK	3	4924.00	50.30	54.00	-3.70	67.72	34.20	9.57	61.19	0.00	374	354	AVERAGE	4	7386.00	54.17	74.00	-19.83	67.61	35.73	11.72	60.89	0.00	165	5	PEAK	5	7386.00	46.97	54.00	-7.03	60.41	35.73	11.72	60.89	0.00	165	5	AVERAGE	6	9855.00	54.87	95.77	-40.90	65.25	37.21	13.67	61.26	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3285.00</td> <td>48.93</td> <td>94.24</td> <td>-45.31</td> <td>70.26</td> <td>32.47</td> <td>7.79</td> <td>61.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>51.79</td> <td>74.00</td> <td>-22.21</td> <td>69.21</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>303</td> <td>142</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>46.47</td> <td>54.00</td> <td>-7.53</td> <td>63.89</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>303</td> <td>142</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7386.00</td> <td>55.19</td> <td>74.00</td> <td>-18.81</td> <td>68.63</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>116</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>48.81</td> <td>54.00</td> <td>-5.19</td> <td>62.25</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>116</td> <td>62</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9855.00</td> <td>50.94</td> <td>94.24</td> <td>-43.30</td> <td>61.32</td> <td>37.21</td> <td>13.67</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3285.00	48.93	94.24	-45.31	70.26	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	51.79	74.00	-22.21	69.21	34.20	9.57	61.19	0.00	303	142	PEAK	3	4924.00	46.47	54.00	-7.53	63.89	34.20	9.57	61.19	0.00	303	142	AVERAGE	4	7386.00	55.19	74.00	-18.81	68.63	35.73	11.72	60.89	0.00	116	62	PEAK	5	7386.00	48.81	54.00	-5.19	62.25	35.73	11.72	60.89	0.00	116	62	AVERAGE	6	9855.00	50.94	94.24	-43.30	61.32	37.21	13.67	61.26	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3285.00	54.86	95.77	-40.91	76.19	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																																
2	4924.00	55.12	74.00	-18.88	72.54	34.20	9.57	61.19	0.00	374	354	PEAK																																																																																																																																																																																																																
3	4924.00	50.30	54.00	-3.70	67.72	34.20	9.57	61.19	0.00	374	354	AVERAGE																																																																																																																																																																																																																
4	7386.00	54.17	74.00	-19.83	67.61	35.73	11.72	60.89	0.00	165	5	PEAK																																																																																																																																																																																																																
5	7386.00	46.97	54.00	-7.03	60.41	35.73	11.72	60.89	0.00	165	5	AVERAGE																																																																																																																																																																																																																
6	9855.00	54.87	95.77	-40.90	65.25	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3285.00	48.93	94.24	-45.31	70.26	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																																
2	4924.00	51.79	74.00	-22.21	69.21	34.20	9.57	61.19	0.00	303	142	PEAK																																																																																																																																																																																																																
3	4924.00	46.47	54.00	-7.53	63.89	34.20	9.57	61.19	0.00	303	142	AVERAGE																																																																																																																																																																																																																
4	7386.00	55.19	74.00	-18.81	68.63	35.73	11.72	60.89	0.00	116	62	PEAK																																																																																																																																																																																																																
5	7386.00	48.81	54.00	-5.19	62.25	35.73	11.72	60.89	0.00	116	62	AVERAGE																																																																																																																																																																																																																
6	9855.00	50.94	94.24	-43.30	61.32	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																																

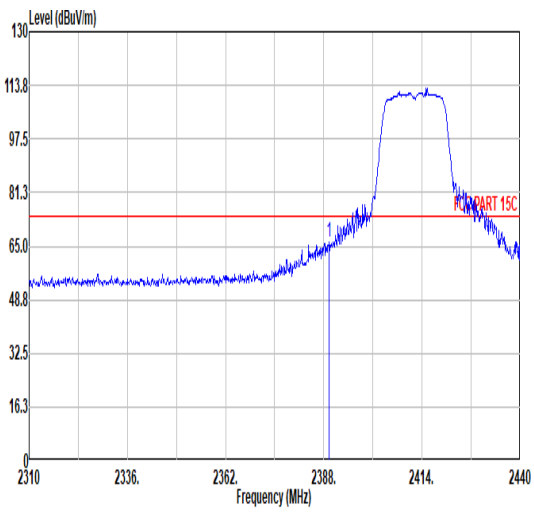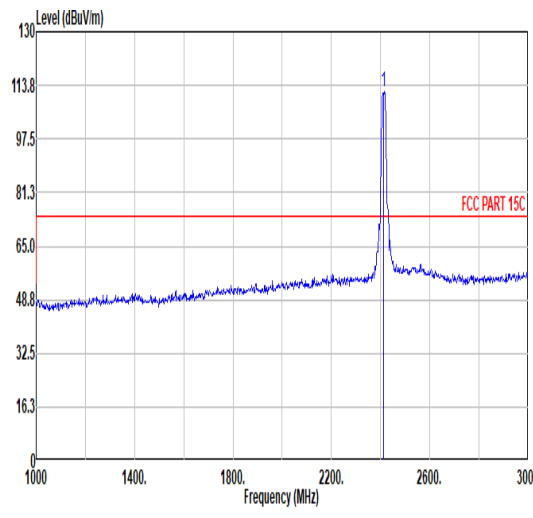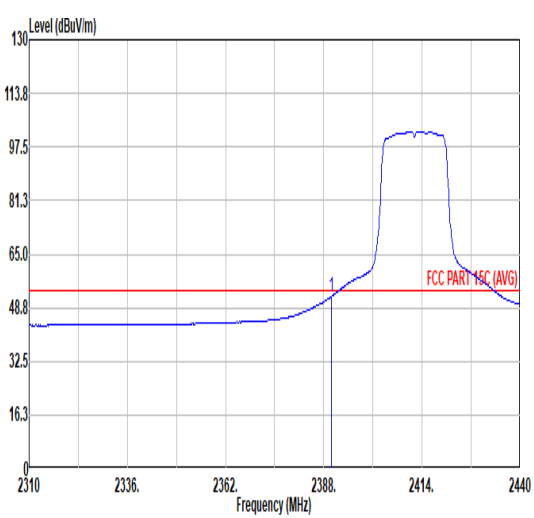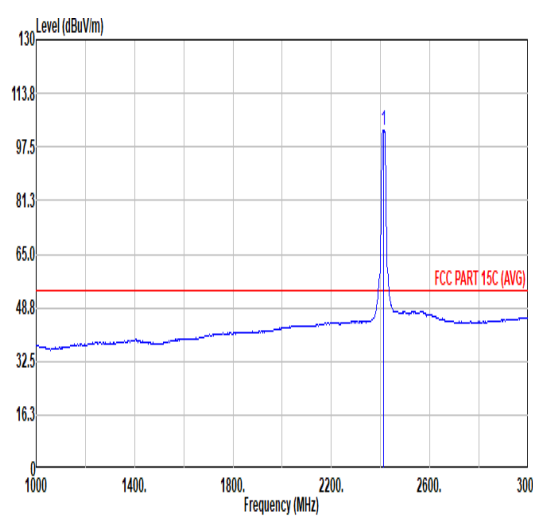

4																																																																																								
Band Edge																																																																																								
2400-2483.5_802.11g_CH01_2412MHz																																																																																								
Pol.																																																																																								
	Horizontal																																																																																							
	Fundamental																																																																																							
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level rising from approximately 48.8 dBuV/m at 2310 MHz to a peak of about 113.8 dBuV/m between 2412 MHz and 2483.5 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>66.31</td> <td>74.00</td> <td>-7.69</td> <td>53.84</td> <td>32.05</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>169</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.43	66.31	74.00	-7.69	53.84	32.05	6.60	32.18	6.00	169	0 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2412 MHz with a level of approximately 111.66 dBuV/m. A red horizontal line indicates the FCC PART 15C limit at approximately 74.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.66</td> <td>-----</td> <td>-----</td> <td>98.93</td> <td>32.28</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>169</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	111.66	-----	-----	98.93	32.28	6.64	32.19	6.00	169	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.43	66.31	74.00	-7.69	53.84	32.05	6.60	32.18	6.00	169	0 PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	111.66	-----	-----	98.93	32.28	6.64	32.19	6.00	169	0 PEAK																																																																													
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, averaged. The plot shows a signal level rising from approximately 48.8 dBuV/m at 2310 MHz to a peak of about 102.43 dBuV/m between 2412 MHz and 2483.5 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.00</td> <td>54.00</td> <td>-1.92</td> <td>39.60</td> <td>32.06</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>169</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	52.00	54.00	-1.92	39.60	32.06	6.60	32.18	6.00	169	0 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The plot shows a sharp peak at 2412 MHz with a level of approximately 102.43 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54.00 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.43</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>32.27</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>169</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	102.43	-----	-----	89.72	32.27	6.63	32.19	6.00	169	0 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.95	52.00	54.00	-1.92	39.60	32.06	6.60	32.18	6.00	169	0 AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	102.43	-----	-----	89.72	32.27	6.63	32.19	6.00	169	0 AVERAGE																																																																													



		4																																																																						
Mode		Band Edge																																																																						
		2400-2483.5_802.11g_CH01_2412MHz																																																																						
Pol.	Vertical										Fundamental																																																													
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.13</td> <td>60.99</td> <td>74.00</td> <td>-13.01</td> <td>48.54</td> <td>32.03</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>373</td> <td>313</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2388.13	60.99	74.00	-13.01	48.54	32.03	6.60	32.18	6.00	373	313	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.10</td> <td>-----</td> <td>-----</td> <td>95.37</td> <td>32.28</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>373</td> <td>313</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	108.10	-----	-----	95.37	32.28	6.64	32.19	6.00	373	313	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2388.13	60.99	74.00	-13.01	48.54	32.03	6.60	32.18	6.00	373	313	PEAK																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2412.00	108.10	-----	-----	95.37	32.28	6.64	32.19	6.00	373	313	PEAK																																																												
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.30</td> <td>54.00</td> <td>-6.70</td> <td>34.82</td> <td>32.06</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>373</td> <td>313</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2389.95	47.30	54.00	-6.70	34.82	32.06	6.60	32.18	6.00	373	313	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.61</td> <td>-----</td> <td>-----</td> <td>85.86</td> <td>32.30</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>373</td> <td>313</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	98.61	-----	-----	85.86	32.30	6.64	32.19	6.00	373	313	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2389.95	47.30	54.00	-6.70	34.82	32.06	6.60	32.18	6.00	373	313	AVERAGE																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2412.00	98.61	-----	-----	85.86	32.30	6.64	32.19	6.00	373	313	AVERAGE																																																												



Mode	4																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>50.27</td> <td>75.19</td> <td>-24.92</td> <td>71.78</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>53.66</td> <td>74.00</td> <td>-20.34</td> <td>71.26</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>308</td> <td>315</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>42.05</td> <td>54.00</td> <td>-11.95</td> <td>59.65</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>308</td> <td>315</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7245.00</td> <td>57.44</td> <td>75.19</td> <td>-17.75</td> <td>70.58</td> <td>35.78</td> <td>11.66</td> <td>60.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>9660.00</td> <td>49.67</td> <td>75.19</td> <td>-25.52</td> <td>60.37</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	50.27	75.19	-24.92	71.78	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	53.66	74.00	-20.34	71.26	34.20	9.47	61.27	0.00	308	315	PEAK	3	4824.00	42.05	54.00	-11.95	59.65	34.20	9.47	61.27	0.00	308	315	AVERAGE	4	7245.00	57.44	75.19	-17.75	70.58	35.78	11.66	60.58	0.00	---	---	Peak	5	9660.00	49.67	75.19	-25.52	60.37	36.92	13.57	61.19	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>52.35</td> <td>76.88</td> <td>-24.53</td> <td>73.86</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>53.79</td> <td>74.00</td> <td>-20.21</td> <td>71.39</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>328</td> <td>145</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>43.69</td> <td>54.00</td> <td>-10.31</td> <td>61.29</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>328</td> <td>145</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7230.00</td> <td>57.36</td> <td>76.88</td> <td>-19.52</td> <td>70.53</td> <td>35.72</td> <td>11.66</td> <td>60.55</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>9660.00</td> <td>51.75</td> <td>76.88</td> <td>-25.13</td> <td>62.45</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	52.35	76.88	-24.53	73.86	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	53.79	74.00	-20.21	71.39	34.20	9.47	61.27	0.00	328	145	PEAK	3	4824.00	43.69	54.00	-10.31	61.29	34.20	9.47	61.27	0.00	328	145	AVERAGE	4	7230.00	57.36	76.88	-19.52	70.53	35.72	11.66	60.55	0.00	---	---	Peak	5	9660.00	51.75	76.88	-25.13	62.45	36.92	13.57	61.19	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	3225.00	50.27	75.19	-24.92	71.78	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																														
2	4824.00	53.66	74.00	-20.34	71.26	34.20	9.47	61.27	0.00	308	315	PEAK																																																																																																																																																																														
3	4824.00	42.05	54.00	-11.95	59.65	34.20	9.47	61.27	0.00	308	315	AVERAGE																																																																																																																																																																														
4	7245.00	57.44	75.19	-17.75	70.58	35.78	11.66	60.58	0.00	---	---	Peak																																																																																																																																																																														
5	9660.00	49.67	75.19	-25.52	60.37	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																		
1	3225.00	52.35	76.88	-24.53	73.86	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																														
2	4824.00	53.79	74.00	-20.21	71.39	34.20	9.47	61.27	0.00	328	145	PEAK																																																																																																																																																																														
3	4824.00	43.69	54.00	-10.31	61.29	34.20	9.47	61.27	0.00	328	145	AVERAGE																																																																																																																																																																														
4	7230.00	57.36	76.88	-19.52	70.53	35.72	11.66	60.55	0.00	---	---	Peak																																																																																																																																																																														
5	9660.00	51.75	76.88	-25.13	62.45	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																														



		5																																																																												
Mode		Band Edge - L																																																																												
		2400-2483.5_802.11g_CH06_2437MHz																																																																												
Pol.	Horizontal					Fundamental																																																																								
Peak																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2308.99</td> <td>56.41</td> <td>74.00</td> <td>-17.59</td> <td>43.94</td> <td>32.05</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>106</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2308.99	56.41	74.00	-17.59	43.94	32.05	6.60	32.18	6.00	106	350	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>111.33</td> <td>-----</td> <td>-----</td> <td>98.40</td> <td>32.46</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>106</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2437.00	111.33	-----	-----	98.40	32.46	6.68	32.21	6.00	106	350	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																								
1	2308.99	56.41	74.00	-17.59	43.94	32.05	6.60	32.18	6.00	106	350	PEAK																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																								
1	2437.00	111.33	-----	-----	98.40	32.46	6.68	32.21	6.00	106	350	PEAK																																																																		
Avg																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2309.50</td> <td>44.17</td> <td>54.00</td> <td>-9.83</td> <td>31.70</td> <td>32.05</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>106</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2309.50	44.17	54.00	-9.83	31.70	32.05	6.60	32.18	6.00	106	350	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>102.31</td> <td>-----</td> <td>-----</td> <td>89.39</td> <td>32.45</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>106</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	2437.00	102.31	-----	-----	89.39	32.45	6.68	32.21	6.00	106	350	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																								
1	2309.50	44.17	54.00	-9.83	31.70	32.05	6.60	32.18	6.00	106	350	AVERAGE																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																								
1	2437.00	102.31	-----	-----	89.39	32.45	6.68	32.21	6.00	106	350	AVERAGE																																																																		



5																																													
Band Edge - R																																													
2400-2483.5_802.11g_CH06_2437MHz																																													
Pol.	Horizontal																																												
Mode	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.79</td> <td>60.56</td> <td>74.00</td> <td>-13.44</td> <td>47.25</td> <td>32.81</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>106</td> <td>350 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.79	60.56	74.00	-13.44	47.25	32.81	6.74	32.24	6.00	106	350 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2488.79	60.56	74.00	-13.44	47.25	32.81	6.74	32.24	6.00	106	350 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>47.48</td> <td>54.00</td> <td>-6.52</td> <td>34.21</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>106</td> <td>350 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.56	47.48	54.00	-6.52	34.21	32.77	6.73	32.23	6.00	106	350 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.56	47.48	54.00	-6.52	34.21	32.77	6.73	32.23	6.00	106	350 AVERAGE																																		





		5																																																																																												
Mode		Band Edge - L																																																																																												
		2400-2483.5_802.11g_CH06_2437MHz																																																																																												
Pol.		Vertical					Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="4"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.11</td> <td>56.69</td> <td>74.00</td> <td>-17.31</td> <td>44.24</td> <td>32.03</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>172</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos					Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.11	56.69	74.00	-17.31	44.24	32.03	6.60	32.18	6.00	172	117	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="4"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>112.50</td> <td>-----</td> <td>-----</td> <td>99.60</td> <td>32.44</td> <td>6.67</td> <td>32.21</td> <td>6.00</td> <td>172</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos					Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	112.50	-----	-----	99.60	32.44	6.67	32.21	6.00	172	117	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	2388.11	56.69	74.00	-17.31	44.24	32.03	6.60	32.18	6.00	172	117	PEAK																																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	2437.00	112.50	-----	-----	99.60	32.44	6.67	32.21	6.00	172	117	PEAK																																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="4"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>44.05</td> <td>54.00</td> <td>-9.95</td> <td>31.57</td> <td>32.06</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>172</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos					Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.88	44.05	54.00	-9.95	31.57	32.06	6.60	32.18	6.00	172	117	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="4"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.32</td> <td>-----</td> <td>-----</td> <td>90.42</td> <td>32.43</td> <td>6.67</td> <td>32.20</td> <td>6.00</td> <td>172</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos					Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	103.32	-----	-----	90.42	32.43	6.67	32.20	6.00	172	117	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	2389.88	44.05	54.00	-9.95	31.57	32.06	6.60	32.18	6.00	172	117	AVERAGE																																																																																		
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	2437.00	103.32	-----	-----	90.42	32.43	6.67	32.20	6.00	172	117	AVERAGE																																																																																		



		5																																														
Mode	Band Edge - R																																															
	2400-2483.5_802.11g_CH06_2437MHz																																															
Pol.	Vertical	Fundamental																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.31</td> <td>61.57</td> <td>74.00</td> <td>-12.43</td> <td>48.30</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>172</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.31	61.57	74.00	-12.43	48.30	32.77	6.73	32.23	6.00	172	117	PEAK	Blank	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	2484.31	61.57	74.00	-12.43	48.30	32.77	6.73	32.23	6.00	172	117	PEAK																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>47.68</td> <td>54.00</td> <td>-6.32</td> <td>34.41</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>172</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.56	47.68	54.00	-6.32	34.41	32.77	6.73	32.23	6.00	172	117	AVERAGE	Blank	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	2483.56	47.68	54.00	-6.32	34.41	32.77	6.73	32.23	6.00	172	117	AVERAGE																																				

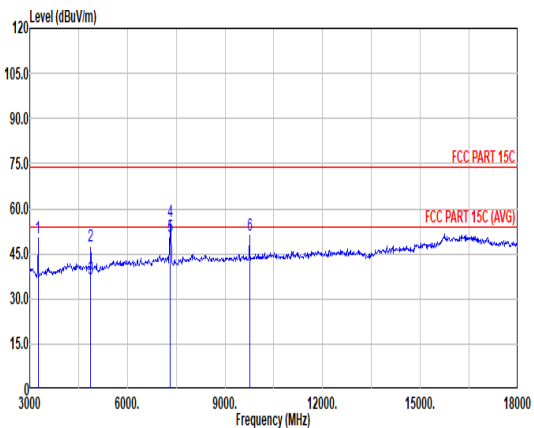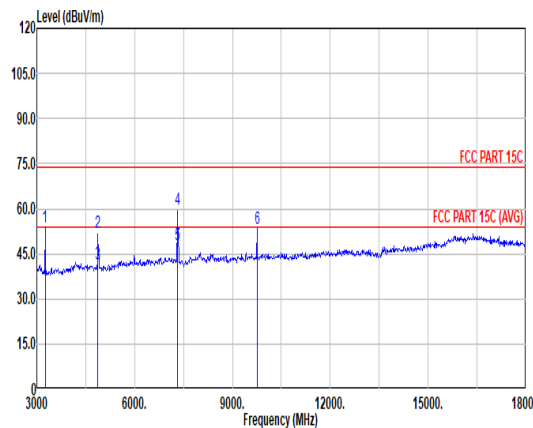

Mode	5																																																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																																																			
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																																		
Peak																																																																																																																																																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>50.26</td> <td>80.48</td> <td>-30.22</td> <td>71.73</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>65.11</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>36.85</td> <td>54.00</td> <td>-17.15</td> <td>54.36</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>55.69</td> <td>74.00</td> <td>-18.31</td> <td>69.09</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>100</td> <td>235</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>50.50</td> <td>54.00</td> <td>-3.50</td> <td>63.90</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>100</td> <td>235</td> <td>Average</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>51.09</td> <td>80.48</td> <td>-29.39</td> <td>61.62</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	50.26	80.48	-30.22	71.73	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	47.60	74.00	-26.40	65.11	34.20	9.52	61.23	0.00	300	360	PEAK	3	4874.00	36.85	54.00	-17.15	54.36	34.20	9.52	61.23	0.00	300	360	AVERAGE	4	7311.00	55.69	74.00	-18.31	69.09	35.64	11.69	60.73	0.00	100	235	Peak	5	7311.00	50.50	54.00	-3.50	63.90	35.64	11.69	60.73	0.00	100	235	Average	6	9750.00	51.09	80.48	-29.39	61.62	37.10	13.59	61.22	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>54.07</td> <td>82.00</td> <td>-28.73</td> <td>75.54</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>52.14</td> <td>74.00</td> <td>-21.86</td> <td>69.65</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>58.97</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>155</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>59.63</td> <td>74.00</td> <td>-14.37</td> <td>73.03</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>115</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>48.19</td> <td>54.00</td> <td>-5.81</td> <td>61.59</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>115</td> <td>267</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>53.30</td> <td>82.00</td> <td>-29.50</td> <td>63.83</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	54.07	82.00	-28.73	75.54	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	52.14	74.00	-21.86	69.65	34.20	9.52	61.23	0.00	300	155	PEAK	3	4874.00	41.46	54.00	-12.54	58.97	34.20	9.52	61.23	0.00	300	155	AVERAGE	4	7311.00	59.63	74.00	-14.37	73.03	35.64	11.69	60.73	0.00	115	267	PEAK	5	7311.00	48.19	54.00	-5.81	61.59	35.64	11.69	60.73	0.00	115	267	AVERAGE	6	9750.00	53.30	82.00	-29.50	63.83	37.10	13.59	61.22	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	50.26	80.48	-30.22	71.73	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	47.60	74.00	-26.40	65.11	34.20	9.52	61.23	0.00	300	360	PEAK																																																																																																																																																																																																								
3	4874.00	36.85	54.00	-17.15	54.36	34.20	9.52	61.23	0.00	300	360	AVERAGE																																																																																																																																																																																																								
4	7311.00	55.69	74.00	-18.31	69.09	35.64	11.69	60.73	0.00	100	235	Peak																																																																																																																																																																																																								
5	7311.00	50.50	54.00	-3.50	63.90	35.64	11.69	60.73	0.00	100	235	Average																																																																																																																																																																																																								
6	9750.00	51.09	80.48	-29.39	61.62	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3255.00	54.07	82.00	-28.73	75.54	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																																								
2	4874.00	52.14	74.00	-21.86	69.65	34.20	9.52	61.23	0.00	300	155	PEAK																																																																																																																																																																																																								
3	4874.00	41.46	54.00	-12.54	58.97	34.20	9.52	61.23	0.00	300	155	AVERAGE																																																																																																																																																																																																								
4	7311.00	59.63	74.00	-14.37	73.03	35.64	11.69	60.73	0.00	115	267	PEAK																																																																																																																																																																																																								
5	7311.00	48.19	54.00	-5.81	61.59	35.64	11.69	60.73	0.00	115	267	AVERAGE																																																																																																																																																																																																								
6	9750.00	53.30	82.00	-29.50	63.83	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																																								







		6																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11g_CH11_2462MHz																																																																																									
Pol.		Horizontal				Fundamental																																																																																					
Peak	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td colspan="2">1</td> <td>2484.12</td> <td>66.93</td> <td>74.00</td> <td>-7.07</td> <td>53.66</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>167</td> <td>0</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark	1		2484.12	66.93	74.00	-7.07	53.66	32.77	6.73	32.23	6.00	167	0	PEAK						
			Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																								
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark																																																																							
1		2484.12	66.93	74.00	-7.07	53.66	32.77	6.73	32.23	6.00	167	0	PEAK																																																																														
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td colspan="2">1</td> <td>2462.00</td> <td>111.70</td> <td>74.00</td> <td>37.70</td> <td>98.72</td> <td>32.58</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>167</td> <td>0</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark	1		2462.00	111.70	74.00	37.70	98.72	32.58	6.70	32.22	6.00	167	0	PEAK							
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																									
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark																																																																							
1		2462.00	111.70	74.00	37.70	98.72	32.58	6.70	32.22	6.00	167	0	PEAK																																																																														
Avg	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td colspan="2">1</td> <td>2483.51</td> <td>52.06</td> <td>54.00</td> <td>-1.94</td> <td>38.79</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>167</td> <td>0</td> <td>AVERAGE</td> <td colspan="6"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark	1		2483.51	52.06	54.00	-1.94	38.79	32.77	6.73	32.23	6.00	167	0	AVERAGE						
			Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																								
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark																																																																							
1		2483.51	52.06	54.00	-1.94	38.79	32.77	6.73	32.23	6.00	167	0	AVERAGE																																																																														
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td colspan="2">1</td> <td>2462.00</td> <td>102.51</td> <td>74.00</td> <td>28.51</td> <td>89.43</td> <td>32.60</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>167</td> <td>0</td> <td>AVERAGE</td> <td colspan="6"></td> </tr> </tbody> </table>										Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark	1		2462.00	102.51	74.00	28.51	89.43	32.60	6.70	32.22	6.00	167	0	AVERAGE							
		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																									
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	Remark																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	cm	deg	Remark																																																																							
1		2462.00	102.51	74.00	28.51	89.43	32.60	6.70	32.22	6.00	167	0	AVERAGE																																																																														



		6																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11g_CH11_2462MHz																																																																																								
Pol.		Vertical				Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>66.42</td> <td>74.00</td> <td>-7.58</td> <td>53.15</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>317</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	66.42	74.00	-7.58	53.15	32.77	6.73	32.23	6.00	395	317	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>109.60</td> <td>-----</td> <td>-----</td> <td>96.47</td> <td>32.64</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>317</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	109.60	-----	-----	96.47	32.64	6.71	32.22	6.00	395	317	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2483.51	66.42	74.00	-7.58	53.15	32.77	6.73	32.23	6.00	395	317	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2462.00	109.60	-----	-----	96.47	32.64	6.71	32.22	6.00	395	317	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>50.27</td> <td>54.00</td> <td>-3.73</td> <td>37.00</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>317</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	50.27	54.00	-3.73	37.00	32.77	6.73	32.23	6.00	395	317	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>100.37</td> <td>-----</td> <td>-----</td> <td>87.25</td> <td>32.63</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>317</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	100.37	-----	-----	87.25	32.63	6.71	32.22	6.00	395	317	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2483.51	50.27	54.00	-3.73	37.00	32.77	6.73	32.23	6.00	395	317	AVERAGE																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2462.00	100.37	-----	-----	87.25	32.63	6.71	32.22	6.00	395	317	AVERAGE																																																																														

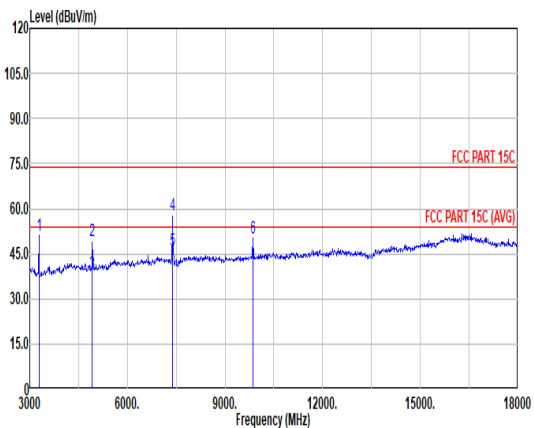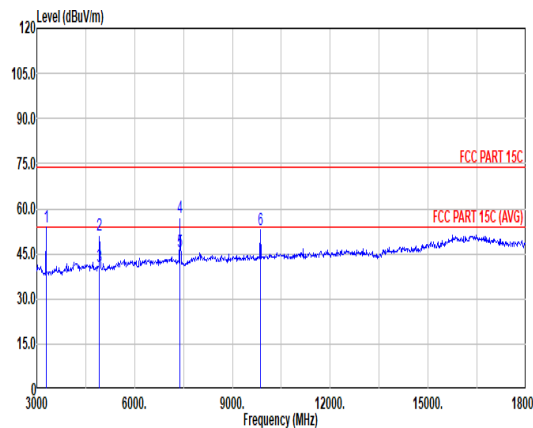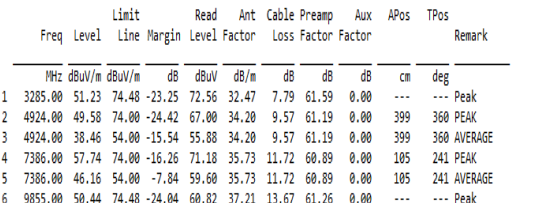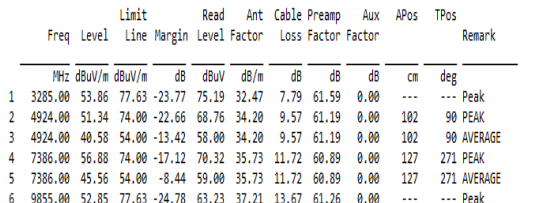

Mode	6																																																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line with several peaks. Two red horizontal lines indicate limits: 'FCC PART 15C' at approximately 75 dBuV/m and 'FCC PART 15C (AVG)' at approximately 55 dBuV/m. Six peaks are marked with vertical blue lines and numbered 1 through 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>3285.00</td><td>51.23</td><td>74.48</td><td>-23.25</td><td>72.56</td><td>32.47</td><td>7.79</td><td>61.59</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4924.00</td><td>49.58</td><td>74.00</td><td>-24.42</td><td>67.00</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr> <tr><td>3</td><td>4924.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>55.88</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>399</td><td>360</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7386.00</td><td>57.74</td><td>74.00</td><td>-16.26</td><td>71.18</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>105</td><td>241</td><td>PEAK</td></tr> <tr><td>5</td><td>7386.00</td><td>46.16</td><td>54.00</td><td>-7.84</td><td>59.60</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>105</td><td>241</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9855.00</td><td>50.44</td><td>74.48</td><td>-24.04</td><td>60.82</td><td>37.21</td><td>13.67</td><td>61.26</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	51.23	74.48	-23.25	72.56	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	49.58	74.00	-24.42	67.00	34.20	9.57	61.19	0.00	399	360	PEAK	3	4924.00	38.46	54.00	-15.54	55.88	34.20	9.57	61.19	0.00	399	360	AVERAGE	4	7386.00	57.74	74.00	-16.26	71.18	35.73	11.72	60.89	0.00	105	241	PEAK	5	7386.00	46.16	54.00	-7.84	59.60	35.73	11.72	60.89	0.00	105	241	AVERAGE	6	9855.00	50.44	74.48	-24.04	60.82	37.21	13.67	61.26	0.00	---	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line with several peaks. Two red horizontal lines indicate limits: 'FCC PART 15C' at approximately 75 dBuV/m and 'FCC PART 15C (AVG)' at approximately 55 dBuV/m. Six peaks are marked with vertical blue lines and numbered 1 through 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>3285.00</td><td>53.86</td><td>77.63</td><td>-23.77</td><td>75.19</td><td>32.47</td><td>7.79</td><td>61.59</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4924.00</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>68.76</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>102</td><td>90</td><td>PEAK</td></tr> <tr><td>3</td><td>4924.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>58.00</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>102</td><td>90</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7386.00</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>70.32</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>127</td><td>271</td><td>PEAK</td></tr> <tr><td>5</td><td>7386.00</td><td>45.56</td><td>54.00</td><td>-8.44</td><td>59.00</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>127</td><td>271</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9855.00</td><td>52.85</td><td>77.63</td><td>-24.78</td><td>63.23</td><td>37.21</td><td>13.67</td><td>61.26</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	53.86	77.63	-23.77	75.19	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	51.34	74.00	-22.66	68.76	34.20	9.57	61.19	0.00	102	90	PEAK	3	4924.00	40.58	54.00	-13.42	58.00	34.20	9.57	61.19	0.00	102	90	AVERAGE	4	7386.00	56.88	74.00	-17.12	70.32	35.73	11.72	60.89	0.00	127	271	PEAK	5	7386.00	45.56	54.00	-8.44	59.00	35.73	11.72	60.89	0.00	127	271	AVERAGE	6	9855.00	52.85	77.63	-24.78	63.23	37.21	13.67	61.26	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3285.00	51.23	74.48	-23.25	72.56	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																								
2	4924.00	49.58	74.00	-24.42	67.00	34.20	9.57	61.19	0.00	399	360	PEAK																																																																																																																																																																																																								
3	4924.00	38.46	54.00	-15.54	55.88	34.20	9.57	61.19	0.00	399	360	AVERAGE																																																																																																																																																																																																								
4	7386.00	57.74	74.00	-16.26	71.18	35.73	11.72	60.89	0.00	105	241	PEAK																																																																																																																																																																																																								
5	7386.00	46.16	54.00	-7.84	59.60	35.73	11.72	60.89	0.00	105	241	AVERAGE																																																																																																																																																																																																								
6	9855.00	50.44	74.48	-24.04	60.82	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3285.00	53.86	77.63	-23.77	75.19	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																								
2	4924.00	51.34	74.00	-22.66	68.76	34.20	9.57	61.19	0.00	102	90	PEAK																																																																																																																																																																																																								
3	4924.00	40.58	54.00	-13.42	58.00	34.20	9.57	61.19	0.00	102	90	AVERAGE																																																																																																																																																																																																								
4	7386.00	56.88	74.00	-17.12	70.32	35.73	11.72	60.89	0.00	127	271	PEAK																																																																																																																																																																																																								
5	7386.00	45.56	54.00	-8.44	59.00	35.73	11.72	60.89	0.00	127	271	AVERAGE																																																																																																																																																																																																								
6	9855.00	52.85	77.63	-24.78	63.23	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line with several peaks. Two red horizontal lines indicate limits: 'FCC PART 15C' at approximately 75 dBuV/m and 'FCC PART 15C (AVG)' at approximately 55 dBuV/m. Six peaks are marked with vertical blue lines and numbered 1 through 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>3285.00</td><td>51.23</td><td>74.48</td><td>-23.25</td><td>72.56</td><td>32.47</td><td>7.79</td><td>61.59</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4924.00</td><td>49.58</td><td>74.00</td><td>-24.42</td><td>67.00</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr> <tr><td>3</td><td>4924.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>55.88</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>399</td><td>360</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7386.00</td><td>57.74</td><td>74.00</td><td>-16.26</td><td>71.18</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>105</td><td>241</td><td>PEAK</td></tr> <tr><td>5</td><td>7386.00</td><td>46.16</td><td>54.00</td><td>-7.84</td><td>59.60</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>105</td><td>241</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9855.00</td><td>50.44</td><td>74.48</td><td>-24.04</td><td>60.82</td><td>37.21</td><td>13.67</td><td>61.26</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	51.23	74.48	-23.25	72.56	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	49.58	74.00	-24.42	67.00	34.20	9.57	61.19	0.00	399	360	PEAK	3	4924.00	38.46	54.00	-15.54	55.88	34.20	9.57	61.19	0.00	399	360	AVERAGE	4	7386.00	57.74	74.00	-16.26	71.18	35.73	11.72	60.89	0.00	105	241	PEAK	5	7386.00	46.16	54.00	-7.84	59.60	35.73	11.72	60.89	0.00	105	241	AVERAGE	6	9855.00	50.44	74.48	-24.04	60.82	37.21	13.67	61.26	0.00	---	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line with several peaks. Two red horizontal lines indicate limits: 'FCC PART 15C' at approximately 75 dBuV/m and 'FCC PART 15C (AVG)' at approximately 55 dBuV/m. Six peaks are marked with vertical blue lines and numbered 1 through 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>3285.00</td><td>53.86</td><td>77.63</td><td>-23.77</td><td>75.19</td><td>32.47</td><td>7.79</td><td>61.59</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4924.00</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>68.76</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>102</td><td>90</td><td>PEAK</td></tr> <tr><td>3</td><td>4924.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>58.00</td><td>34.20</td><td>9.57</td><td>61.19</td><td>0.00</td><td>102</td><td>90</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7386.00</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>70.32</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>127</td><td>271</td><td>PEAK</td></tr> <tr><td>5</td><td>7386.00</td><td>45.56</td><td>54.00</td><td>-8.44</td><td>59.00</td><td>35.73</td><td>11.72</td><td>60.89</td><td>0.00</td><td>127</td><td>271</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9855.00</td><td>52.85</td><td>77.63</td><td>-24.78</td><td>63.23</td><td>37.21</td><td>13.67</td><td>61.26</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	53.86	77.63	-23.77	75.19	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	51.34	74.00	-22.66	68.76	34.20	9.57	61.19	0.00	102	90	PEAK	3	4924.00	40.58	54.00	-13.42	58.00	34.20	9.57	61.19	0.00	102	90	AVERAGE	4	7386.00	56.88	74.00	-17.12	70.32	35.73	11.72	60.89	0.00	127	271	PEAK	5	7386.00	45.56	54.00	-8.44	59.00	35.73	11.72	60.89	0.00	127	271	AVERAGE	6	9855.00	52.85	77.63	-24.78	63.23	37.21	13.67	61.26	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3285.00	51.23	74.48	-23.25	72.56	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																								
2	4924.00	49.58	74.00	-24.42	67.00	34.20	9.57	61.19	0.00	399	360	PEAK																																																																																																																																																																																																								
3	4924.00	38.46	54.00	-15.54	55.88	34.20	9.57	61.19	0.00	399	360	AVERAGE																																																																																																																																																																																																								
4	7386.00	57.74	74.00	-16.26	71.18	35.73	11.72	60.89	0.00	105	241	PEAK																																																																																																																																																																																																								
5	7386.00	46.16	54.00	-7.84	59.60	35.73	11.72	60.89	0.00	105	241	AVERAGE																																																																																																																																																																																																								
6	9855.00	50.44	74.48	-24.04	60.82	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	3285.00	53.86	77.63	-23.77	75.19	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																																																																								
2	4924.00	51.34	74.00	-22.66	68.76	34.20	9.57	61.19	0.00	102	90	PEAK																																																																																																																																																																																																								
3	4924.00	40.58	54.00	-13.42	58.00	34.20	9.57	61.19	0.00	102	90	AVERAGE																																																																																																																																																																																																								
4	7386.00	56.88	74.00	-17.12	70.32	35.73	11.72	60.89	0.00	127	271	PEAK																																																																																																																																																																																																								
5	7386.00	45.56	54.00	-8.44	59.00	35.73	11.72	60.89	0.00	127	271	AVERAGE																																																																																																																																																																																																								
6	9855.00	52.85	77.63	-24.78	63.23	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																																																																								



7

Mode

Band Edge



2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.

Horizontal

Fundamental



Peak

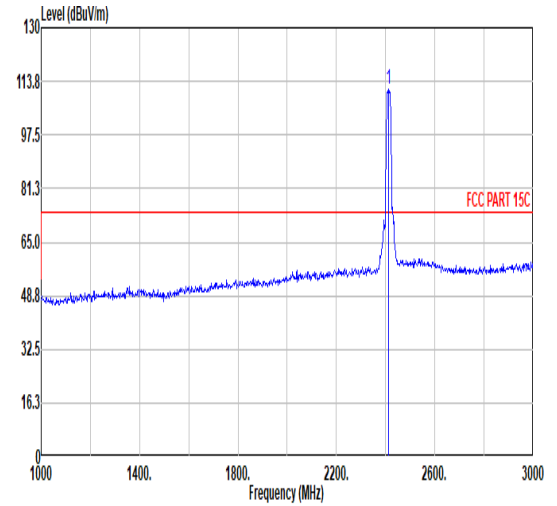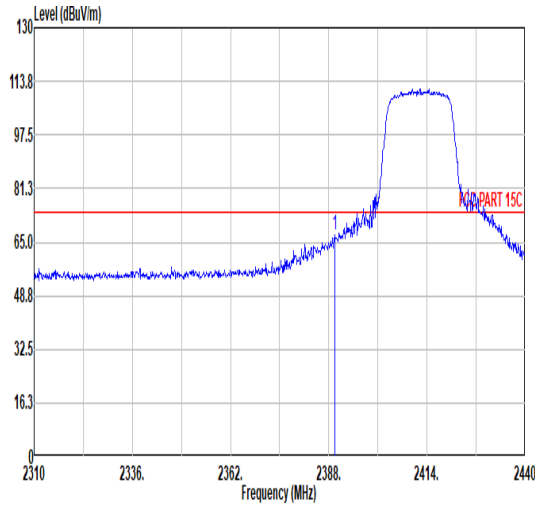

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2389.69	66.98	74.00	-7.02	54.50	32.06	6.60	32.18	6.00	171	0	PEAK

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2412.00	111.25	-----	-----	98.54	32.27	6.63	32.19	6.00	171	0	PEAK

Avg

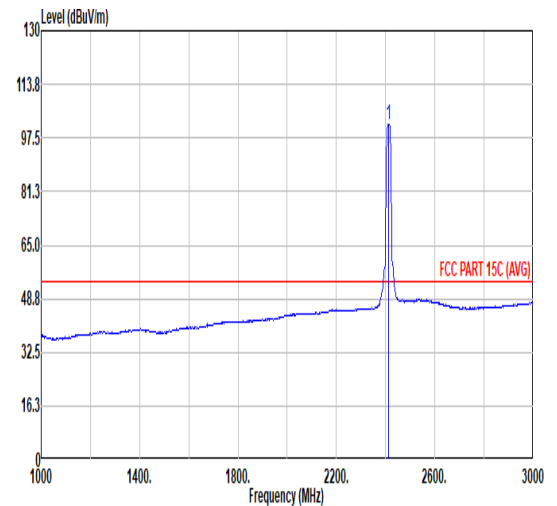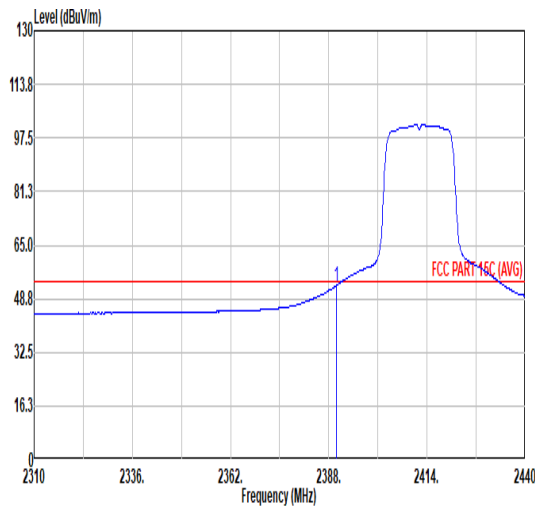

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2389.95	52.69	54.00	-1.31	40.21	32.06	6.60	32.18	6.00	171	0	AVERAGE

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark				
									Freq	Level	Line Margin	Level Factor
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			
1	2412.00	101.65	-----	-----	88.94	32.27	6.63	32.19	6.00	171	0	AVERAGE





		7																																																																						
Mode		Band Edge																																																																						
		2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																						
Pol.	Vertical										Fundamental																																																													
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>60.41</td> <td>74.00</td> <td>-13.59</td> <td>47.95</td> <td>32.04</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>372</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2388.65	60.41	74.00	-13.59	47.95	32.04	6.60	32.18	6.00	372	314	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>107.43</td> <td>-----</td> <td>-----</td> <td>94.68</td> <td>32.30</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>372</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	107.43	-----	-----	94.68	32.30	6.64	32.19	6.00	372	314	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2388.65	60.41	74.00	-13.59	47.95	32.04	6.60	32.18	6.00	372	314	PEAK																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2412.00	107.43	-----	-----	94.68	32.30	6.64	32.19	6.00	372	314	PEAK																																																												
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.70</td> <td>54.00</td> <td>-7.30</td> <td>34.22</td> <td>32.06</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>372</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2389.95	46.70	54.00	-7.30	34.22	32.06	6.60	32.18	6.00	372	314	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.04</td> <td>-----</td> <td>-----</td> <td>85.29</td> <td>32.30</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>372</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	98.04	-----	-----	85.29	32.30	6.64	32.19	6.00	372	314	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2389.95	46.70	54.00	-7.30	34.22	32.06	6.60	32.18	6.00	372	314	AVERAGE																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																														
1	2412.00	98.04	-----	-----	85.29	32.30	6.64	32.19	6.00	372	314	AVERAGE																																																												



Mode	7																																																																																																																																																															
	Harmonic																																																																																																																																																															
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>48.26</td> <td>75.11</td> <td>-26.85</td> <td>69.77</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>42.94</td> <td>74.00</td> <td>-31.06</td> <td>60.54</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7230.00</td> <td>50.84</td> <td>75.11</td> <td>-24.27</td> <td>64.01</td> <td>35.72</td> <td>11.66</td> <td>60.55</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>9660.00</td> <td>49.24</td> <td>75.11</td> <td>-25.87</td> <td>59.94</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	48.26	75.11	-26.85	69.77	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	42.94	74.00	-31.06	60.54	34.20	9.47	61.27	0.00	---	---	PEAK	3	7230.00	50.84	75.11	-24.27	64.01	35.72	11.66	60.55	0.00	---	---	Peak	4	9660.00	49.24	75.11	-25.87	59.94	36.92	13.57	61.19	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3225.00</td> <td>49.00</td> <td>76.21</td> <td>-27.21</td> <td>70.51</td> <td>32.45</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>44.23</td> <td>74.00</td> <td>-29.77</td> <td>61.83</td> <td>34.20</td> <td>9.47</td> <td>61.27</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7230.00</td> <td>48.22</td> <td>76.21</td> <td>-27.99</td> <td>61.39</td> <td>35.72</td> <td>11.66</td> <td>60.55</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>9660.00</td> <td>50.66</td> <td>76.21</td> <td>-25.55</td> <td>61.36</td> <td>36.92</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3225.00	49.00	76.21	-27.21	70.51	32.45	7.71	61.67	0.00	---	---	Peak	2	4824.00	44.23	74.00	-29.77	61.83	34.20	9.47	61.27	0.00	---	---	PEAK	3	7230.00	48.22	76.21	-27.99	61.39	35.72	11.66	60.55	0.00	---	---	Peak	4	9660.00	50.66	76.21	-25.55	61.36	36.92	13.57	61.19	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																								
1	3225.00	48.26	75.11	-26.85	69.77	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																				
2	4824.00	42.94	74.00	-31.06	60.54	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																																																																																				
3	7230.00	50.84	75.11	-24.27	64.01	35.72	11.66	60.55	0.00	---	---	Peak																																																																																																																																																				
4	9660.00	49.24	75.11	-25.87	59.94	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																								
1	3225.00	49.00	76.21	-27.21	70.51	32.45	7.71	61.67	0.00	---	---	Peak																																																																																																																																																				
2	4824.00	44.23	74.00	-29.77	61.83	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																																																																																				
3	7230.00	48.22	76.21	-27.99	61.39	35.72	11.66	60.55	0.00	---	---	Peak																																																																																																																																																				
4	9660.00	50.66	76.21	-25.55	61.36	36.92	13.57	61.19	0.00	---	---	Peak																																																																																																																																																				
Peak Avg																																																																																																																																																																

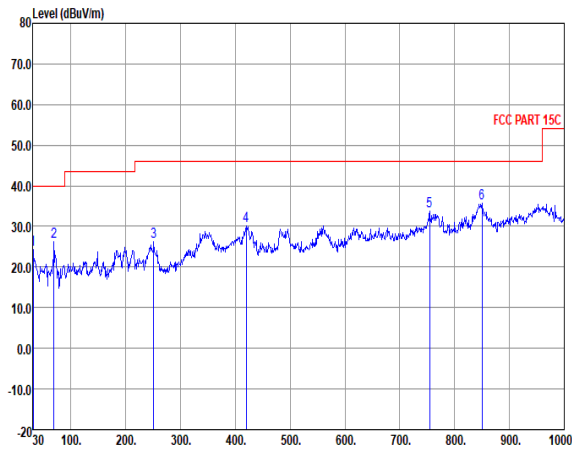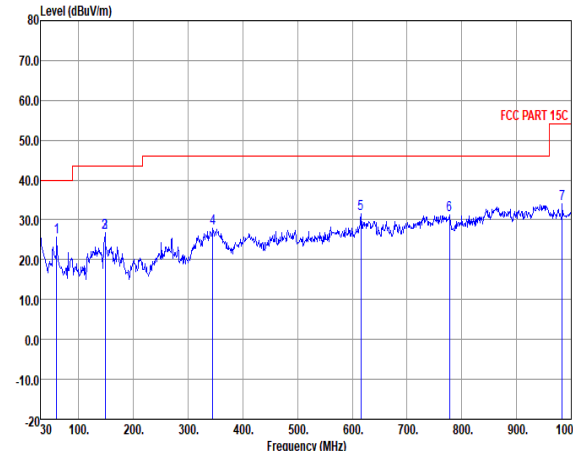

Mode	7																																																																																																																																																																																																									
	LF																																																																																																																																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>24.34</td><td>-15.66</td><td>40.00</td><td>31.15</td><td>24.93</td><td>0.46</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>68.80</td><td>26.11</td><td>-13.89</td><td>40.00</td><td>45.50</td><td>12.23</td><td>0.94</td><td>32.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>251.16</td><td>26.24</td><td>-19.76</td><td>46.00</td><td>37.81</td><td>18.66</td><td>2.14</td><td>32.37</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>419.94</td><td>30.25</td><td>-15.75</td><td>46.00</td><td>37.34</td><td>22.60</td><td>2.76</td><td>32.45</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>754.59</td><td>33.73</td><td>-12.27</td><td>46.00</td><td>34.24</td><td>28.16</td><td>3.71</td><td>32.38</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>849.65</td><td>35.70</td><td>-10.30</td><td>46.00</td><td>34.74</td><td>29.08</td><td>3.93</td><td>32.05</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.97	24.34	-15.66	40.00	31.15	24.93	0.46	32.20	---	---	Peak	2	68.80	26.11	-13.89	40.00	45.50	12.23	0.94	32.62	---	---	Peak	3	251.16	26.24	-19.76	46.00	37.81	18.66	2.14	32.37	---	---	Peak	4	419.94	30.25	-15.75	46.00	37.34	22.60	2.76	32.45	---	---	Peak	5	754.59	33.73	-12.27	46.00	34.24	28.16	3.71	32.38	---	---	Peak	6	849.65	35.70	-10.30	46.00	34.74	29.08	3.93	32.05	---	---	Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>60.07</td><td>25.64</td><td>-14.36</td><td>40.00</td><td>45.36</td><td>11.93</td><td>0.84</td><td>32.49</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>148.34</td><td>26.79</td><td>-16.71</td><td>43.50</td><td>40.38</td><td>17.15</td><td>1.62</td><td>32.36</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>148.34</td><td>26.79</td><td>-16.71</td><td>43.50</td><td>40.38</td><td>17.15</td><td>1.62</td><td>32.36</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>345.25</td><td>27.82</td><td>-18.18</td><td>46.00</td><td>37.47</td><td>20.25</td><td>2.51</td><td>32.41</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>615.88</td><td>31.59</td><td>-14.41</td><td>46.00</td><td>35.12</td><td>25.73</td><td>3.35</td><td>32.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>777.87</td><td>31.24</td><td>-14.76</td><td>46.00</td><td>31.54</td><td>28.26</td><td>3.77</td><td>32.33</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>7</td><td>983.51</td><td>34.12</td><td>-19.88</td><td>54.00</td><td>29.14</td><td>31.48</td><td>4.23</td><td>30.73</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	60.07	25.64	-14.36	40.00	45.36	11.93	0.84	32.49	---	---	Peak	2	148.34	26.79	-16.71	43.50	40.38	17.15	1.62	32.36	---	---	Peak	3	148.34	26.79	-16.71	43.50	40.38	17.15	1.62	32.36	---	---	Peak	4	345.25	27.82	-18.18	46.00	37.47	20.25	2.51	32.41	---	---	Peak	5	615.88	31.59	-14.41	46.00	35.12	25.73	3.35	32.61	---	---	Peak	6	777.87	31.24	-14.76	46.00	31.54	28.26	3.77	32.33	---	---	Peak	7	983.51	34.12	-19.88	54.00	29.14	31.48	4.23	30.73	---	---	Peak
Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	30.97	24.34	-15.66	40.00	31.15	24.93	0.46	32.20	---	---	Peak																																																																																																																																																																																															
2	68.80	26.11	-13.89	40.00	45.50	12.23	0.94	32.62	---	---	Peak																																																																																																																																																																																															
3	251.16	26.24	-19.76	46.00	37.81	18.66	2.14	32.37	---	---	Peak																																																																																																																																																																																															
4	419.94	30.25	-15.75	46.00	37.34	22.60	2.76	32.45	---	---	Peak																																																																																																																																																																																															
5	754.59	33.73	-12.27	46.00	34.24	28.16	3.71	32.38	---	---	Peak																																																																																																																																																																																															
6	849.65	35.70	-10.30	46.00	34.74	29.08	3.93	32.05	---	---	Peak																																																																																																																																																																																															
Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	60.07	25.64	-14.36	40.00	45.36	11.93	0.84	32.49	---	---	Peak																																																																																																																																																																																															
2	148.34	26.79	-16.71	43.50	40.38	17.15	1.62	32.36	---	---	Peak																																																																																																																																																																																															
3	148.34	26.79	-16.71	43.50	40.38	17.15	1.62	32.36	---	---	Peak																																																																																																																																																																																															
4	345.25	27.82	-18.18	46.00	37.47	20.25	2.51	32.41	---	---	Peak																																																																																																																																																																																															
5	615.88	31.59	-14.41	46.00	35.12	25.73	3.35	32.61	---	---	Peak																																																																																																																																																																																															
6	777.87	31.24	-14.76	46.00	31.54	28.26	3.77	32.33	---	---	Peak																																																																																																																																																																																															
7	983.51	34.12	-19.88	54.00	29.14	31.48	4.23	30.73	---	---	Peak																																																																																																																																																																																															



		8																																											
Mode		Band Edge - L																																											
		2400-2483.5_802.11n_HT20_CH06_2437MHz																																											
Pol.		Horizontal					Fundamental																																						
Peak	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2382.26</td> <td>56.05</td> <td>74.00</td> <td>-17.95</td> <td>43.70</td> <td>31.95</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>105</td> <td>350 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2382.26	56.05	74.00	-17.95	43.70	31.95	6.59	32.19	6.00	105	350 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																			
1	2382.26	56.05	74.00	-17.95	43.70	31.95	6.59	32.19	6.00	105	350 PEAK																																		
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>109.31</td> <td>-----</td> <td>-----</td> <td>96.39</td> <td>32.45</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>105</td> <td>350 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2437.00	109.31	-----	-----	96.39	32.45	6.68	32.21	6.00	105	350 PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																			
1	2437.00	109.31	-----	-----	96.39	32.45	6.68	32.21	6.00	105	350 PEAK																																		
Avg	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2377.56</td> <td>44.09</td> <td>54.00</td> <td>-9.91</td> <td>31.81</td> <td>31.89</td> <td>6.58</td> <td>32.19</td> <td>6.00</td> <td>105</td> <td>350 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2377.56	44.09	54.00	-9.91	31.81	31.89	6.58	32.19	6.00	105	350 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																			
1	2377.56	44.09	54.00	-9.91	31.81	31.89	6.58	32.19	6.00	105	350 AVERAGE																																		
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>100.18</td> <td>-----</td> <td>-----</td> <td>87.26</td> <td>32.45</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>105</td> <td>350 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2437.00	100.18	-----	-----	87.26	32.45	6.68	32.21	6.00	105	350 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																			
1	2437.00	100.18	-----	-----	87.26	32.45	6.68	32.21	6.00	105	350 AVERAGE																																		



		8																																							
Mode	Band Edge - R																																								
	2400-2483.5_802.11n HT20_CH06_2437MHz																																								
Pol.	Horizontal		Fundamental																																						
Peak			Blank																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.81</td> <td>60.11</td> <td>74.00</td> <td>-13.89</td> <td>46.84</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>105</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.81	60.11	74.00	-13.89	46.84	32.77	6.73	32.23	6.00	105
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																	
1	2483.81	60.11	74.00	-13.89	46.84	32.77	6.73	32.23	6.00	105	350	PEAK																													
Avg			Blank																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.81</td> <td>46.92</td> <td>54.00</td> <td>-7.08</td> <td>33.65</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>105</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.81	46.92	54.00	-7.08	33.65	32.77	6.73	32.23	6.00	105
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																	
1	2483.81	46.92	54.00	-7.08	33.65	32.77	6.73	32.23	6.00	105	350	AVERAGE																													



8

Mode

Band Edge - L



2400-2483.5_802.11n_HT20_CH06_2437MHz

Pol.



Vertical

Fundamental

Peak

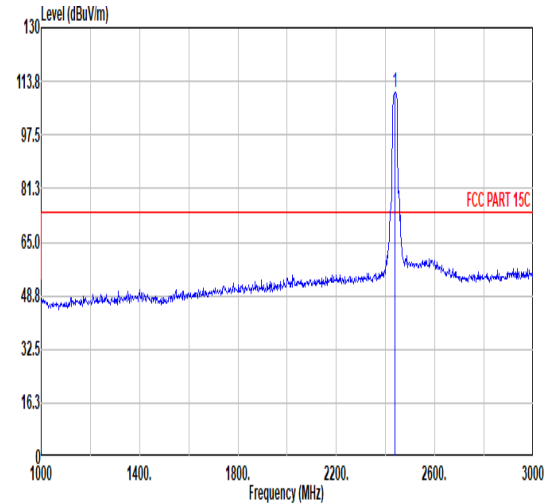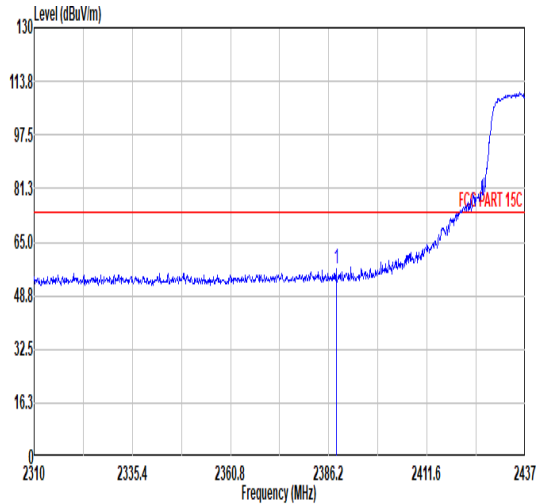


Avg

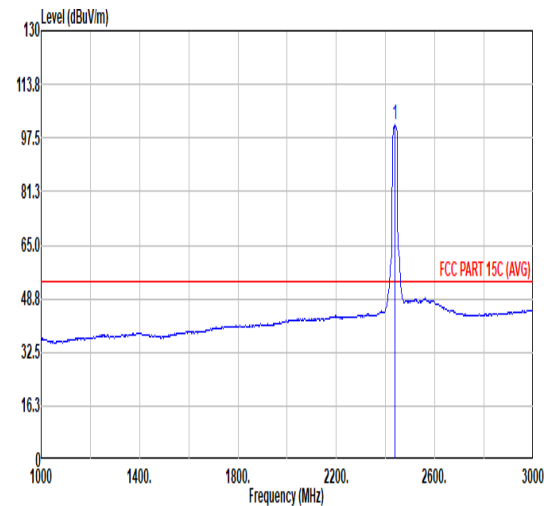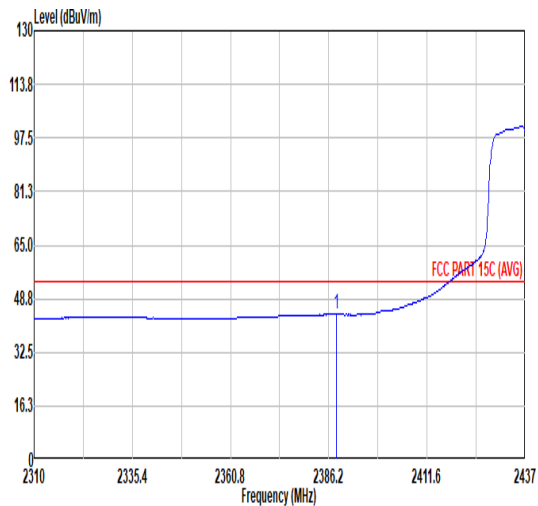




8	
Mode	Band Edge - R
	2400-2483.5_802.11n HT20_CH06_2437MHz
Pol.	Vertical
Peak	Fundamental
	Blank
Avg	Fundamental
	Blank

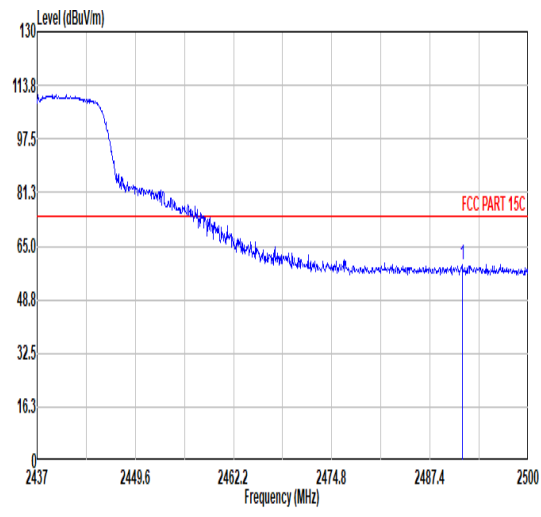

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	
1 2491.56	59.42	74.00	-14.58	46.09	32.83	6.74	32.24	6.00	174 117 PEAK

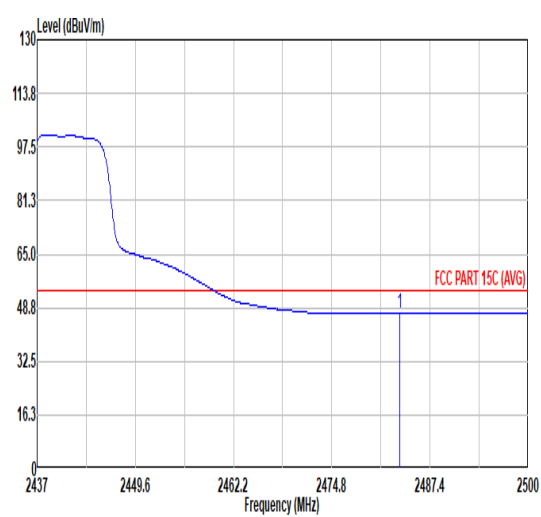

Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	
1 2483.56	47.26	54.00	-6.74	33.99	32.77	6.73	32.23	6.00	174 117 AVERAGE



Mode	8																																																																																																																																																																																																						
	Harmonic																																																																																																																																																																																																						
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																																																																																					
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>50.45</td> <td>79.84</td> <td>-29.39</td> <td>71.92</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>43.38</td> <td>74.00</td> <td>-30.62</td> <td>60.89</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>58.86</td> <td>74.00</td> <td>-15.14</td> <td>72.26</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>105</td> <td>60</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>45.39</td> <td>54.00</td> <td>-8.61</td> <td>58.78</td> <td>35.65</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>105</td> <td>60</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>9750.00</td> <td>49.35</td> <td>79.84</td> <td>-30.49</td> <td>59.88</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	50.45	79.84	-29.39	71.92	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	43.38	74.00	-30.62	60.89	34.20	9.52	61.23	0.00	---	---	PEAK	3	7311.00	58.86	74.00	-15.14	72.26	35.64	11.69	60.73	0.00	105	60	PEAK	4	7311.00	45.39	54.00	-8.61	58.78	35.65	11.69	60.73	0.00	105	60	AVERAGE	5	9750.00	49.35	79.84	-30.49	59.88	37.10	13.59	61.22	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3255.00</td> <td>54.48</td> <td>79.47</td> <td>-24.99</td> <td>75.95</td> <td>32.41</td> <td>7.75</td> <td>61.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>47.70</td> <td>74.00</td> <td>-26.30</td> <td>65.21</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4874.00</td> <td>37.42</td> <td>54.00</td> <td>-16.58</td> <td>54.93</td> <td>34.20</td> <td>9.52</td> <td>61.23</td> <td>0.00</td> <td>300</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>55.57</td> <td>74.00</td> <td>-18.43</td> <td>68.97</td> <td>35.64</td> <td>11.69</td> <td>60.73</td> <td>0.00</td> <td>158</td> <td>2</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7311.00</td> <td>43.78</td> <td>54.00</td> <td>-10.22</td> <td>57.18</td> <td>35.63</td> <td>11.69</td> <td>60.72</td> <td>0.00</td> <td>158</td> <td>2</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9750.00</td> <td>51.76</td> <td>79.47</td> <td>-27.71</td> <td>62.29</td> <td>37.10</td> <td>13.59</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3255.00	54.48	79.47	-24.99	75.95	32.41	7.75	61.63	0.00	---	---	Peak	2	4874.00	47.70	74.00	-26.30	65.21	34.20	9.52	61.23	0.00	300	0	PEAK	3	4874.00	37.42	54.00	-16.58	54.93	34.20	9.52	61.23	0.00	300	0	AVERAGE	4	7311.00	55.57	74.00	-18.43	68.97	35.64	11.69	60.73	0.00	158	2	PEAK	5	7311.00	43.78	54.00	-10.22	57.18	35.63	11.69	60.72	0.00	158	2	AVERAGE	6	9750.00	51.76	79.47	-27.71	62.29	37.10	13.59	61.22	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																															
1	3255.00	50.45	79.84	-29.39	71.92	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																											
2	4874.00	43.38	74.00	-30.62	60.89	34.20	9.52	61.23	0.00	---	---	PEAK																																																																																																																																																																																											
3	7311.00	58.86	74.00	-15.14	72.26	35.64	11.69	60.73	0.00	105	60	PEAK																																																																																																																																																																																											
4	7311.00	45.39	54.00	-8.61	58.78	35.65	11.69	60.73	0.00	105	60	AVERAGE																																																																																																																																																																																											
5	9750.00	49.35	79.84	-30.49	59.88	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																															
1	3255.00	54.48	79.47	-24.99	75.95	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																																											
2	4874.00	47.70	74.00	-26.30	65.21	34.20	9.52	61.23	0.00	300	0	PEAK																																																																																																																																																																																											
3	4874.00	37.42	54.00	-16.58	54.93	34.20	9.52	61.23	0.00	300	0	AVERAGE																																																																																																																																																																																											
4	7311.00	55.57	74.00	-18.43	68.97	35.64	11.69	60.73	0.00	158	2	PEAK																																																																																																																																																																																											
5	7311.00	43.78	54.00	-10.22	57.18	35.63	11.69	60.72	0.00	158	2	AVERAGE																																																																																																																																																																																											
6	9750.00	51.76	79.47	-27.71	62.29	37.10	13.59	61.22	0.00	---	---	Peak																																																																																																																																																																																											



		9																																																							
Mode		Band Edge																																																							
		2400-2483.5_802.11n HT20_CH11_2462MHz																																																							
Pol.		Horizontal					Fundamental																																																		
Peak																																																									
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.66</td> <td>67.98</td> <td>74.00</td> <td>-6.02</td> <td>54.71</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>328</td> <td>0 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.66	67.98	74.00	-6.02	54.71	32.77	6.73	32.23	6.00	328	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2483.66	67.98	74.00	-6.02	54.71	32.77	6.73	32.23	6.00	328	0 PEAK																																														
Avg																																																									
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>52.27</td> <td>54.00</td> <td>-1.73</td> <td>39.00</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>328</td> <td>0 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	52.27	54.00	-1.73	39.00	32.77	6.73	32.23	6.00	328	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2483.51	52.27	54.00	-1.73	39.00	32.77	6.73	32.23	6.00	328	0 AVERAGE																																														
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>111.46</td> <td>74.00</td> <td>37.46</td> <td>98.33</td> <td>32.64</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>328</td> <td>0 PEAK</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	111.46	74.00	37.46	98.33	32.64	6.71	32.22	6.00	328	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2462.00	111.46	74.00	37.46	98.33	32.64	6.71	32.22	6.00	328	0 PEAK																																														
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.13</td> <td>54.00</td> <td>48.13</td> <td>89.03</td> <td>32.61</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>328</td> <td>0 AVERAGE</td> </tr> </tbody> </table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	102.13	54.00	48.13	89.03	32.61	6.71	32.22	6.00	328	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2462.00	102.13	54.00	48.13	89.03	32.61	6.71	32.22	6.00	328	0 AVERAGE																																														



		9																																																																																				
Mode		Band Edge																																																																																				
		2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																				
Pol.	Vertical				Fundamental																																																																																	
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.96</td> <td>63.91</td> <td>74.00</td> <td>-10.09</td> <td>50.64</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>321</td> <td>PEAK</td> </tr> </tbody> </table>				Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.96	63.91	74.00	-10.09	50.64	32.77	6.73	32.23	6.00	395	321	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>100.32</td> <td>-----</td> <td>-----</td> <td>95.20</td> <td>32.63</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>321</td> <td>PEAK</td> </tr> </tbody> </table>				Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	100.32	-----	-----	95.20	32.63	6.71	32.22	6.00	395	321	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 2483.96	63.91	74.00	-10.09	50.64	32.77	6.73	32.23	6.00	395	321	PEAK																																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 2462.00	100.32	-----	-----	95.20	32.63	6.71	32.22	6.00	395	321	PEAK																																																																											
Avg																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.51</td> <td>49.77</td> <td>54.00</td> <td>-4.23</td> <td>36.50</td> <td>32.77</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>395</td> <td>321</td> <td>AVERAGE</td> </tr> </tbody> </table>				Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.51	49.77	54.00	-4.23	36.50	32.77	6.73	32.23	6.00	395	321	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>99.26</td> <td>-----</td> <td>-----</td> <td>86.14</td> <td>32.63</td> <td>6.71</td> <td>32.22</td> <td>6.00</td> <td>395</td> <td>321</td> <td>AVERAGE</td> </tr> </tbody> </table>				Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	99.26	-----	-----	86.14	32.63	6.71	32.22	6.00	395	321	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 2483.51	49.77	54.00	-4.23	36.50	32.77	6.73	32.23	6.00	395	321	AVERAGE																																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Level	Loss	Loss	Factor	Factor	cm	deg																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																														
1 2462.00	99.26	-----	-----	86.14	32.63	6.71	32.22	6.00	395	321	AVERAGE																																																																											



Mode	9																																																																																																																																																															
	Harmonic																																																																																																																																																															
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3285.00</td> <td>48.15</td> <td>80.40</td> <td>-32.25</td> <td>69.48</td> <td>32.47</td> <td>7.79</td> <td>61.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>43.34</td> <td>74.00</td> <td>-30.66</td> <td>60.76</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>45.04</td> <td>74.00</td> <td>-28.96</td> <td>58.48</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>9855.00</td> <td>50.92</td> <td>80.40</td> <td>-29.48</td> <td>61.30</td> <td>37.21</td> <td>13.67</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	48.15	80.40	-32.25	69.48	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	43.34	74.00	-30.66	60.76	34.20	9.57	61.19	0.00	---	---	PEAK	3	7386.00	45.04	74.00	-28.96	58.48	35.73	11.72	60.89	0.00	---	---	PEAK	4	9855.00	50.92	80.40	-29.48	61.30	37.21	13.67	61.26	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3285.00</td> <td>50.92</td> <td>80.31</td> <td>-29.39</td> <td>72.25</td> <td>32.47</td> <td>7.79</td> <td>61.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>44.49</td> <td>74.00</td> <td>-29.51</td> <td>61.91</td> <td>34.20</td> <td>9.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>45.91</td> <td>74.00</td> <td>-28.09</td> <td>59.35</td> <td>35.73</td> <td>11.72</td> <td>60.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>9855.00</td> <td>51.79</td> <td>80.31</td> <td>-28.52</td> <td>62.17</td> <td>37.21</td> <td>13.67</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	3285.00	50.92	80.31	-29.39	72.25	32.47	7.79	61.59	0.00	---	---	Peak	2	4924.00	44.49	74.00	-29.51	61.91	34.20	9.57	61.19	0.00	---	---	PEAK	3	7386.00	45.91	74.00	-28.09	59.35	35.73	11.72	60.89	0.00	---	---	PEAK	4	9855.00	51.79	80.31	-28.52	62.17	37.21	13.67	61.26	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																								
1	3285.00	48.15	80.40	-32.25	69.48	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																				
2	4924.00	43.34	74.00	-30.66	60.76	34.20	9.57	61.19	0.00	---	---	PEAK																																																																																																																																																				
3	7386.00	45.04	74.00	-28.96	58.48	35.73	11.72	60.89	0.00	---	---	PEAK																																																																																																																																																				
4	9855.00	50.92	80.40	-29.48	61.30	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																								
1	3285.00	50.92	80.31	-29.39	72.25	32.47	7.79	61.59	0.00	---	---	Peak																																																																																																																																																				
2	4924.00	44.49	74.00	-29.51	61.91	34.20	9.57	61.19	0.00	---	---	PEAK																																																																																																																																																				
3	7386.00	45.91	74.00	-28.09	59.35	35.73	11.72	60.89	0.00	---	---	PEAK																																																																																																																																																				
4	9855.00	51.79	80.31	-28.52	62.17	37.21	13.67	61.26	0.00	---	---	Peak																																																																																																																																																				







		10																																																																						
Mode		Band Edge																																																																						
		2400-2483.5_802.11g_CH2_2417MHz																																																																						
Pol.	Horizontal					Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.71</td> <td>65.07</td> <td>74.00</td> <td>-8.93</td> <td>52.27</td> <td>32.40</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>113</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2383.71	65.07	74.00	-8.93	52.27	32.40	6.59	32.19	6.00	113	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>112.59</td> <td>-----</td> <td>-----</td> <td>99.61</td> <td>32.53</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>113</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2417.00	112.59	-----	-----	99.61	32.53	6.64	32.19	6.00	113	297	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	2383.71	65.07	74.00	-8.93	52.27	32.40	6.59	32.19	6.00	113	297	PEAK																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	2417.00	112.59	-----	-----	99.61	32.53	6.64	32.19	6.00	113	297	PEAK																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>51.19</td> <td>54.00</td> <td>-2.81</td> <td>38.29</td> <td>32.48</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>113</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2389.95	51.19	54.00	-2.81	38.29	32.48	6.60	32.18	6.00	113	297	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>103.33</td> <td>-----</td> <td>-----</td> <td>90.36</td> <td>32.51</td> <td>6.65</td> <td>32.19</td> <td>6.00</td> <td>113</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2417.00	103.33	-----	-----	90.36	32.51	6.65	32.19	6.00	113	297	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	2389.95	51.19	54.00	-2.81	38.29	32.48	6.60	32.18	6.00	113	297	AVERAGE																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	2417.00	103.33	-----	-----	90.36	32.51	6.65	32.19	6.00	113	297	AVERAGE																																																												



Mode	10																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11g_CH2_2417MHz																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>64.94</td> <td>74.00</td> <td>-9.06</td> <td>52.05</td> <td>32.47</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>122</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.43	64.94	74.00	-9.06	52.05	32.47	6.60	32.18	6.00	122	280	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>111.63</td> <td>-----</td> <td>-----</td> <td>98.66</td> <td>32.51</td> <td>6.65</td> <td>32.19</td> <td>6.00</td> <td>122</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2417.00	111.63	-----	-----	98.66	32.51	6.65	32.19	6.00	122	280	PEAK
Limit	Over	Read	Ant	Cable	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.43	64.94	74.00	-9.06	52.05	32.47	6.60	32.18	6.00	122	280	PEAK																																																																
Limit	Over	Read	Ant	Cable	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2417.00	111.63	-----	-----	98.66	32.51	6.65	32.19	6.00	122	280	PEAK																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>51.00</td> <td>54.00</td> <td>-3.00</td> <td>38.10</td> <td>32.48</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>122</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.95	51.00	54.00	-3.00	38.10	32.48	6.60	32.18	6.00	122	280	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>102.38</td> <td>-----</td> <td>-----</td> <td>89.41</td> <td>32.51</td> <td>6.65</td> <td>32.19</td> <td>6.00</td> <td>122</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2417.00	102.38	-----	-----	89.41	32.51	6.65	32.19	6.00	122	280	AVERAGE
Limit	Over	Read	Ant	Cable	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.95	51.00	54.00	-3.00	38.10	32.48	6.60	32.18	6.00	122	280	AVERAGE																																																																
Limit	Over	Read	Ant	Cable	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2417.00	102.38	-----	-----	89.41	32.51	6.65	32.19	6.00	122	280	AVERAGE																																																																

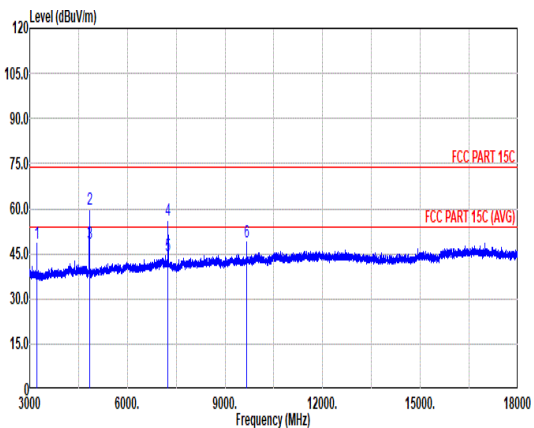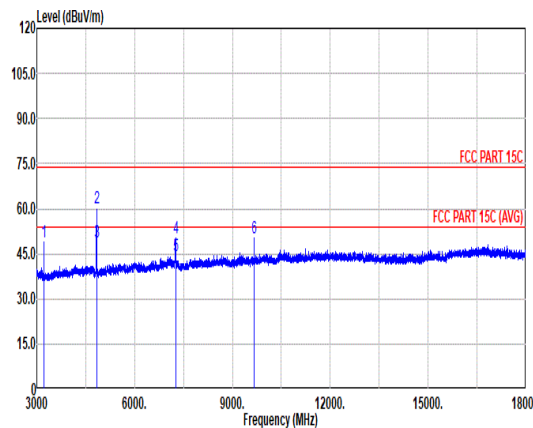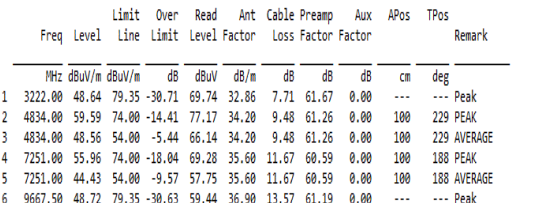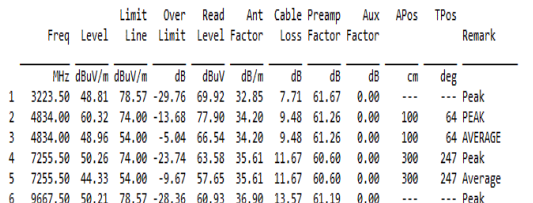

Mode	10																																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																																					
	2400-2483.5_802.11g_CH2_2417MHz																																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C') and 75 dBuV/m (labeled 'FCC PART 15C (AVG)'). Vertical blue lines mark peaks at 3222.00, 4834.00, 4834.00, 7251.00, and 9667.50 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3222.00</td><td>48.64</td><td>79.35</td><td>-30.71</td><td>69.74</td><td>32.86</td><td>7.71</td><td>61.67</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4834.00</td><td>59.59</td><td>74.00</td><td>-14.41</td><td>77.17</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>229</td><td>PEAK</td></tr> <tr><td>3</td><td>4834.00</td><td>48.56</td><td>54.00</td><td>-5.44</td><td>66.14</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>229</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7251.00</td><td>55.96</td><td>74.00</td><td>-18.04</td><td>69.28</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>100</td><td>188</td><td>PEAK</td></tr> <tr><td>5</td><td>7251.00</td><td>44.43</td><td>54.00</td><td>-9.57</td><td>57.75</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>100</td><td>188</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9667.50</td><td>48.72</td><td>79.35</td><td>-30.63</td><td>59.44</td><td>36.90</td><td>13.57</td><td>61.19</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3222.00	48.64	79.35	-30.71	69.74	32.86	7.71	61.67	0.00	---	---	Peak	2	4834.00	59.59	74.00	-14.41	77.17	34.20	9.48	61.26	0.00	100	229	PEAK	3	4834.00	48.56	54.00	-5.44	66.14	34.20	9.48	61.26	0.00	100	229	AVERAGE	4	7251.00	55.96	74.00	-18.04	69.28	35.60	11.67	60.59	0.00	100	188	PEAK	5	7251.00	44.43	54.00	-9.57	57.75	35.60	11.67	60.59	0.00	100	188	AVERAGE	6	9667.50	48.72	79.35	-30.63	59.44	36.90	13.57	61.19	0.00	---	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C') and 75 dBuV/m (labeled 'FCC PART 15C (AVG)'). Vertical blue lines mark peaks at 3223.50, 4834.00, 4834.00, 7255.50, and 9667.50 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3223.50</td><td>48.81</td><td>78.57</td><td>-29.76</td><td>69.92</td><td>32.85</td><td>7.71</td><td>61.67</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4834.00</td><td>60.32</td><td>74.00</td><td>-13.68</td><td>77.90</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr> <tr><td>3</td><td>4834.00</td><td>48.96</td><td>54.00</td><td>-5.04</td><td>66.54</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7255.50</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>63.58</td><td>35.61</td><td>11.67</td><td>60.60</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr> <tr><td>5</td><td>7255.50</td><td>44.33</td><td>54.00</td><td>-9.67</td><td>57.65</td><td>35.61</td><td>11.67</td><td>60.60</td><td>0.00</td><td>300</td><td>247</td><td>Average</td></tr> <tr><td>6</td><td>9667.50</td><td>50.21</td><td>78.57</td><td>-28.36</td><td>60.93</td><td>36.90</td><td>13.57</td><td>61.19</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3223.50	48.81	78.57	-29.76	69.92	32.85	7.71	61.67	0.00	---	---	Peak	2	4834.00	60.32	74.00	-13.68	77.90	34.20	9.48	61.26	0.00	100	64	PEAK	3	4834.00	48.96	54.00	-5.04	66.54	34.20	9.48	61.26	0.00	100	64	AVERAGE	4	7255.50	50.26	74.00	-23.74	63.58	35.61	11.67	60.60	0.00	300	247	Peak	5	7255.50	44.33	54.00	-9.67	57.65	35.61	11.67	60.60	0.00	300	247	Average	6	9667.50	50.21	78.57	-28.36	60.93	36.90	13.57	61.19	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																																																																													
1	3222.00	48.64	79.35	-30.71	69.74	32.86	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																										
2	4834.00	59.59	74.00	-14.41	77.17	34.20	9.48	61.26	0.00	100	229	PEAK																																																																																																																																																																																										
3	4834.00	48.56	54.00	-5.44	66.14	34.20	9.48	61.26	0.00	100	229	AVERAGE																																																																																																																																																																																										
4	7251.00	55.96	74.00	-18.04	69.28	35.60	11.67	60.59	0.00	100	188	PEAK																																																																																																																																																																																										
5	7251.00	44.43	54.00	-9.57	57.75	35.60	11.67	60.59	0.00	100	188	AVERAGE																																																																																																																																																																																										
6	9667.50	48.72	79.35	-30.63	59.44	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																																																																													
1	3223.50	48.81	78.57	-29.76	69.92	32.85	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																										
2	4834.00	60.32	74.00	-13.68	77.90	34.20	9.48	61.26	0.00	100	64	PEAK																																																																																																																																																																																										
3	4834.00	48.96	54.00	-5.04	66.54	34.20	9.48	61.26	0.00	100	64	AVERAGE																																																																																																																																																																																										
4	7255.50	50.26	74.00	-23.74	63.58	35.61	11.67	60.60	0.00	300	247	Peak																																																																																																																																																																																										
5	7255.50	44.33	54.00	-9.67	57.65	35.61	11.67	60.60	0.00	300	247	Average																																																																																																																																																																																										
6	9667.50	50.21	78.57	-28.36	60.93	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																										
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C') and 75 dBuV/m (labeled 'FCC PART 15C (AVG)'). Vertical blue lines mark peaks at 3222.00, 4834.00, 4834.00, 7251.00, and 9667.50 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3222.00</td><td>48.64</td><td>79.35</td><td>-30.71</td><td>69.74</td><td>32.86</td><td>7.71</td><td>61.67</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4834.00</td><td>59.59</td><td>74.00</td><td>-14.41</td><td>77.17</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>229</td><td>PEAK</td></tr> <tr><td>3</td><td>4834.00</td><td>48.56</td><td>54.00</td><td>-5.44</td><td>66.14</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>229</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7251.00</td><td>55.96</td><td>74.00</td><td>-18.04</td><td>69.28</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>100</td><td>188</td><td>PEAK</td></tr> <tr><td>5</td><td>7251.00</td><td>44.43</td><td>54.00</td><td>-9.57</td><td>57.75</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>100</td><td>188</td><td>AVERAGE</td></tr> <tr><td>6</td><td>9667.50</td><td>48.72</td><td>79.35</td><td>-30.63</td><td>59.44</td><td>36.90</td><td>13.57</td><td>61.19</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3222.00	48.64	79.35	-30.71	69.74	32.86	7.71	61.67	0.00	---	---	Peak	2	4834.00	59.59	74.00	-14.41	77.17	34.20	9.48	61.26	0.00	100	229	PEAK	3	4834.00	48.56	54.00	-5.44	66.14	34.20	9.48	61.26	0.00	100	229	AVERAGE	4	7251.00	55.96	74.00	-18.04	69.28	35.60	11.67	60.59	0.00	100	188	PEAK	5	7251.00	44.43	54.00	-9.57	57.75	35.60	11.67	60.59	0.00	100	188	AVERAGE	6	9667.50	48.72	79.35	-30.63	59.44	36.90	13.57	61.19	0.00	---	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C') and 75 dBuV/m (labeled 'FCC PART 15C (AVG)'). Vertical blue lines mark peaks at 3223.50, 4834.00, 4834.00, 7255.50, and 9667.50 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>3223.50</td><td>48.81</td><td>78.57</td><td>-29.76</td><td>69.92</td><td>32.85</td><td>7.71</td><td>61.67</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>4834.00</td><td>60.32</td><td>74.00</td><td>-13.68</td><td>77.90</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr> <tr><td>3</td><td>4834.00</td><td>48.96</td><td>54.00</td><td>-5.04</td><td>66.54</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr> <tr><td>4</td><td>7255.50</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>63.58</td><td>35.61</td><td>11.67</td><td>60.60</td><td>0.00</td><td>300</td><td>247</td><td>Peak</td></tr> <tr><td>5</td><td>7255.50</td><td>44.33</td><td>54.00</td><td>-9.67</td><td>57.65</td><td>35.61</td><td>11.67</td><td>60.60</td><td>0.00</td><td>300</td><td>247</td><td>Average</td></tr> <tr><td>6</td><td>9667.50</td><td>50.21</td><td>78.57</td><td>-28.36</td><td>60.93</td><td>36.90</td><td>13.57</td><td>61.19</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3223.50	48.81	78.57	-29.76	69.92	32.85	7.71	61.67	0.00	---	---	Peak	2	4834.00	60.32	74.00	-13.68	77.90	34.20	9.48	61.26	0.00	100	64	PEAK	3	4834.00	48.96	54.00	-5.04	66.54	34.20	9.48	61.26	0.00	100	64	AVERAGE	4	7255.50	50.26	74.00	-23.74	63.58	35.61	11.67	60.60	0.00	300	247	Peak	5	7255.50	44.33	54.00	-9.67	57.65	35.61	11.67	60.60	0.00	300	247	Average	6	9667.50	50.21	78.57	-28.36	60.93	36.90	13.57	61.19	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																																																																													
1	3222.00	48.64	79.35	-30.71	69.74	32.86	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																										
2	4834.00	59.59	74.00	-14.41	77.17	34.20	9.48	61.26	0.00	100	229	PEAK																																																																																																																																																																																										
3	4834.00	48.56	54.00	-5.44	66.14	34.20	9.48	61.26	0.00	100	229	AVERAGE																																																																																																																																																																																										
4	7251.00	55.96	74.00	-18.04	69.28	35.60	11.67	60.59	0.00	100	188	PEAK																																																																																																																																																																																										
5	7251.00	44.43	54.00	-9.57	57.75	35.60	11.67	60.59	0.00	100	188	AVERAGE																																																																																																																																																																																										
6	9667.50	48.72	79.35	-30.63	59.44	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																																																																													
1	3223.50	48.81	78.57	-29.76	69.92	32.85	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																										
2	4834.00	60.32	74.00	-13.68	77.90	34.20	9.48	61.26	0.00	100	64	PEAK																																																																																																																																																																																										
3	4834.00	48.96	54.00	-5.04	66.54	34.20	9.48	61.26	0.00	100	64	AVERAGE																																																																																																																																																																																										
4	7255.50	50.26	74.00	-23.74	63.58	35.61	11.67	60.60	0.00	300	247	Peak																																																																																																																																																																																										
5	7255.50	44.33	54.00	-9.67	57.65	35.61	11.67	60.60	0.00	300	247	Average																																																																																																																																																																																										
6	9667.50	50.21	78.57	-28.36	60.93	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																										



		11																																												
Mode		Band Edge																																												
		2400-2483.5 802.11g_CH9_2452MHz																																												
Pol.		Horizontal					Fundamental																																							
Peak	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.22</td> <td>68.27</td> <td>74.00</td> <td>-5.73</td> <td>55.16</td> <td>32.61</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>124</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2484.22	68.27	74.00	-5.73	55.16	32.61	6.73	32.23	6.00	124	278	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2484.22	68.27	74.00	-5.73	55.16	32.61	6.73	32.23	6.00	124	278	PEAK																																		
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>113.37</td> <td>-----</td> <td>-----</td> <td>100.45</td> <td>32.44</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>124</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2452.00	113.37	-----	-----	100.45	32.44	6.70	32.22	6.00	124	278	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2452.00	113.37	-----	-----	100.45	32.44	6.70	32.22	6.00	124	278	PEAK																																		
Avg	Horizontal	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>52.53</td> <td>54.00</td> <td>-1.47</td> <td>39.43</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>124</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2483.50	52.53	54.00	-1.47	39.43	32.60	6.73	32.23	6.00	124	278	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2483.50	52.53	54.00	-1.47	39.43	32.60	6.73	32.23	6.00	124	278	AVERAGE																																		
Fundamental	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>104.00</td> <td>-----</td> <td>-----</td> <td>91.16</td> <td>32.44</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>124</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	2452.00	104.00	-----	-----	91.16	32.44	6.70	32.22	6.00	124	278	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	2452.00	104.00	-----	-----	91.16	32.44	6.70	32.22	6.00	124	278	AVERAGE																																		







		11																																													
Mode		Band Edge																																													
		2400-2483.5 802.11g_CH9_2452MHz																																													
Pol.		Vertical					Fundamental																																								
Peak	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.28</td> <td>62.13</td> <td>74.00</td> <td>-11.87</td> <td>48.99</td> <td>32.64</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>309</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	2490.28	62.13	74.00	-11.87	48.99	32.64	6.74	32.24	6.00	309	262	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
1	2490.28	62.13	74.00	-11.87	48.99	32.64	6.74	32.24	6.00	309	262	PEAK																																			
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>105.95</td> <td>-----</td> <td>-----</td> <td>93.06</td> <td>32.42</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>309</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	2452.00	105.95	-----	-----	93.06	32.42	6.68	32.21	6.00	309	262	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
1	2452.00	105.95	-----	-----	93.06	32.42	6.68	32.21	6.00	309	262	PEAK																																			
Avg	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.58</td> <td>54.00</td> <td>-4.42</td> <td>36.48</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>309</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	2483.50	49.58	54.00	-4.42	36.48	32.60	6.73	32.23	6.00	309	262	Average
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
1	2483.50	49.58	54.00	-4.42	36.48	32.60	6.73	32.23	6.00	309	262	Average																																			
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>96.97</td> <td>-----</td> <td>-----</td> <td>84.09</td> <td>32.41</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>309</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	2452.00	96.97	-----	-----	84.09	32.41	6.68	32.21	6.00	309	262	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
1	2452.00	96.97	-----	-----	84.09	32.41	6.68	32.21	6.00	309	262	AVERAGE																																			



Mode	11																																																																																																																																																																										
	Harmonic																																																																																																																																																																										
	2400-2483.5_802.11g_CH9_2452MHz																																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3270.00</td> <td>52.97</td> <td>85.00</td> <td>-32.03</td> <td>74.05</td> <td>32.76</td> <td>7.77</td> <td>61.61</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4904.00</td> <td>44.07</td> <td>74.00</td> <td>-29.93</td> <td>61.63</td> <td>34.09</td> <td>9.55</td> <td>61.20</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7356.00</td> <td>54.82</td> <td>74.00</td> <td>-19.18</td> <td>68.24</td> <td>35.70</td> <td>11.71</td> <td>60.83</td> <td>0.00</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7356.00</td> <td>43.35</td> <td>54.00</td> <td>-10.65</td> <td>56.77</td> <td>35.70</td> <td>11.71</td> <td>60.83</td> <td>0.00</td> <td>100</td> <td>267</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>9808.50</td> <td>50.31</td> <td>85.00</td> <td>-34.69</td> <td>60.93</td> <td>37.02</td> <td>13.60</td> <td>61.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3270.00	52.97	85.00	-32.03	74.05	32.76	7.77	61.61	0.00	---	---	Peak	2	4904.00	44.07	74.00	-29.93	61.63	34.09	9.55	61.20	0.00	---	---	PEAK	3	7356.00	54.82	74.00	-19.18	68.24	35.70	11.71	60.83	0.00	100	267	PEAK	4	7356.00	43.35	54.00	-10.65	56.77	35.70	11.71	60.83	0.00	100	267	AVERAGE	5	9808.50	50.31	85.00	-34.69	60.93	37.02	13.60	61.24	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3270.00</td> <td>49.04</td> <td>76.14</td> <td>-27.10</td> <td>70.12</td> <td>32.76</td> <td>7.77</td> <td>61.61</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4904.00</td> <td>42.20</td> <td>74.00</td> <td>-31.80</td> <td>59.76</td> <td>34.09</td> <td>9.55</td> <td>61.20</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7356.00</td> <td>44.46</td> <td>74.00</td> <td>-29.54</td> <td>57.88</td> <td>35.70</td> <td>11.71</td> <td>60.83</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>9808.50</td> <td>48.15</td> <td>76.14</td> <td>-27.99</td> <td>58.77</td> <td>37.02</td> <td>13.60</td> <td>61.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3270.00	49.04	76.14	-27.10	70.12	32.76	7.77	61.61	0.00	---	---	Peak	2	4904.00	42.20	74.00	-31.80	59.76	34.09	9.55	61.20	0.00	---	---	PEAK	3	7356.00	44.46	74.00	-29.54	57.88	35.70	11.71	60.83	0.00	---	---	PEAK	4	9808.50	48.15	76.14	-27.99	58.77	37.02	13.60	61.24	0.00	---	---	Peak
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																
1	3270.00	52.97	85.00	-32.03	74.05	32.76	7.77	61.61	0.00	---	---	Peak																																																																																																																																																															
2	4904.00	44.07	74.00	-29.93	61.63	34.09	9.55	61.20	0.00	---	---	PEAK																																																																																																																																																															
3	7356.00	54.82	74.00	-19.18	68.24	35.70	11.71	60.83	0.00	100	267	PEAK																																																																																																																																																															
4	7356.00	43.35	54.00	-10.65	56.77	35.70	11.71	60.83	0.00	100	267	AVERAGE																																																																																																																																																															
5	9808.50	50.31	85.00	-34.69	60.93	37.02	13.60	61.24	0.00	---	---	Peak																																																																																																																																																															
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																
1	3270.00	49.04	76.14	-27.10	70.12	32.76	7.77	61.61	0.00	---	---	Peak																																																																																																																																																															
2	4904.00	42.20	74.00	-31.80	59.76	34.09	9.55	61.20	0.00	---	---	PEAK																																																																																																																																																															
3	7356.00	44.46	74.00	-29.54	57.88	35.70	11.71	60.83	0.00	---	---	PEAK																																																																																																																																																															
4	9808.50	48.15	76.14	-27.99	58.77	37.02	13.60	61.24	0.00	---	---	Peak																																																																																																																																																															

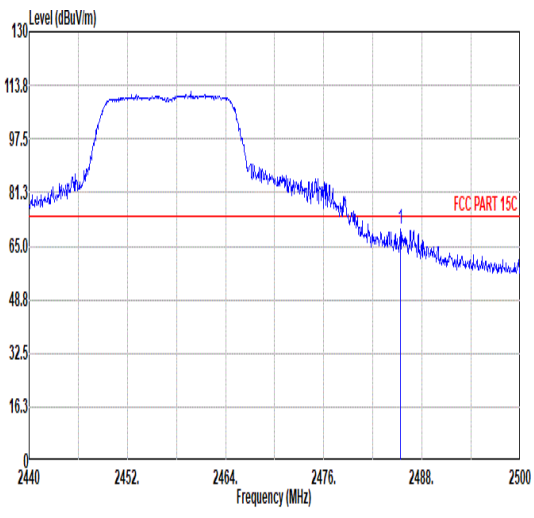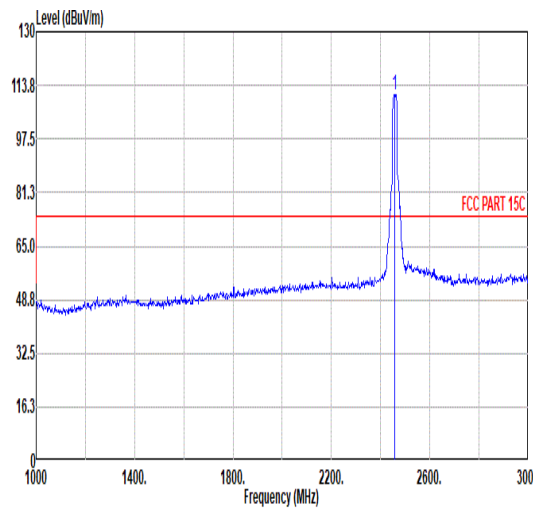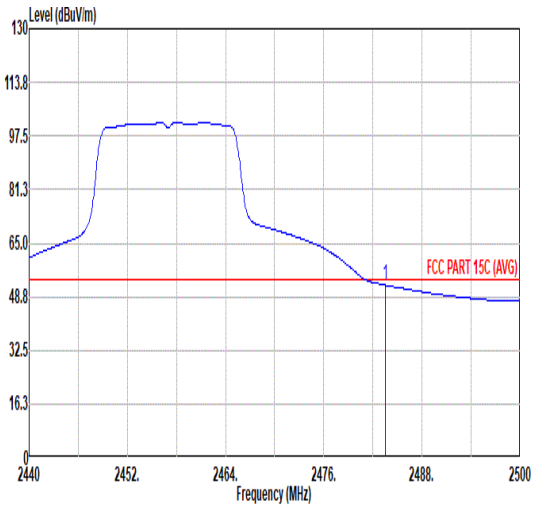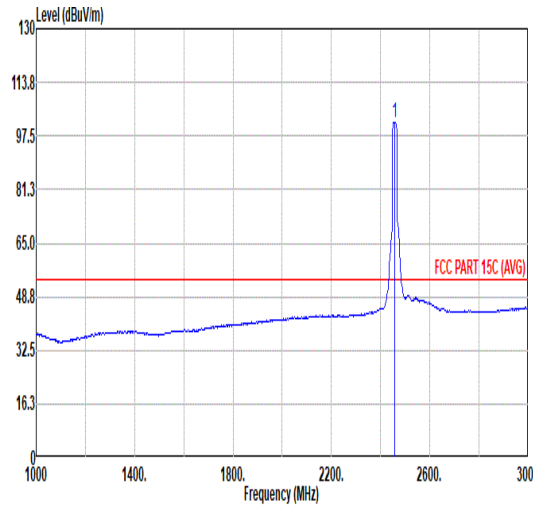

		12																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_802.11g_CH10_2457MHz																																																																																										
Pol.		Horizontal					Fundamental																																																																																					
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.36</td> <td>70.18</td> <td>74.00</td> <td>-3.82</td> <td>57.06</td> <td>32.61</td> <td>6.74</td> <td>32.23</td> <td>6.00</td> <td>100</td> <td>194 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.36	70.18	74.00	-3.82	57.06	32.61	6.74	32.23	6.00	100	194 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>110.90</td> <td>-----</td> <td>-----</td> <td>98.03</td> <td>32.47</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>100</td> <td>194 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	110.90	-----	-----	98.03	32.47	6.70	32.22	6.00	100	194 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2485.36	70.18	74.00	-3.82	57.06	32.61	6.74	32.23	6.00	100	194 PEAK																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2457.00	110.90	-----	-----	98.03	32.47	6.70	32.22	6.00	100	194 PEAK																																																																																	
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>52.27</td> <td>54.00</td> <td>-1.73</td> <td>39.17</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>100</td> <td>194 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	52.27	54.00	-1.73	39.17	32.60	6.73	32.23	6.00	100	194 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>101.60</td> <td>-----</td> <td>-----</td> <td>88.76</td> <td>32.44</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>100</td> <td>194 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	101.60	-----	-----	88.76	32.44	6.70	32.22	6.00	100	194 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2483.50	52.27	54.00	-1.73	39.17	32.60	6.73	32.23	6.00	100	194 AVERAGE																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2457.00	101.60	-----	-----	88.76	32.44	6.70	32.22	6.00	100	194 AVERAGE																																																																																	



Mode	12																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11g_CH10_2457MHz																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.78</td> <td>66.27</td> <td>74.00</td> <td>-7.73</td> <td>53.15</td> <td>32.61</td> <td>6.74</td> <td>32.23</td> <td>6.00</td> <td>264</td> <td>303 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.78	66.27	74.00	-7.73	53.15	32.61	6.74	32.23	6.00	264	303 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>108.90</td> <td>-----</td> <td>-----</td> <td>96.08</td> <td>32.42</td> <td>6.69</td> <td>32.21</td> <td>6.00</td> <td>264</td> <td>303 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	108.90	-----	-----	96.08	32.42	6.69	32.21	6.00	264	303 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2485.78	66.27	74.00	-7.73	53.15	32.61	6.74	32.23	6.00	264	303 PEAK																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2457.00	108.90	-----	-----	96.08	32.42	6.69	32.21	6.00	264	303 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.32</td> <td>54.00</td> <td>-5.68</td> <td>35.22</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>264</td> <td>303 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	48.32	54.00	-5.68	35.22	32.60	6.73	32.23	6.00	264	303 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>99.89</td> <td>-----</td> <td>-----</td> <td>86.97</td> <td>32.44</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>264</td> <td>303 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	99.89	-----	-----	86.97	32.44	6.70	32.22	6.00	264	303 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2483.50	48.32	54.00	-5.68	35.22	32.60	6.73	32.23	6.00	264	303 AVERAGE																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2457.00	99.89	-----	-----	86.97	32.44	6.70	32.22	6.00	264	303 AVERAGE																																																																											



Mode	12																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																	
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3276.00</td> <td>48.20</td> <td>82.01</td> <td>-33.81</td> <td>69.27</td> <td>32.75</td> <td>7.78</td> <td>61.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4914.00</td> <td>60.52</td> <td>74.00</td> <td>-13.48</td> <td>78.08</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>319</td> <td>347</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4914.00</td> <td>49.20</td> <td>54.00</td> <td>-4.80</td> <td>66.76</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>319</td> <td>347</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7371.00</td> <td>44.50</td> <td>74.00</td> <td>-29.50</td> <td>57.95</td> <td>35.70</td> <td>11.71</td> <td>60.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>9828.00</td> <td>48.54</td> <td>82.01</td> <td>-33.47</td> <td>59.10</td> <td>37.06</td> <td>13.63</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3276.00	48.20	82.01	-33.81	69.27	32.75	7.78	61.60	0.00	---	---	Peak	2	4914.00	60.52	74.00	-13.48	78.08	34.07	9.56	61.19	0.00	319	347	PEAK	3	4914.00	49.20	54.00	-4.80	66.76	34.07	9.56	61.19	0.00	319	347	AVERAGE	4	7371.00	44.50	74.00	-29.50	57.95	35.70	11.71	60.86	0.00	---	---	PEAK	5	9828.00	48.54	82.01	-33.47	59.10	37.06	13.63	61.25	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3276.00</td> <td>49.04</td> <td>80.67</td> <td>-31.63</td> <td>70.11</td> <td>32.75</td> <td>7.78</td> <td>61.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4914.00</td> <td>62.18</td> <td>74.00</td> <td>-11.82</td> <td>79.74</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>201</td> <td>37</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4914.00</td> <td>50.84</td> <td>54.00</td> <td>-3.16</td> <td>68.40</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>201</td> <td>37</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7371.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>61.43</td> <td>35.70</td> <td>11.71</td> <td>60.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>9828.00</td> <td>48.70</td> <td>80.67</td> <td>-31.97</td> <td>59.26</td> <td>37.06</td> <td>13.63</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3276.00	49.04	80.67	-31.63	70.11	32.75	7.78	61.60	0.00	---	---	Peak	2	4914.00	62.18	74.00	-11.82	79.74	34.07	9.56	61.19	0.00	201	37	PEAK	3	4914.00	50.84	54.00	-3.16	68.40	34.07	9.56	61.19	0.00	201	37	AVERAGE	4	7371.00	47.98	74.00	-26.02	61.43	35.70	11.71	60.86	0.00	---	---	PEAK	5	9828.00	48.70	80.67	-31.97	59.26	37.06	13.63	61.25	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	3276.00	48.20	82.01	-33.81	69.27	32.75	7.78	61.60	0.00	---	---	Peak																																																																																																																																																																																						
2	4914.00	60.52	74.00	-13.48	78.08	34.07	9.56	61.19	0.00	319	347	PEAK																																																																																																																																																																																						
3	4914.00	49.20	54.00	-4.80	66.76	34.07	9.56	61.19	0.00	319	347	AVERAGE																																																																																																																																																																																						
4	7371.00	44.50	74.00	-29.50	57.95	35.70	11.71	60.86	0.00	---	---	PEAK																																																																																																																																																																																						
5	9828.00	48.54	82.01	-33.47	59.10	37.06	13.63	61.25	0.00	---	---	Peak																																																																																																																																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	3276.00	49.04	80.67	-31.63	70.11	32.75	7.78	61.60	0.00	---	---	Peak																																																																																																																																																																																						
2	4914.00	62.18	74.00	-11.82	79.74	34.07	9.56	61.19	0.00	201	37	PEAK																																																																																																																																																																																						
3	4914.00	50.84	54.00	-3.16	68.40	34.07	9.56	61.19	0.00	201	37	AVERAGE																																																																																																																																																																																						
4	7371.00	47.98	74.00	-26.02	61.43	35.70	11.71	60.86	0.00	---	---	PEAK																																																																																																																																																																																						
5	9828.00	48.70	80.67	-31.97	59.26	37.06	13.63	61.25	0.00	---	---	Peak																																																																																																																																																																																						





		13																																																							
Mode		Band Edge																																																							
		2400-2483.5_802.11n_HT20_CH2_2417MHz																																																							
Pol.		Horizontal					Fundamental																																																		
Peak																																																									
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.45</td> <td>64.95</td> <td>74.00</td> <td>-9.05</td> <td>52.15</td> <td>32.40</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>115</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2383.45	64.95	74.00	-9.05	52.15	32.40	6.59	32.19	6.00	115	297	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2383.45	64.95	74.00	-9.05	52.15	32.40	6.59	32.19	6.00	115	297	PEAK																																													
Avg																																																									
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>51.14</td> <td>54.00</td> <td>-2.86</td> <td>38.24</td> <td>32.48</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>115</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	51.14	54.00	-2.86	38.24	32.48	6.60	32.18	6.00	115	297	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2389.95	51.14	54.00	-2.86	38.24	32.48	6.60	32.18	6.00	115	297	AVERAGE																																													
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>112.07</td> <td>74.00</td> <td>38.07</td> <td>99.10</td> <td>32.51</td> <td>6.65</td> <td>32.19</td> <td>6.00</td> <td>115</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2417.00	112.07	74.00	38.07	99.10	32.51	6.65	32.19	6.00	115	297	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2417.00	112.07	74.00	38.07	99.10	32.51	6.65	32.19	6.00	115	297	PEAK																																													
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>102.78</td> <td>54.00</td> <td>48.78</td> <td>89.81</td> <td>32.51</td> <td>6.65</td> <td>32.19</td> <td>6.00</td> <td>115</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2417.00	102.78	54.00	48.78	89.81	32.51	6.65	32.19	6.00	115	297	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2417.00	102.78	54.00	48.78	89.81	32.51	6.65	32.19	6.00	115	297	AVERAGE																																													



		13																																																																																														
Mode		Band Edge																																																																																														
		2400-2483.5_802.11n_HT20_CH2_2417MHz																																																																																														
Pol.	Vertical										Fundamental																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>66.93</td> <td>74.00</td> <td>-7.07</td> <td>54.04</td> <td>32.47</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>100</td> <td>280 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.91	66.93	74.00	-7.07	54.04	32.47	6.60	32.18	6.00	100	280 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>110.55</td> <td>-----</td> <td>-----</td> <td>97.56</td> <td>32.55</td> <td>6.63</td> <td>32.19</td> <td>6.00</td> <td>100</td> <td>280 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	110.55	-----	-----	97.56	32.55	6.63	32.19	6.00	100	280 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	2388.91	66.93	74.00	-7.07	54.04	32.47	6.60	32.18	6.00	100	280 PEAK																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	2417.00	110.55	-----	-----	97.56	32.55	6.63	32.19	6.00	100	280 PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.60</td> <td>54.00</td> <td>-1.40</td> <td>39.70</td> <td>32.48</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>100</td> <td>280 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	52.60	54.00	-1.40	39.70	32.48	6.60	32.18	6.00	100	280 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2417.00</td> <td>101.38</td> <td>-----</td> <td>-----</td> <td>88.39</td> <td>32.54</td> <td>6.64</td> <td>32.19</td> <td>6.00</td> <td>100</td> <td>280 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	101.38	-----	-----	88.39	32.54	6.64	32.19	6.00	100	280 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	2389.95	52.60	54.00	-1.40	39.70	32.48	6.60	32.18	6.00	100	280 AVERAGE																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	2417.00	101.38	-----	-----	88.39	32.54	6.64	32.19	6.00	100	280 AVERAGE																																																																																					

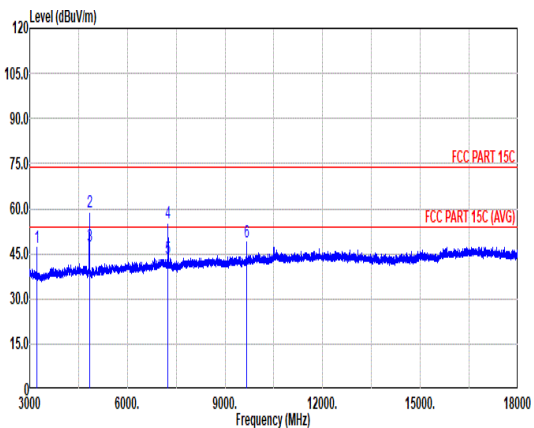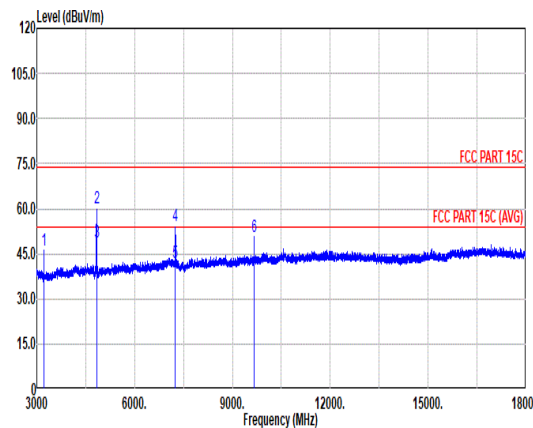

Mode	13																																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																																											
	2400-2483.5_802.11n_HT20_CH2_2417MHz																																																																																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C (AVG)') and 75 dBuV/m (labeled 'FCC PART 15C'). Six vertical blue lines mark specific frequencies: 1, 2, 3, 4, 5, and 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3223.50</td> <td>47.18</td> <td>80.00</td> <td>-32.91</td> <td>68.29</td> <td>32.85</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4834.00</td> <td>58.99</td> <td>74.00</td> <td>-15.01</td> <td>76.57</td> <td>34.20</td> <td>9.48</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>228</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4834.00</td> <td>47.58</td> <td>54.00</td> <td>-6.42</td> <td>65.16</td> <td>34.20</td> <td>9.48</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>228</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7251.00</td> <td>55.18</td> <td>74.00</td> <td>-18.82</td> <td>68.50</td> <td>35.60</td> <td>11.67</td> <td>60.59</td> <td>0.00</td> <td>104</td> <td>191</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7251.00</td> <td>43.45</td> <td>54.00</td> <td>-10.55</td> <td>56.77</td> <td>35.60</td> <td>11.67</td> <td>60.59</td> <td>0.00</td> <td>104</td> <td>191</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9667.50</td> <td>48.97</td> <td>80.00</td> <td>-31.12</td> <td>59.69</td> <td>36.90</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3223.50	47.18	80.00	-32.91	68.29	32.85	7.71	61.67	0.00	---	---	Peak	2	4834.00	58.99	74.00	-15.01	76.57	34.20	9.48	61.26	0.00	100	228	PEAK	3	4834.00	47.58	54.00	-6.42	65.16	34.20	9.48	61.26	0.00	100	228	AVERAGE	4	7251.00	55.18	74.00	-18.82	68.50	35.60	11.67	60.59	0.00	104	191	PEAK	5	7251.00	43.45	54.00	-10.55	56.77	35.60	11.67	60.59	0.00	104	191	AVERAGE	6	9667.50	48.97	80.00	-31.12	59.69	36.90	13.57	61.19	0.00	---	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with two red horizontal limit lines at approximately 55 dBuV/m (labeled 'FCC PART 15C (AVG)') and 75 dBuV/m (labeled 'FCC PART 15C'). Six vertical blue lines mark specific frequencies: 1, 2, 3, 4, 5, and 6.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3222.00</td> <td>46.07</td> <td>83.84</td> <td>-37.77</td> <td>67.17</td> <td>32.86</td> <td>7.71</td> <td>61.67</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4834.00</td> <td>60.01</td> <td>74.00</td> <td>-13.99</td> <td>77.59</td> <td>34.20</td> <td>9.48</td> <td>61.26</td> <td>0.00</td> <td>101</td> <td>61</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4834.00</td> <td>48.84</td> <td>54.00</td> <td>-5.16</td> <td>66.42</td> <td>34.20</td> <td>9.48</td> <td>61.26</td> <td>0.00</td> <td>101</td> <td>61</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7251.00</td> <td>54.12</td> <td>74.00</td> <td>-19.88</td> <td>67.44</td> <td>35.60</td> <td>11.67</td> <td>60.59</td> <td>0.00</td> <td>100</td> <td>238</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>7251.00</td> <td>41.97</td> <td>54.00</td> <td>-12.03</td> <td>55.29</td> <td>35.60</td> <td>11.67</td> <td>60.59</td> <td>0.00</td> <td>100</td> <td>238</td> <td>AVERAGE</td> </tr> <tr> <td>6</td> <td>9667.50</td> <td>50.53</td> <td>83.84</td> <td>-33.31</td> <td>61.25</td> <td>36.90</td> <td>13.57</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3222.00	46.07	83.84	-37.77	67.17	32.86	7.71	61.67	0.00	---	---	Peak	2	4834.00	60.01	74.00	-13.99	77.59	34.20	9.48	61.26	0.00	101	61	PEAK	3	4834.00	48.84	54.00	-5.16	66.42	34.20	9.48	61.26	0.00	101	61	AVERAGE	4	7251.00	54.12	74.00	-19.88	67.44	35.60	11.67	60.59	0.00	100	238	PEAK	5	7251.00	41.97	54.00	-12.03	55.29	35.60	11.67	60.59	0.00	100	238	AVERAGE	6	9667.50	50.53	83.84	-33.31	61.25	36.90	13.57	61.19	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3223.50	47.18	80.00	-32.91	68.29	32.85	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																																																
2	4834.00	58.99	74.00	-15.01	76.57	34.20	9.48	61.26	0.00	100	228	PEAK																																																																																																																																																																																																																
3	4834.00	47.58	54.00	-6.42	65.16	34.20	9.48	61.26	0.00	100	228	AVERAGE																																																																																																																																																																																																																
4	7251.00	55.18	74.00	-18.82	68.50	35.60	11.67	60.59	0.00	104	191	PEAK																																																																																																																																																																																																																
5	7251.00	43.45	54.00	-10.55	56.77	35.60	11.67	60.59	0.00	104	191	AVERAGE																																																																																																																																																																																																																
6	9667.50	48.97	80.00	-31.12	59.69	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3222.00	46.07	83.84	-37.77	67.17	32.86	7.71	61.67	0.00	---	---	Peak																																																																																																																																																																																																																
2	4834.00	60.01	74.00	-13.99	77.59	34.20	9.48	61.26	0.00	101	61	PEAK																																																																																																																																																																																																																
3	4834.00	48.84	54.00	-5.16	66.42	34.20	9.48	61.26	0.00	101	61	AVERAGE																																																																																																																																																																																																																
4	7251.00	54.12	74.00	-19.88	67.44	35.60	11.67	60.59	0.00	100	238	PEAK																																																																																																																																																																																																																
5	7251.00	41.97	54.00	-12.03	55.29	35.60	11.67	60.59	0.00	100	238	AVERAGE																																																																																																																																																																																																																
6	9667.50	50.53	83.84	-33.31	61.25	36.90	13.57	61.19	0.00	---	---	Peak																																																																																																																																																																																																																







		14																																																																																																				
Mode		Band Edge																																																																																																				
		2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																																				
Pol.		Horizontal					Fundamental																																																																																															
Peak																																																																																																						
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.18</td> <td>68.41</td> <td>74.00</td> <td>-5.59</td> <td>55.29</td> <td>32.61</td> <td>6.74</td> <td>32.23</td> <td>6.00</td> <td>138</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>112.12</td> <td>-----</td> <td>-----</td> <td>99.18</td> <td>32.46</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>138</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.18	68.41	74.00	-5.59	55.29	32.61	6.74	32.23	6.00	138	192	PEAK	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	112.12	-----	-----	99.18	32.46	6.70	32.22	6.00	138	192
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2485.18	68.41	74.00	-5.59	55.29	32.61	6.74	32.23	6.00	138	192	PEAK																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2457.00	112.12	-----	-----	99.18	32.46	6.70	32.22	6.00	138	192	PEAK																																																																																										
Avg																																																																																																						
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>52.39</td> <td>54.00</td> <td>-1.61</td> <td>39.29</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>138</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>102.34</td> <td>-----</td> <td>-----</td> <td>89.41</td> <td>32.45</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>138</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	52.39	54.00	-1.61	39.29	32.60	6.73	32.23	6.00	138	192	AVERAGE	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2457.00	102.34	-----	-----	89.41	32.45	6.70	32.22	6.00	138	192
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2483.50	52.39	54.00	-1.61	39.29	32.60	6.73	32.23	6.00	138	192	AVERAGE																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2457.00	102.34	-----	-----	89.41	32.45	6.70	32.22	6.00	138	192	AVERAGE																																																																																										



		14																																																																																															
Mode		Band Edge																																																																																															
		2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																															
Pol.		Vertical					Fundamental																																																																																										
Peak																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.40</td> <td>63.17</td> <td>74.00</td> <td>-10.83</td> <td>50.06</td> <td>32.61</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>115</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.40	63.17	74.00	-10.83	50.06	32.61	6.73	32.23	6.00	115	279	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>110.47</td> <td>-----</td> <td>-----</td> <td>97.57</td> <td>32.42</td> <td>6.69</td> <td>32.21</td> <td>6.00</td> <td>115</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2457.00	110.47	-----	-----	97.57	32.42	6.69	32.21	6.00	115	279
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2484.40	63.17	74.00	-10.83	50.06	32.61	6.73	32.23	6.00	115	279	PEAK																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2457.00	110.47	-----	-----	97.57	32.42	6.69	32.21	6.00	115	279	PEAK																																																																																					
Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.41</td> <td>54.00</td> <td>-5.59</td> <td>35.31</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>115</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.50	48.41	54.00	-5.59	35.31	32.60	6.73	32.23	6.00	115	279	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2457.00</td> <td>100.98</td> <td>-----</td> <td>-----</td> <td>88.06</td> <td>32.44</td> <td>6.70</td> <td>32.22</td> <td>6.00</td> <td>115</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2457.00	100.98	-----	-----	88.06	32.44	6.70	32.22	6.00	115	279
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2483.50	48.41	54.00	-5.59	35.31	32.60	6.73	32.23	6.00	115	279	AVERAGE																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2457.00	100.98	-----	-----	88.06	32.44	6.70	32.22	6.00	115	279	AVERAGE																																																																																					

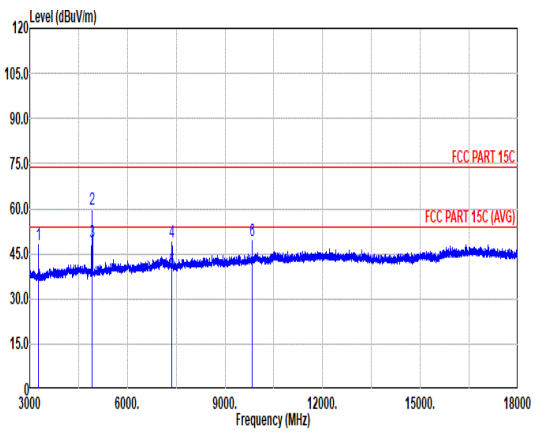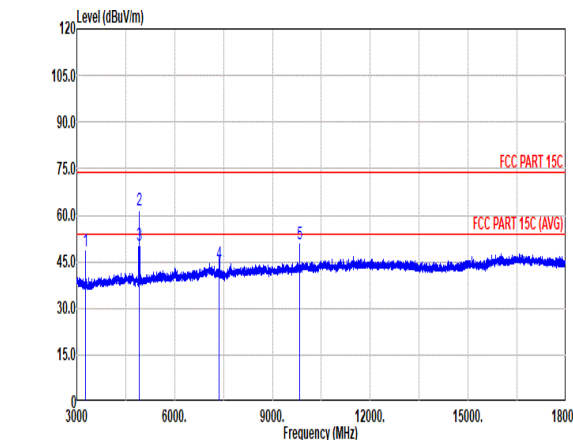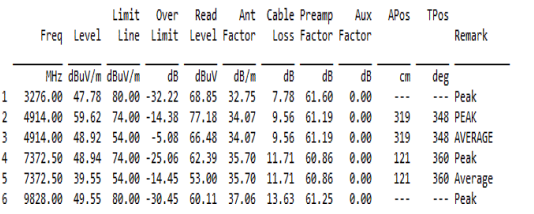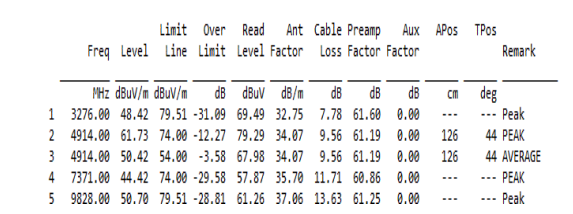


Mode	14																																																																																																																																																																																																														
	Harmonic																																																																																																																																																																																																														
	2400-2483.5_802.11n_HT20_CH10_2457MHz																																																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																																																													
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3276.00</td> <td>47.78</td> <td>80.00</td> <td>-32.22</td> <td>68.85</td> <td>32.75</td> <td>7.78</td> <td>61.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4914.00</td> <td>59.62</td> <td>74.00</td> <td>-14.38</td> <td>77.18</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>319</td> <td>348</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4914.00</td> <td>48.92</td> <td>54.00</td> <td>-5.08</td> <td>66.48</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>319</td> <td>348</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7372.50</td> <td>48.94</td> <td>74.00</td> <td>-25.06</td> <td>62.39</td> <td>35.70</td> <td>11.71</td> <td>60.86</td> <td>0.00</td> <td>121</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>7372.50</td> <td>39.55</td> <td>54.00</td> <td>-14.45</td> <td>53.00</td> <td>35.70</td> <td>11.71</td> <td>60.86</td> <td>0.00</td> <td>121</td> <td>360</td> <td>Average</td> </tr> <tr> <td>6</td> <td>9828.00</td> <td>49.55</td> <td>80.00</td> <td>-30.45</td> <td>60.11</td> <td>37.06</td> <td>13.63</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3276.00	47.78	80.00	-32.22	68.85	32.75	7.78	61.60	0.00	---	---	Peak	2	4914.00	59.62	74.00	-14.38	77.18	34.07	9.56	61.19	0.00	319	348	PEAK	3	4914.00	48.92	54.00	-5.08	66.48	34.07	9.56	61.19	0.00	319	348	AVERAGE	4	7372.50	48.94	74.00	-25.06	62.39	35.70	11.71	60.86	0.00	121	360	Peak	5	7372.50	39.55	54.00	-14.45	53.00	35.70	11.71	60.86	0.00	121	360	Average	6	9828.00	49.55	80.00	-30.45	60.11	37.06	13.63	61.25	0.00	---	---	Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3276.00</td> <td>48.42</td> <td>79.51</td> <td>-31.09</td> <td>69.49</td> <td>32.75</td> <td>7.78</td> <td>61.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4914.00</td> <td>61.73</td> <td>74.00</td> <td>-12.27</td> <td>79.29</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>126</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>4914.00</td> <td>50.42</td> <td>54.00</td> <td>-3.58</td> <td>67.98</td> <td>34.07</td> <td>9.56</td> <td>61.19</td> <td>0.00</td> <td>126</td> <td>44</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>7371.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>57.67</td> <td>35.70</td> <td>11.71</td> <td>60.86</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>9828.00</td> <td>50.70</td> <td>79.51</td> <td>-28.81</td> <td>61.26</td> <td>37.06</td> <td>13.63</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3276.00	48.42	79.51	-31.09	69.49	32.75	7.78	61.60	0.00	---	---	Peak	2	4914.00	61.73	74.00	-12.27	79.29	34.07	9.56	61.19	0.00	126	44	PEAK	3	4914.00	50.42	54.00	-3.58	67.98	34.07	9.56	61.19	0.00	126	44	AVERAGE	4	7371.00	44.42	74.00	-29.58	57.67	35.70	11.71	60.86	0.00	---	---	PEAK	5	9828.00	50.70	79.51	-28.81	61.26	37.06	13.63	61.25	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																					
1	3276.00	47.78	80.00	-32.22	68.85	32.75	7.78	61.60	0.00	---	---	Peak																																																																																																																																																																																																			
2	4914.00	59.62	74.00	-14.38	77.18	34.07	9.56	61.19	0.00	319	348	PEAK																																																																																																																																																																																																			
3	4914.00	48.92	54.00	-5.08	66.48	34.07	9.56	61.19	0.00	319	348	AVERAGE																																																																																																																																																																																																			
4	7372.50	48.94	74.00	-25.06	62.39	35.70	11.71	60.86	0.00	121	360	Peak																																																																																																																																																																																																			
5	7372.50	39.55	54.00	-14.45	53.00	35.70	11.71	60.86	0.00	121	360	Average																																																																																																																																																																																																			
6	9828.00	49.55	80.00	-30.45	60.11	37.06	13.63	61.25	0.00	---	---	Peak																																																																																																																																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																					
1	3276.00	48.42	79.51	-31.09	69.49	32.75	7.78	61.60	0.00	---	---	Peak																																																																																																																																																																																																			
2	4914.00	61.73	74.00	-12.27	79.29	34.07	9.56	61.19	0.00	126	44	PEAK																																																																																																																																																																																																			
3	4914.00	50.42	54.00	-3.58	67.98	34.07	9.56	61.19	0.00	126	44	AVERAGE																																																																																																																																																																																																			
4	7371.00	44.42	74.00	-29.58	57.67	35.70	11.71	60.86	0.00	---	---	PEAK																																																																																																																																																																																																			
5	9828.00	50.70	79.51	-28.81	61.26	37.06	13.63	61.25	0.00	---	---	Peak																																																																																																																																																																																																			
Avg																																																																																																																																																																																																															

Note: For the above frequencies which fall in the non-restricted frequency band, the limit is 100kHz-PSD down 20dB.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	99.38	-	-	10Hz

802.11b

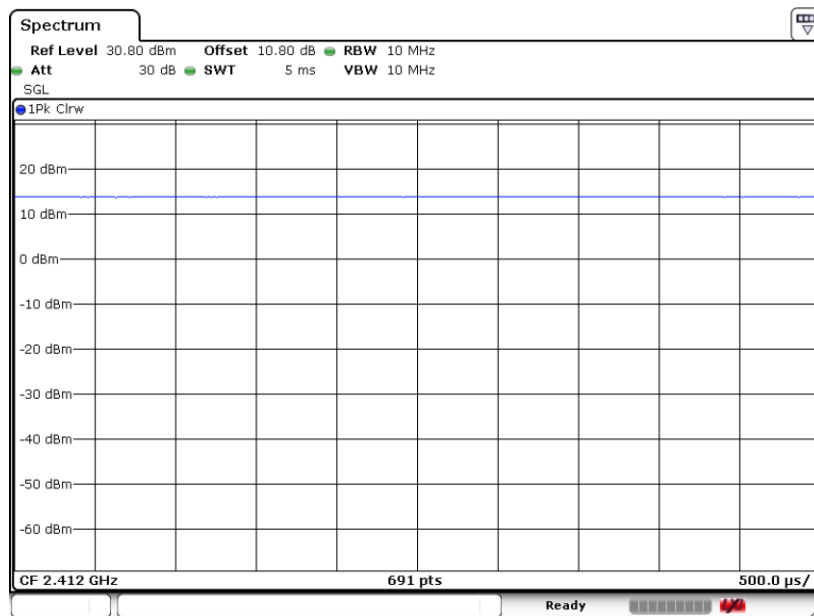



802.11g

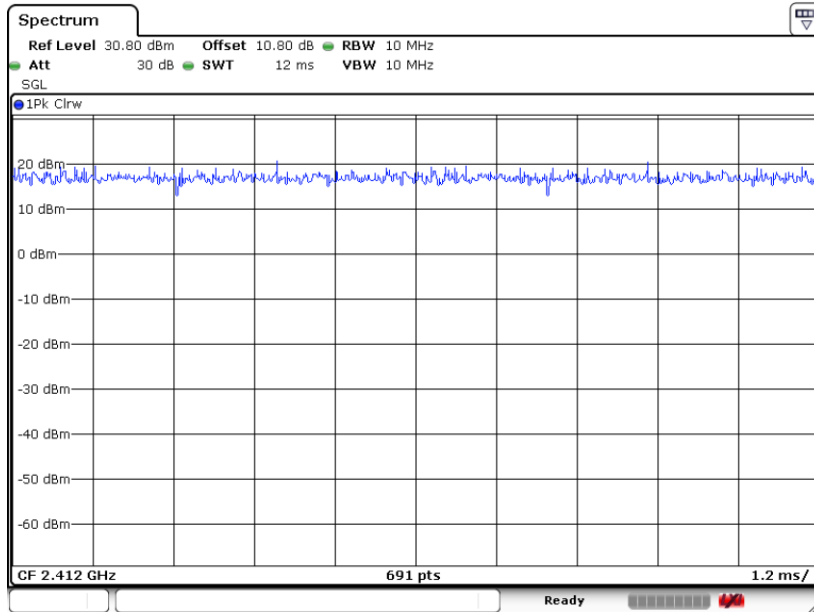

802.11n HT20

