

**SP-1005A IM**  
Size: 258(w) x 100(h) mm




# CAR KARAOKE MICROPHONE

## Instruction Manual

Thank you for purchasing the Car Karaoke Microphone. This manual provides more information about this Car Karaoke Microphone, please read the instructions before using.



### Product Overview

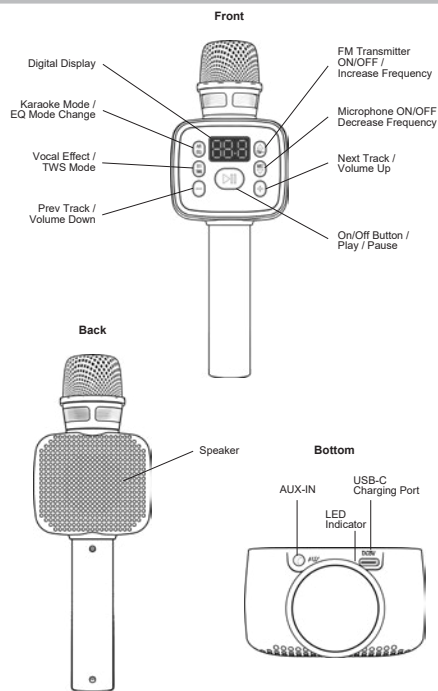

### Package Contents

- 1(One) Car Karaoke Microphone 10.6in. x 3.6in. x 2.1in. (26.8cm x 9.2cm x 5.4cm)
- 1(One) USB-C Charging Cable 19.7in. (50cm)
- 1(One) Instruction Manual

### Power On/Off

**Power on**  
Press and Hold the Play/Pause Button for 3 seconds.

**Power off**  
Press and Hold the Play/Pause Button for 3 seconds.

Note: Always power off the Car Karaoke Microphone when not in use.

### Technical Specification

Driver Diameter : 52 mm	Power Supply : Li-Ion Battery 3.7V 1200 mAh
Impedance : 4 Ohms	Bluetooth Range : 32.8 feet
Playing Time : 4 Hours	Bluetooth Version : 5.3
Charging Time : 2.5 Hours	USB-C Charging Cable Included.
AUX-IN Cable Not Included.	

### Pair Wireless Microphone Speaker with your mobile device

1. Keep the distance between your Car Karaoke Microphone and mobile phone (or other devices) within 32.8 Feet.
2. Power on the Car Karaoke Microphone .
3. Activate the Bluetooth function on your phone within range and select "SP-1005A" from the list shown.
4. You will hear a beep sound when pairing is successful.

### Reconnect Wireless Microphone Speaker to your mobile device

When powered on, the Car Karaoke Microphone will automatically connect with the last successfully paired device.

### Basic Functions

Pause / Play Music: Short Press on Play/Pause Button  
Previous track: Short Press the Previous " - " Button.  
Next track: Short Press the Next " + " Button.  
Volume Down: Long Press the Previous " - " Button.  
Volume Up: Long Press the Next " + " Button.

### Karaoke Mode

1. Long press the Microphone ON/OFF Button to turn on the microphone function and sing along with the music.
2. Short press the Vocal Effect Button to change the vocal effect (3 vocal effect options).
3. Long press the EQ Mode Change Button to adjust the sound (6 EQ sound options).
4. Press the Karaoke Mode Button to remove the original vocals and enter accompaniment mode.
5. Long press the Microphone ON/OFF Button to turn off the microphone function.

### FM Transmission

1. Turn on the car radio.
2. On the car radio, tune to a frequency which is not exist any broadcast channel. And the frequency range can only between 87.5 to 99.9MHz.
3. On the Car Karaoke Microphone, use the Increase Frequency and Decrease Frequency buttons to set the same frequency as the car radio.
4. Long Press the FM Transmitter ON/OFF to turn on the transmission.
5. Music will now playing to the car radio.
6. Long Press the FM Transmitter ON/OFF to turn off the transmission.

### NOTE:

Car Karaoke Microphone's speaker will be disabled during FM Transmission.

### TWS Pairing

1. Cancel the pairing name of the previously connected Car Karaoke Microphone from the Bluetooth settings on your phone and cancel the vocal removal mode by pressing the Karaoke Mode Button. This will restore the speakers to their initial state.
2. Turn on both Car Karaoke Microphone and long press the TWS Button on one of them to make it be the master. Wait for a moment until the TWS pairing is complete. You will hear a prompt sound when the pairing is successful.
3. Open the Bluetooth settings on your phone and connect to the only "SP-1005A" device in the list. Once connected, you can operate the Car Microphone as if they were a single unit. Both Car Karaoke Microphone will play music in sync with each other.
4. If you want to sing a duet, the master Car Karaoke Microphone will control both Car Karaoke Microphone will respond accordingly. Each Car Karaoke Microphone's microphone function can be turned on and off independently.

### NOTE:

TWS mode is not supported in FM Transmission, car radio can only receive the master Car Karaoke Microphone.

### AUX Input

Connect a 3.5mm audio cable to the AUX-IN port to play audio from external devices. The Car Karaoke Microphone will automatically switch to LINE-IN mode.

### NOTE:

AUX-IN is not supported in TWS mode, please only turn on one Car Karaoke Microphone during use AUX-IN function.

AUX-IN cable is not included.

### Charging Your Car Karaoke Microphone

⚠ For your safety, please always use appropriate 5V output charger/Adapter to charge the product. **DO NOT USE** Quick Charging USB Adapter to charge the product, as it might damage the product.

1. Use the USB-C charging cable provided with this Car Karaoke Microphone.
2. Connect the USB-C plug to USB-C charging port on the Car Karaoke Microphone, then connect the USB plug to a USB port on a computer or wall adapter to begin charging.
3. The LED Indicator will turn on while charging and will turn off once fully charged.

### NOTE:

- You must select a qualified charger from a regular manufacturer.
- You must charge the Car Karaoke Microphone if it has been not used for more than 6 months.



⚠ **CAUTION:** The USB-C charging cable included with this item is intended for use with this product. Only use the included USB-C charging cable to charge this product.

### FAQ

• **If the Car Karaoke Microphone cannot be paired with your device, please try the following:**  
Ensure that your Car Karaoke Microphone is in pairing mode or reconnection mode. Ensure that Bluetooth search function of your mobile device is activated.

• **If the Car Karaoke Microphone cannot be recharged:**  
If you use a power outlet, ensure that the power supply is connected securely and the outlet works. If you use a computer, ensure that it is connected and the USB port is powered.

⚠ Safety instructions for the lithium battery and charging the product

- The input voltage to the product is DC 5V 1A.
- In order to charge the product in safe manner and reliable conditions, please only adopt certified appropriate charger/ adapter for charging the product.
- Only charge the product at ambient temperatures between 10°C/ 50°F and 40°C/ 104°F.
- Do not heat above 70 °C/158 °F, eg. Do not expose to sunlight or throw into fire.
- Switch off the product after use.
- Please note that we won't take any responsibility for any wrong operation (eg. Voltage higher than 5V) as this may result in severe injury or loss of property, and we cannot control the operating process during the time the user using this product.
- In extreme cases, abuse or misuse of Lithium battery pack can lead to explosion, heat generation, fire development or smoke development.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by 1616 Holdings, Inc. is under license. Other trademarks and trade names are those of their respective owners.

### FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference.  
(2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



FCC ID: 2ADM5-SP-1005A

Class 1 LED product

Keep All Relevant Information For Future Reference

Made in China  
ITEM# SP-1005A

Approval:

Date: