




# EXTERIOR LED POD KIT



## 6Pod

23191

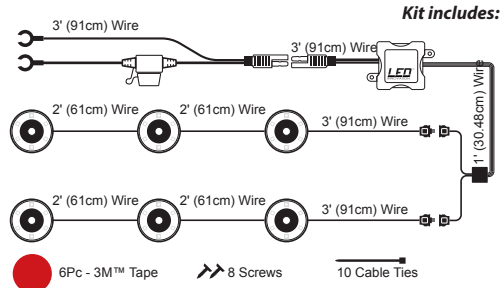

### WARNING

- Never use the LED Innovation App while driving & obey all traffic laws.
- This product is intended solely for the purpose of decorative or off-road use. Check laws and/or regulations in your state, county and/or municipality regarding installation and use of this product. This product is not DOT Approved.
- Do not install this product or run its wires near any moving parts. Keep all wires and lighting units away from excessively hot areas.
- 12 Volt use only. Product designed to draw up to 2.8 Amps.

### BEFORE INSTALLATION

It is recommended that you download the App, connect and test your LED lighting kit before installation and read all instructions carefully.

### INSTALLATION

1. Begin by laying out your new lighting system. Place your Pod lights where you would like to install them and place the 12V power wires near the power source to make sure you have enough wire. You may power your lights using the included trailer harness or 12V direct wire option.
2. Next, select a mounting location for the control box while making sure you leave enough wire to reach both the Pod lights and 12V power source. Clean the control box installation surface thoroughly with alcohol and allow to dry before installation. Install your control box using the included two-sided tape and screws (if desired).
3. To install your LED Light Pods, you may use the included 3M double sided tape, the included screws or both. Run your wires from each set of LED Light Pods to the control box and plug them in. Tuck and secure all wires with included cable ties.
4. If using the 12V trailer wiring harness to power your lights, insert the trailer wiring harness into your trailer socket. Tuck and secure all wires. Alternatively, you may use the 12V hardwire option.  
**(Follow the instructions on the next page)**
5. Start your vehicle. Open the LED INNOV APP and choose to connect to the "EXT HUB" 1 channel system. Mobile phone must be within Bluetooth range.  
**(Approximately 30 feet from the control box)**
6. You have now successfully installed your new lighting system and are ready to customize it using the LED INNOV APP. Please see the "Info" tab on your LED INNOV APP for important tips and instructions.

### OPTIONAL HARDWIRE KIT INSTALLATION INSTRUCTIONS:

1. Open the package and find the direct wire harness. (included)
2. Run the wires toward a 12V power source. **(For example, a fuse box or light switch)**  
The circuit chosen must be able to supply 3 Amps.
3. Connect the (+) red wire to a (+) positive power source that is switched (like a running light) so the light strips will light only when the vehicle ignition is turned on.
4. Or you can connect the red (+) positive wire to a circuit with constant power and add your own switch to turn it on and off. The LED INNOVATION APP also includes a master ON/OFF switch.
5. Connect the black/red (-) negative wire to any clean, metal ground.
6. Tuck and secure all wires.

### ONE YEAR WARRANTY

We guarantee this product to be free of defects in material and workmanship for a period of one year from the date of purchase. If a defect in material or workmanship occurs, call Custom Accessories customer service at (800) 962-6676 for instructions on how to have it replaced or repaired free of charge.

### PROOF OF PURCHASE OR RECEIPTS MUST BE PROVIDED FOR ANY/ALL REPLACED OR REPAIRED ITEMS.

This guarantee does not cover normal damage to the product that is not the result of a defect in materials or workmanship such as, for example, normal wear and tear or damage resulting from an accident. Shipment of any product back to Custom Accessories is at the consumer's expense. Custom Accessories, Inc. limits its liability only to the replacement of its products, not incidental or consequential damages to other property. Some states do not allow the exclusion or limitation of incidental or consequential damages. This guarantee gives you specific legal rights and you may also have other rights which vary from state to state.

For FCC matters please contact:  
Custom Accessories Inc., 5900 Ami Drive, Richmond, IL 60071  
Ph. # (815) 678-1600


FCC RF Radiation Exposure Statement  
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

### FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the product. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

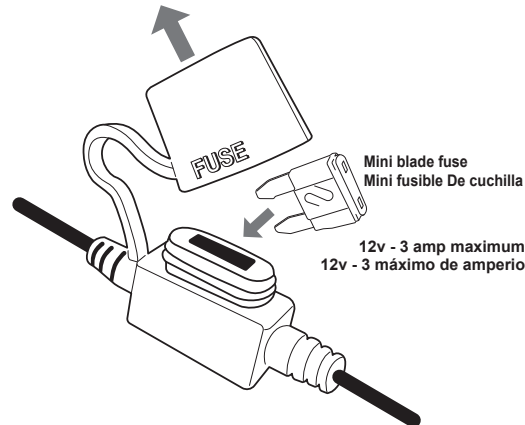

To replace fuse, remove fuse and replace with like amperage.

Para cambiar el fusible, saque el fusible y reemplácelo con uno de amperaje similar.

To learn more about  
**Smart Lighting**  
and download the App scan  
the QR code with your  
smartphone!



Download the  
"LED INNOV"  
App



A registered trademark of Bluetooth SIG, Inc



	Customer Service: 1-800-962-6676
	Visit our website at <a href="http://www.causa.com">www.causa.com</a>

Model: 23191

FCC ID: 2ADMQ-23191-23192



CUSTOM ACCESSORIES, INC.,  
RICHMOND, IL 60071, USA  
MADE IN CHINA © 01\_2021 CA