T350B User Manual

Brand:ROYQUEEN

FCC ID:2ADORRQT350

Dear customer,

Thank you for purchasing the Bluetooth speaker T350B. To ensure correct operation, please read this user manual carefully before operation.

Important Safety Instructions

• This speaker is designed to protect against splashing water sprayed at all angles. Dropping the whole unit in body of water may damage the product.

- Keep speaker away from any source of heat.
- Adjust the volume to a suitable level so as to avoid damaging your hearing, or the unit itself.

• If does not use this speaker for long time, please charge at lease once within one month, in order to prevent the lithium battery from causing and damaging because of excessive consumption.

Features

1. Bluetooth Music and Mobile Hands-free Function

Bluetooth stereo music playing, support mobile hands-free function.

2. Aux In

Work as the external speaker by connecting to the audio source of computer, mobile, PSP/MP3/MP4 etc.

3. Voice Guide


The speaker will voice the current working mode under operation

Technical Data

Voltage: DC 5V Impedance: 3Ω

Aux in Jack: 3.5mm **Net Weight:** 148g **Size:** 41(H)*84(Φ)(mm)



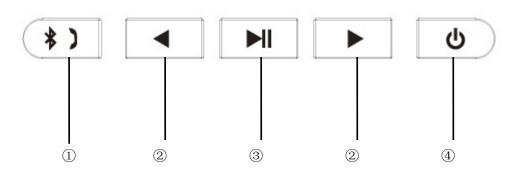

1 *)

Short press: Pick up/Hand off the phone call

Long press: Disconnect the Bluetooth device forcibly

2 < / >

Short press: Previous song/Next song (Bluetooth mode)

Long press: increase/decrease the volume

3 📕

Short Press: Play/Pause (Bluetooth mode);

Long press: Switch the mobile phone call between the mobile and the speaker.

₄ ٺ

Long press: Power on/off the speaker

<u>Slot</u>



① Micro USB

Use the Micro USB cable included to connect the speaker to the computer/adaptor for charging.

2 AUX

Work as the external speaker by connecting to the audio source of computer, mobile, PSP/MP3/MP4 etc.

Instructions

1. Power On / Off

Long press the 0 button to power on the speaker (The blue light will be on); Long press the 0 button again to power off the speaker (The blue light will be off).

2. Bluetooth

- (1) Power on the speaker, it will enter the Bluetooth mode directly.
- (2) Bluetooth Paired

Please turn on the Bluetooth function of your mobile/other devices. And start to search for Bluetooth devices, the "**T350B**" will be found, please connect it. (The speaker will voice "Device paired" when connecting). The speaker's default pairing code is "0000". After pairing, you can use Bluetooth music playing and hands-free function.

(3) Bluetooth Music

Please turn on the mobile or other devices' music player, and speaker will play the selected music.

(4) Mobile Hands-free

Under pairing, using phone to call, it can enter the Hands-free status.

- (a) When phone call comes in, please press the ***) button to pick up, press the ***) button again to hand off the phone call.
- (b) Long press the * > button to reject the phone.
- (c) Under Bluetooth pairing status, press the * > button twice and speaker will re-dial the last telephone number.

3. Aux In

Use the 3.5mm audio cable included to connect the speaker to an audio source (PC, MP3/MP4, mobile phone). The speaker will play the music from the audio source. Please note: The speaker can not enter the Bluetooth mode if connecting with the aux in cable. Please remove the aux in mode when using the Bluetooth mode.

4. Charging

The speaker with built-in rechargeable 800 mAh lithium battery, can play about 3hours at the highest volume.

When battery low, the speaker will voice "out of battery", please charge the battery as soon as possible.

Below is the charging method:

1. Using the included micro USB charging cable to connect the speaker to the computer for charging

2. Using the included micro USB charging cable to connect the speaker to t a branded good quality 5V/1000mA adaptor for charging

Please Note: Do not charging the speaker more than 4 hours

5. LED Indicator Light

Blue light on: Bluetooth device paired;

Blue light flash slowly: Waiting for Bluetooth pairing;

Orange light on: Under charging, the light will off when charging completed.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference

that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.