

C57 Antenna

Specifications

► Contents ◀

1.Passive Data

1.1 Wifi Antenna

1.1.1 Antenna type

1.1.2 Gain

1.1.3 Radiation Pattern

1.2 Cellular Antenna

1.2.1 Antenna type

1.2.2 Gain

1.2.3 Radiation Pattern

2 Test Condition

2.1 Test Environment (Condition/Method)

3 Antenna Description

3.1 Type

3.2 Model number

4 List of Measuring Equipment

5 Manufacturer

1.1 Wifi Antenna

1.1.1 Antenna type


Internal antenna

1.1.2 Gain

BAND	Freq[MHZ]	Avg Gain (dbi)	PEAK Gain[dbi]	TX ANT
WIFI2.4/BT	2402-2480	-4.7	-1.2	ANT2

BAND	Freq[MHZ]	Avg Gain[dbi]	PEAK Gain[dbi]	TX ANT
WIFI 5G	5150-5850	-4.6	-0.6	ANT2

1.1.3 Radiation Pattern

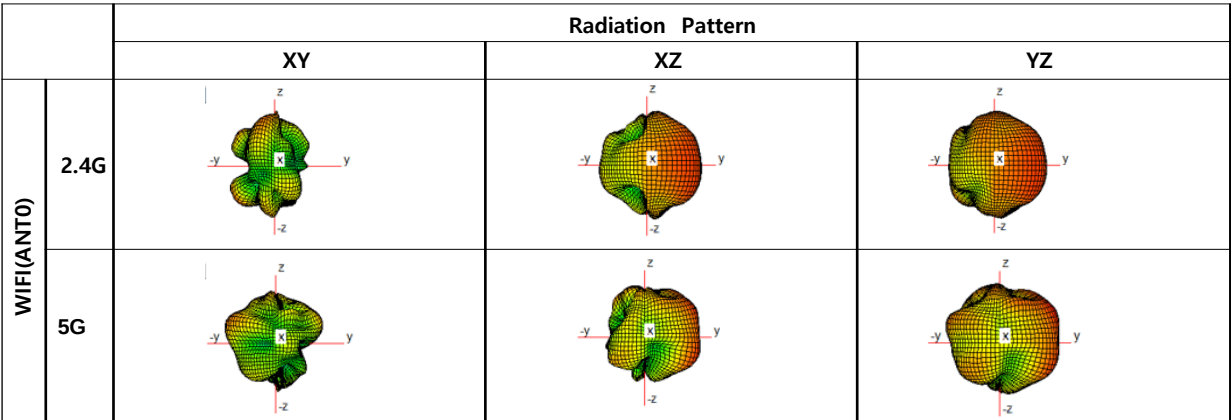

1.2 Cellular Antenna


1.2.1 Antenna type







Internal antenna

1.2.2 Gain

BAND	Freq[MHZ]	Avg Gain[dbi]	PEAK Gain[dbi]	TX ANT
B1	1920-2170	-5.4	-2	ANTO
B25(2)	1850-1995	-5	-1.3	ANTO
B3	1710-1880	-5	-0.2	ANTO
B66(4)	1710-2180	-5.8	-1.6	ANTO
B26(5)	814-894	-7.2	-3.1	ANTO
B7	2500-2690	-5.1	-0.9	ANTO
B8	880-960	-6.3	-2.3	ANTO
B12(17)	699-746	-7.3	-5.2	ANTO
B13	746-787	-7.1	-3.3	ANTO
B28	703-803	-7.5	-4.5	ANTO
B41(38)	2500-2690	-5.1	-0.9	ANTO
B71	617-698	-8.4	-6.4	ANTO

1.2.3 Radiation Pattern

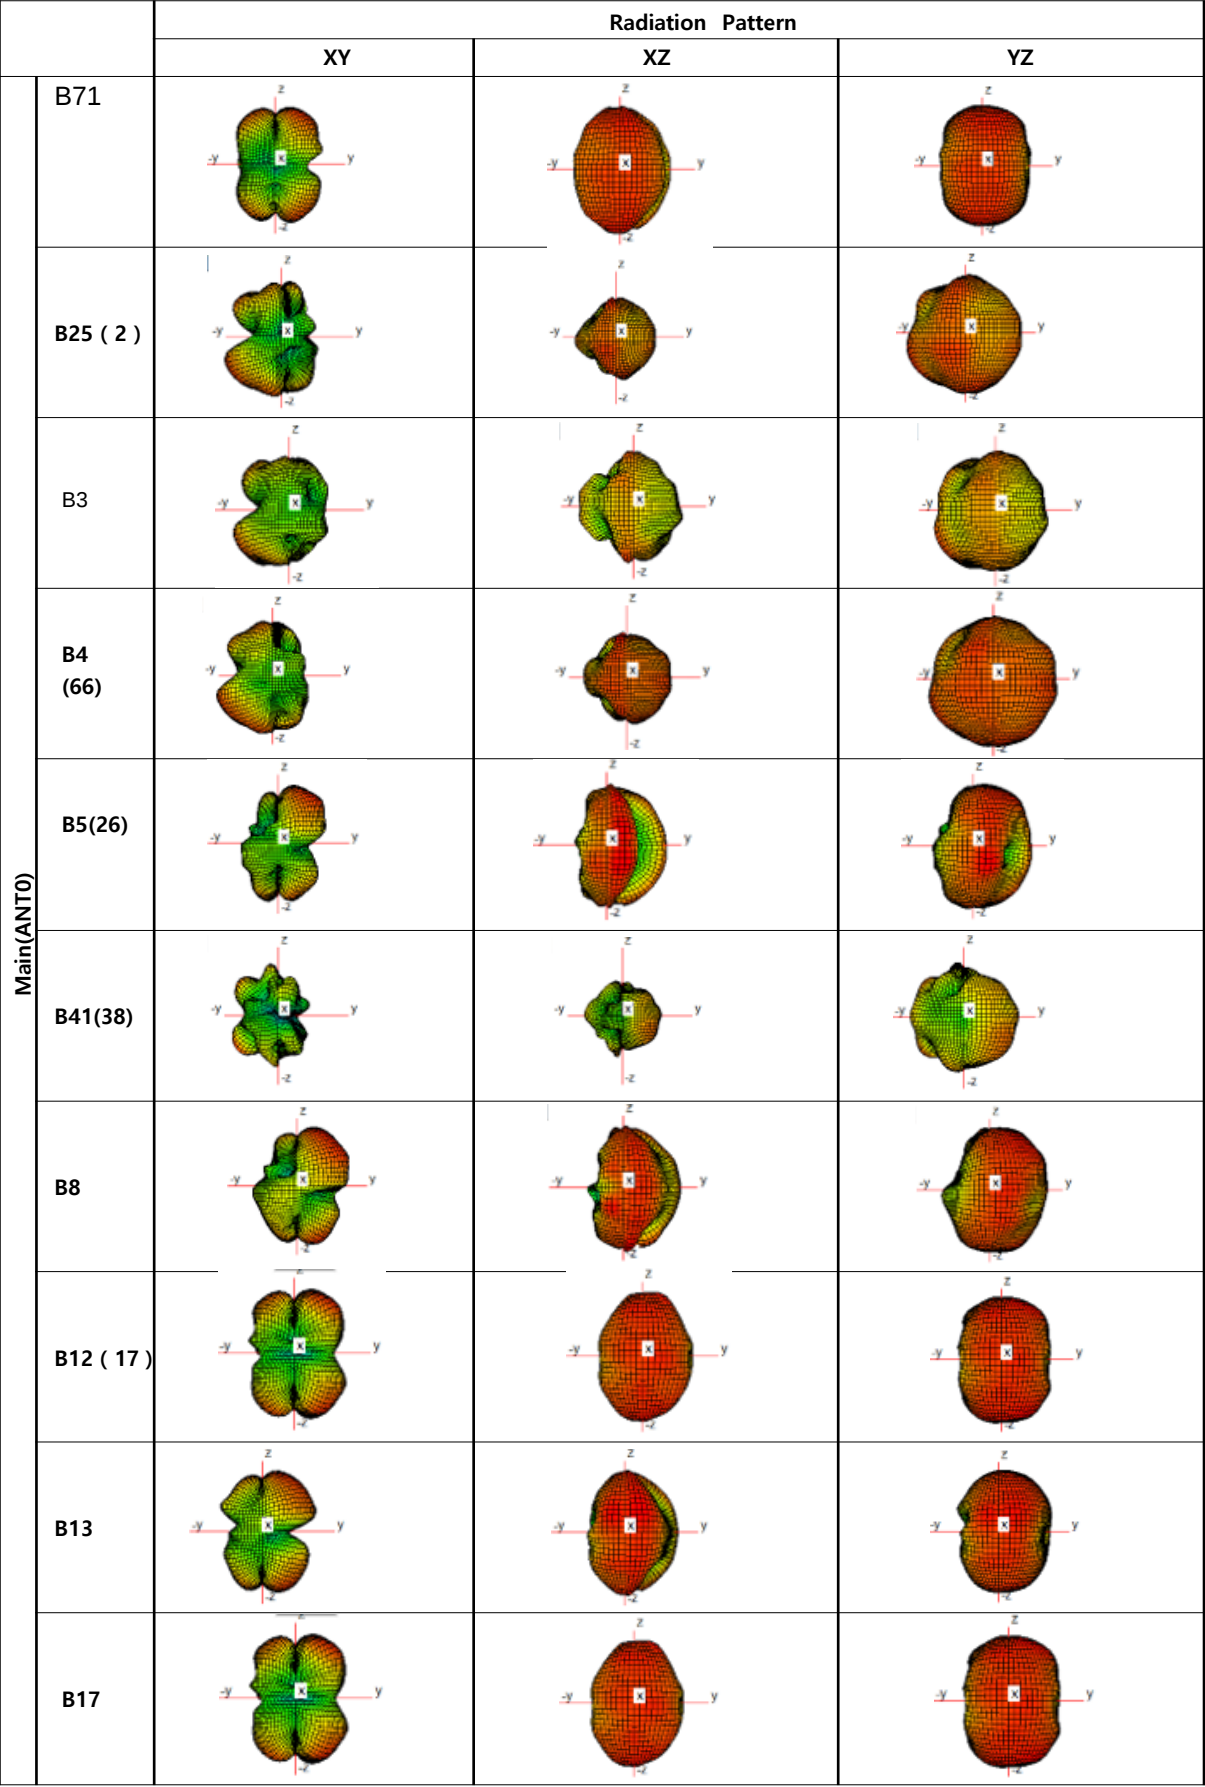

B28			
B7			


2 Test Condition

2.1 Test Environment (Condition/Method Radiation & Gain)

Step 1. Calibrate the Chamber system using Horn antenna, and set up the software to control the Chamber system at the same time.

Step 2. Keep the measuring antenna to holder.

Step 3. Measure Gain & efficiency.


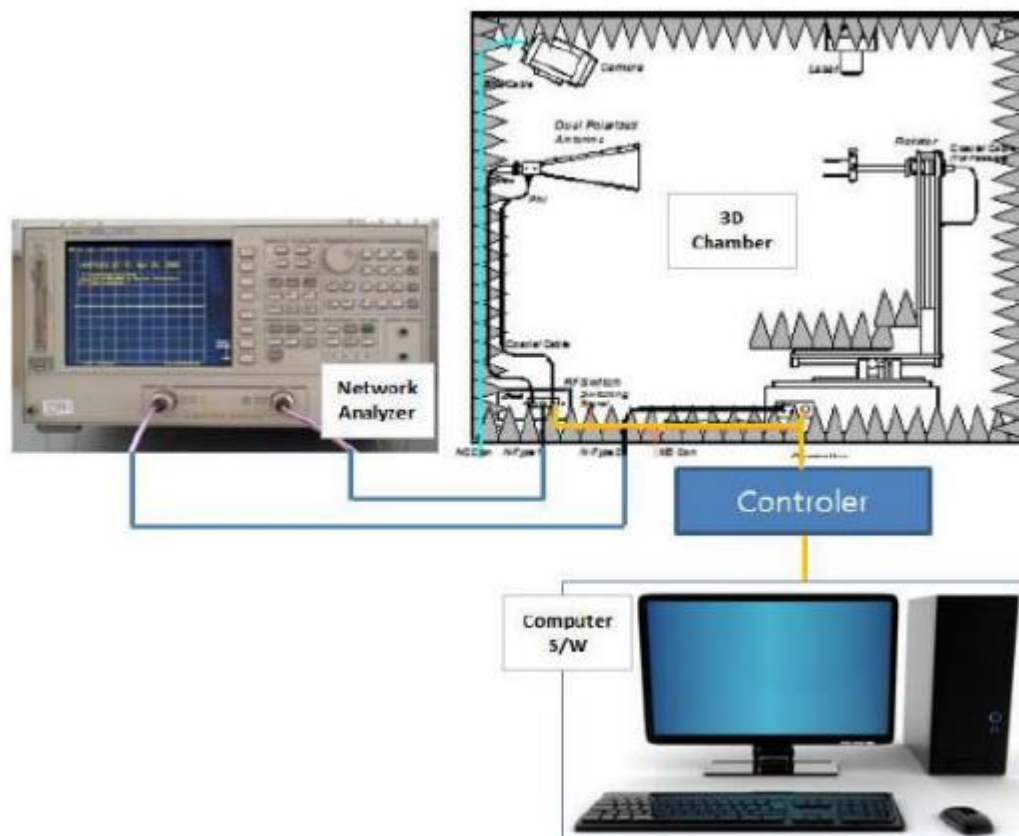


3 Antenna description



Type : Internal Antenna

4 List of Measuring Equipment

Multi-Probe OTA Measurement System

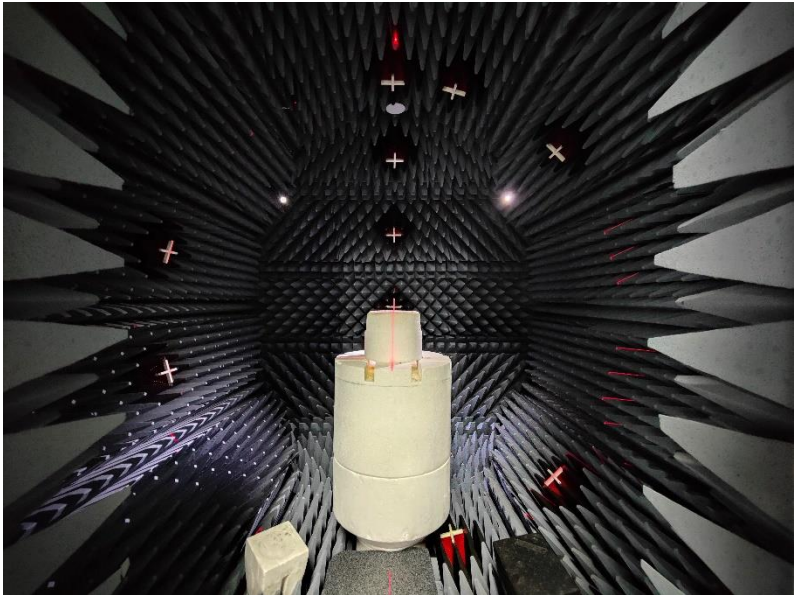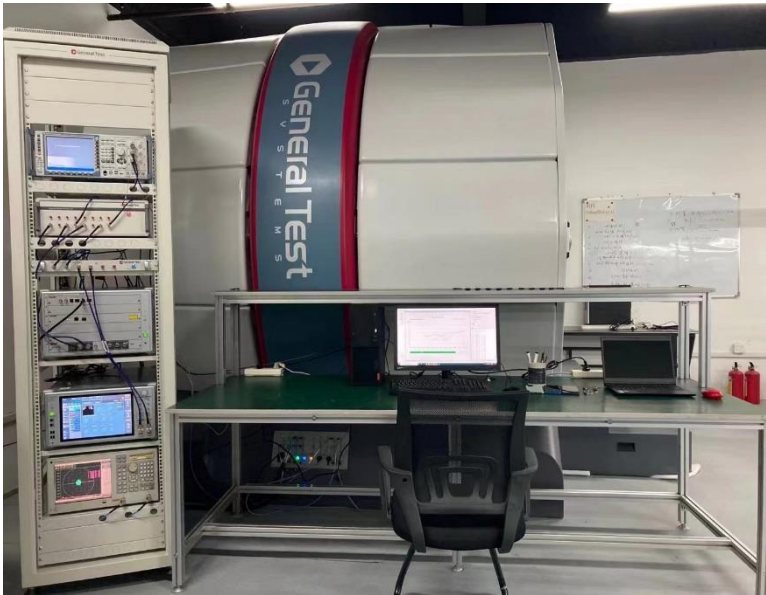

DUT setup photo of free space OTA testing

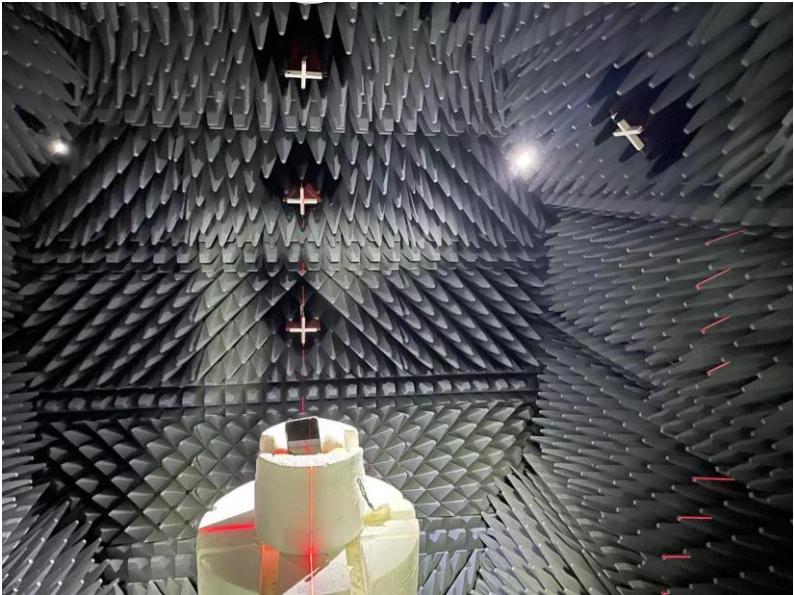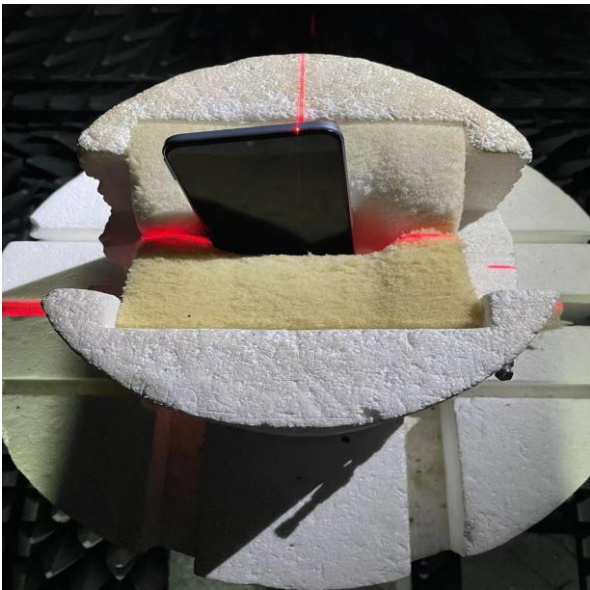

5

Name	Shenzhen HamyWe Technology Co, Ltd.
Address	1st floor,Building B,Jinghang Industrial Park,Liu xian 2nd Road,District71,Bao'an,Shenzhen
Tel	0755-3688170
E-mail	rf1@szuhot.com
Equipment	GTS2800

5.2.Product Specification

5.2.1 Size and shape_Pattern

