

geminini[®]



GSP-L5500PK* / GSP-5500

15-Inch 2-Way Active Bluetooth[®] PA Speaker

**LED Party Lighting & Speaker Stand included*

©2024 Innovative Concepts & Design LLC. All Right Reserved.
Bluetooth[®] is a registered trademark of Bluetooth SIG Inc.
Product Specifications and colors may vary from photo.

Manufactured and serviced by:
Innovative Concepts & Design LLC
458 Florida Grove Road
Perth Amboy, NJ 08861 USA
(732)587-5466
geminisound.com

INDEX

What's Included	2
Precautions	3
Features	4
Product Overview	5
Specifications	7
FCC Compliance Statement	8
Legality & Safety	9
Warranty Info	10
Manual en Español	11
Manuel en Français	16
Handbuch in Deutsch	21
Manuale in Italiano	26
Handleiding in het Nederlands	31

What's Included

Please ensure that you find these accessories with your GSP Series package

- GSP Series Loudspeaker
 - Wired Microphone
 - Speaker Stand*
 - Power Cable
 - User Manual

*Speaker Stand included with GSP-L5500PK version only

PRECAUTIONS





PLEASE READ THESE INSTRUCTIONS GIVEN IN THIS MANUAL AND THOSE MARKED ON THE UNIT

This set has been designed and manufactured to assure personal safety. Improper use can result in electric shock or fire hazard. The safeguards incorporated in this unit will protect you if you observe the following procedures for installation, use and servicing. This unit is fully transistorized and does not contain any parts that can be repaired by the user.

WARNINGS

Fire and electric shock hazard

- 1 - Do not place any open flame sources, such as lighted candles, on or near the apparatus.
- 2 - Do not attempt to service the apparatus yourself.
- 3 - Opening or removing covers may expose you to dangerous voltages or other hazards and will void the manufacturer's warranty.
- 4 - To prevent risk of fire or electric shock, avoid overloading wall outlet convenience receptacles.
- 5 - Lightning storms Unplug this apparatus during lightning storms.
- 6- Object and liquid entry: Never insert objects of any kind through the openings of this apparatus, as it may touch dangerous voltage points or short-circuit parts that could result in a fire or electric shock. Care should be taken so that objects do not fall and liquids are not spilled into the apparatus through openings in the enclosure

	CAUTION RISK OF ELECTRIC SHOCK, DO NOT OPEN	
Caution: To reduce the risk of electric shock do not open this device, there are no serviceable parts for customers. Please refer any maintenance or repair to qualified personnel.		
	This sign means the existence of dangerous voltage inside the unit, which states a risk of electric shock.	
	This sign means that there are important instructions of operation and handling in the manual that comes with this device.	



NOTE: This unit may be submitted for changes in specifications, characteristics and/or operation without prior notice to user, in order to continue improving and developing its technology.

FEATURES

Elevate your parties to a whole new level with the GSP-L5500PK and GSP-5500 DJ Party Speakers, both designed to deliver versatility, connectivity, and stunning audio performance in a portable design.

With multiple playback options (USB, Bluetooth, AUX), these speakers ensure seamless integration with your favorite devices. Experience dynamic sound with a powerful 15" Woofer and 1.35" Tweeter, driven by a bi-amped AB Class amplifier, delivering a total of 2200 watts peak power. With EQ presets, Bass/Treble adjustments, and TWS linking for true wireless stereo pairing, you can fine-tune your audio experience to get the best sound in your space!

The GSP-L5500PK adds a vibrant touch with multi-mode beat-sync LED party lighting and includes a speaker stand, while the GSP-5500 provides the same robust audio performance without the lighting effects or stand. Both speakers feature a retractable trolley handle and skate style wheels for easy transport.

IMMERSIVE SOUND EXPERIENCE

Feel the music come alive with powerful 15" Woofer and 1.35" Tweeter, delivering crisp highs and deep bass for an immersive audio experience that fills any space.

VERSATILE CONNECTIVITY

Seamlessly connect your devices via HDMI, USB, Bluetooth, or AUX inputs, ensuring you're always ready to play your favorite tunes from any source.

MICROPHONE INPUTS

Engage with your audience using two microphone input channels (XLR & 1/4"), perfect for karaoke nights or event hosting.


LIGHTING EFFECTS (GSP-L5500PK only)

Elevate your visual experience with multi-mode full-color LED lighting on the woofer and front corners of the speaker, syncing with your music for a dazzling display.

ADVANCED DSP AND EQ

Dial in the perfect sound with independent Bass and Treble EQ control, plus 6 EQ presets (Normal, Club, Jazz, Classical, Rock, Speech) for customized sound.

PRODUCT OVERVIEW

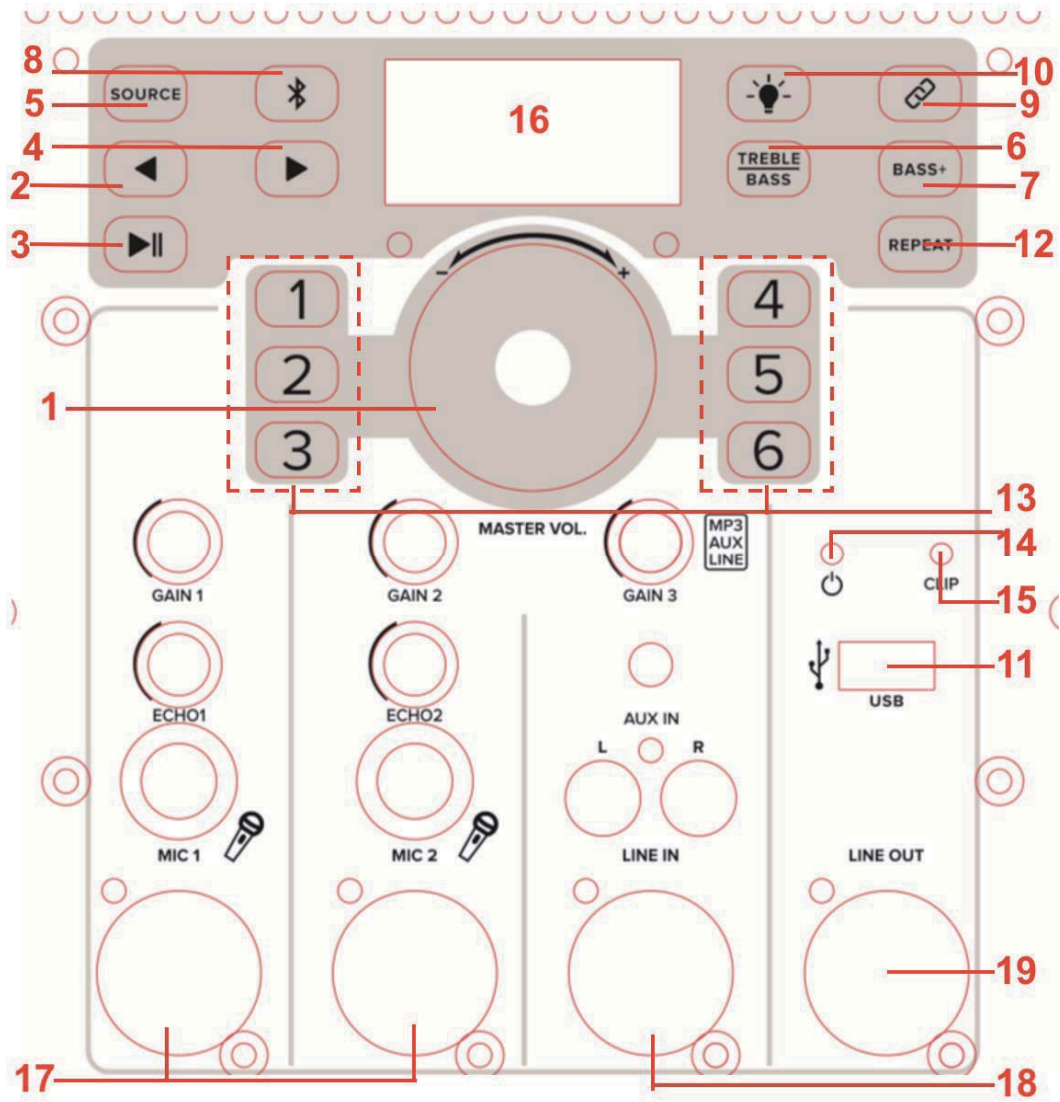

1. **MASTER VOLUME** – Turn knob to adjust volume of all audio sources including microphone. Use this knob to make EQ adjustments with button #6 (Press and hold for 6 seconds to restore speaker to factory settings)
 2. **PREVIOUS/BACK** – Press to skip back a track during USB/Bluetooth playback.
 3. **PLAY / PAUSE** – Press to Play or Pause playback in USB/Bluetooth modes.
 4. **FORWARD / NEXT** – Press to skip to next track during USB/Bluetooth playback.
 5. **SOURCE** – Press to switch between playback modes BLUETOOTH / USB / AUX
For Bluetooth playback, press SOURCE to enter BT mode, find “GSP Series” in the device list on your Bluetooth player and connect.
 6. **TREBLE / BASS*** – Press to enter Treble/Bass EQ mode. Use Master Volume knob #1 to adjust treble and bass EQ gain.
 7. **BASS+** - Press to activate Gemini “X BASS” bass booster feature.
 8. **BLUETOOTH** – In Bluetooth mode, press to disconnect connected device and connect to another. Press again to reestablish previous connection.
 9. **TWS LINK** – Press to enter TWS pairing mode, screen will show the word “Link” blinking. With 2 GSP Series speakers powered on, Press TWS LINK button on both speakers. Once successfully connected display will stop blinking.
 10. **LED PARTY LIGHTING*** (GSP-L5500PK only) – Press to cycle through the various LED lighting modes.
 11. **USB PORT** – Supports 5V charging as well as playback of MP3/WMA files.
 12. **REPEAT** – Press to cycle through repeat modes: Off / Repeat 1 / Repeat all
 13. **EQ PRESETS** – Press buttons 1-6 to select factory preset EQ settings:
 1. Normal - FLAT
 2. Club – LOW +4 / MID -2 / HIGH +4
 3. Jazz – LOW -2 / MID +2 / HIGH +2
 4. Classical – LOW 0 / MID 0 / HIGH -3
 5. Rock – LOW +2 / MID -1 / HIGH +3
 6. Speech – LOW +5 / MID -3 / HIGH -2
 14. **POWER LED** – Illuminates when speaker is on
 15. **CLIP LED** – Illuminates when audio output is clipping, reduce volume to avoid clipping/distortion.
 16. **DISPLAY** – Shows information about playback mode, EQ settings etc.
 17. **MIC LEVEL INPUT CHANNELS** – Connect microphones via XLR or ¼” input jack.
 18. **AUX/LINE INPUT CHANNEL** – Connect line level source via XLR, RCA or 1/8” input jack.
 19. **LINE OUT** – Balanced XLR mix output, connect to recording device or another speaker for expanded system.
 20. **GAIN KNOBS** – Adjust the input volume of the individual channels.
 21. **ECHO EFFECT** – Add Echo effect to individual mic input channels
- *Please note – On the GSP-5500 the EQ adjustment settings have their own buttons for Bass (#6) and Treble (#10) since there is no LED PARTY LIGHTING button.**

SPECIFICATIONS

Active/Passive	Active
Amplifier Type	Bi-Amped AB Class Amplifier
LF Driver Size	15" Woofer
HF Driver Size	1.35" Tweeter
LF Driver Power	550 RMS
HF Driver Power	
Total Power	2200 Watts Peak
Inputs	2 x ¼" Mic input jack 2 x XLR Mic input jack 1 x 1/8" Aux line input 1 x RCA line input 1 x XLR line input
Outputs	XLR Mix Output
Media Player	USB MP3 / WMA Audio Playback
Bluetooth	Bluetooth® Streaming with TWS Link
*Lighting	*Multi-mode full color LED Party Lighting
Frequency Response	20HZ-20KHZ
Max Peak SPL @ 1 Meter	126dB
Signal Processing	Bass and Treble EQ Control 6 EQ Presets: Normal, Club, Jazz, Classical, Rock, Speech
Enclosure Material	PP Plastic
*Mounting Options	Pole Mount with 35mm socket *Speaker Stand Included
Battery	N/A

****Please note – Only the GSP-L5500PK version has LED Party Lighting and includes a speaker stand.***

FCC COMPLIANCE STATEMENT

Responsible Party Name:

Innovative Concepts & Designs LLC

Company address:

458 Florida Grove Road
Perth Amboy, NJ, 08861 USA

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. The operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. This equipment generates uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and then on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to a different outlet so that the equipment and receiver are on different branch circuits.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC ID: 2AE6G-GSP-L5500PK

LEGALITY & SAFETY

The device is not intended for use by people (including children) with reduced physical, sensory or mental capacity. People who have not read the manual, unless they have received an explanation by someone responsible for their safety, should not use this unit. Children should be monitored to ensure that they do not play with the device. The device should always be readily accessible. The device should not be exposed to water. No objects filled with liquids, such as vases, shall be placed on the device. Always leave a minimum distance of 10 cm around the unit to ensure sufficient ventilation. Open flame sources, such as candles, should not be placed on top of the device. The device is intended for use only in a temperate climate. At full volume, prolonged listening may damage your hearing and cause temporary or permanent deafness, hearing drone, tinnitus, or hyperacusis. Listening at high volume is not recommended. One hour per day is not recommended either. Danger of explosion if battery is incorrectly replaced or not replaced by the same type or equivalent. The battery should not be exposed to excessive heat such as sunshine or fire. Different types of batteries, or new and used batteries, should not be mixed. The battery must be installed according to its polarity. If the battery is worn, it must be removed from the product. The battery must be disposed of safely. Always use collection bins to protect the environment. The battery can only be replaced by the maker of this product, the sales department, or a qualified person. Switch the device off where the use of the device is not allowed or where there is a risk of causing interference or danger - for examples: on an aircraft, or near medical equipment, fuel, chemicals or blasting sites. Check the current laws and regulations regarding the use of this device in the areas where you drive. Do not handle the device when driving. Concentrate fully on driving. All wireless devices are susceptible to interference which may affect their performance. All our devices conform to international/national standards and regulations, and we aim to limit user exposure to electromagnetic fields. These standards and regulations were adopted after the completion of extensive scientific research. This research established no link between the use of the mobile headset and any adverse effects on health if the device is used in accordance with standard practices. Only qualified people are authorized to install or repair this product. Only use batteries, chargers and other accessories which are compatible with this equipment. Do not connect incompatible products. This equipment is not waterproof. Keep it dry. Keep your device in a safe place, out of the reach of young children. The device contains small parts which may present a choking hazard to kids.

WARRANTY

A. Innovative Concepts & Designs LLC guarantees its products to be free from defects in materials and workmanship for one (1) year from the original purchase date. Exceptions: Laser assemblies on CD Players, batteries, cartridges, and crossfaders are covered for 90 days.

B. This limited warranty does not cover damage or failure caused by abuse, misuse, abnormal use, faulty installation, improper maintenance, or any repairs other than those provided by an authorized Innovative Concepts & Designs Service Center.

C. There are no obligations of liability on the part of Innovative Concepts & Designs for consequential damages arising out of or in connection with the use or performance of the product or other indirect damages with respect to loss of property, revenues, of profit, or costs of removal, installation, or reinstallation. All implied warranties for Innovative Concepts & Designs, including implied warranties for fitness, are limited in duration to one (1) year from the original date of purchase, unless otherwise mandated by local statutes.

WELCOME TO THE GEMINI FAMILY!

At Gemini, our highest priority is making your experience unforgettable.
Need help with setting up, troubleshooting, or looking for some tips?
We're here for you, Monday through Friday 9AM-5PM EST.



hello@gemini-sound.com



1-844-GEMINI9



www.gemini-sound.com



FUNCIONES

Eleva tus fiestas a un nivel completamente nuevo con los altavoces para fiestas de DJ GSP-L5500PK y GSP-5500, ambos diseñados para ofrecer versatilidad, conectividad y un rendimiento de audio impresionante en un diseño portátil.

Con múltiples opciones de reproducción (USB, Bluetooth, AUX), estos altavoces garantizan una integración perfecta con sus dispositivos favoritos. Experimenta un sonido dinámico con un potente woofer de 15" y un tweeter de 1,35", impulsados por un amplificador de clase AB biamplificado, que ofrece una potencia máxima total de 2200 vatios. Con los preajustes de ecualización, los ajustes de graves/agudos y la vinculación TWS para un verdadero emparejamiento estéreo inalámbrico, puedes ajustar tu experiencia de audio para obtener el mejor sonido en tu espacio.

El GSP-L5500PK añade un toque vibrante con iluminación LED para fiestas multimodo y sincronizado con ritmos e incluye un soporte para altavoces, mientras que el GSP-5500 proporciona el mismo rendimiento de audio robusto sin los efectos de iluminación ni el soporte. Ambos altavoces cuentan con un asa de carro retráctil y ruedas estilo patín para facilitar el transporte.

EXPERIENCIA DE SONIDO INMERSIVA

Siente cómo la música cobra vida con el potente woofer de 15" y el tweeter de 1,35", que ofrecen agudos nítidos y graves profundos para una experiencia de audio envolvente que llena cualquier espacio.

CONECTIVIDAD VERSÁTIL

Conecta sin problemas tus dispositivos a través de entradas HDMI, USB, Bluetooth o AUX, asegurándote de estar siempre listo para reproducir tus canciones favoritas desde cualquier fuente.

ENTRADAS DE MICRÓFONO

Interactúe con su audiencia utilizando dos canales de entrada de micrófono (XLR y 1/4"), perfectos para noches de karaoke o organización de eventos.

EFFECTOS DE ILUMINACIÓN (solo GSP-L5500PK)

Mejora tu experiencia visual con la iluminación LED multimodo a todo color en el woofer y las esquinas frontales del altavoz, que se sincroniza con tu música para una pantalla deslumbrante.

DSP Y EQ AVANZADOS

Marca el sonido perfecto con el control independiente de ecualización de graves y agudos, además de 6 preajustes de ecualización para un sonido personalizado.