# **FCC Test Report**

Report No.: AGC03588150605FE01

**FCC ID** : 2AE6GUHF-6100

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Wireless Receiver

BRAND NAME : Gemini

MODEL NAME : UHF-6100

**CLIENT**: INNOVATIVE CONCEPTS AND DESIGN LLC

**DATE OF ISSUE** : Jul.3, 2015

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION** V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 25

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul.3, 2015	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. RELATED SUBMITTAL(S) / GRANT (S)	5
2.3. TEST METHODOLOGY	5
2.4. SPECIAL ACCESSORIES	5
2.5. EQUIPMENT MODIFICATIONS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	6
5.1. EQUIPMENT USED IN EUT SYSTEM	ε
5.2. SUMMARY OF TEST RESULTS	ε
6. TEST FACILITY	7
7. RADIATED EMISSION	9
7.1. MEASUREMENT PROCEDURE	9
7.2. TEST SETUP	11
7.3. TEST RESULT	12
8. FCC LINE CONDUCTED EMISSION TEST	14
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	14
8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	14
8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	15
8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	15
8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	16
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	18
APPENDIX B: PHOTOGRAPHS OF EUT	19

Page 4 of 25

#### 1. VERIFICATION OF CONFORMITY

Applicant	INNOVATIVE CONCEPTS AND DESIGN LLC
Address	107 Trumbull Street - Bldg F8, 2nd Flr, Elizabeth, NJ 07206 USA
Manufacturer	PROAUDIO ELECTRONICS CO., LIMITED
Address	FLAT 03H 15/F CARNIVAL COMMERCIAL BUILDING 18 JAVA ROAD NORTH POINT HK
Product Designation	Wireless Receiver
Brand Name	Gemini
Test Model UHF-6100	
Date of test	Jun.26, 2015 to Jul.2, 2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part .

Prepared By

Sally Wu
Sally Wu
Jul.3, 2015

Checked By

Max Zhang Jul.3, 2015

Max Zhang

Solyer Zhang

**Authorized By** 

Solger Zhang Jul.3, 2015

Page 5 of 25

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency 682~694.75MHz	
Field Strength(3m)	33.52dBuV/m(QP)@3m
Modulation PLL	
Number of channels 256	
Hardware Version	UHF-6100RX Rev A3
Software Version	UHF-6100RXASM Rev A3
Antenna Designation	Detachable antenna(Specific connector provided by client)
EUT Supply	DC 12.0V by adapter
Adapter Supply AC 120V/60Hz	

#### 2.2. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AE6GUHF-6100** filing to comply with Section 15.107&109 of the FCC Part 15, Subpart B Rules.

#### 2.3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.4. SPECIAL ACCESSORIES

Refer to section 5.1.

#### 2.5. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 6 of 25

#### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: ±3.18dB Radiated measurement: ±3.91dB

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Receiver mode

#### **5. SYSTEM TEST CONFIGURATION**

#### **5.1. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Receiver	UHF-6100	N/A	N/A
2	Adapter	CGSW-1200500	DC12V/500mA	Support

#### **5.2. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.109	Radiated Emission	Compliant
§15.107	Conducted Emission	Compliant

Page 7 of 25

### **6. TEST FACILITY**

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

#### **ALL TEST EQUIPMENT LIST**

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2014	July 3, 2015
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2014	July 3, 2015
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2014	July 3, 2015
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

### FOR RADIATED EMISSION TEST (1GHZ ABOVE)

	Radiated Emission Test Site				
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2014	July 10, 2015
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2014	July 3, 2015
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2014	July 6, 2015
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2014	July 7, 2015
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Page 8 of 25

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2014	July 3, 2015
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2014	July 7, 2015
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2014	July 7, 2015
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2014	July 3, 2015
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

Page 9 of 25

#### 7. RADIATED EMISSION

#### 7.1. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 7. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 8. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 12. Only the worst case is reported.

Page 10 of 25

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz		
Start Stop Froquerity	1MHz/1MHz for Peak, 1MHz/10Hz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP


Page 11 of 25

#### 7.2. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

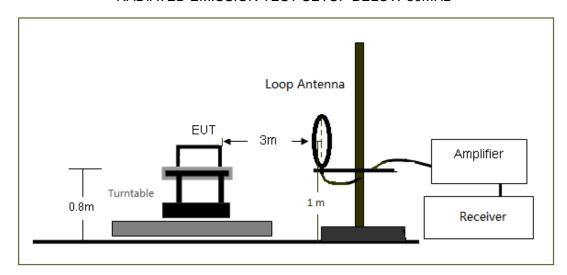

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

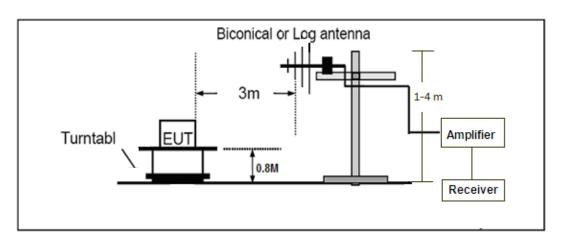

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

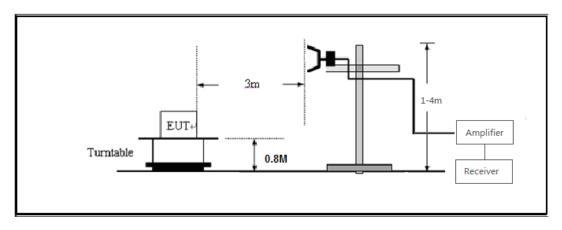


Page 12 of 25

#### 7.3. TEST RESULT

# Test Mode: Receiver Mode RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.


# RADIATED EMISSION BELOW 1GHZ-Horizontal

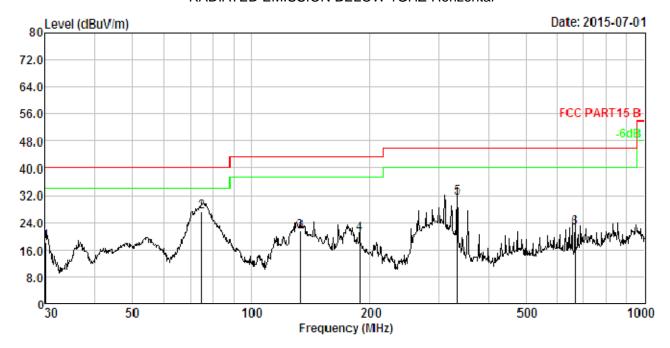

No.	Freq MHz	Cable Loss dB	AN I Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	30.105	1.06	13.24	33.83	29.97	18.16	40.00	-21.84	QP
2.	74.919	1.88	9.87	45.70	30.29	27.16	40.00	-12.84	QP
3.	133,151	2.40	12.87	36.70	30.49	21.48	43.50	-22.02	QP
4.	188.413	2.72	11.31	37.22	30.61	20.64	43.50	-22.86	QP
5.	332.519	3.23	13.93	44.98	30.81	31.33	46.00	-14.67	QP
6.	665.804	3.86	19.74	29.99	31.05	22.54	46.00	<b>-</b> 23.46	QP

Page 13 of 25

#### **RADIATED EMISSION BELOW 1GHZ-Vertical**

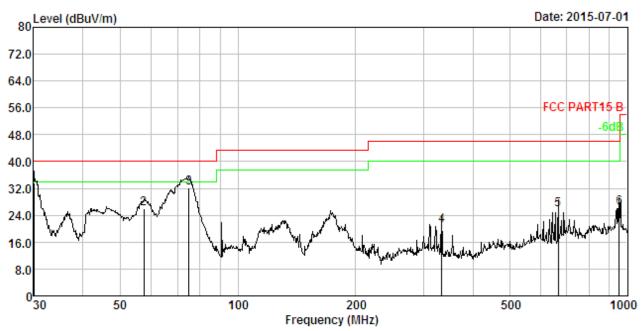

No.	Freq MHz	Cable Loss dB		Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	
1.	30.000	1.06	13.24	49.19	29.97	33.52	40.00	-6.48	QP	-
2.	57.392	1.64	12.03	42.46	30.20	25.93	40.00	-14.07	QP	
3.	74.919	1.88	9.87	50.84	30.29	32.30	40.00	-7.70	QP	
4.	332.519	3.23	13.93	34.54	30.81	20.89	46.00	-25.11	QP	
5.	665.804	3.86	19.74	33.14	31.05	25.69	46.00	-20.31	QP	
6.	952.094	4.19	23.43	29.82	31.17	26.27	46.00	-19.73	QP	

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Emissions range from 1GHz to 7GHz have 20dB margin. No recording in the test report.
- 4. Only the data of the worst case would be record in this test report.

Page 14 of 25

#### 8. FCC LINE CONDUCTED EMISSION TEST


#### 8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF	Line Voltage
Frequency	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

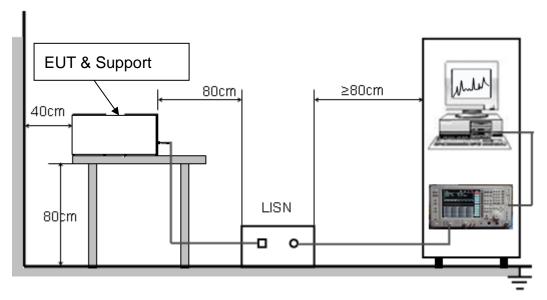

Page 15 of 25

#### 8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.


- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

### 8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

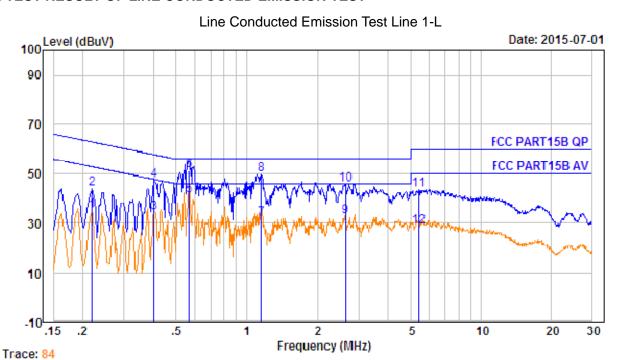

No.	Freq MHz	Cable Loss dB	Clamp Factor dB	Receiver Reading dBpW	Emission Level dBpW	Limit dBpW	Over Limit dB	Remark
1.	0.219	10.61	0.60	23.83	35.04	52.88	-17.84	Average
2.	0.219	10.61	0.60	32.83	44.04	62.88	-18.84	QP
3.	0.402	10.64	0.60	23.01	34.25	47.81	-13.56	Average
4.	0.402	10.64	0.60	36.01	47.25	57.81	-10.56	QP
5.	0.567	10.65	0.60	30.00	41.25	46.00	-4.75	Average
6.	0.567	10.65	0.60	40.00	51.25	56.00	-4.75	QP _
7.	1.153	10.68	0.60	20.54	31.82	46.00	-14.18	Average
8.	1.153	10.68	0.60	38.54	49.82	56.00	-6.18	QP -
9.	2.636	10.71	0.60	21.47	32.78	46.00	-13.22	Average
10.	2.636	10.71	0.60	34.47	45.78	56.00	-10.22	QP -
11.	5.419	10.74	0.60	32.37	43.71	50.00	-6.29	Average
12.	5.419	10.74	0.60	17.37	28.71	60.00	-31.29	QP -

#### Line Conducted Emission Test Line 2-N

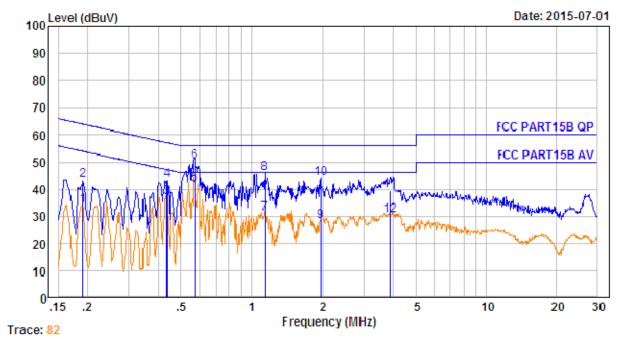

No.	Freq MHz	Cable Loss dB	Clamp Factor dB	Receiver Reading dBpW	Emission Level dBpW	Limit dBpW	Over Limit dB	Remark
1.	0.190	10.61	0.60	22.81	34.02	54.02	-20.00	Average
2.	0.190	10.61	0.60	31.8 <b>1</b>	43.02	64.02	-21.00	QP -
3.	0.435	10.64	0.60	25.77	37.01	47.15	-10.14	Average
4.	0.435	10.64	0.60	31.77	43.01	57.15	-14.14	QP -
5.	0.570	10.66	0.60	30.39	41.65	46.00	-4.35	Average
6.	0.570	10.66	0.60	39.00	50.26	56.00	-5.74	QP
7.	1.135	10.68	0.60	19.54	30.82	46.00	-15.18	Average
8.	1.135	10.68	0.60	34.54	45.82	56.00	-10.18	QP
9.	1.970	10.70	0.60	16.74	28.04	46.00	-17.96	Average
<b>1</b> 0.	1.970	10.70	0.60	32.74	44.04	56.00	-11.96	QP
<b>1</b> 1.	3.881	10.72	0.60	28.00	39.32	46.00	-6.68	Average
<b>1</b> 2.	3.881	10.72	0.60	18.99	30.31	56.00	-25.69	QP

**RESULT: PASS** 


Page 18 of 25

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

LINE CONDUCTED EMISSION TEST SETUP



RADIATED EMISSION TEST SETUP

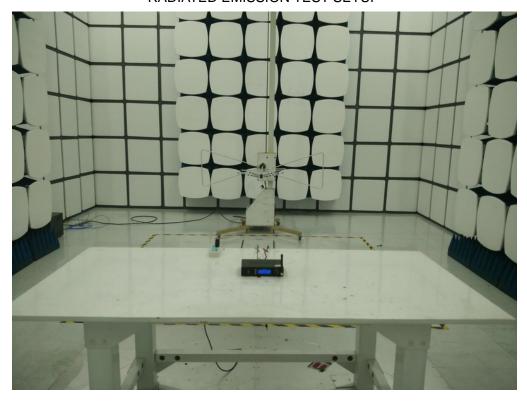


Page 19 of 25

### **APPENDIX B: PHOTOGRAPHS OF EUT**


ALL VIEW OF EUT



TOP VIEW OF EUT

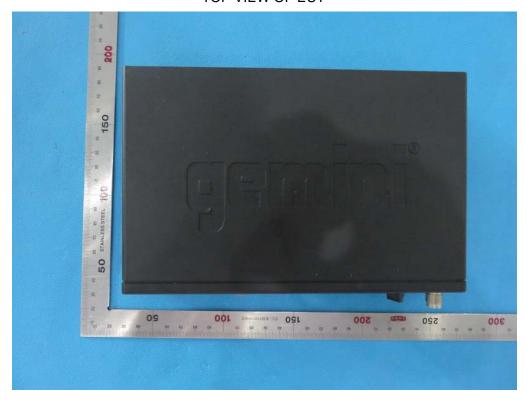

### **BOTTOM VIEW OF EUT**

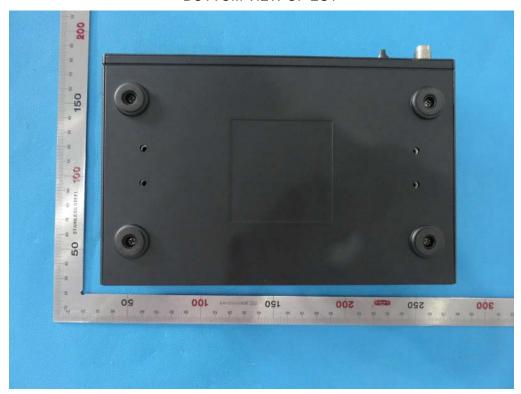

FRONT VIEW OF EUT




Page 21 of 25

### **BACK VIEW OF EUT**



LEFT VIEW OF EUT

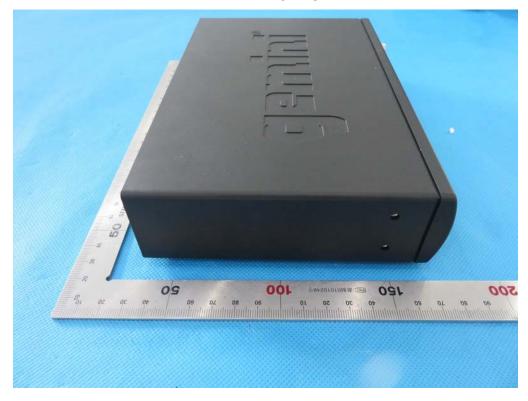


Page 22 of 25






**OPEN VIEW OF EUT** 

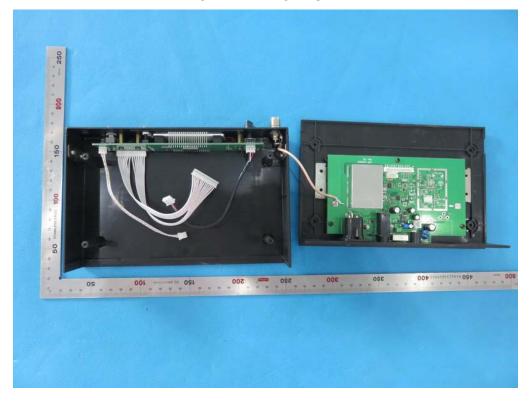


Report No.: AGC03588150605FE01 Page 23 of 25

**INTERNAL VIEW OF EUT-1** 

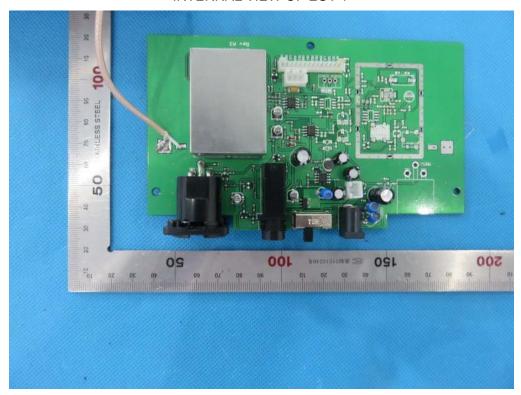

**INTERNAL VIEW OF EUT-2** 

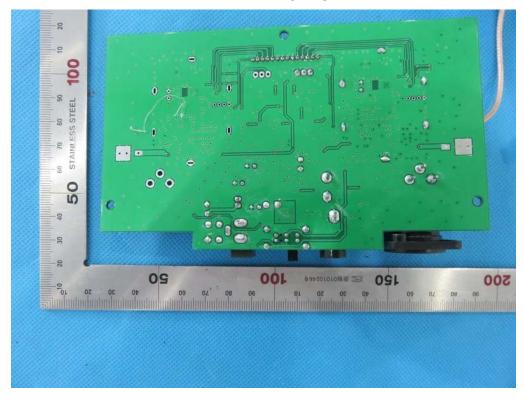

Page 24 of 25

### **INTERNAL VIEW OF EUT-3**




**INTERNAL VIEW OF EUT-4** 



**INTERNAL VIEW OF EUT-5** 



**INTERNAL VIEW OF EUT-6** 

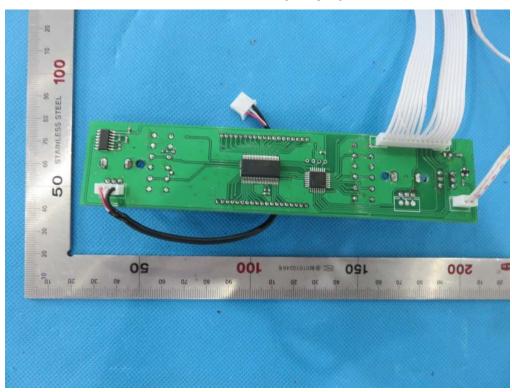

----END OF REPORT----