

BMT101

BIGASUO

BIGASUO

User Manual

Baby Monitor

BMT101, BMT102, BC-780, 3057-7" Baby Monitor, BC-780-2

Please read this manual before operating your WiFi camera,
and keep it for further reference.



CONTENTS

I. Safety Guidance	2
II. Parent unit	3
III. Camera Overview	3
IV. Getting Started	4
BGS Baby Cam	4
Connecting the Parent Unit and Camera	4
Disconnect a Camera	8
V. Operation	9
Home Screen	9
Live Feedback	9
App menu	10
Connecting Multiple Cameras	11
VI. Help	11
No Display	11
Connection Problems	11
Sound Problems	12
VII. General Information	12
Customer Support	12
Limitation of Liability and Indemnity	13

I. SAFETY GUIDANCE

Read these safety precautions before using your device and store them for possible future reference. Always follow these basic safety precautions when using your Mobile device. This reduces the risk of fire, electric shock, and injury.

- Do not expose this product to rain or moisture.
- Keep the device out of direct sunlight and heat sources.
- Protect the power cord.Route power cords so that they are not likely to be walked on or pinched by items placed on or against them.Pay particular attention to the point where the cord attaches to the device.
- Only use the AC adapter included with the device.Using any other power adapter voids your warranty.
- Do not remove the cover.There are no user-serviceable parts inside.
- If the charger cord is damaged,have it repaired by the manufacturer, its service or a similarly qualified person in order to avoid any hazard.
- The charger is not intended for use by persons (including children) with reduced physical, sensory or mental capacity. Persons who have not read the manual, unless they have received explanations by a person responsible for their safety and supervision should not use this unit.
- Children should be monitored to ensure that they do not play with the charger.
- The charger should always be readily accessible.
- The device should not be exposed to dripping or splashing water.
- No objects filled with liquids such as vases shall be placed on the device.
- Always leave a minimum distance of 10 cm around the unit to ensure sufficient ventilation.
- Naked flame sources, such as candles, should not be placed on top of the device.
- The device is intended for use only in a temperate climate.
- CAUTION: Danger of explosion if battery is incorrectly replaced or not replaced by the same type or equivalent.
- The battery should not be exposed to excessive heat such as sunshine, fire or similar.
- Different types of batteries, new and used batteries should not be mixed.
- The battery must be installed according to the polarity.
- If the battery is worn, it must be removed from the product.
- The battery must be disposed of safely. Always use the collection bins provided (check with your dealer) to protect the environment. This mobile device conforms to guidelines for exposure to radio frequency.

This mobile device conforms to guidelines for exposure to radio frequency. Your mobile device is a radio transmitter and receiver. It was designed to meet the limits recommended by international guidelines on the exposure to radio-waves.


Radio Frequency Interference

Radio frequency emissions from electronic equipment can interfere with other electronic equipment and can cause malfunctions. Although this mobile device has been designed, tested and manufactured in accordance with the EU regulations on radio frequency emissions, the mobile device's wireless transmitter and electrical circuits can cause interference with other electronic equipment. We recommend to take caution when traveling.

II. PARENT UNIT OVERVIEW

Specifications:

- 7 Inch IPS Display
- Capacitive Multi-Touch Display
- Quad-Core-Processor
- 8GB Storage
- Micro SD Card Slot
- Wi-Fi Connectivity
- Built in Android System
- G-Sensor
- Multi-Language
- HD Video Display
- Remote View via WiFi

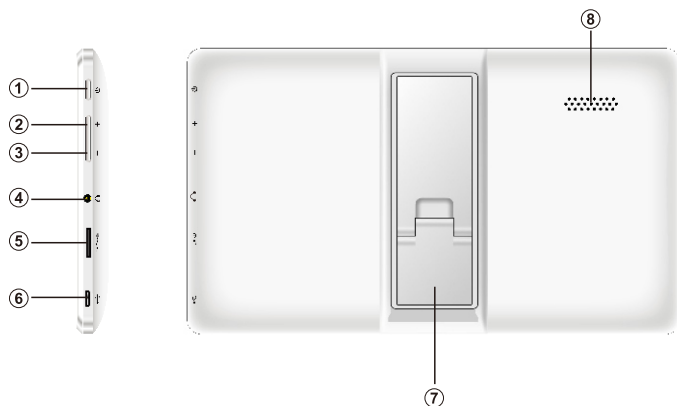


- 1.Power ON/OFF 2.Volume up(+) 3.Volume down(-) 4. Headphone Jack
5.Micro SD Card Slot 6.USB Connection 7. Parent Unit support 8.Speaker

III. CAMERA OVERVIEW

- 2.4 GHz Wi-Fi Connectivity
- Motorized 360° Pan/Tilt/Zoom
- HD Resolution
- H.264 Video Compression
- Micro SD Card Slot

1. Main Camera Lenses 2. Night Vision Sensor 3. Power ON/OFF 4. Indicator Light
5. Microphone 6. Antenna 7. Micro SD Card Slot 8. Micro USB Charging Port
9. The Temperature Sensor

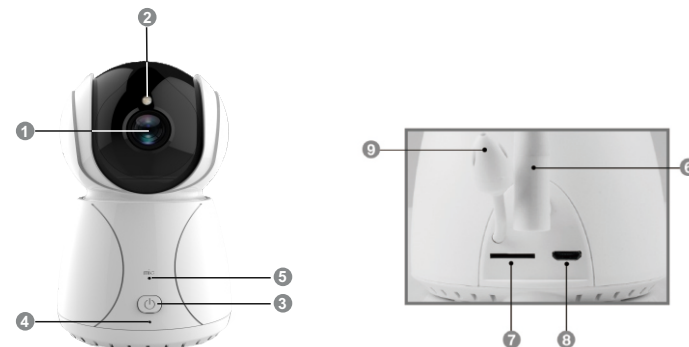

IV. GETTING STARTED



Before starting, make sure that the Parent Unit has a sufficient charge and that the camera is plugged in. The **BGS Baby Cam** app comes pre-installed on the Parent Unit. If you want to install it on your own Parent Unit and cellphone, head to the Google Play store or the App Store and download the **BGS Baby Cam** app.



Connecting your own Parent Unit / Cellphone and Camera

Connecting the Parent Unit and Camera


1. Open the **BGS Baby Cam** app and select "Add Camera" from the home screen.
2. You will be given two options: connect directly or connect through WiFi.

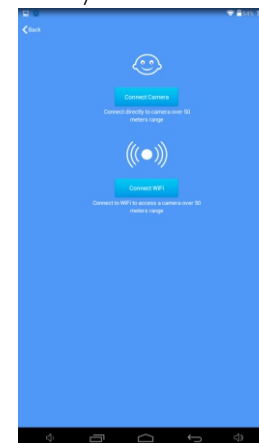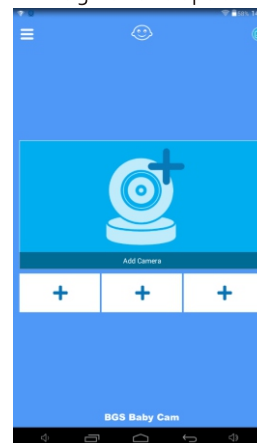

A. Direct Connection for all devices:

Select "Connect Camera";

Find your camera to connect. The camera's name will be "BMT101xxxxx" (display on the bottom of the camera, x=the ID number of the camera).

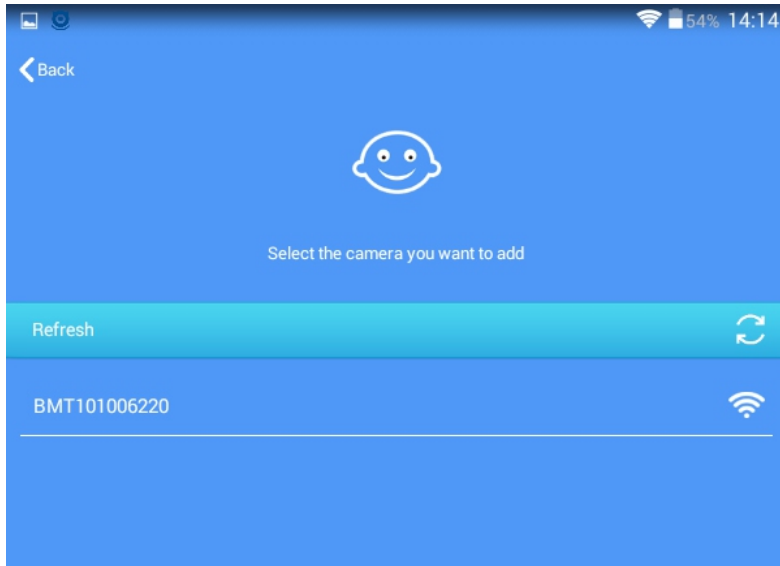


This option is just for **in-home** use. (NOT FOR REMOTE CONNECTION)
The camera and live feedback are most responsive when using this type of connection.


B. WiFi connection

Select "Connect WiFi";

In home: Find your camera to connect.

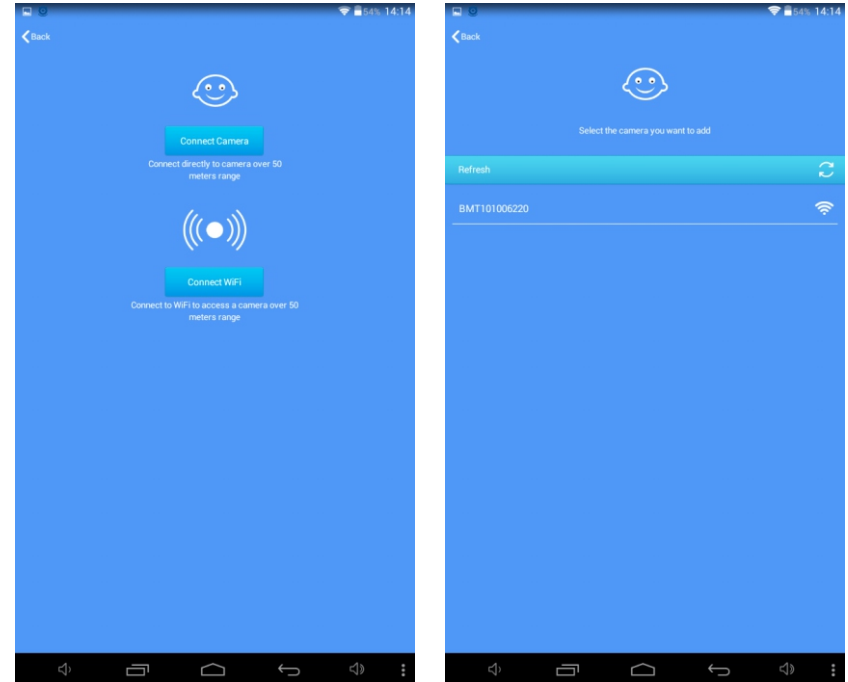


Outdoor: When you go out, use the Parent Unit or mobile phone to open the app, it will automatically connect to baby monitor by your Parent Unit or cellphone's current wifi, or 3G/4G network; but the premise is to ensure that the camera at home is turned on and the most start pairing wifi mode is working.

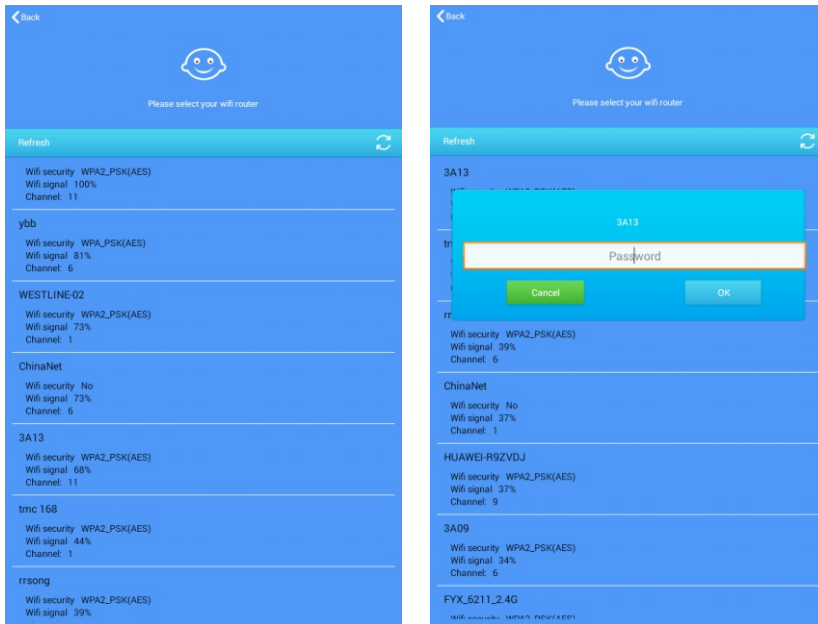

Use this option when trying to access the camera from a remote location.
You can also set up multiple cameras using WiFi.

3. If successfully connected, the app will return to the main screen and the camera's feedback will now be visible.

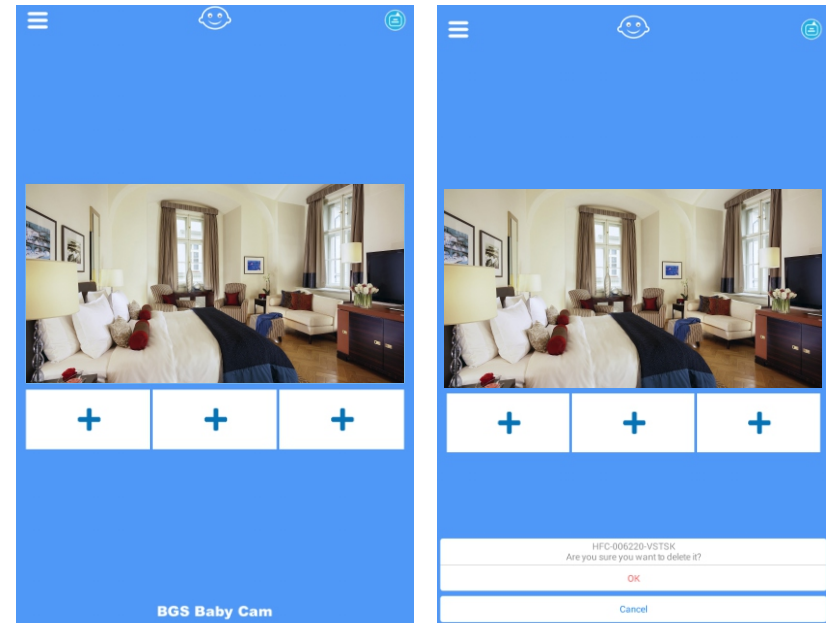





Disconnect a Camera















To disconnect a camera press and hold the live feedback screen on the main page. Select the "X" in the top right corner and then select "OK" to confirm.

V. OPERATION

Home Screen


-  Press to switch to Wi-Fi connection.
-  Press to switch to direct connection.
-  Indicates the camera and tablet are connected.
-  Alternate landscape and portrait view

Live Feedback

-  Selecting this will rotate the camera left and right 360° continuously. Press again to stop.
-  Selecting this will rotate the camera 120° continuously up and down. Press again to stop.
-  Adjust the brightness
-  Adjust the contrast
-  Select between different types of viewing.
Preferred Speed: For most responsive viewing
Preferred Quality: For best quality picture
HD Mode: Best response and quality
-  Remotely play music from the camera. Selecting this opens a play menu.
-  Press to take a photo. The photo is stored in the app's photo section.
-  Press to record a video. Press again to stop. The video is stored in the app's Video section.
-  Toggle the audio feedback from camera to Parent Unit
-  Return to app home screen
-  Night Vision. press to turn ON/OFF
-  Left and right mirror
-  Up and down mirror
-  VOX and motion alarming. Press to turn ON/OFF

APP Menu

1. Video: Choosing video records to play. There has Client and Remote two modes, Client mode is tablet/cellphone's videos, Remote mode is camera's Micro SD Card.
2. Photo: It is a place that Client photos storage
3. Setup: It is Restart, Alarm, Time and Record setup key.
4. Help: There has some problems you will meet, if you don't know how to operate, please refer to it.

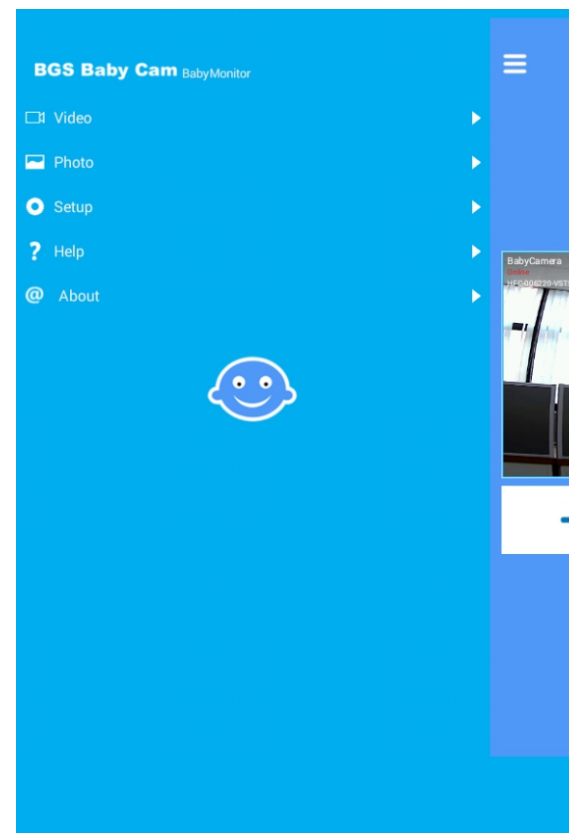

Connecting Multiple Cameras

The BGS Baby Cam app can connect up to four cameras at the same time. To add another camera:

1. Make sure that the first camera is set to a WiFi connection.

NOTE: Multiple feedback only works when cameras are connected through WiFi. Cameras using a direct connection will not operate when using multiple cameras, they must be switched to WiFi.

2. Select one of the three add boxes below the main live feedback area. Follow the on screen instructions until the second camera is connected.

3. Repeat the process to add additional cameras.

NOTE: The BGS Baby Cam app is designed to work with the only BIGASUO camera brand.

Connect to a Computer

Connect the Parent Unit to a computer for copying and deleting Parent Unit contents, Use the micro USB cable (not included in the package) to connect and operate the Parent Unit just like a USB storage device.

VI. HELP

No Display

- Make sure that all cameras are properly plugged in and that there is sufficient WiFi coverage.
- Is the Parent Unit on? Make sure that the Parent Unit is on and has a sufficient charge.
- Make sure that the camera was correctly setup when connecting. The camera's name is "BMT101XXXXXX"(x=the ID number of the camera).

Connection Problems

- Make sure that all cameras are properly plugged in and that there is sufficient WiFi coverage.
- Make sure that the Parent Unit and camera are within range(only when using direct connection).
- Reset the units by disconnecting them from the electrical power. Wait about 15 seconds before reconnecting. Allow up to one minute for the camera and the Parent Unit to synchronize.
- See "Connecting the Parent Unit and Camera" on page 4-8 for instructions on camera and Parent Unit syncing.

Sound Problems

- The camera and Parent Unit may be too close. Move them further apart.
- Make sure the Parent Unit and the camera are within range(direct connection only).
- Make sure the baby and Parent Unit are not near other electrical equipment, such as a television, computer or cordless/mobile telephone.
- Other 2.4GHz items, such as wireless networks(Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the Parent Unit away(at least 5ft[1m]) from these types of products, or turn them off if they appear to be causing interference.
- If the signal is weak, try moving the Parent Unit and/or camera to different positions in the reference to the in-app help section for more help.

VII. GENERAL INFORMATION

Customer Support

Send E-mail to UK.BMT@WONNIE.CO.UK for customer support regarding your device.

Limitation of Liability and Indemnity

To the maximum extent permitted by applicable law, BIGASUO shall not be liable for any damages suffered as a result of using, modifying, contributing, copying, distributing, or downloading the materials, use of the BIGASUO User Manual or use of any BIGASUO be liable for any indirect, extraordinary, exemplary, punitive, special, incidental, or consequential damages(including,without limitation, loss of data, revenue, profits, use or other economic advantage) however arising ,whether for breach of contract of in tort ,even if BIGASUO has been previously advised of the possibility of such damage .You agree that you have sole responsibility for adequate protection and backup of data and/or equipment used in connection with the product and software and will not make a claim of any nature against BIGASUO for lose data ,of the materials .You agree to indemnity ,hold harmless and defend BIGASUO, together with its affiliates, parent and subsidiary entities, successors, assigns, partners, managers, members, employees, officers, directors and shareholders, from and against any and all demands, actions, causer of action, claims, costs and expenses(including,without limitation ,reasonable attorneys' fees, charges and disbursements, as well as the cost of in-house consul and appeals)arising from of related to BIGASUO, the use ofThe BIGASUO User Manual or any BIGASUO product and/or software. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This device complies with Part 15 of the FCC Rules, Operation is subject to the following two conditions:

- (1) This device may not cause harmful and interference
- (2) This device must accept any interference received , including interference that may cause undesired operation.

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF exposure warning

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The distance between user and products shoule be no less than 20 cm.