



## Use Manual

This product uses the latest Bluetooth V4.0 Technology, which compatibility with V3.0, V2.1, V2.0, V1.2, V1.1. Internal integrate 80MHz RISC MCU and 80MIPS Kalimba DSP, However Bluetooth 3.0 the maximum support to 64MHz RISC MCU and 64MIPS Kalimba DSP


This product supports Profiles:

- HFP v1.6 wideband speech(HD voice ready)
- HSP v1.2
- A2DP v1.2
- AVRCP v1.4
- CVC Version 6.0

Effective distance: 10metres

Work frequency: 2.4GHz

Support multi-point connection(simultaneous connectio of two mobile phones)  
Two mobile phones, one headset, a key to answer the call.

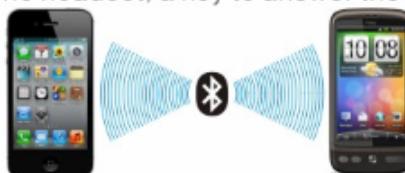

Support voice report number

When phone call coming, automatic report telephone numbers to avoid important telephones.

E.g.: "1" "0" "0" "8" "6" phone call coming.

Support voice reminding function

Real-time report to users the status of the Bluetooth earphone, handle skillfully.

E.g.: "Bluetooth is connected", "Bluetooth into pairing mode".

iPhone: power consumption display function:

Display Bluetooth headset power on iphone , In order to consider whether need to charge the headset.

Support for voice calls

When a call coming, if you do not want to answer to say "NO" to hang up the phone, on the contrary, if you want to answer can also use "YES" to answer the phone!

Buttons operation and LED display explain:

| Buttons<br>(refer to<br>drawings) | Function                                                 | Before the<br>operation status        | Operation<br>way   | Voice Prompt                  | Remark                                                           |
|-----------------------------------|----------------------------------------------------------|---------------------------------------|--------------------|-------------------------------|------------------------------------------------------------------|
| Function<br>button                | Switch on                                                | Power off                             | Long press<br>1.5S | Switch on                     |                                                                  |
|                                   | Power off                                                | Switch on                             | Long press<br>2.5S | Power off                     |                                                                  |
|                                   | Pair                                                     | Power off                             | Long press<br>5S   | entered the<br>pairing status |                                                                  |
|                                   | Pairing is<br>successful and<br>successful<br>connection | Switch on                             |                    | Bluetooth<br>connection       |                                                                  |
|                                   |                                                          | Switch on                             |                    | Bluetooth<br>connection       |                                                                  |
|                                   | Phone call<br>coming                                     |                                       |                    | To report<br>telephone        |                                                                  |
|                                   | Refuse<br>phone call                                     | Standby(calls)                        | Long press<br>1.5S | Du(short voice)               | Or press the hang up<br>button of mobile phone                   |
|                                   | answer                                                   | Standby                               | Short press        | Du(short voice)               | Or press the hang up<br>button of mobile phone                   |
|                                   | Hang up                                                  | Conversation                          | Short press        | Du(short voice)               | Or press the hang up<br>button of mobile phone                   |
|                                   | The last<br>number redial                                | Standby                               | Double-click       | The last number<br>redial     | Redial the previous<br>number                                    |
|                                   | Stop dialing                                             | Dial number                           | Short press        | Du(short voice)               | Or press the hang up<br>button of mobile phone                   |
|                                   | Reconnect                                                | Switch on<br>(disconnect status)      | Long press<br>1.5S | Bluetooth<br>connection       |                                                                  |
| Dual<br>Button                    | Play                                                     | pause/stop                            | Short press        | Du(short voice)               |                                                                  |
|                                   | Pause                                                    | play                                  | Short press        | Du(short voice)               |                                                                  |
| Single<br>button                  | Volume+                                                  | Conversation<br>or listen to<br>music | Short press        | Du(short voice)               | To the maximum sound                                             |
|                                   | Volume-                                                  | Conversation or<br>listen to music    |                    | Du(short voice)               | Minimize sound                                                   |
| Single<br>button                  | Volume+ & -                                              | Conversation or<br>listen to music    | Short press        | Du(short voice)               | 5-speed circulation, to the maximum<br>sound beep Minimize sound |

### Federal Communications Commission (FCC) Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Warning:** Changes or modifications made to this device not expressly approved by PJA Distribution Limited. may void the FCC authorization to operate this device.

**Note:** The manufacturer is not responsible for any radio or tv interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.