

Magic

User's Guide



FC CE ROHS  

Contents

1. Introduction	2
2. Battery Precautions	3
3. Getting Started	4
4. Bluetooth Connection	5
5. NFC Connection	6
6. Functions	6
7. LED Display Status	7
8. Microphone Usage	7
9. Battery and Wireless Charging	8
10. Product Care	9

Please read the following safety warnings and precautions before using your device.

1. Introduction

Thank you for purchasing the Magic II. This device can be easily connected to your smartphone, Tablet PC and other devices via Bluetooth or audio cable.

Specifications

Magic II
Power Output: 35W Bluetooth Subwoofer
Master: Magic, 10W stereo speaker
Slave: Subwoofer, 25W
S/N: >85dB
Frequency Range: 20Hz-20KHz
Power Supply: DC adapter for slave wireless charge or USB cable for Master
Audio Source: iPhone, iPad, Smartphone, Notebook, MP3, MP4, etc
Functions: Bluetooth, Microphone, Line in, wireless Charging
Size: Master: 200mm X 64mm X 60.7mm
Slave: 300mm X 144mm X 166mm

Master (Magic) can be charged by USB cable or by Slave wirelessly.
Slave (Subwoofer) is not rechargeable.

Operating range: Smartphone to Master: from 10 to 20 meters.
Slave: from 10 to 20 meters, due to different environment

2. Battery Precautions

Master can be powered by a built-in rechargeable lithium battery. Please charge the battery at least 8 hours before your first use of device. If the device is not used for a long period of time, Please charge the battery. Use only the supplied USB micro cable to recharge the battery. Improper charging may damage the battery and the device.

Do not attempt to open the rechargeable battery or battery pack. There is not serviceable part inside.

Should a battery leak, the device may become damaged. Clean the battery compartment immediately. Avoid it touching your skin.

Keep the battery out of reach of children. If swallowed, consult a physician immediately.





Avoid storing the battery in extreme hot or cold environments. A device with a hot or cold battery may not work temporarily, even when the battery is fully charged.

Do not dispose batteries in a fire as they may explode. Batteries may also explode if damaged. Please dispose of them according to local regulations.

Do not dispose them as household waste.


3. Getting Started _____

General controls



The Magic II can be used in two ways :

1. Use both the Master and Slave.

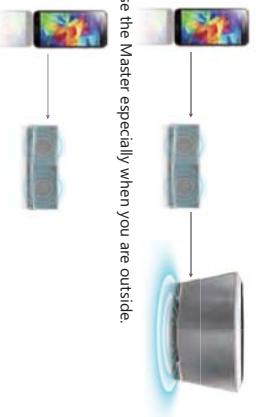

2. Use the Master especially when you are outside.

4. Bluetooth Connection _____

Pair Magic II to your smart device (keep pairing distance with 10meters)

Generally speaking, the Master and Slave are connected before packing. They will connect automatically when you open both of them.

The master and slave connect automatically, how to connect the Master with your device:

1. Select "Set Up" Bluetooth or turn "on" Bluetooth on your device.
2. Select "search" or "Discover" devices
3. Select "Magic II"
4. If requested, type the password 0000.
5. Press the Enter key

After completing the steps above, a message on your device will appear confirming that your device is now paired /connected

In case of unsuccessful pairing, Press "⏻" to turn off the device and restart them

Disconnected, connect the Master with Slave first:

If the Master and Slave were disconnected, please connect it as following:

1. Connect the Slave via DC adapter.
 2. Short press Slave ON/OFF button until the light flashes slowly in blue then release it.
 3. Short press ON/OFF button again until the light flashes quickly in blue then release it.
 4. Long press ON/OFF button of Master until the light flashes slowly in blue then release it.
 5. Long press ON/OFF button again until you hear two beeps then release it.
 6. Wait a while until the light of the master/slave turn solid blue. Now the two speakers are paired.
- In case of unsuccessful pairing, Press "⏻" to turn off the device and restart process .

Notice:

If you turn off the device, but the Bluetooth on your smart phone remains open, when you restart the device, the Bluetooth will be connected automatically.

When your smartphone and this speaker are apart beyond bluetooth receiving range, after 10 minutes, this speaker will disconnect with your smartphone and turn into pairing mode. If within 10 minutes your smartphone is back, It will connect with this speaker automatically.

If long press "⏻" button, the speaker will be disconnected and ready to pair with other smartphones.

5. NFC Connection _____



NFC: Near Field Communication, is a set of standards for Smartphones and this speaker to establish Bluetooth radio communication with each other by touching them together or bringing them into close proximity, usually no more than a few centimeters.

Please activate the NFC function (subject to tablets own setting) on your bluetooth device. Bring your device close to the speaker, (as above picture).

Your bluetooth device will ask you whether you want to pair the speaker, confirm by "Yes" or "Ok", then the pairing process is completed.

6. Function Guidance _____

Play music from your Magic II

Button	Function
⊕	Volume up
⓪	Volume down
⊗	Next song
⊗	Previous song
⊗	Play/Pause/Answer/End a call

7. LED Display Status _____

LED	Display	Light Indication
Master	Solid	Charging
	Off	Fully charged
	Flash quickly	Low battery
	Flash	Ready to pair or disconnect with Slave
Blue Light	Solid	Connected
	Solid	Paired with Master
	Flash slowly	Disconnect with Master
Slave	Flash slowly	Disconnect with Master
	Flash quickly	Ready to pair

8. Microphone Usage _____


When a phone call comes in, press the pause button, you can now talk through the microphone on the speaker.

9. Battery and Wireless Charging

The Master has a built-in rechargeable lithium battery that can be charged by Slave or USB port.

When it's charging, the light will turn red.

The Slave can support power to the Master and Smart phone by wireless. Put the Master onto the Slave for charging (to avoid the Master slipping, a non-slip mat can be used)

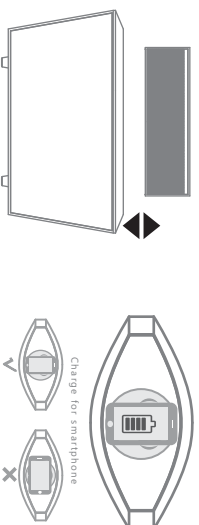

10. Product care

Your device is designed to be powerful and durable. As an electronic device, it must be treated carefully. Putting unnecessary pressure on it or striking the device against other objects may cause damage.

To avoid damage to your device :

- Do not drop, crush, bend or apply excessive force to the device.
- Do not expose your device to moisture, extreme or prolonged heat, cold, humidity, or other adverse conditions. Avoid storing it in damp, humid or wet places. It is not waterproof.
- Clean the unit with a soft cloth or damp chamois leather. Never use solvents.

The Unit can Only be opened by qualified personnel.

This device contains magnets. Keep magnetic field sensitive products such as credit cards and video screen away from this device to avoid damage or malfunction.

FCC Information and Copyright

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF warning statement: the device has been evaluated to meet general RF exposure requirement, The device can be used in portable exposure condition without restriction.