




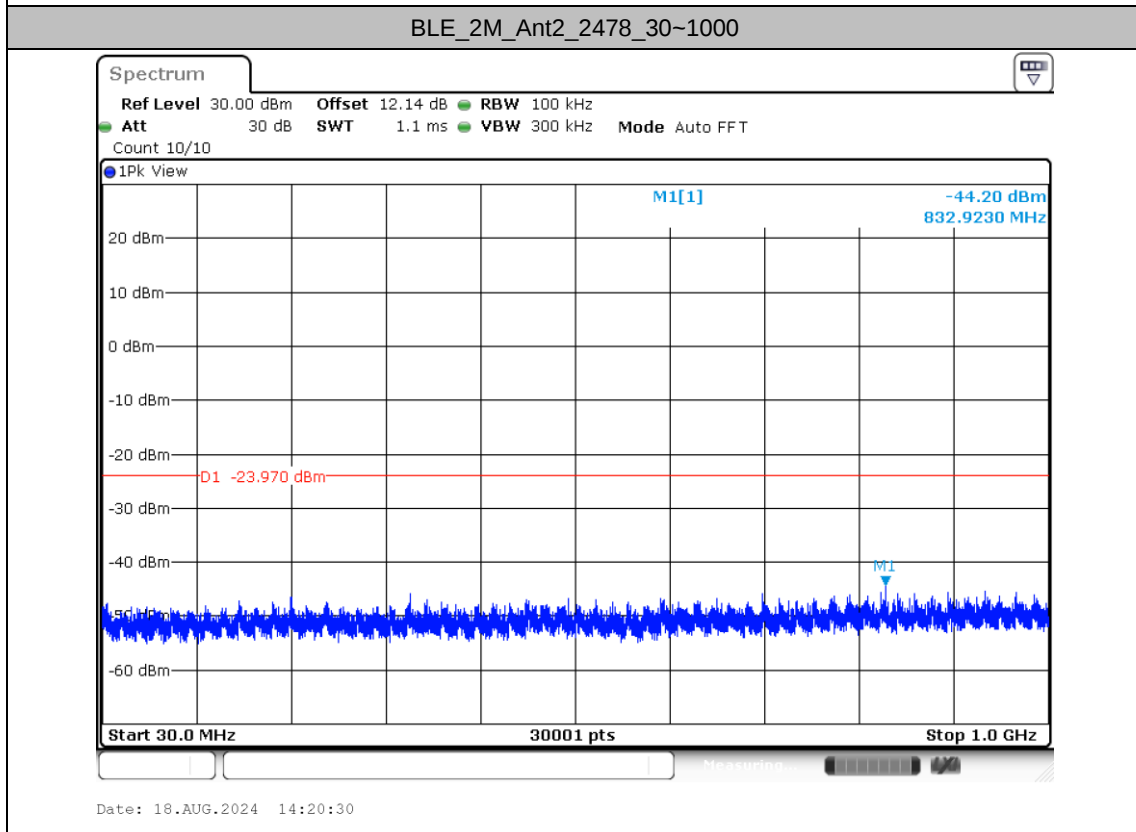
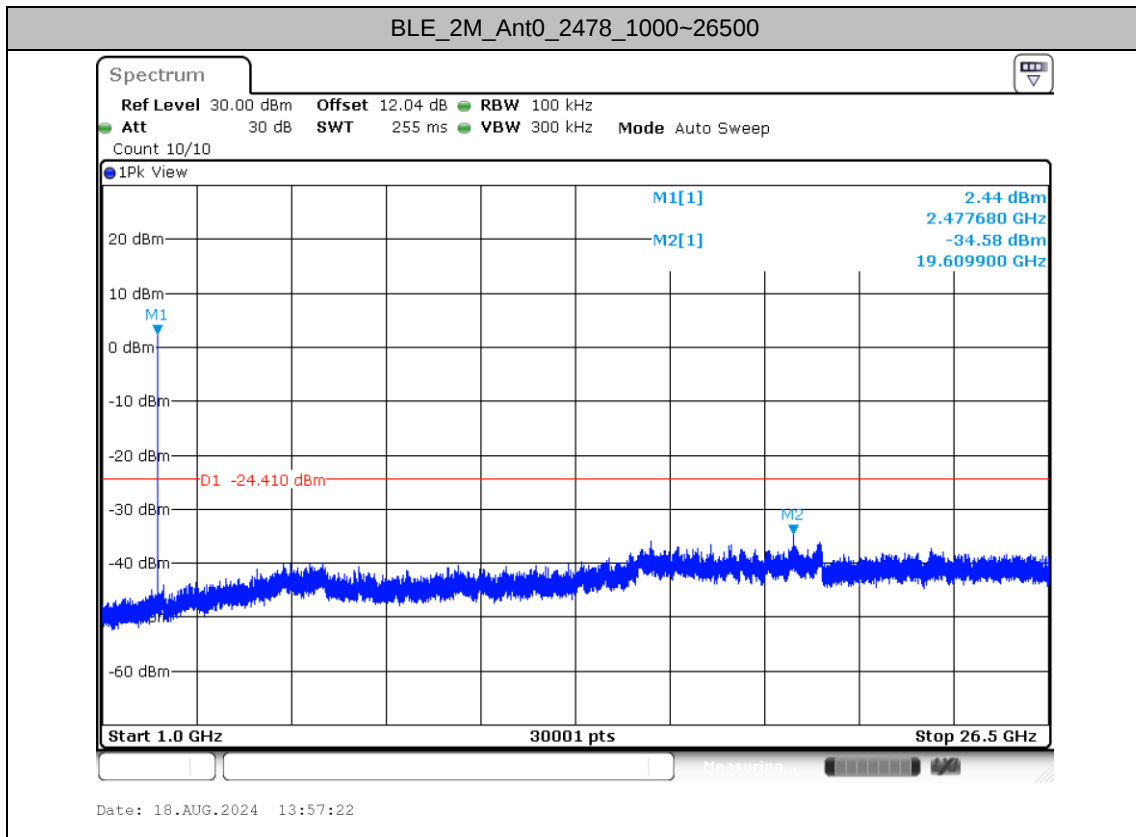
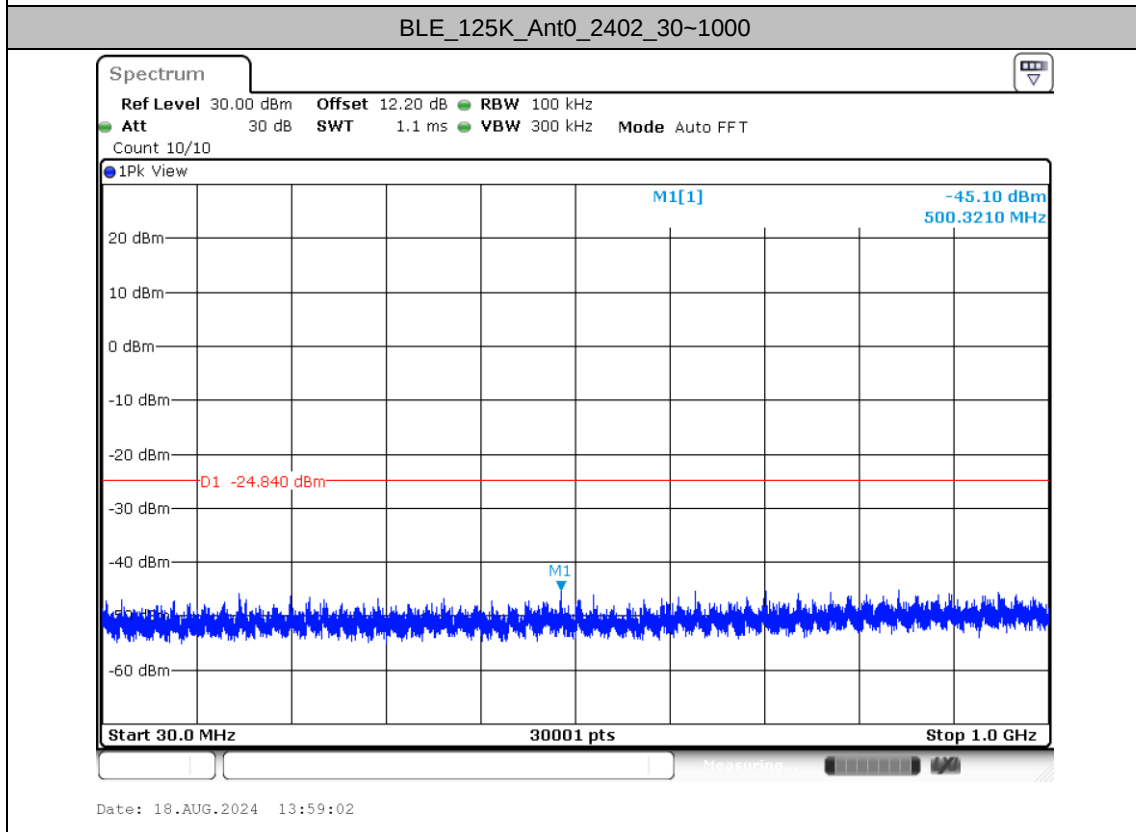
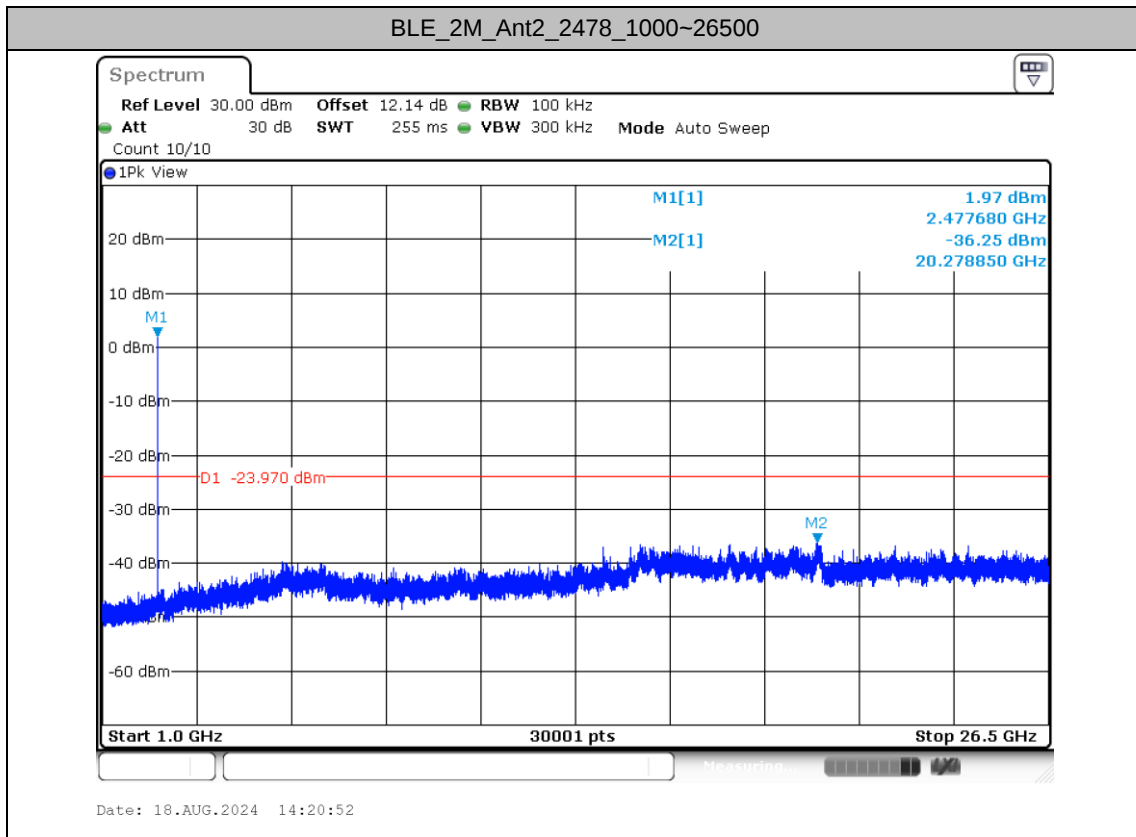


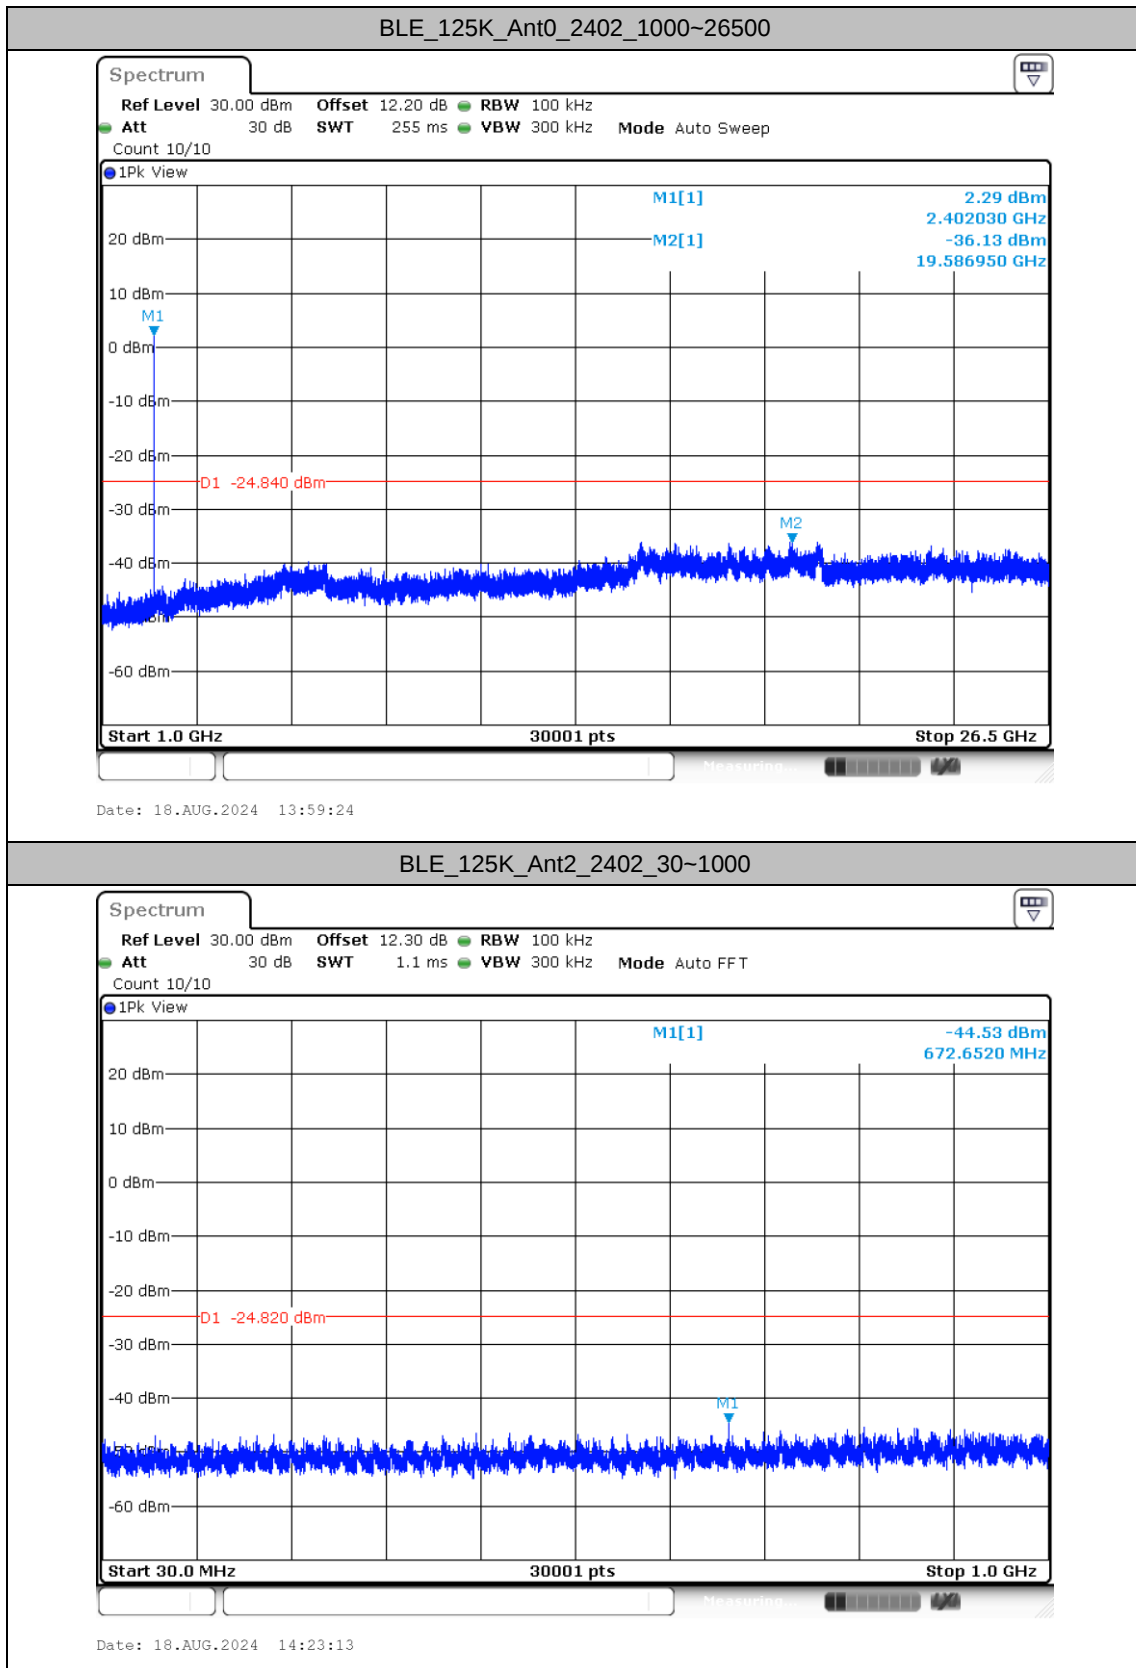



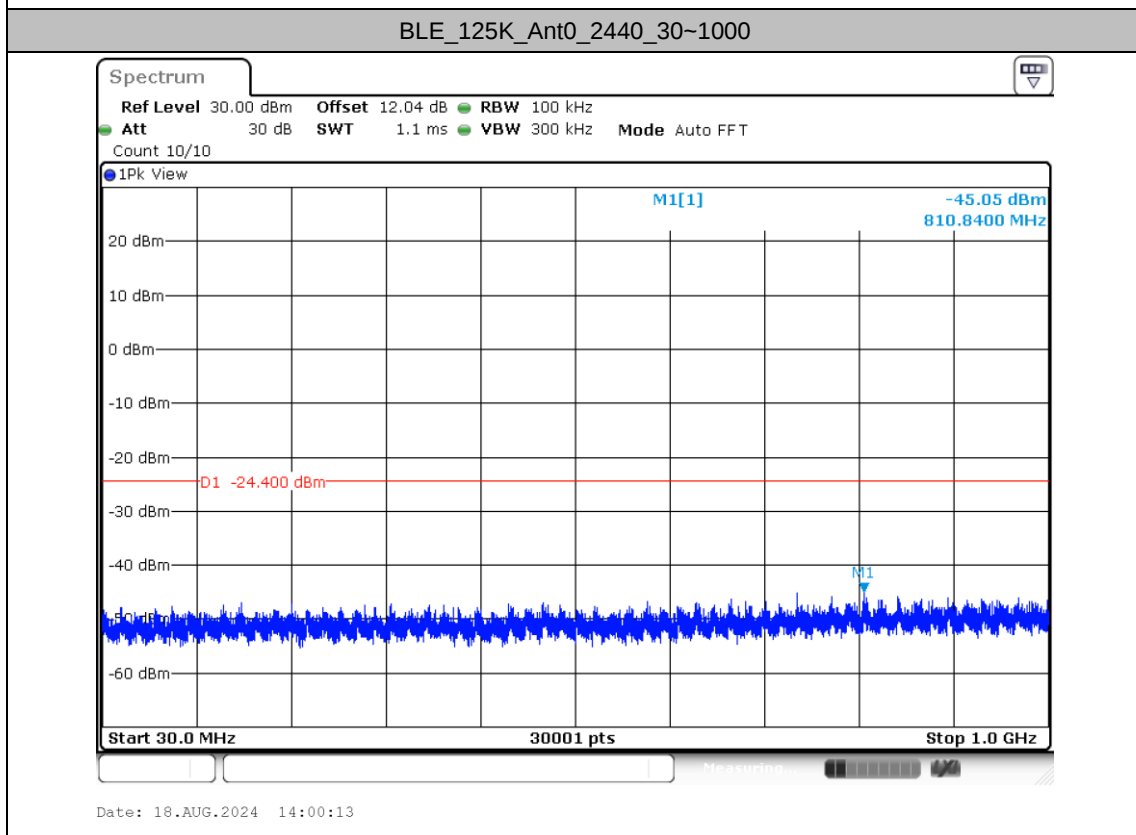


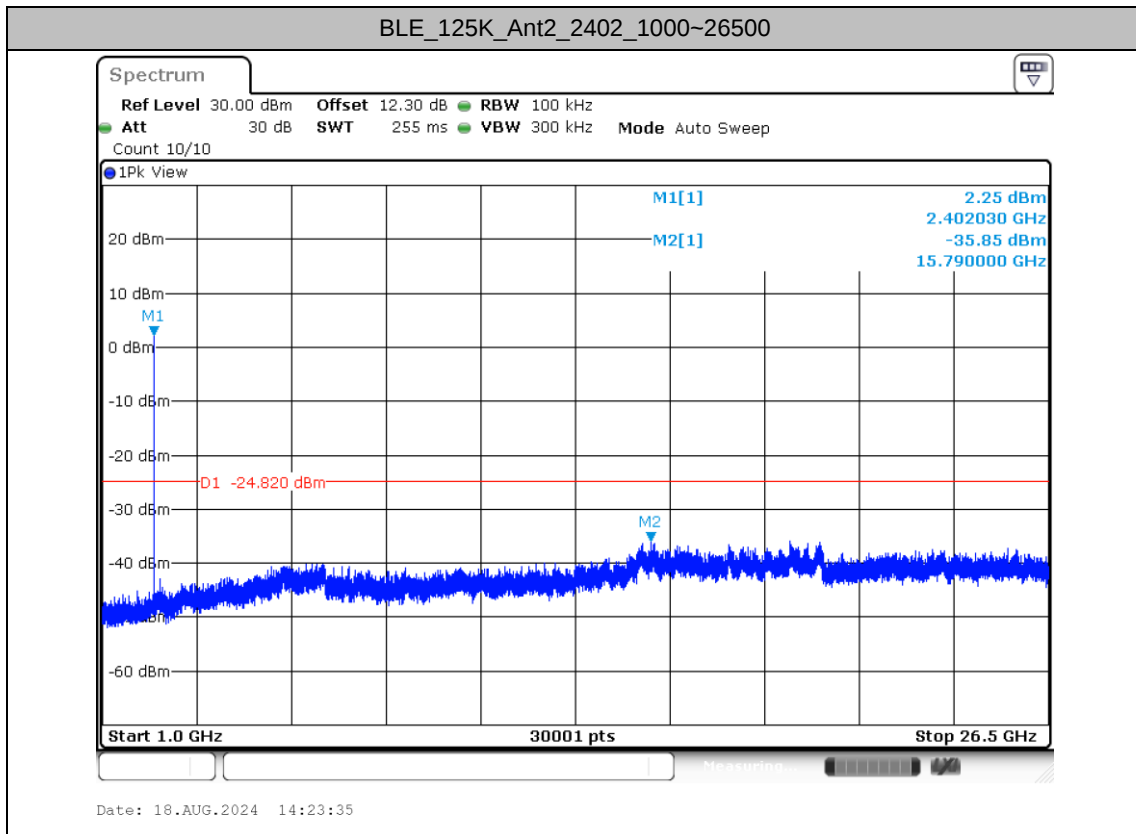


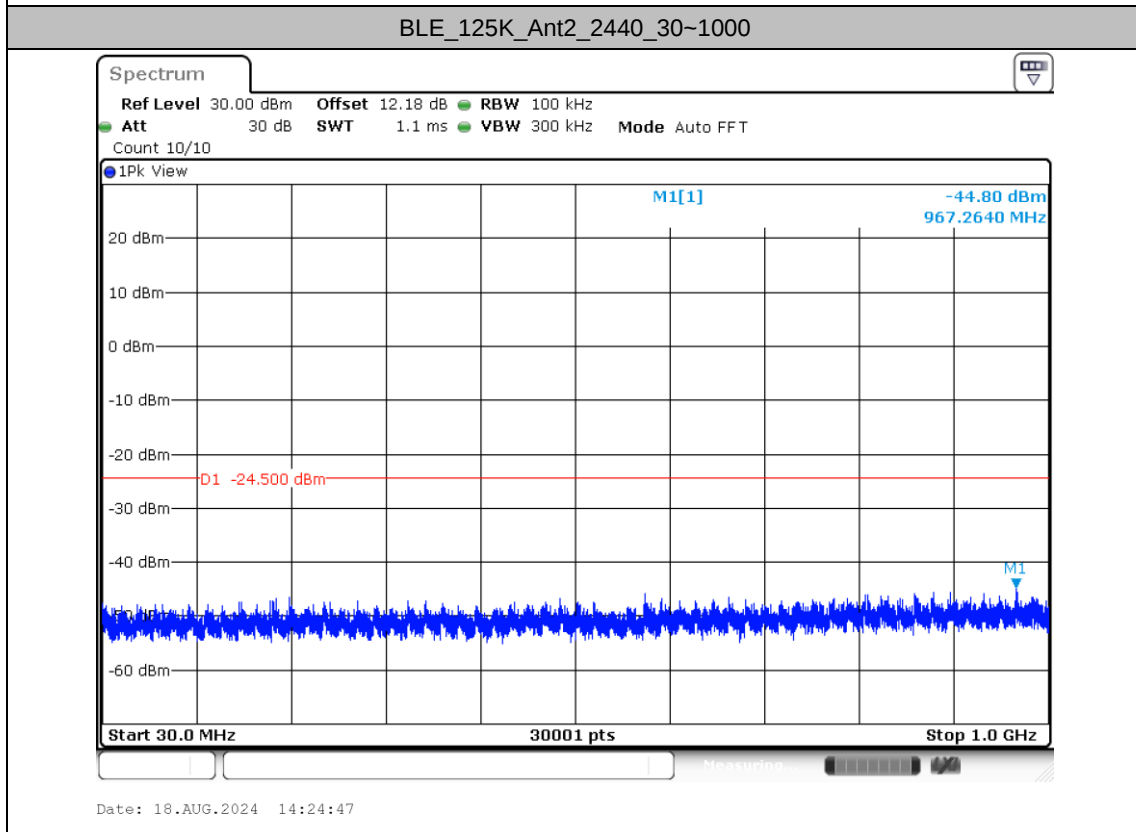

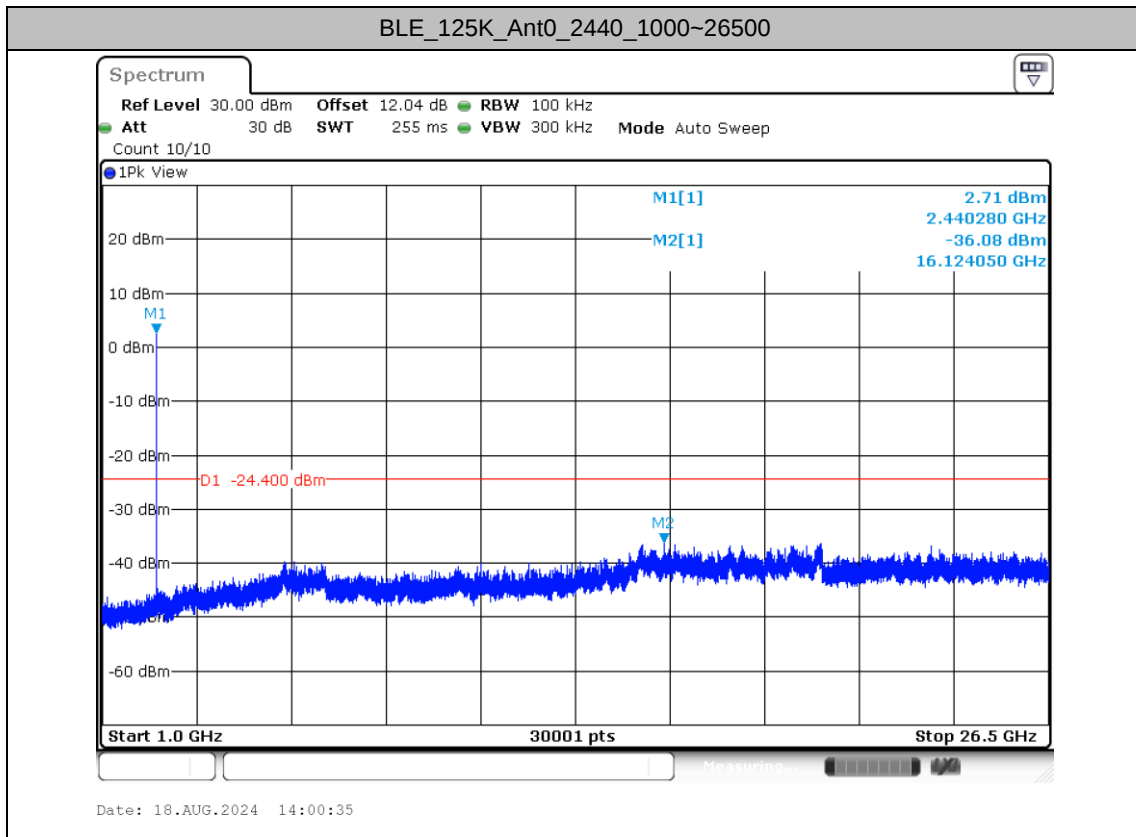

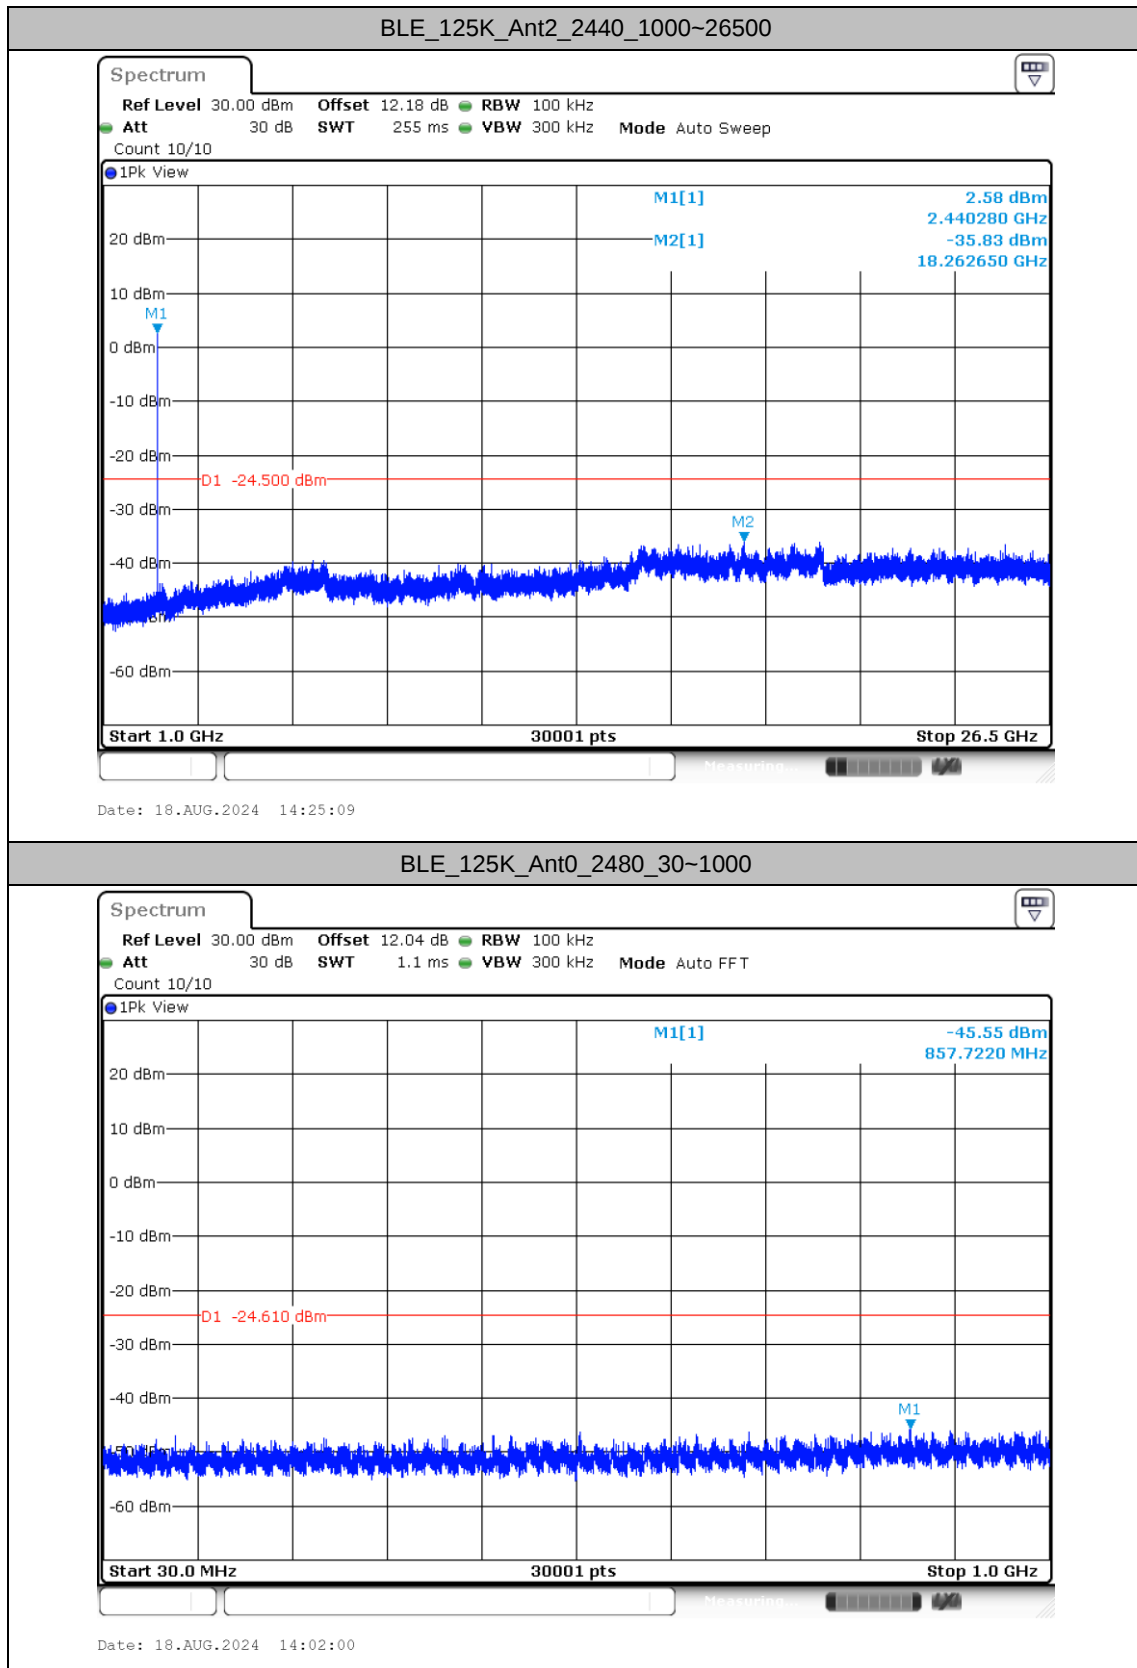

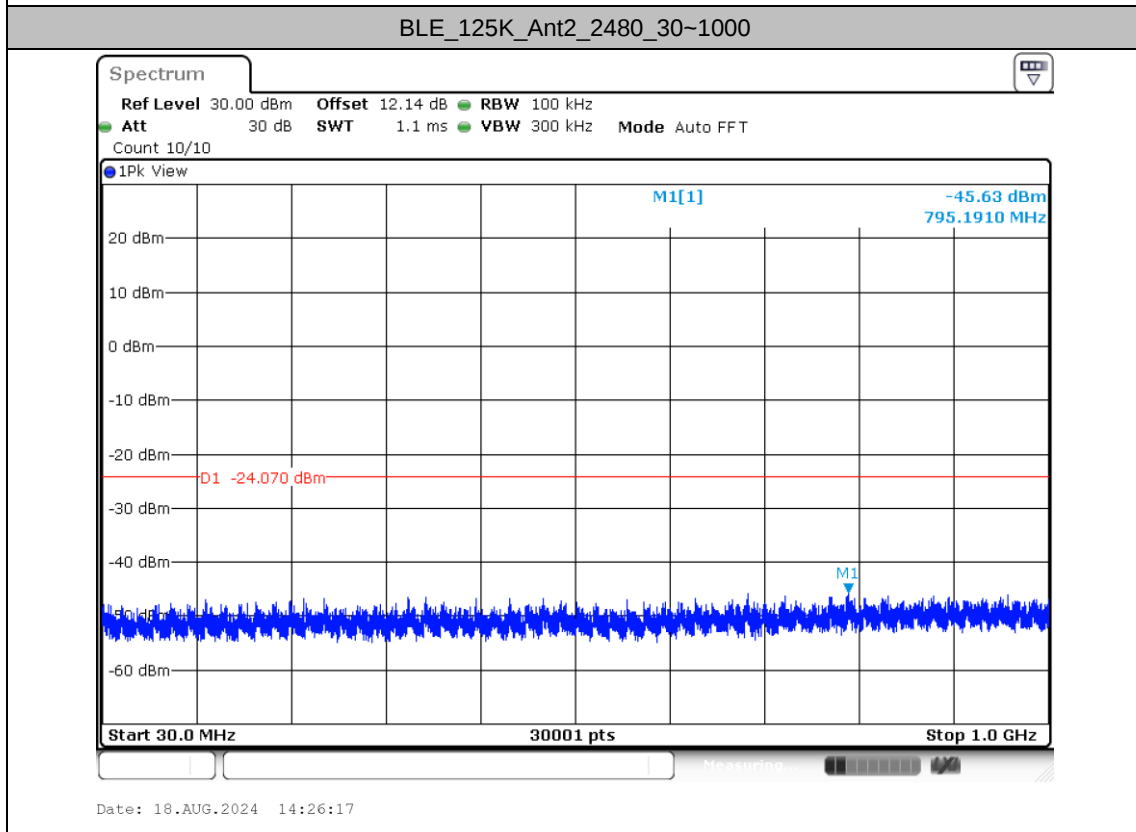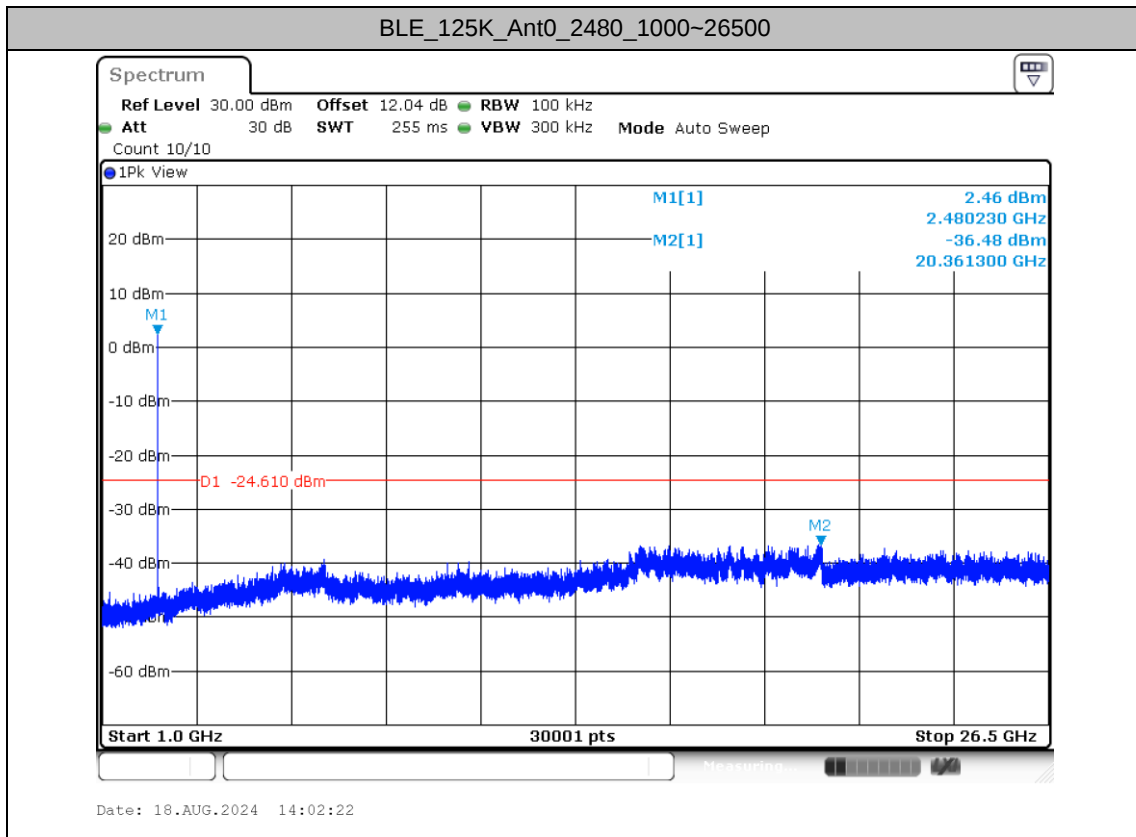


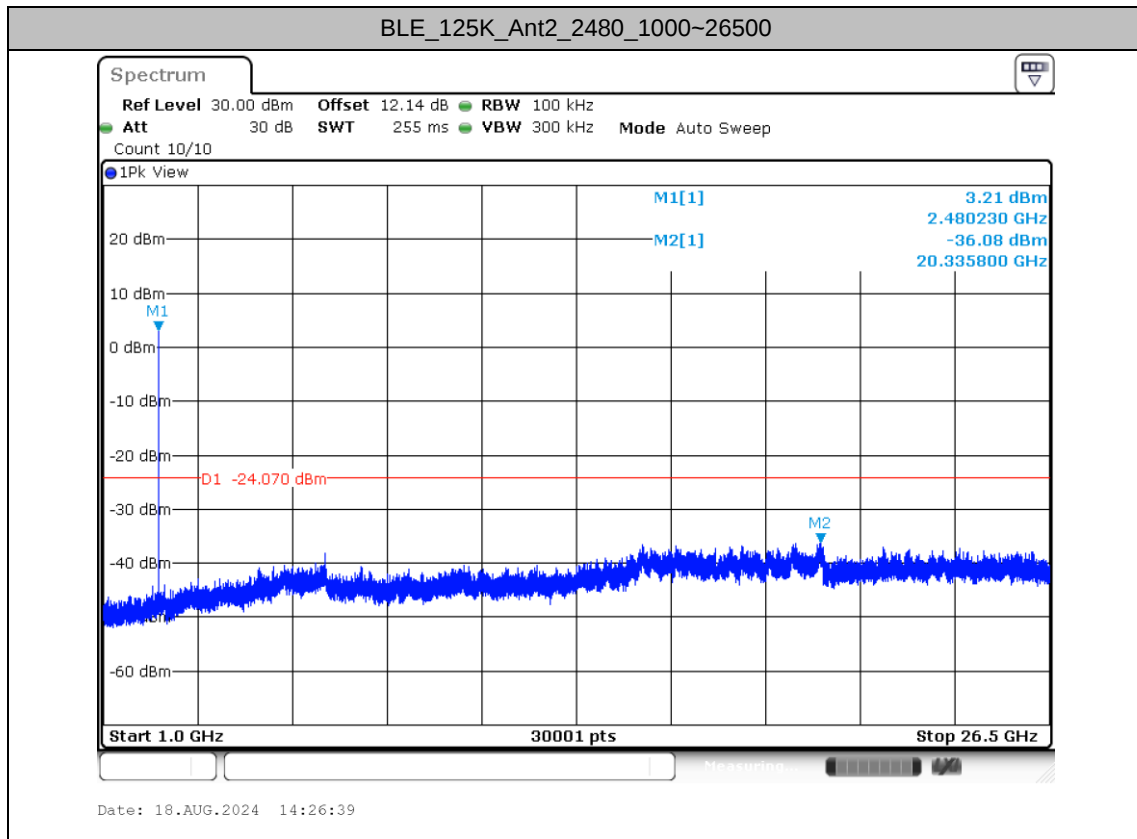



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

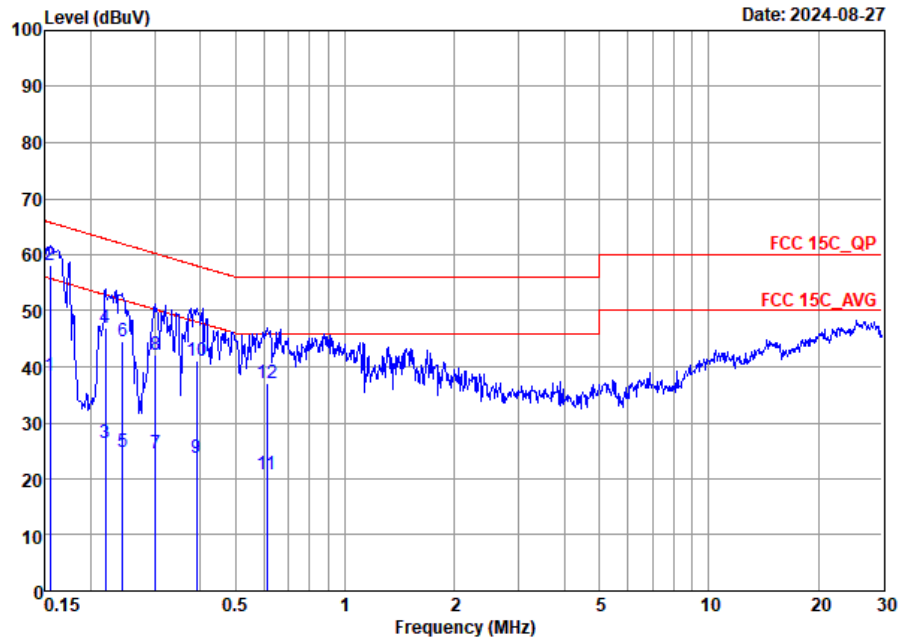


Site : CO01-SZ
Condition: FCC 15C_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	38.36	-17.38	55.74	18.40	9.82	10.14	Average
2 *	0.15	58.26	-7.48	65.74	38.30	9.82	10.14	QP
3	0.22	26.43	-26.40	52.83	6.50	9.78	10.15	Average
4	0.22	46.83	-16.00	62.83	26.90	9.78	10.15	QP
5	0.24	24.92	-27.03	51.95	5.01	9.76	10.15	Average
6	0.24	44.42	-17.53	61.95	24.51	9.76	10.15	QP
7	0.30	24.61	-25.58	50.19	4.70	9.76	10.15	Average
8	0.30	42.11	-18.08	60.19	22.20	9.76	10.15	QP
9	0.39	23.68	-24.35	48.03	3.60	9.92	10.16	Average
10	0.39	41.08	-16.95	58.03	21.00	9.92	10.16	QP
11	0.61	20.68	-25.32	46.00	0.80	9.72	10.16	Average
12	0.61	37.08	-18.92	56.00	17.20	9.72	10.16	QP



Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

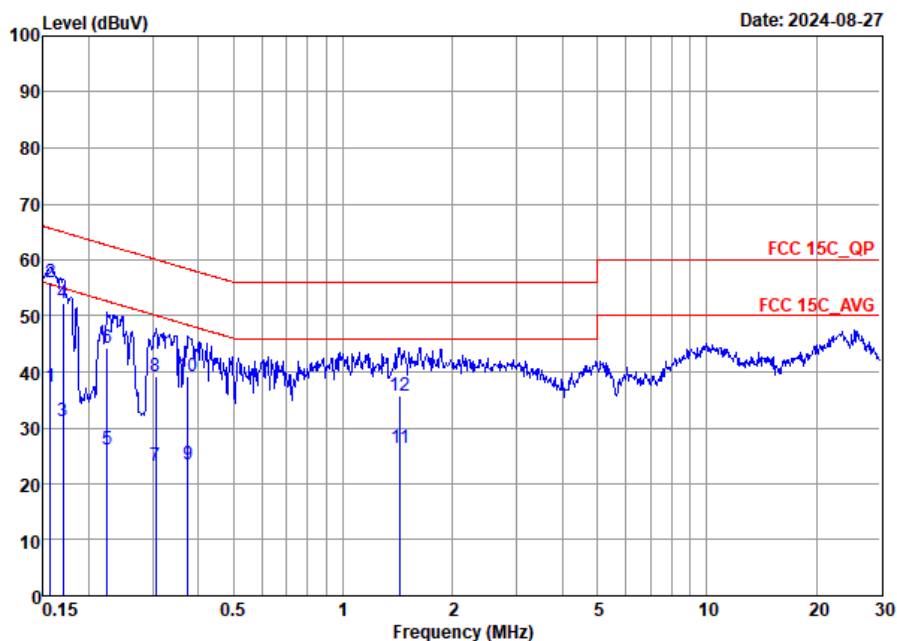

Site : C001-SZ
Condition: FCC 15C QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	37.20	-18.45	55.65	17.19	9.87	10.14	Average
2 *	0.16	56.00	-9.65	65.65	35.99	9.87	10.14	QP
3	0.17	31.32	-23.62	54.94	11.30	9.88	10.14	Average
4	0.17	52.32	-12.62	64.94	32.30	9.88	10.14	QP
5	0.22	26.09	-26.57	52.66	6.20	9.74	10.15	Average
6	0.22	44.39	-18.27	62.66	24.50	9.74	10.15	QP
7	0.31	23.32	-26.78	50.10	3.40	9.77	10.15	Average
8	0.31	39.32	-20.78	60.10	19.40	9.77	10.15	QP
9	0.38	23.48	-24.91	48.39	3.60	9.72	10.16	Average
10	0.38	39.18	-19.21	58.39	19.30	9.72	10.16	QP
11	1.43	26.50	-19.50	46.00	6.60	9.70	10.20	Average
12	1.43	35.80	-20.20	56.00	15.90	9.70	10.20	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	ZhangXu	Relative Humidity :	50%
		Temperature :	20°C-22°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 5	2400-2483.5	0	Bluetooth-LE	00	2402	125kbps	-	-
Mode 6	2400-2483.5	0	Bluetooth-LE	19	2440	125kbps	-	-
Mode 7	2400-2483.5	0	Bluetooth-LE	39	2480	125kbps	-	-
Mode 8	2400-2483.5	0	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 9	2400-2483.5	0	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 10	2400-2483.5	0	Bluetooth-LE	38	2478	2M	-	LF
Mode 15	2400-2483.5	2	Bluetooth-LE	00	2402	125kbps	-	-
Mode 16	2400-2483.5	2	Bluetooth-LE	19	2440	125kbps	-	-
Mode 17	2400-2483.5	2	Bluetooth-LE	39	2480	125kbps	-	-
Mode 18	2400-2483.5	2	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 19	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 20	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	LF
Mode 56	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	-
WPT TX (For Pen Charging)								





**Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
5	Bluetooth-LE	00	2365.55	33.96	54.00	-20.04	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	46.21	74.00	-27.79	H	Peak	Pass	Harmonic
6	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
6	Bluetooth-LE	19	7320.00	46.68	74.00	-27.32	H	Peak	Pass	Harmonic
7	Bluetooth-LE	39	2486.78	33.90	54.00	-20.10	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	45.78	74.00	-28.22	H	Peak	Pass	Harmonic
8	Bluetooth-LE	01	2345.60	36.50	54.00	-17.50	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	01	4808.00	45.35	74.00	-28.65	H	Peak	Pass	Harmonic
9	Bluetooth-LE	38	2483.59	36.81	54.00	-17.19	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	46.28	74.00	-27.72	H	Peak	Pass	Harmonic
10	Bluetooth-LE	38	30.00	29.64	40.00	-10.64	V	Peak	Pass	LF
	Bluetooth-LE	38	-	-	-	-	-	-	-	Harmonic
15	Bluetooth-LE	00	2321.03	34.74	54.00	-19.26	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	45.09	74.00	-28.91	H	Peak	Pass	Harmonic
16	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	46.07	74.00	-27.93	H	Peak	Pass	Harmonic
17	Bluetooth-LE	39	2484.08	34.40	54.00	-19.60	H	AVERAGE	Pass	Band Edge
17	Bluetooth-LE	39	7440.00	46.73	74.00	-27.27	V	Peak	Pass	Harmonic
18	Bluetooth-LE	01	2330.48	36.64	54.00	-17.36	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	01	4808.00	44.93	74.00	-29.07	V	Peak	Pass	Harmonic
19	Bluetooth-LE	38	2487.24	36.74	54.00	-17.26	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	46.74	74.00	-27.26	V	Peak	Pass	Harmonic
20	Bluetooth-LE	38	30.00	28.09	40.00	-11.91	V	Peak	Pass	LF
	Bluetooth-LE	38	-	-	-	-	-	-	-	Harmonic
56	Bluetooth-LE	38	2494.92	35.90	54.00	-18.10	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	45.69	74.00	-28.31	V	Peak	Pass	Harmonic

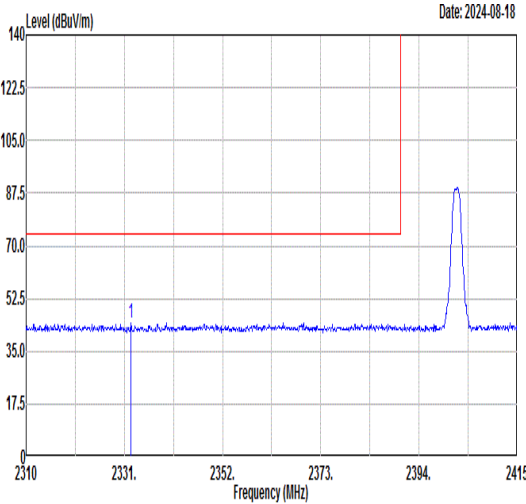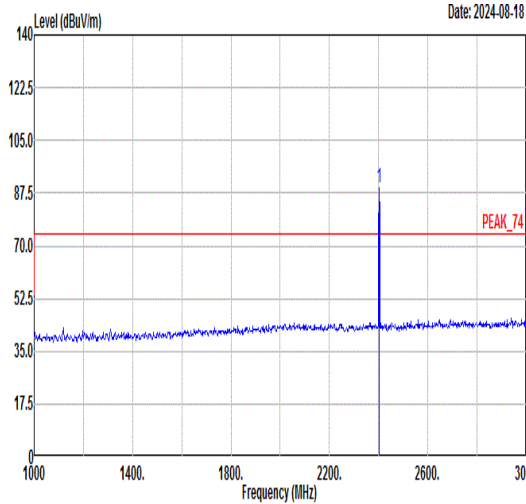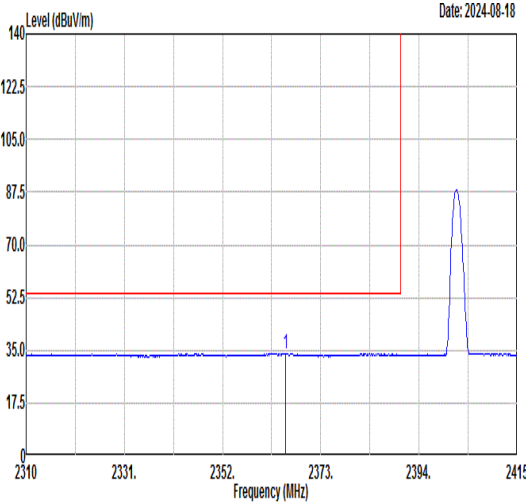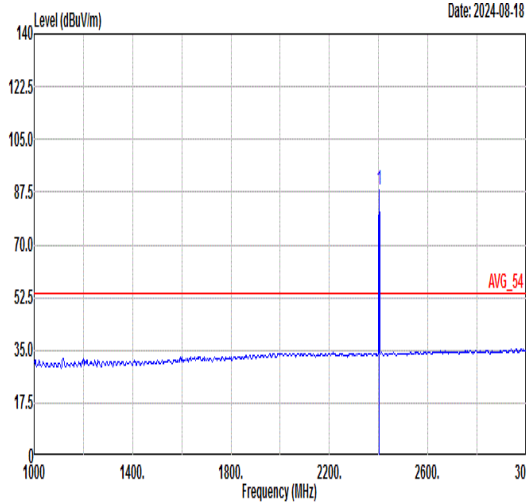

Mode	5																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2332.47</td><td>44.29</td><td>74.00</td><td>-29.71</td><td>41.75</td><td>30.73</td><td>5.31</td><td>33.50</td><td>200</td><td>134</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2332.47	44.29	74.00	-29.71	41.75	30.73	5.31	33.50	200	134	PEAK	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>89.44</td><td>-----</td><td>-----</td><td>86.89</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>134</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	89.44	-----	-----	86.89	30.72	5.37	33.54	200	134	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2332.47	44.29	74.00	-29.71	41.75	30.73	5.31	33.50	200	134	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	89.44	-----	-----	86.89	30.72	5.37	33.54	200	134	PEAK																																																																																	
Avg	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2335.55</td><td>33.96</td><td>54.00</td><td>-20.04</td><td>31.41</td><td>30.73</td><td>5.34</td><td>33.52</td><td>200</td><td>134</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2335.55	33.96	54.00	-20.04	31.41	30.73	5.34	33.52	200	134	AVERAGE	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>88.15</td><td>-----</td><td>-----</td><td>85.60</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>134</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.15	-----	-----	85.60	30.72	5.37	33.54	200	134	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2335.55	33.96	54.00	-20.04	31.41	30.73	5.34	33.52	200	134	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	88.15	-----	-----	85.60	30.72	5.37	33.54	200	134	AVERAGE																																																																																	

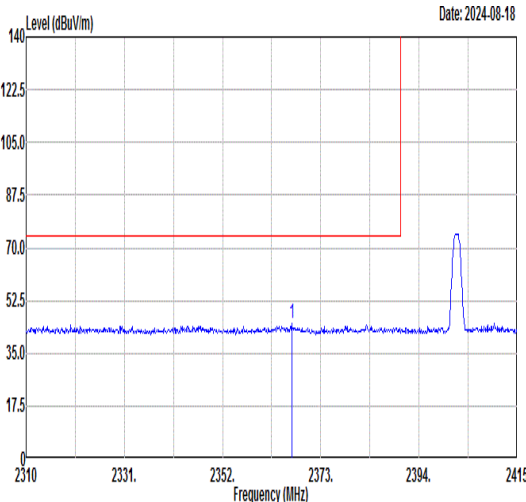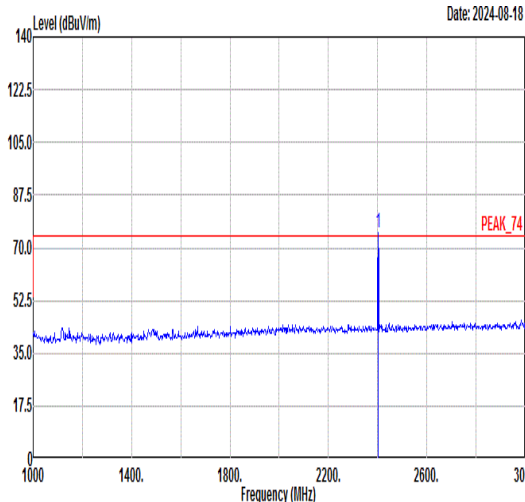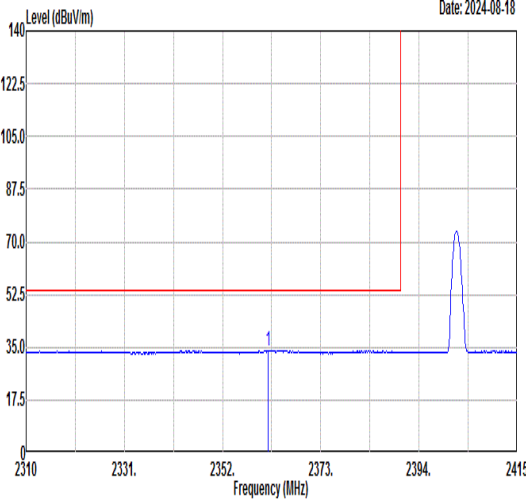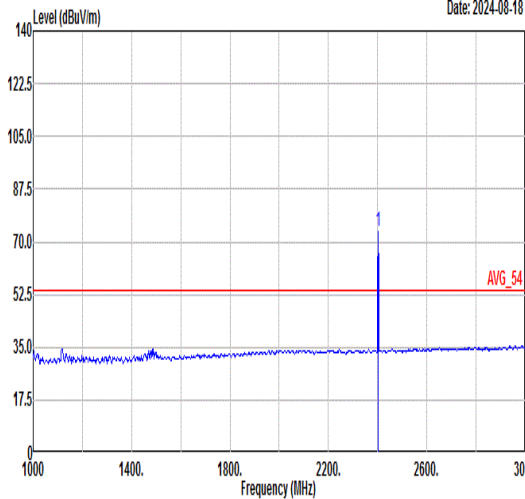

Mode	5																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	0																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2366.81</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>42.24</td><td>30.73</td><td>5.34</td><td>33.52</td><td>300</td><td>212 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2366.81	44.79	74.00	-29.21	42.24	30.73	5.34	33.52	300	212 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>74.87</td><td>-----</td><td>-----</td><td>72.32</td><td>30.72</td><td>5.37</td><td>33.54</td><td>300</td><td>212 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	74.87	-----	-----	72.32	30.72	5.37	33.54	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2366.81	44.79	74.00	-29.21	42.24	30.73	5.34	33.52	300	212 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	74.87	-----	-----	72.32	30.72	5.37	33.54	300	212 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.77</td><td>33.89</td><td>54.00</td><td>-20.11</td><td>31.34</td><td>30.73</td><td>5.34</td><td>33.52</td><td>300</td><td>212 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2361.77	33.89	54.00	-20.11	31.34	30.73	5.34	33.52	300	212 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>73.44</td><td>-----</td><td>-----</td><td>70.89</td><td>30.72</td><td>5.37</td><td>33.54</td><td>300</td><td>212 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	73.44	-----	-----	70.89	30.72	5.37	33.54	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2361.77	33.89	54.00	-20.11	31.34	30.73	5.34	33.52	300	212 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	73.44	-----	-----	70.89	30.72	5.37	33.54	300	212 AVERAGE																																																																																	



Mode	5																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-08-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td>53.12</td><td>35.73</td><td>8.94</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.21	74.00	-27.79	53.12	35.73	8.94	51.58	---	---	Peak	Level (dBuV/m) Date: 2024-08-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.37</td><td>74.00</td><td>-28.63</td><td>52.28</td><td>35.73</td><td>8.94</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.37	74.00	-28.63	52.28	35.73	8.94	51.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4804.00	46.21	74.00	-27.79	53.12	35.73	8.94	51.58	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4804.00	45.37	74.00	-28.63	52.28	35.73	8.94	51.58	---	---	Peak																																																																																	







Mode	6																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																	
ANT	0																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-08-22 PEAK_74 AVG_54						Level (dBuV/m) Date: 2024-08-22 PEAK_74 AVG_54																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>51.23</td><td>35.91</td><td>8.71</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.68</td><td>74.00</td><td>-27.32</td><td>50.79</td><td>36.87</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	44.30	74.00	-29.70	51.23	35.91	8.71	51.55	---	---	Peak	2	7320.00	46.68	74.00	-27.32	50.79	36.87	10.18	51.16	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.31</td><td>74.00</td><td>-29.69</td><td>51.24</td><td>35.91</td><td>8.71</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>49.72</td><td>36.87</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	44.31	74.00	-29.69	51.24	35.91	8.71	51.55	---	---	Peak	2	7320.00	45.61	74.00	-28.39	49.72	36.87	10.18	51.16	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	44.30	74.00	-29.70	51.23	35.91	8.71	51.55	---	---	Peak																																																																																																																							
2	7320.00	46.68	74.00	-27.32	50.79	36.87	10.18	51.16	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	44.31	74.00	-29.69	51.24	35.91	8.71	51.55	---	---	Peak																																																																																																																							
2	7320.00	45.61	74.00	-28.39	49.72	36.87	10.18	51.16	---	---	Peak																																																																																																																							



Mode	7																																																																											
	Band Edge																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																											
ANT	0																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2024-08-18 PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.80</td><td>44.70</td><td>74.00</td><td>-29.30</td><td>42.13</td><td>30.70</td><td>5.47</td><td>33.60</td><td>399 360 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2494.80	44.70	74.00	-29.30	42.13	30.70	5.47	33.60	399 360 PEAK	Level (dBuV/m) Date: 2024-08-18 PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.79</td><td>-----</td><td>-----</td><td>88.22</td><td>30.70</td><td>5.46</td><td>33.59</td><td>399 360 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.79	-----	-----	88.22	30.70	5.46	33.59	399 360 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2494.80	44.70	74.00	-29.30	42.13	30.70	5.47	33.60	399 360 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2480.00	90.79	-----	-----	88.22	30.70	5.46	33.59	399 360 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2024-08-18 AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.78</td><td>33.90</td><td>54.00</td><td>-20.10</td><td>31.33</td><td>30.70</td><td>5.46</td><td>33.59</td><td>399 360 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.78	33.90	54.00	-20.10	31.33	30.70	5.46	33.59	399 360 AVERAGE	Level (dBuV/m) Date: 2024-08-18 AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>89.53</td><td>-----</td><td>-----</td><td>86.96</td><td>30.70</td><td>5.46</td><td>33.59</td><td>399 360 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	89.53	-----	-----	86.96	30.70	5.46	33.59	399 360 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2486.78	33.90	54.00	-20.10	31.33	30.70	5.46	33.59	399 360 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2480.00	89.53	-----	-----	86.96	30.70	5.46	33.59	399 360 AVERAGE																																																																			

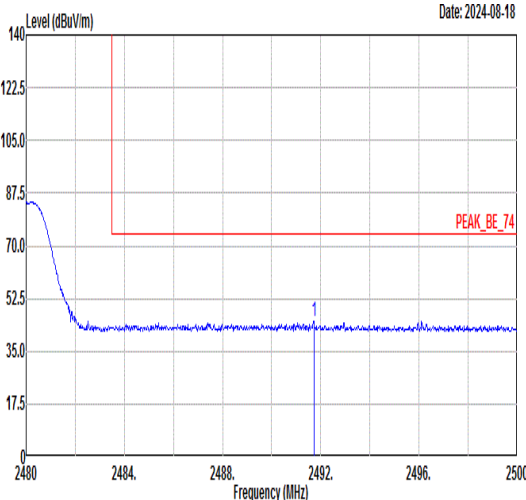
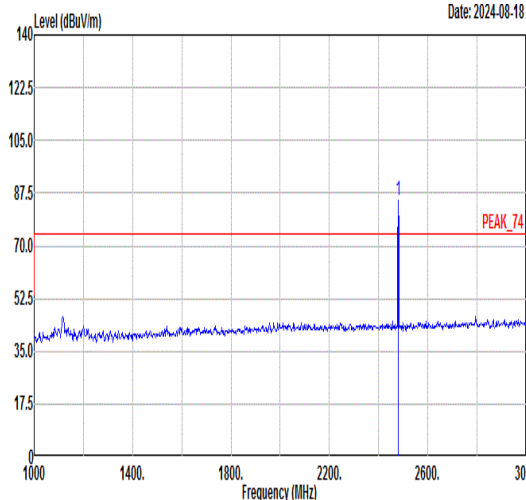
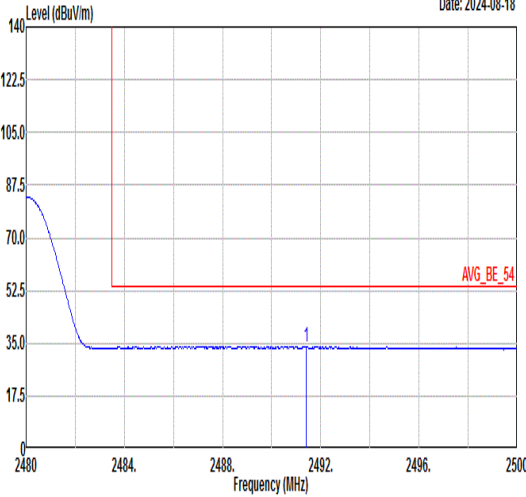
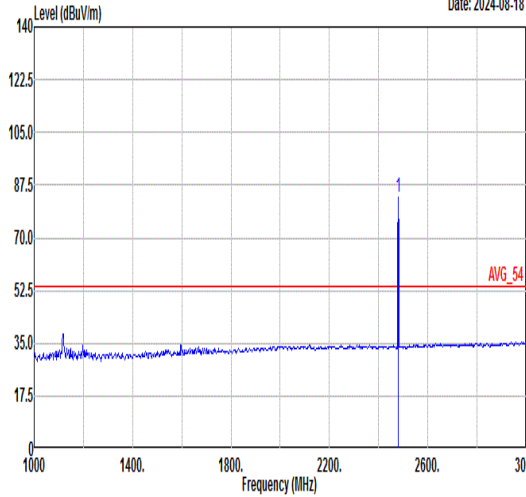


Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2024-08-18  PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2491.72</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>42.41</td><td>30.70</td><td>5.47</td><td>33.60</td><td>300</td><td>194 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2491.72	44.98	74.00	-29.02	42.41	30.70	5.47	33.60	300	194 PEAK	Date: 2024-08-18  PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>84.84</td><td>-----</td><td>-----</td><td>82.27</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>194 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	84.84	-----	-----	82.27	30.70	5.46	33.59	300	194 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2491.72	44.98	74.00	-29.02	42.41	30.70	5.47	33.60	300	194 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2480.00	84.84	-----	-----	82.27	30.70	5.46	33.59	300	194 PEAK																																																																									
Avg	Date: 2024-08-18  AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2491.40</td><td>33.85</td><td>54.00</td><td>-20.15</td><td>31.27</td><td>30.70</td><td>5.47</td><td>33.59</td><td>300</td><td>194 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2491.40	33.85	54.00	-20.15	31.27	30.70	5.47	33.59	300	194 AVERAGE	Date: 2024-08-18  AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>83.54</td><td>-----</td><td>-----</td><td>80.97</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>194 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	83.54	-----	-----	80.97	30.70	5.46	33.59	300	194 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2491.40	33.85	54.00	-20.15	31.27	30.70	5.47	33.59	300	194 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2480.00	83.54	-----	-----	80.97	30.70	5.46	33.59	300	194 AVERAGE																																																																									







Mode	7																																																																																																																															
	Harmonic																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																															
ANT	0																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>45.28</td><td>74.00</td><td>-28.72</td><td>52.24</td><td>36.10</td><td>8.46</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.78</td><td>74.00</td><td>-28.22</td><td>49.98</td><td>36.82</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	45.28	74.00	-28.72	52.24	36.10	8.46	51.52	---	---	Peak	2	7440.00	45.78	74.00	-28.22	49.98	36.82	10.17	51.19	---	---	Peak	Level (dBuV/m) Date: 2024-08-22 <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.74</td><td>74.00</td><td>-29.26</td><td>51.70</td><td>36.10</td><td>8.46</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.13</td><td>74.00</td><td>-28.87</td><td>49.33</td><td>36.82</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	44.74	74.00	-29.26	51.70	36.10	8.46	51.52	---	---	Peak	2	7440.00	45.13	74.00	-28.87	49.33	36.82	10.17	51.19	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4960.00	45.28	74.00	-28.72	52.24	36.10	8.46	51.52	---	---	Peak																																																																																																																					
2	7440.00	45.78	74.00	-28.22	49.98	36.82	10.17	51.19	---	---	Peak																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4960.00	44.74	74.00	-29.26	51.70	36.10	8.46	51.52	---	---	Peak																																																																																																																					
2	7440.00	45.13	74.00	-28.87	49.33	36.82	10.17	51.19	---	---	Peak																																																																																																																					

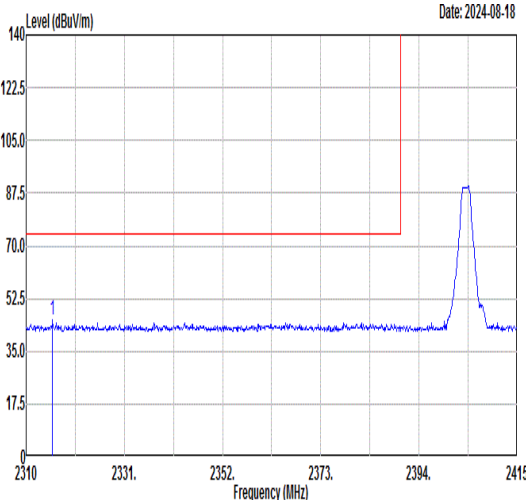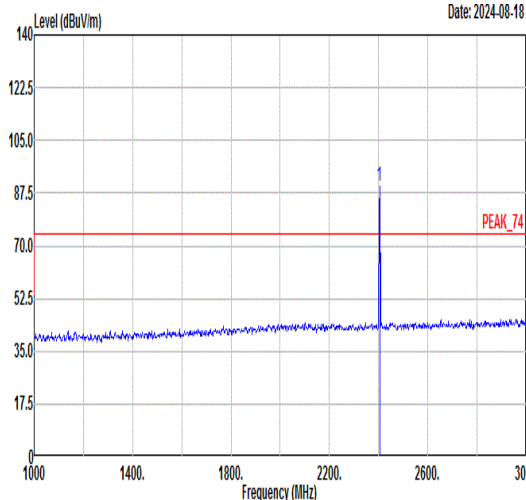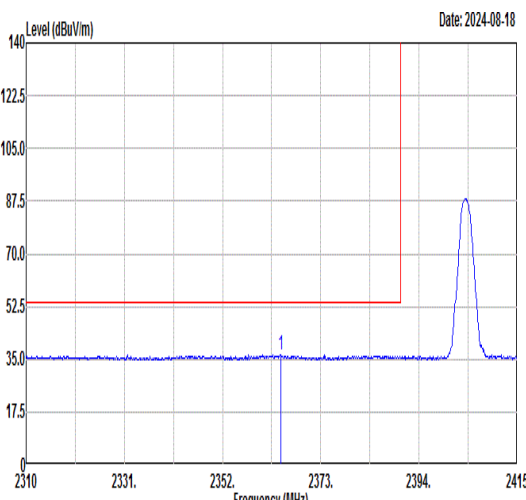
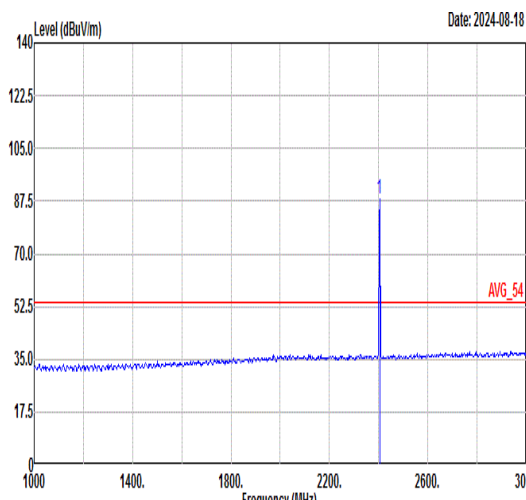


Mode	8																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																								
ANT	0																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2315.67</td><td>45.42</td><td>74.00</td><td>-28.58</td><td>42.87</td><td>30.74</td><td>5.30</td><td>33.49</td><td>200 94 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2315.67	45.42	74.00	-28.58	42.87	30.74	5.30	33.49	200 94 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>89.71</td><td>-----</td><td>87.16</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>94 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	89.71	-----	87.16	30.72	5.37	33.54	200
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2315.67	45.42	74.00	-28.58	42.87	30.74	5.30	33.49	200 94 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2404.00	89.71	-----	87.16	30.72	5.37	33.54	200	94 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.39</td><td>36.50</td><td>54.00</td><td>-17.50</td><td>33.95</td><td>30.73</td><td>5.34</td><td>33.52</td><td>200 94 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2364.39	36.50	54.00	-17.50	33.95	30.73	5.34	33.52	200 94 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>88.11</td><td>-----</td><td>85.56</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>94 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	88.11	-----	85.56	30.72	5.37	33.54	200
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2364.39	36.50	54.00	-17.50	33.95	30.73	5.34	33.52	200 94 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2404.00	88.11	-----	85.56	30.72	5.37	33.54	200	94 AVERAGE																																																																																

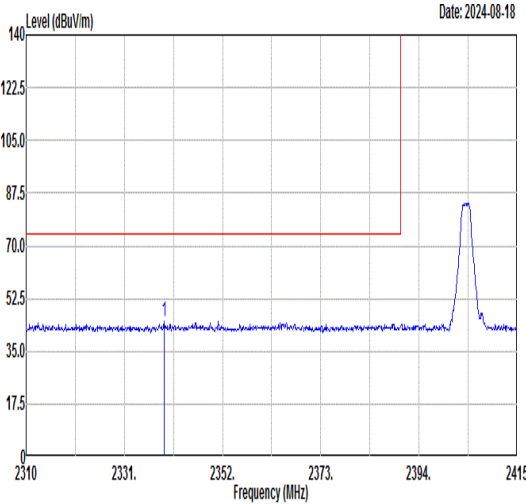
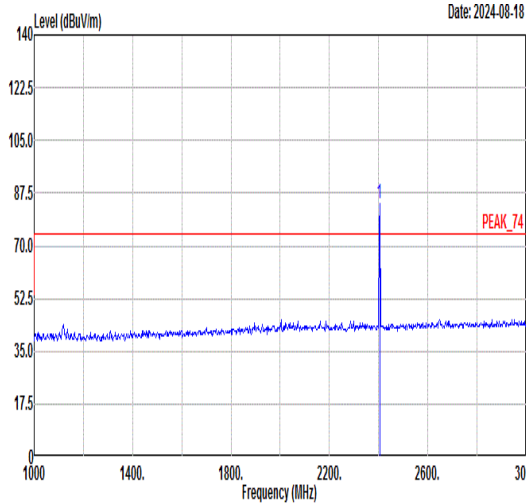
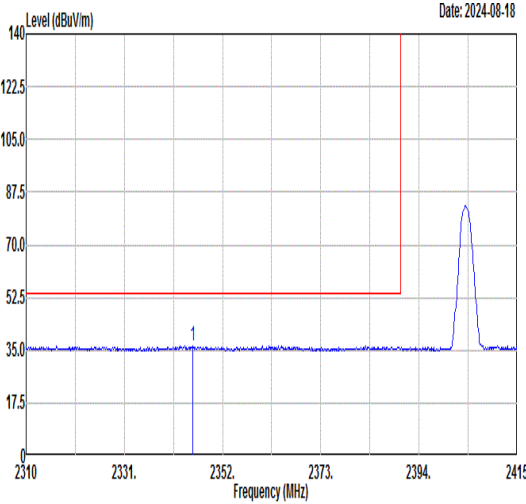
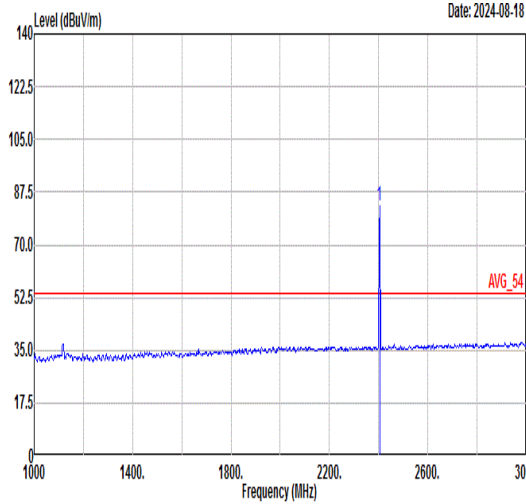


Mode	8																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-18  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2339.51</td><td>44.94</td><td>74.00</td><td>-29.06</td><td>42.39</td><td>30.73</td><td>5.32</td><td>33.50</td><td>200</td><td>210 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2339.51	44.94	74.00	-29.06	42.39	30.73	5.32	33.50	200	210 PEAK	Level (dBuV/m) Date: 2024-08-18  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2404.00</td><td>84.21</td><td>-----</td><td>-----</td><td>81.66</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>210 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2404.00	84.21	-----	-----	81.66	30.72	5.37	33.54	200	210 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2339.51	44.94	74.00	-29.06	42.39	30.73	5.32	33.50	200	210 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2404.00	84.21	-----	-----	81.66	30.72	5.37	33.54	200	210 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-08-18  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2345.60</td><td>36.50</td><td>54.00</td><td>-17.50</td><td>33.96</td><td>30.73</td><td>5.32</td><td>33.51</td><td>200</td><td>210 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2345.60	36.50	54.00	-17.50	33.96	30.73	5.32	33.51	200	210 AVERAGE	Level (dBuV/m) Date: 2024-08-18  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2404.00</td><td>82.80</td><td>-----</td><td>-----</td><td>80.25</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>210 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2404.00	82.80	-----	-----	80.25	30.72	5.37	33.54	200	210 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2345.60	36.50	54.00	-17.50	33.96	30.73	5.32	33.51	200	210 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2404.00	82.80	-----	-----	80.25	30.72	5.37	33.54	200	210 AVERAGE																																																																									



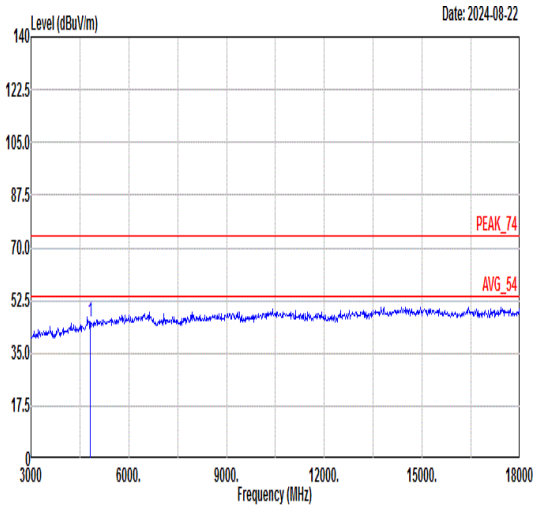
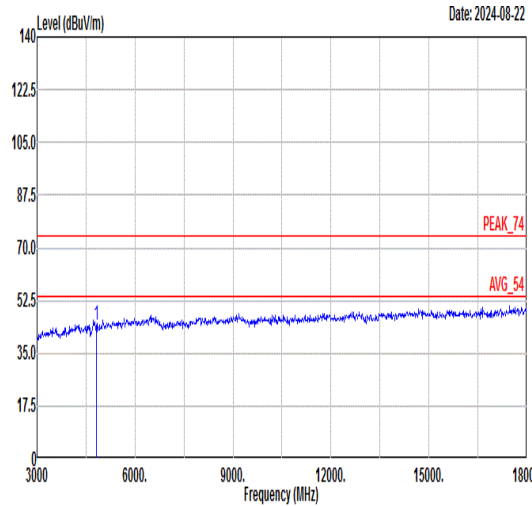


Mode	8																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Bluetooth-LE _CH01_2404MHz																																																																																										
ANT	0																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>45.35</td><td>74.00</td><td>-28.65</td><td>52.27</td><td>35.74</td><td>8.92</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	45.35	74.00	-28.65	52.27	35.74	8.92	51.58	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>44.23</td><td>74.00</td><td>-29.77</td><td>51.15</td><td>35.74</td><td>8.92</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	44.23	74.00	-29.77	51.15	35.74	8.92	51.58	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4808.00	45.35	74.00	-28.65	52.27	35.74	8.92	51.58	---	---	Peak																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4808.00	44.23	74.00	-29.77	51.15	35.74	8.92	51.58	---	---	Peak																																																																																

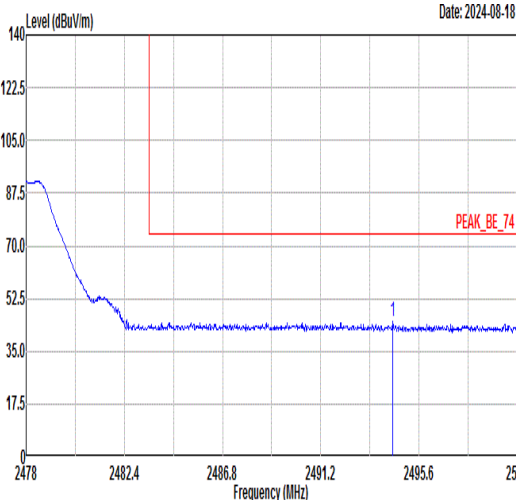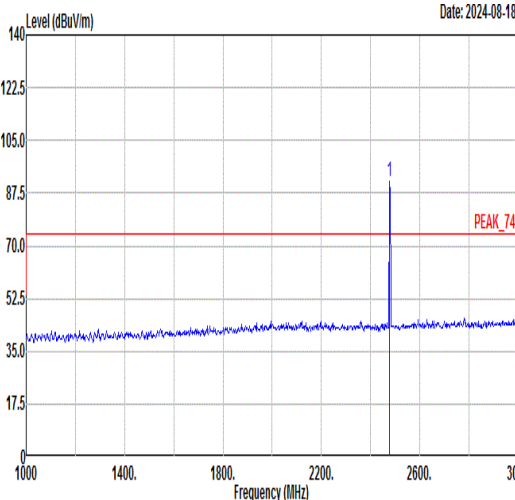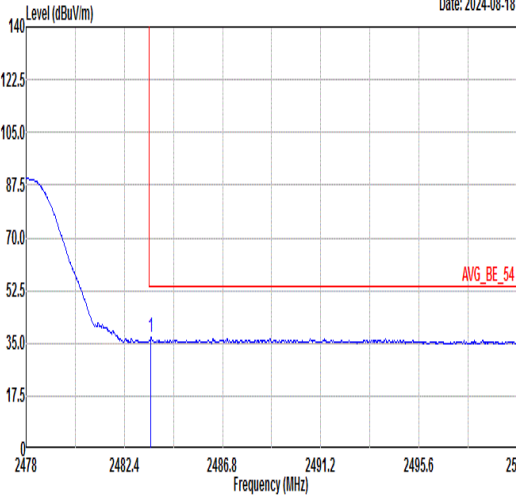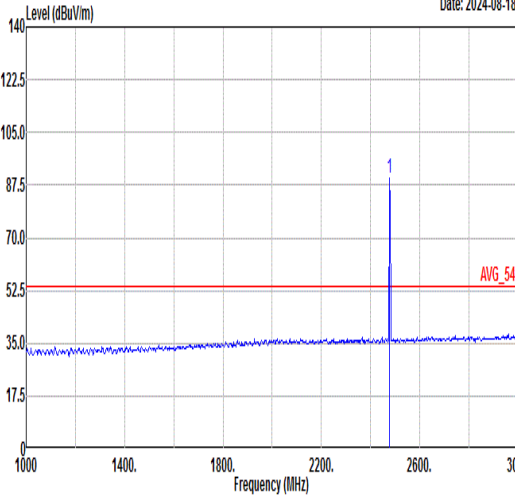

Mode	9																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																							
ANT	0																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2478 to 2500 MHz. A red limit line is at 74.00 dB. A peak is marked at 2494.43 MHz with a level of 44.73 dBuV/m. The peak is labeled PEAK_BE_74. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.43</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>42.16</td><td>30.70</td><td>5.47</td><td>33.60</td><td>171</td><td>316 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2494.43	44.73	74.00	-29.27	42.16	30.70	5.47	33.60	171	316 PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 74.00 dB. A peak is marked at 2478.00 MHz with a level of 91.54 dBuV/m. The peak is labeled PEAK_74. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>91.54</td><td>-----</td><td>-----</td><td>88.98</td><td>30.70</td><td>5.45</td><td>33.59</td><td>171</td><td>316 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	91.54	-----	-----	88.98	30.70	5.45	33.59	171	316 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2494.43	44.73	74.00	-29.27	42.16	30.70	5.47	33.60	171	316 PEAK																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	91.54	-----	-----	88.98	30.70	5.45	33.59	171	316 PEAK																																																																														
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2478 to 2500 MHz. A red limit line is at 54.00 dB. An average level is marked at 2483.59 MHz with a level of 36.81 dBuV/m. The average level is labeled AVG_BE_54. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.59</td><td>36.81</td><td>54.00</td><td>-17.19</td><td>34.24</td><td>30.70</td><td>5.46</td><td>33.59</td><td>171</td><td>316 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.59	36.81	54.00	-17.19	34.24	30.70	5.46	33.59	171	316 AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 54.00 dB. An average level is marked at 2478.00 MHz with a level of 90.06 dBuV/m. The average level is labeled AVG_54. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>90.06</td><td>-----</td><td>-----</td><td>87.50</td><td>30.70</td><td>5.45</td><td>33.59</td><td>171</td><td>316 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	90.06	-----	-----	87.50	30.70	5.45	33.59	171	316 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2483.59	36.81	54.00	-17.19	34.24	30.70	5.46	33.59	171	316 AVERAGE																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	90.06	-----	-----	87.50	30.70	5.45	33.59	171	316 AVERAGE																																																																														

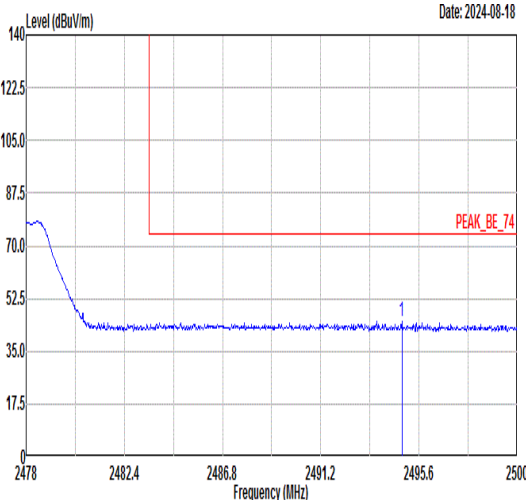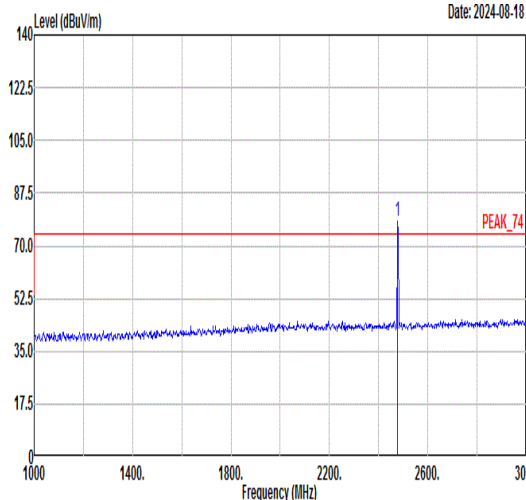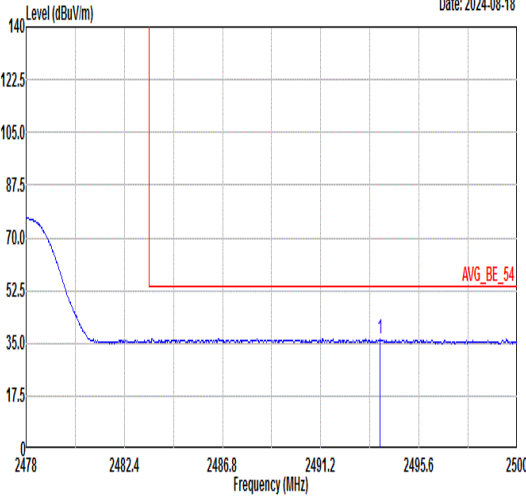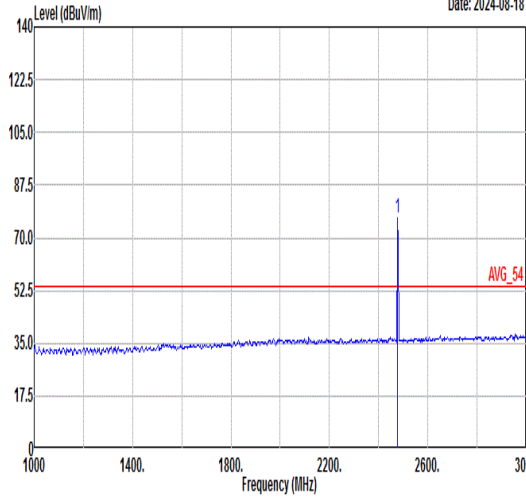

Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-18  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2494.83</td><td>44.88</td><td>74.00</td><td>-29.12</td><td>42.31</td><td>30.70</td><td>5.47</td><td>33.60</td><td>163</td><td>282 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2494.83	44.88	74.00	-29.12	42.31	30.70	5.47	33.60	163	282 PEAK	Level (dBuV/m) Date: 2024-08-18  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2478.00</td><td>77.99</td><td>-----</td><td>-----</td><td>75.43</td><td>30.70</td><td>5.45</td><td>33.59</td><td>163</td><td>282 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2478.00	77.99	-----	-----	75.43	30.70	5.45	33.59	163	282 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2494.83	44.88	74.00	-29.12	42.31	30.70	5.47	33.60	163	282 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2478.00	77.99	-----	-----	75.43	30.70	5.45	33.59	163	282 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-08-18  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2493.84</td><td>36.71</td><td>54.00</td><td>-17.29</td><td>34.14</td><td>30.70</td><td>5.47</td><td>33.60</td><td>163</td><td>282 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2493.84	36.71	54.00	-17.29	34.14	30.70	5.47	33.60	163	282 AVERAGE	Level (dBuV/m) Date: 2024-08-18  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2478.00</td><td>76.61</td><td>-----</td><td>-----</td><td>74.05</td><td>30.70</td><td>5.45</td><td>33.59</td><td>163</td><td>282 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2478.00	76.61	-----	-----	74.05	30.70	5.45	33.59	163	282 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2493.84	36.71	54.00	-17.29	34.14	30.70	5.47	33.60	163	282 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2478.00	76.61	-----	-----	74.05	30.70	5.45	33.59	163	282 AVERAGE																																																																									



Mode	9																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																			
ANT	0																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>52.62</td><td>36.09</td><td>8.48</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>50.47</td><td>36.83</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	45.67	74.00	-28.33	52.62	36.09	8.48	51.52	---	---	Peak	2	7434.00	46.28	74.00	-27.72	50.47	36.83	10.17	51.19	---	---	Peak	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>45.13</td><td>74.00</td><td>-28.87</td><td>52.08</td><td>36.09</td><td>8.48</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>46.27</td><td>74.00</td><td>-27.73</td><td>50.46</td><td>36.83</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	45.13	74.00	-28.87	52.08	36.09	8.48	51.52	---	---	Peak	2	7434.00	46.27	74.00	-27.73	50.46	36.83	10.17	51.19	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4956.00	45.67	74.00	-28.33	52.62	36.09	8.48	51.52	---	---	Peak																																																																																																									
2	7434.00	46.28	74.00	-27.72	50.47	36.83	10.17	51.19	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4956.00	45.13	74.00	-28.87	52.08	36.09	8.48	51.52	---	---	Peak																																																																																																									
2	7434.00	46.27	74.00	-27.73	50.46	36.83	10.17	51.19	---	---	Peak																																																																																																									







Mode	10																																																																																																																																																																																																																															
	LF																																																																																																																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																																																																																																																															
ANT	0																																																																																																																																																																																																																															
Pol.	Horizontal								Vertical																																																																																																																																																																																																																							
QPI/ Peak	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>24.35</td><td>40.00</td><td>-15.65</td><td>30.22</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>86.26</td><td>22.22</td><td>40.00</td><td>-17.78</td><td>38.89</td><td>14.20</td><td>0.93</td><td>31.80</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>209.45</td><td>26.79</td><td>43.50</td><td>-16.71</td><td>41.99</td><td>14.93</td><td>1.47</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>336.52</td><td>26.20</td><td>46.00</td><td>-19.80</td><td>35.63</td><td>20.07</td><td>1.93</td><td>31.43</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>459.71</td><td>26.34</td><td>46.00</td><td>-19.66</td><td>32.30</td><td>23.30</td><td>2.22</td><td>31.48</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>566.41</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>29.83</td><td>26.44</td><td>2.49</td><td>31.17</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>									Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	24.35	40.00	-15.65	30.22	25.20	0.53	31.60	---	---	---	Peak	2	86.26	22.22	40.00	-17.78	38.89	14.20	0.93	31.80	---	---	---	Peak	3	209.45	26.79	43.50	-16.71	41.99	14.93	1.47	31.60	---	---	---	Peak	4	336.52	26.20	46.00	-19.80	35.63	20.07	1.93	31.43	---	---	---	Peak	5	459.71	26.34	46.00	-19.66	32.30	23.30	2.22	31.48	---	---	---	Peak	6	566.41	27.59	46.00	-18.41	29.83	26.44	2.49	31.17	---	---	---	Peak	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>29.36</td><td>40.00</td><td>-10.64</td><td>35.23</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>84.32</td><td>28.47</td><td>40.00</td><td>-11.53</td><td>45.36</td><td>14.00</td><td>0.91</td><td>31.80</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>196.84</td><td>20.64</td><td>43.50</td><td>-22.86</td><td>35.93</td><td>14.90</td><td>1.42</td><td>31.61</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>256.01</td><td>22.47</td><td>46.00</td><td>-23.53</td><td>33.11</td><td>19.28</td><td>1.67</td><td>31.59</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>465.53</td><td>25.42</td><td>46.00</td><td>-20.58</td><td>31.23</td><td>23.42</td><td>2.24</td><td>31.47</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>727.43</td><td>29.54</td><td>46.00</td><td>-16.46</td><td>30.33</td><td>27.60</td><td>2.81</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>									Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	29.36	40.00	-10.64	35.23	25.20	0.53	31.60	---	---	---	Peak	2	84.32	28.47	40.00	-11.53	45.36	14.00	0.91	31.80	---	---	---	Peak	3	196.84	20.64	43.50	-22.86	35.93	14.90	1.42	31.61	---	---	---	Peak	4	256.01	22.47	46.00	-23.53	33.11	19.28	1.67	31.59	---	---	---	Peak	5	465.53	25.42	46.00	-20.58	31.23	23.42	2.24	31.47	---	---	---	Peak	6	727.43	29.54	46.00	-16.46	30.33	27.60	2.81	31.20	---	---	---	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																			
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																				
1	30.00	24.35	40.00	-15.65	30.22	25.20	0.53	31.60	---	---	---	Peak																																																																																																																																																																																																																				
2	86.26	22.22	40.00	-17.78	38.89	14.20	0.93	31.80	---	---	---	Peak																																																																																																																																																																																																																				
3	209.45	26.79	43.50	-16.71	41.99	14.93	1.47	31.60	---	---	---	Peak																																																																																																																																																																																																																				
4	336.52	26.20	46.00	-19.80	35.63	20.07	1.93	31.43	---	---	---	Peak																																																																																																																																																																																																																				
5	459.71	26.34	46.00	-19.66	32.30	23.30	2.22	31.48	---	---	---	Peak																																																																																																																																																																																																																				
6	566.41	27.59	46.00	-18.41	29.83	26.44	2.49	31.17	---	---	---	Peak																																																																																																																																																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1	30.00	29.36	40.00	-10.64	35.23	25.20	0.53	31.60	---	---	---	Peak																																																																																																																																																																																																																				
2	84.32	28.47	40.00	-11.53	45.36	14.00	0.91	31.80	---	---	---	Peak																																																																																																																																																																																																																				
3	196.84	20.64	43.50	-22.86	35.93	14.90	1.42	31.61	---	---	---	Peak																																																																																																																																																																																																																				
4	256.01	22.47	46.00	-23.53	33.11	19.28	1.67	31.59	---	---	---	Peak																																																																																																																																																																																																																				
5	465.53	25.42	46.00	-20.58	31.23	23.42	2.24	31.47	---	---	---	Peak																																																																																																																																																																																																																				
6	727.43	29.54	46.00	-16.46	30.33	27.60	2.81	31.20	---	---	---	Peak																																																																																																																																																																																																																				



Mode	15																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2362.08</td><td>44.71</td><td>74.00</td><td>-29.29</td><td>42.16</td><td>30.73</td><td>5.34</td><td>33.52</td><td>329 48 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2362.08	44.71	74.00	-29.29	42.16	30.73	5.34	33.52	329 48 PEAK	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.52</td><td>-----</td><td>90.97</td><td>30.72</td><td>5.37</td><td>33.54</td><td>329</td><td>48 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.52	-----	90.97	30.72	5.37	33.54	329	48 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2362.08	44.71	74.00	-29.29	42.16	30.73	5.34	33.52	329 48 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	93.52	-----	90.97	30.72	5.37	33.54	329	48 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) 1 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2346.02</td><td>34.13</td><td>54.00</td><td>-19.87</td><td>31.59</td><td>30.73</td><td>5.32</td><td>33.51</td><td>329 48 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2346.02	34.13	54.00	-19.87	31.59	30.73	5.32	33.51	329 48 AVERAGE	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>92.26</td><td>-----</td><td>89.71</td><td>30.72</td><td>5.37</td><td>33.54</td><td>329</td><td>48 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.26	-----	89.71	30.72	5.37	33.54	329	48 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2346.02	34.13	54.00	-19.87	31.59	30.73	5.32	33.51	329 48 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	92.26	-----	89.71	30.72	5.37	33.54	329	48 AVERAGE																																																																									

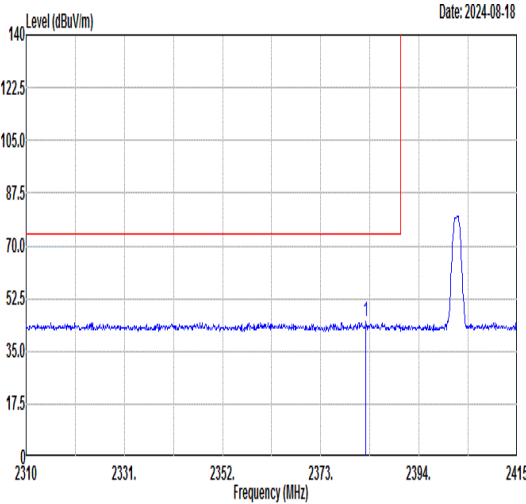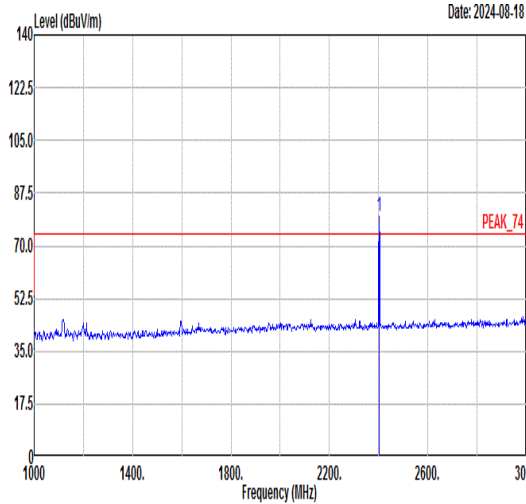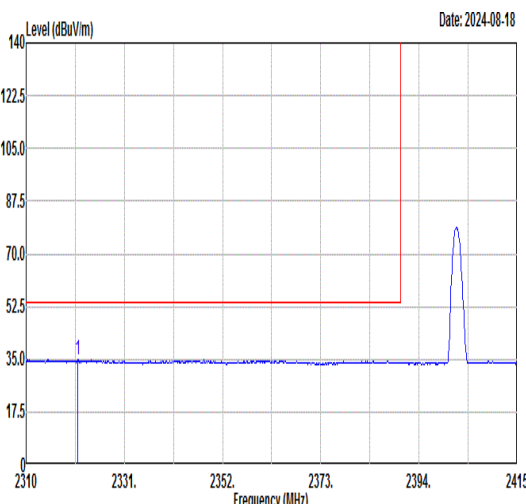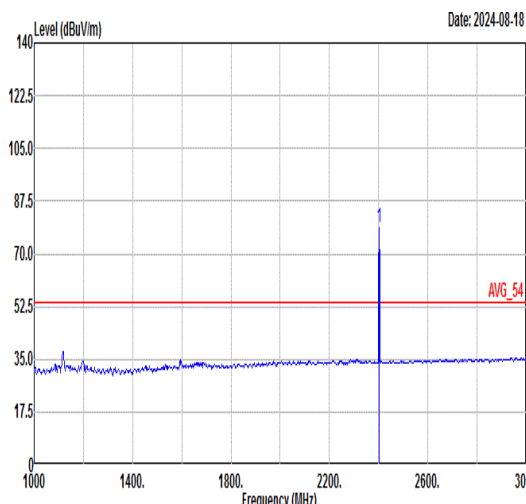

Mode	15																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																								
ANT	2																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.66</td><td>44.71</td><td>74.00</td><td>-29.29</td><td>42.17</td><td>30.72</td><td>5.35</td><td>33.53</td><td>273 197 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2382.66	44.71	74.00	-29.29	42.17	30.72	5.35	33.53	273 197 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>79.94</td><td>-----</td><td>77.39</td><td>30.72</td><td>5.37</td><td>33.54</td><td>273</td><td>197 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	79.94	-----	77.39	30.72	5.37	33.54	273
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2382.66	44.71	74.00	-29.29	42.17	30.72	5.35	33.53	273 197 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	79.94	-----	77.39	30.72	5.37	33.54	273	197 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2321.03</td><td>34.74</td><td>54.00</td><td>-19.26</td><td>32.19</td><td>30.74</td><td>5.30</td><td>33.49</td><td>273 197 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2321.03	34.74	54.00	-19.26	32.19	30.74	5.30	33.49	273 197 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>78.57</td><td>-----</td><td>76.02</td><td>30.72</td><td>5.37</td><td>33.54</td><td>273</td><td>197 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	78.57	-----	76.02	30.72	5.37	33.54	273
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2321.03	34.74	54.00	-19.26	32.19	30.74	5.30	33.49	273 197 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	78.57	-----	76.02	30.72	5.37	33.54	273	197 AVERAGE																																																																																







Mode	15																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																															
ANT	2																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-08-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>52.00</td><td>35.73</td><td>8.94</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	45.09	74.00	-28.91	52.00	35.73	8.94	51.58	---	---	Peak	Level (dBuV/m) Date: 2024-08-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>44.75</td><td>74.00</td><td>-29.25</td><td>51.66</td><td>35.73</td><td>8.94</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	44.75	74.00	-29.25	51.66	35.73	8.94	51.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4804.00	45.09	74.00	-28.91	52.00	35.73	8.94	51.58	---	---	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4804.00	44.75	74.00	-29.25	51.66	35.73	8.94	51.58	---	---	Peak																																																																																					







Mode	16																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																	
ANT	2																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-08-22 Frequency (MHz)						Level (dBuV/m) Date: 2024-08-22 Frequency (MHz)																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.72</td><td>74.00</td><td>-29.28</td><td>51.65</td><td>35.91</td><td>8.71</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>50.18</td><td>36.87</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4880.00	44.72	74.00	-29.28	51.65	35.91	8.71	51.55	---	---	Peak	2	7320.00	46.07	74.00	-27.93	50.18	36.87	10.18	51.16	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.74</td><td>74.00</td><td>-29.26</td><td>51.67</td><td>35.91</td><td>8.71</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.24</td><td>74.00</td><td>-29.76</td><td>48.35</td><td>36.87</td><td>10.18</td><td>51.16</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4880.00	44.74	74.00	-29.26	51.67	35.91	8.71	51.55	---	---	Peak	2	7320.00	44.24	74.00	-29.76	48.35	36.87	10.18	51.16	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4880.00	44.72	74.00	-29.28	51.65	35.91	8.71	51.55	---	---	Peak																																																																																																							
2	7320.00	46.07	74.00	-27.93	50.18	36.87	10.18	51.16	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4880.00	44.74	74.00	-29.26	51.67	35.91	8.71	51.55	---	---	Peak																																																																																																							
2	7320.00	44.24	74.00	-29.76	48.35	36.87	10.18	51.16	---	---	Peak																																																																																																							

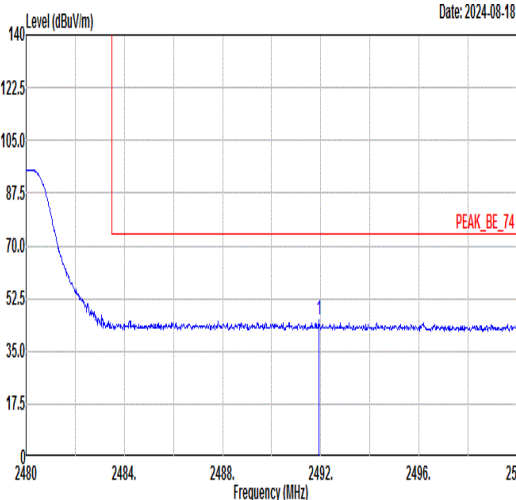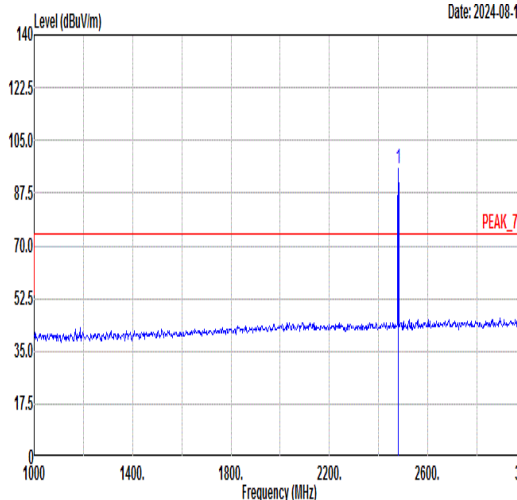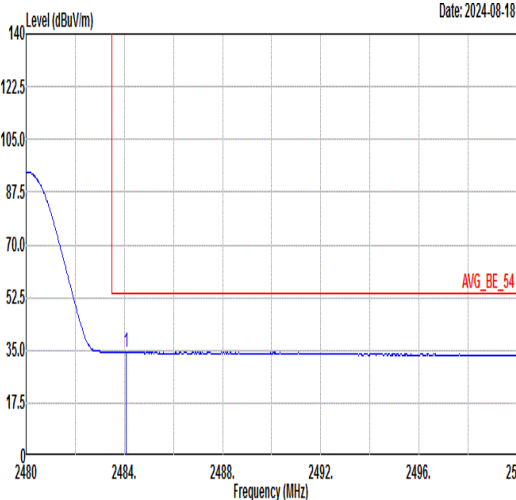
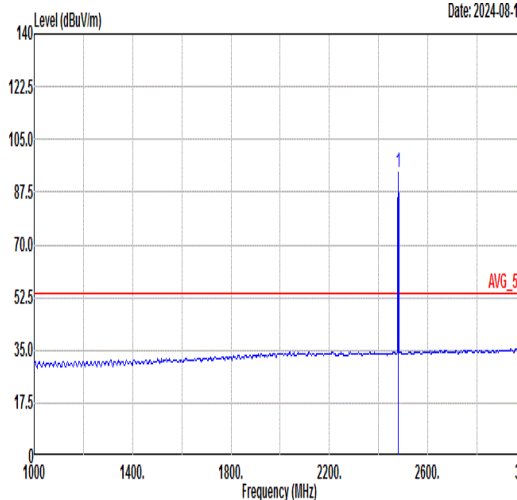


Mode	17																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2480 to 2500 MHz. A red limit line is at 74.00 dB. A blue curve shows the measured signal, with a peak labeled 'PEAK_BE_74' at 2480.00 MHz. A table below the plot provides detailed data for this peak. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>42.64</td><td>30.70</td><td>5.47</td><td>33.60</td><td>400 53 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	45.21	74.00	-28.79	42.64	30.70	5.47	33.60	400 53 PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 74.00 dB. A blue curve shows the measured signal, with a peak labeled 'PEAK_74' at 2480.00 MHz. A table below the plot provides detailed data for this peak. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.54</td><td>-----</td><td>92.97</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400</td><td>53 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.54	-----	92.97	30.70	5.46	33.59	400	53 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.00	45.21	74.00	-28.79	42.64	30.70	5.47	33.60	400 53 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.00	95.54	-----	92.97	30.70	5.46	33.59	400	53 PEAK																																																																																	
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2480 to 2500 MHz. A red limit line is at 54.00 dB. A blue curve shows the measured signal, with a peak labeled 'AVG_BE_54' at 2480.00 MHz. A table below the plot provides detailed data for this peak. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.08</td><td>34.40</td><td>54.00</td><td>-19.60</td><td>31.83</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400 53 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.08	34.40	54.00	-19.60	31.83	30.70	5.46	33.59	400 53 AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 54.00 dB. A blue curve shows the measured signal, with a peak labeled 'AVG_54' at 2480.00 MHz. A table below the plot provides detailed data for this peak. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.20</td><td>-----</td><td>91.63</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400</td><td>53 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.20	-----	91.63	30.70	5.46	33.59	400	53 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.08	34.40	54.00	-19.60	31.83	30.70	5.46	33.59	400 53 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.00	94.20	-----	91.63	30.70	5.46	33.59	400	53 AVERAGE																																																																																	

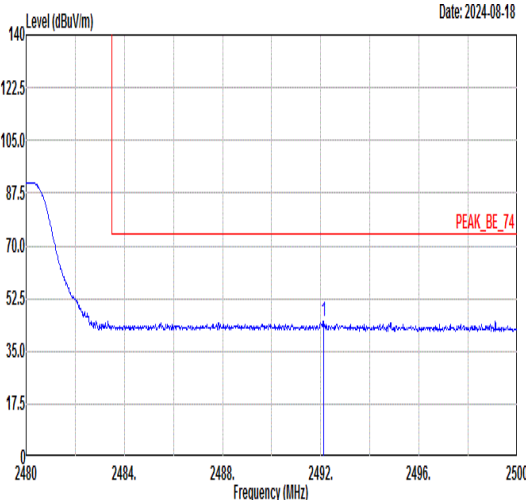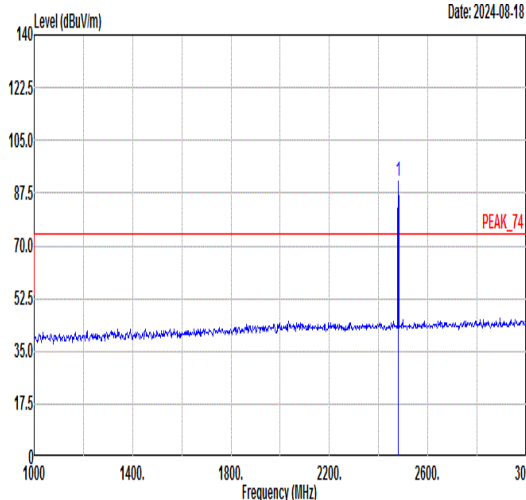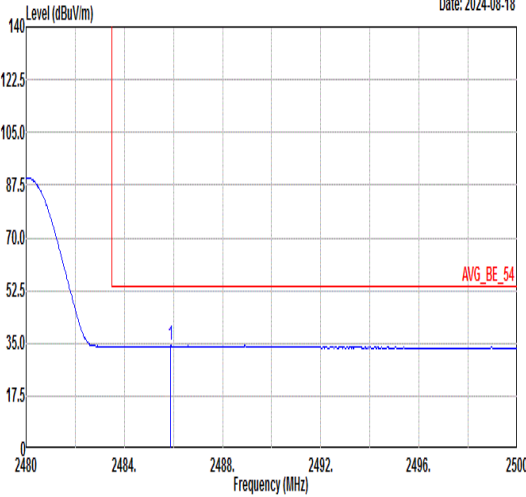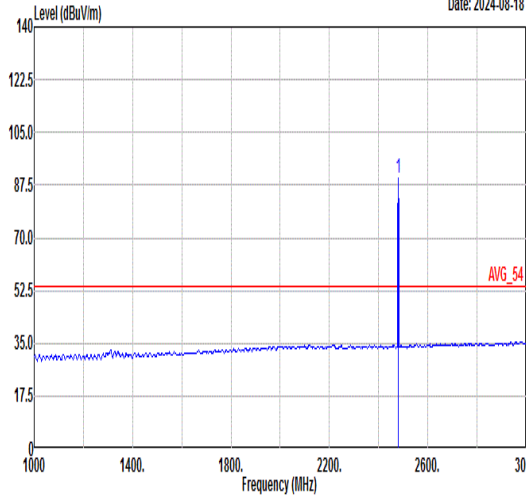

Mode	17																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2492.12</td><td>44.92</td><td>74.00</td><td>-29.08</td><td>42.35</td><td>30.70</td><td>5.47</td><td>33.60</td><td>400</td><td>0</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2492.12	44.92	74.00	-29.08	42.35	30.70	5.47	33.60	400	0	PEAK	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2480.00</td><td>91.33</td><td>-----</td><td>-----</td><td>88.76</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400</td><td>0</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2480.00	91.33	-----	-----	88.76	30.70	5.46	33.59	400	0	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																																																		
1	2492.12	44.92	74.00	-29.08	42.35	30.70	5.47	33.60	400	0	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																																																		
1	2480.00	91.33	-----	-----	88.76	30.70	5.46	33.59	400	0	PEAK																																																																															
Avg	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2485.88</td><td>34.22</td><td>54.00</td><td>-19.78</td><td>31.65</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2485.88	34.22	54.00	-19.78	31.65	30.70	5.46	33.59	400	0	AVERAGE	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2480.00</td><td>90.02</td><td>-----</td><td>-----</td><td>87.45</td><td>30.70</td><td>5.46</td><td>33.59</td><td>400</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	2480.00	90.02	-----	-----	87.45	30.70	5.46	33.59	400	0	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																																																		
1	2485.88	34.22	54.00	-19.78	31.65	30.70	5.46	33.59	400	0	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																																																		
1	2480.00	90.02	-----	-----	87.45	30.70	5.46	33.59	400	0	AVERAGE																																																																															



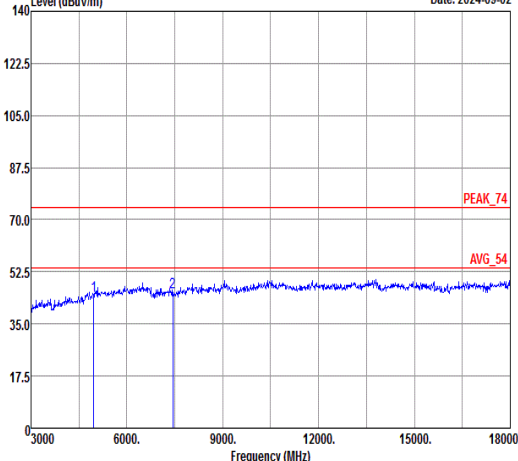
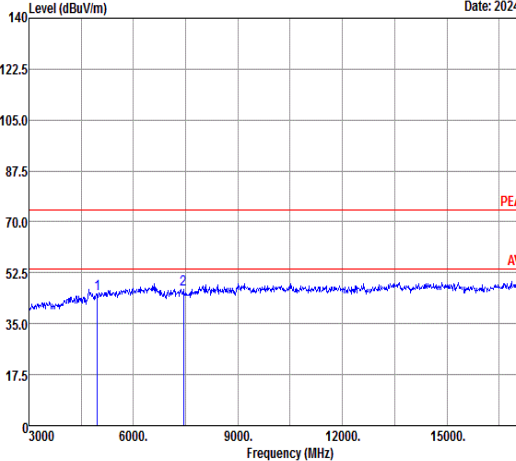


Mode	17																																																											
	Harmonic																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																											
ANT	2																																																											
Pol.	Horizontal						Vertical																																																					
Peak Avg	Data: 1 Level (dBuV/m) Date: 2024-09-02  Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB cm deg Remark <table><tr><td>1</td><td>4960.00</td><td>44.55</td><td>-29.45</td><td>74.00</td><td>51.02</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 *</td><td>7440.00</td><td>45.72</td><td>-28.28</td><td>74.00</td><td>49.98</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>						1	4960.00	44.55	-29.45	74.00	51.02	36.64	8.41	51.52	---	---	Peak	2 *	7440.00	45.72	-28.28	74.00	49.98	36.76	10.17	51.19	---	---	Peak	Data: 2 Level (dBuV/m) Date: 2024-09-02  Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB cm deg Remark <table><tr><td>1</td><td>4960.00</td><td>45.21</td><td>-28.79</td><td>74.00</td><td>51.68</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 *</td><td>7440.00</td><td>46.73</td><td>-27.27</td><td>74.00</td><td>50.99</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>						1	4960.00	45.21	-28.79	74.00	51.68	36.64	8.41	51.52	---	---	Peak	2 *	7440.00	46.73	-27.27	74.00	50.99	36.76	10.17	51.19	---	---	Peak
	1	4960.00	44.55	-29.45	74.00	51.02	36.64	8.41	51.52	---	---	Peak																																																
	2 *	7440.00	45.72	-28.28	74.00	49.98	36.76	10.17	51.19	---	---	Peak																																																
1	4960.00	45.21	-28.79	74.00	51.68	36.64	8.41	51.52	---	---	Peak																																																	
2 *	7440.00	46.73	-27.27	74.00	50.99	36.76	10.17	51.19	---	---	Peak																																																	






Mode	18																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.86</td><td>44.64</td><td>74.00</td><td>-29.36</td><td>42.09</td><td>30.72</td><td>5.36</td><td>33.53</td><td>247</td><td>360</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.86	44.64	74.00	-29.36	42.09	30.72	5.36	33.53	247	360	PEAK	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>89.61</td><td>-----</td><td>-----</td><td>87.06</td><td>30.72</td><td>5.37</td><td>33.54</td><td>247</td><td>360</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	89.61	-----	-----	87.06	30.72	5.37	33.54	247	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.86	44.64	74.00	-29.36	42.09	30.72	5.36	33.53	247	360	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	89.61	-----	-----	87.06	30.72	5.37	33.54	247	360	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2364.60</td><td>36.60</td><td>54.00</td><td>-17.40</td><td>34.05</td><td>30.73</td><td>5.34</td><td>33.52</td><td>247</td><td>360</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2364.60	36.60	54.00	-17.40	34.05	30.73	5.34	33.52	247	360	AVERAGE	Level (dBuV/m) Date: 2024-08-18 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2404.00</td><td>88.28</td><td>-----</td><td>-----</td><td>85.73</td><td>30.72</td><td>5.37</td><td>33.54</td><td>247</td><td>360</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	88.28	-----	-----	85.73	30.72	5.37	33.54	247	360	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2364.60	36.60	54.00	-17.40	34.05	30.73	5.34	33.52	247	360	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	88.28	-----	-----	85.73	30.72	5.37	33.54	247	360	AVERAGE																																																																							

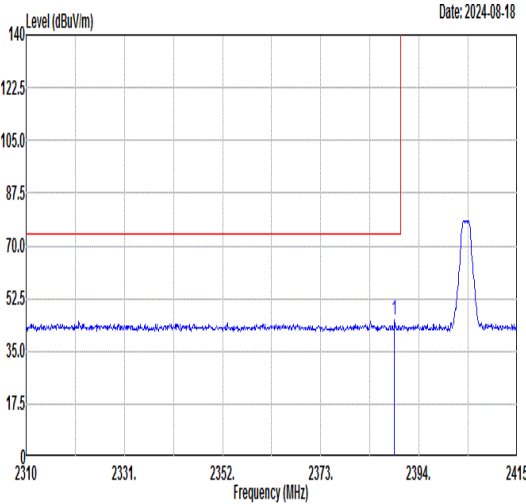
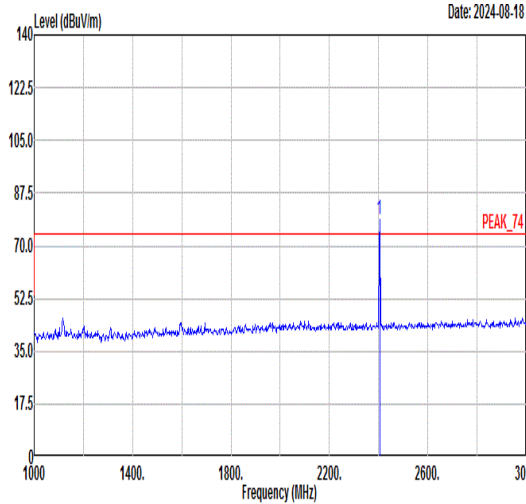
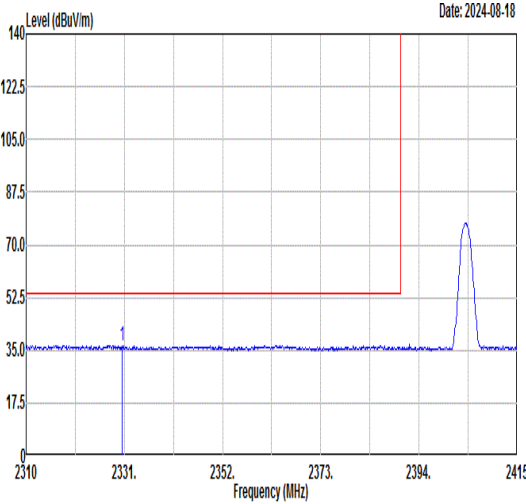
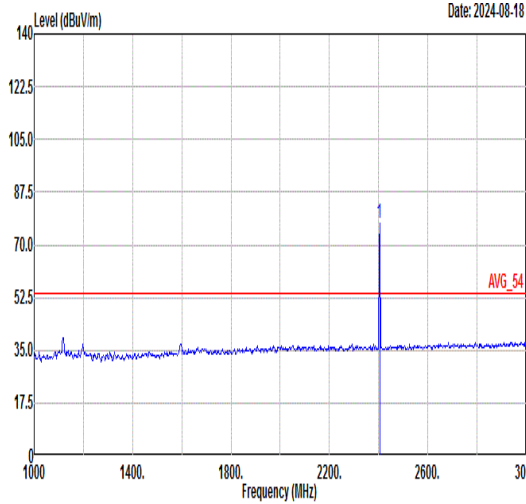


Mode	18																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																										
ANT	2																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.75</td><td>45.18</td><td>74.00</td><td>-28.82</td><td>42.63</td><td>30.72</td><td>5.36</td><td>33.53</td><td>287</td><td>199</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.75	45.18	74.00	-28.82	42.63	30.72	5.36	33.53	287	199	PEAK	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>78.55</td><td>-----</td><td>-----</td><td>76.00</td><td>30.72</td><td>5.37</td><td>33.54</td><td>287</td><td>199</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	78.55	-----	-----	76.00	30.72	5.37	33.54	287	199	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2388.75	45.18	74.00	-28.82	42.63	30.72	5.36	33.53	287	199	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2404.00	78.55	-----	-----	76.00	30.72	5.37	33.54	287	199	PEAK																																																																																
Avg	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2330.48</td><td>36.64</td><td>54.00</td><td>-17.36</td><td>34.10</td><td>30.73</td><td>5.31</td><td>33.50</td><td>287</td><td>199</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2330.48	36.64	54.00	-17.36	34.10	30.73	5.31	33.50	287	199	AVERAGE	 Date: 2024-08-18 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>76.99</td><td>-----</td><td>-----</td><td>74.44</td><td>30.72</td><td>5.37</td><td>33.54</td><td>287</td><td>199</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	76.99	-----	-----	74.44	30.72	5.37	33.54	287	199	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2330.48	36.64	54.00	-17.36	34.10	30.73	5.31	33.50	287	199	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2404.00	76.99	-----	-----	74.44	30.72	5.37	33.54	287	199	AVERAGE																																																																																

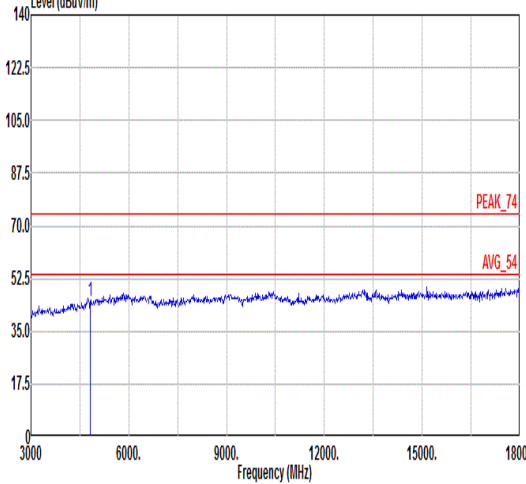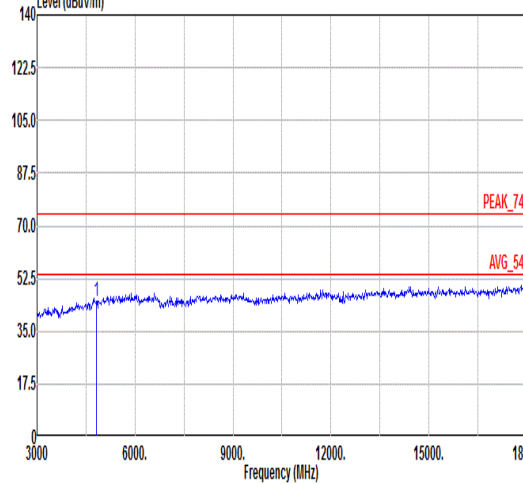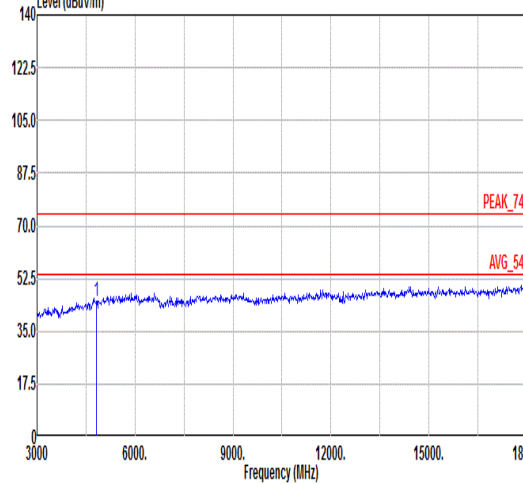

Mode	18																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																																									
ANT	2																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-08-22  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4808.00</td><td>44.86</td><td>74.00</td><td>-29.14</td><td>51.78</td><td>35.74</td><td>8.92</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table> <td colspan="6"> Level (dBuV/m) Date: 2024-08-22  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4808.00</td><td>44.93</td><td>74.00</td><td>-29.07</td><td>51.85</td><td>35.74</td><td>8.92</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table> </td>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4808.00	44.86	74.00	-29.14	51.78	35.74	8.92	51.58	---	---	Peak	Level (dBuV/m) Date: 2024-08-22  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4808.00</td><td>44.93</td><td>74.00</td><td>-29.07</td><td>51.85</td><td>35.74</td><td>8.92</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4808.00	44.93	74.00	-29.07	51.85	35.74	8.92	51.58	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4808.00	44.86	74.00	-29.14	51.78	35.74	8.92	51.58	---	---	Peak																																																																																															
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4808.00	44.93	74.00	-29.07	51.85	35.74	8.92	51.58	---	---	Peak																																																																																															

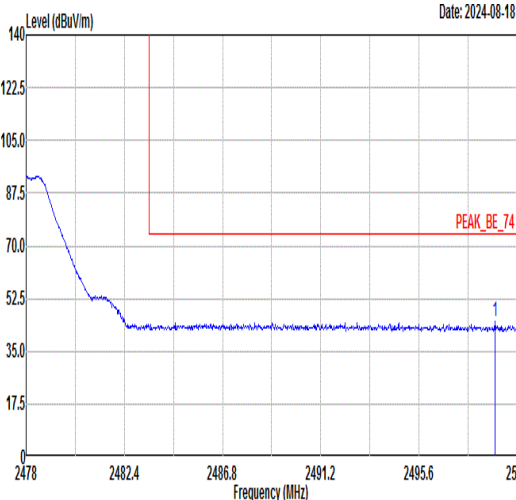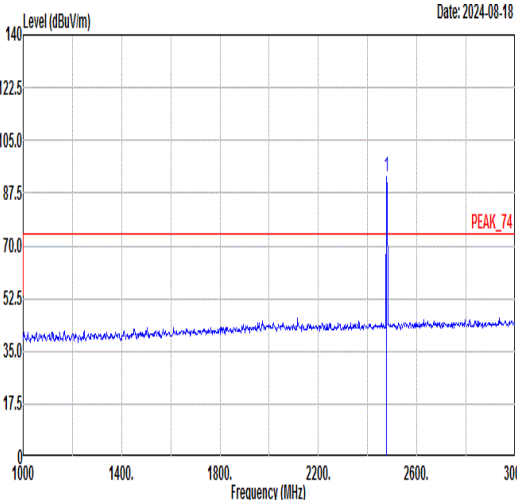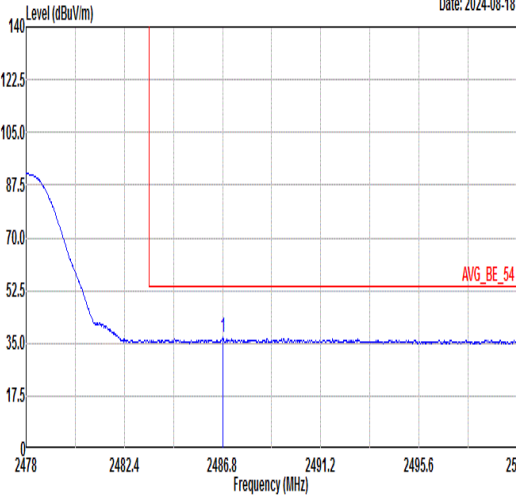
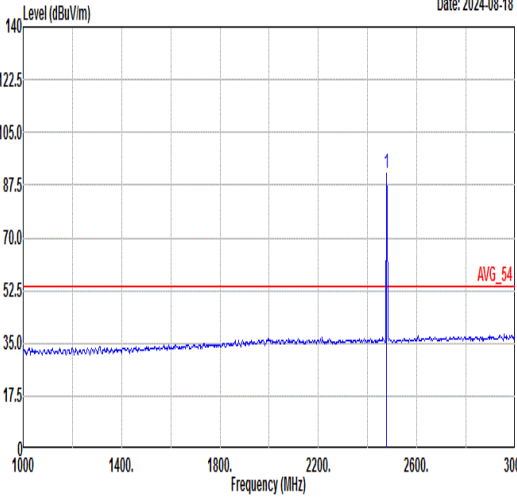


Mode	19																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																							
ANT	2																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 87.5 dBuV/m at 2478 MHz, decreasing to about 44.73 dBuV/m at 2482.4 MHz, and then remaining relatively flat around 35-40 dBuV/m up to 2500 MHz. A red line indicates the limit at 74.00 dB. A peak is marked at 2499.01 MHz with a level of 44.73 dBuV/m. The date is 2024-08-18. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.01</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>42.15</td><td>30.70</td><td>5.48</td><td>33.60</td><td>131</td><td>0 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2499.01	44.73	74.00	-29.27	42.15	30.70	5.48	33.60	131	0 PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 87.5 dBuV/m at 2478 MHz, decreasing to about 44.73 dBuV/m at 2482.4 MHz, and then remaining relatively flat around 35-40 dBuV/m up to 2500 MHz. A red line indicates the limit at 74.00 dB. A peak is marked at 2499.01 MHz with a level of 44.73 dBuV/m. The date is 2024-08-18. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>92.92</td><td>-----</td><td>-----</td><td>90.36</td><td>30.70</td><td>5.45</td><td>33.59</td><td>131</td><td>0 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	92.92	-----	-----	90.36	30.70	5.45	33.59	131	0 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2499.01	44.73	74.00	-29.27	42.15	30.70	5.48	33.60	131	0 PEAK																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	92.92	-----	-----	90.36	30.70	5.45	33.59	131	0 PEAK																																																																														
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 87.5 dBuV/m at 2478 MHz, decreasing to about 44.73 dBuV/m at 2482.4 MHz, and then remaining relatively flat around 35-40 dBuV/m up to 2500 MHz. A red line indicates the limit at 74.00 dB. A peak is marked at 2499.01 MHz with a level of 44.73 dBuV/m. The date is 2024-08-18. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.82</td><td>36.72</td><td>54.00</td><td>-17.28</td><td>34.15</td><td>30.70</td><td>5.46</td><td>33.59</td><td>131</td><td>0 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2486.82	36.72	54.00	-17.28	34.15	30.70	5.46	33.59	131	0 AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 87.5 dBuV/m at 2478 MHz, decreasing to about 44.73 dBuV/m at 2482.4 MHz, and then remaining relatively flat around 35-40 dBuV/m up to 2500 MHz. A red line indicates the limit at 74.00 dB. A peak is marked at 2499.01 MHz with a level of 44.73 dBuV/m. The date is 2024-08-18. <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>91.60</td><td>-----</td><td>-----</td><td>89.04</td><td>30.70</td><td>5.45</td><td>33.59</td><td>131</td><td>0 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2478.00	91.60	-----	-----	89.04	30.70	5.45	33.59	131	0 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2486.82	36.72	54.00	-17.28	34.15	30.70	5.46	33.59	131	0 AVERAGE																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																															
1	2478.00	91.60	-----	-----	89.04	30.70	5.45	33.59	131	0 AVERAGE																																																																														



Mode	19																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																	
ANT	2																																																																																	
Pol.	Vertical					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-08-18 PEAK_BE_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.02</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>42.22</td><td>30.70</td><td>5.46</td><td>33.59</td><td>143</td><td>360</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2485.02	44.79	74.00	-29.21	42.22	30.70	5.46	33.59	143	360	PEAK	Level (dBuV/m) Date: 2024-08-18 PEAK_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>87.50</td><td>-----</td><td>-----</td><td>84.94</td><td>30.70</td><td>5.45</td><td>33.59</td><td>143</td><td>360</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2478.00	87.50	-----	-----	84.94	30.70	5.45	33.59	143	360	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2485.02	44.79	74.00	-29.21	42.22	30.70	5.46	33.59	143	360	PEAK																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	87.50	-----	-----	84.94	30.70	5.45	33.59	143	360	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-08-18 AVG_BE_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2487.24</td><td>36.74</td><td>54.00</td><td>-17.26</td><td>34.17</td><td>30.70</td><td>5.46</td><td>33.59</td><td>143</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2487.24	36.74	54.00	-17.26	34.17	30.70	5.46	33.59	143	360	AVERAGE	Level (dBuV/m) Date: 2024-08-18 AVG_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>86.09</td><td>-----</td><td>-----</td><td>83.53</td><td>30.70</td><td>5.45</td><td>33.59</td><td>143</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2478.00	86.09	-----	-----	83.53	30.70	5.45	33.59	143	360	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2487.24	36.74	54.00	-17.26	34.17	30.70	5.46	33.59	143	360	AVERAGE																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	86.09	-----	-----	83.53	30.70	5.45	33.59	143	360	AVERAGE																																																																							



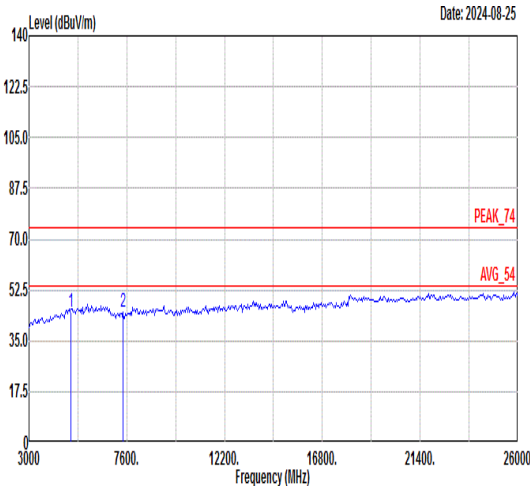
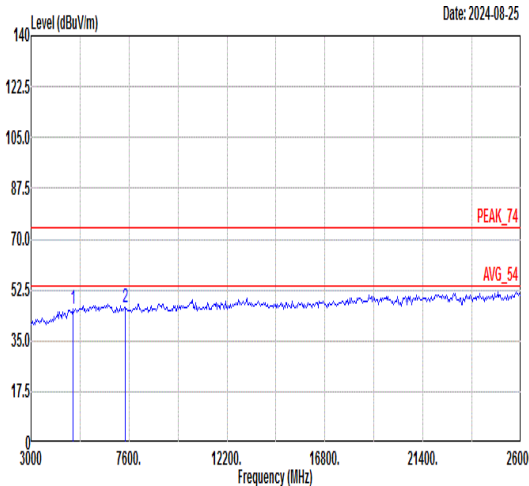


Mode	19																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																	
ANT	2																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>44.70</td><td>74.00</td><td>-29.30</td><td>51.65</td><td>36.09</td><td>8.48</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>49.17</td><td>36.83</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4956.00	44.70	74.00	-29.30	51.65	36.09	8.48	51.52	---	---	Peak	2	7434.00	44.98	74.00	-29.02	49.17	36.83	10.17	51.19	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>52.89</td><td>36.09</td><td>8.48</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>46.74</td><td>74.00</td><td>-27.26</td><td>50.93</td><td>36.83</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4956.00	45.94	74.00	-28.06	52.89	36.09	8.48	51.52	---	---	Peak	2	7434.00	46.74	74.00	-27.26	50.93	36.83	10.17	51.19	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4956.00	44.70	74.00	-29.30	51.65	36.09	8.48	51.52	---	---	Peak																																																																																																							
2	7434.00	44.98	74.00	-29.02	49.17	36.83	10.17	51.19	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4956.00	45.94	74.00	-28.06	52.89	36.09	8.48	51.52	---	---	Peak																																																																																																							
2	7434.00	46.74	74.00	-27.26	50.93	36.83	10.17	51.19	---	---	Peak																																																																																																							







Mode	20																																																																																																																																																																																																																																
	LF																																																																																																																																																																																																																																
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																																																																																																																																
ANT	2																																																																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																																																																										
QPI Peak	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>30.00</td><td>24.11</td><td>40.00</td><td>-15.89</td><td>29.98</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>84.32</td><td>22.69</td><td>40.00</td><td>-17.31</td><td>39.58</td><td>14.00</td><td>0.91</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>203.63</td><td>24.46</td><td>43.50</td><td>-19.04</td><td>39.55</td><td>15.06</td><td>1.45</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>331.67</td><td>24.61</td><td>46.00</td><td>-21.39</td><td>34.26</td><td>19.88</td><td>1.91</td><td>31.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>453.89</td><td>26.14</td><td>46.00</td><td>-19.86</td><td>32.24</td><td>23.18</td><td>2.21</td><td>31.49</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>730.34</td><td>30.00</td><td>46.00</td><td>-16.00</td><td>30.69</td><td>27.70</td><td>2.81</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	30.00	24.11	40.00	-15.89	29.98	25.20	0.53	31.60	---	---	Peak	2	84.32	22.69	40.00	-17.31	39.58	14.00	0.91	31.80	---	---	Peak	3	203.63	24.46	43.50	-19.04	39.55	15.06	1.45	31.60	---	---	Peak	4	331.67	24.61	46.00	-21.39	34.26	19.88	1.91	31.44	---	---	Peak	5	453.89	26.14	46.00	-19.86	32.24	23.18	2.21	31.49	---	---	Peak	6	730.34	30.00	46.00	-16.00	30.69	27.70	2.81	31.20	---	---	Peak	Level (dBuV/m) Date: 2024-08-25 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>30.00</td><td>28.09</td><td>40.00</td><td>-11.91</td><td>33.96</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>84.32</td><td>28.39</td><td>40.00</td><td>-11.61</td><td>45.28</td><td>14.00</td><td>0.91</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>143.49</td><td>23.52</td><td>43.50</td><td>-19.98</td><td>36.62</td><td>17.40</td><td>1.23</td><td>31.73</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>256.98</td><td>22.55</td><td>46.00</td><td>-23.45</td><td>33.11</td><td>19.36</td><td>1.67</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>465.53</td><td>25.78</td><td>46.00</td><td>-20.22</td><td>31.59</td><td>23.42</td><td>2.24</td><td>31.47</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>667.29</td><td>27.88</td><td>46.00</td><td>-18.12</td><td>29.99</td><td>26.40</td><td>2.69</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	30.00	28.09	40.00	-11.91	33.96	25.20	0.53	31.60	---	---	Peak	2	84.32	28.39	40.00	-11.61	45.28	14.00	0.91	31.80	---	---	Peak	3	143.49	23.52	43.50	-19.98	36.62	17.40	1.23	31.73	---	---	Peak	4	256.98	22.55	46.00	-23.45	33.11	19.36	1.67	31.59	---	---	Peak	5	465.53	25.78	46.00	-20.22	31.59	23.42	2.24	31.47	---	---	Peak	6	667.29	27.88	46.00	-18.12	29.99	26.40	2.69	31.20	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																								
1	30.00	24.11	40.00	-15.89	29.98	25.20	0.53	31.60	---	---	Peak																																																																																																																																																																																																																						
2	84.32	22.69	40.00	-17.31	39.58	14.00	0.91	31.80	---	---	Peak																																																																																																																																																																																																																						
3	203.63	24.46	43.50	-19.04	39.55	15.06	1.45	31.60	---	---	Peak																																																																																																																																																																																																																						
4	331.67	24.61	46.00	-21.39	34.26	19.88	1.91	31.44	---	---	Peak																																																																																																																																																																																																																						
5	453.89	26.14	46.00	-19.86	32.24	23.18	2.21	31.49	---	---	Peak																																																																																																																																																																																																																						
6	730.34	30.00	46.00	-16.00	30.69	27.70	2.81	31.20	---	---	Peak																																																																																																																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																								
1	30.00	28.09	40.00	-11.91	33.96	25.20	0.53	31.60	---	---	Peak																																																																																																																																																																																																																						
2	84.32	28.39	40.00	-11.61	45.28	14.00	0.91	31.80	---	---	Peak																																																																																																																																																																																																																						
3	143.49	23.52	43.50	-19.98	36.62	17.40	1.23	31.73	---	---	Peak																																																																																																																																																																																																																						
4	256.98	22.55	46.00	-23.45	33.11	19.36	1.67	31.59	---	---	Peak																																																																																																																																																																																																																						
5	465.53	25.78	46.00	-20.22	31.59	23.42	2.24	31.47	---	---	Peak																																																																																																																																																																																																																						
6	667.29	27.88	46.00	-18.12	29.99	26.40	2.69	31.20	---	---	Peak																																																																																																																																																																																																																						

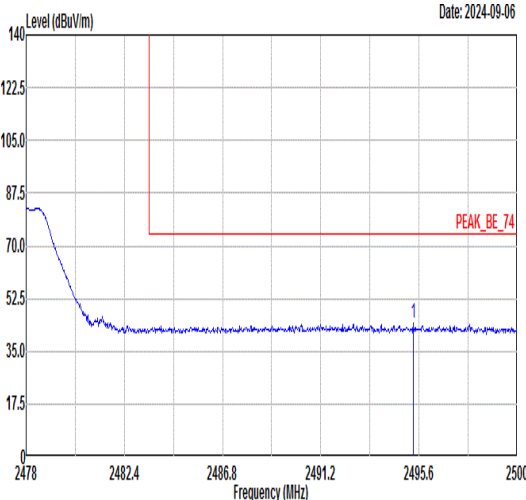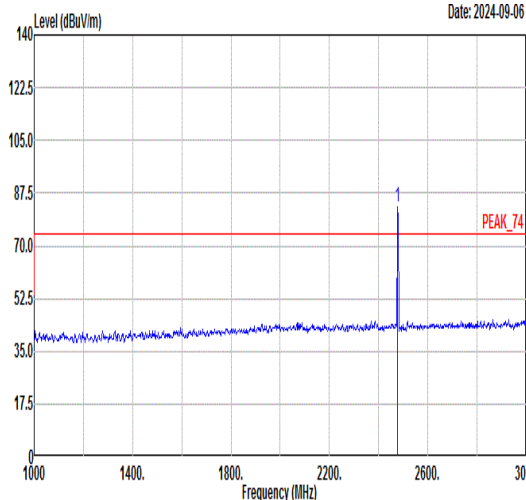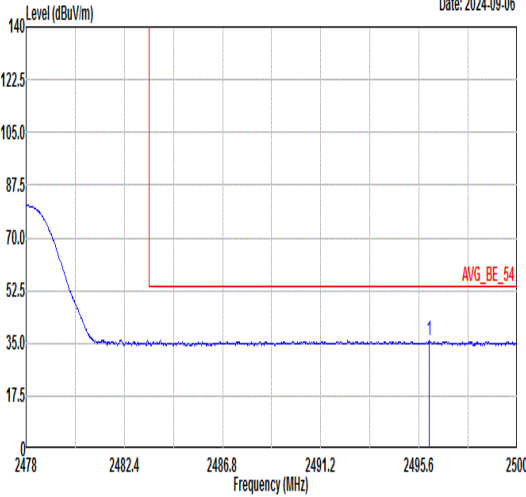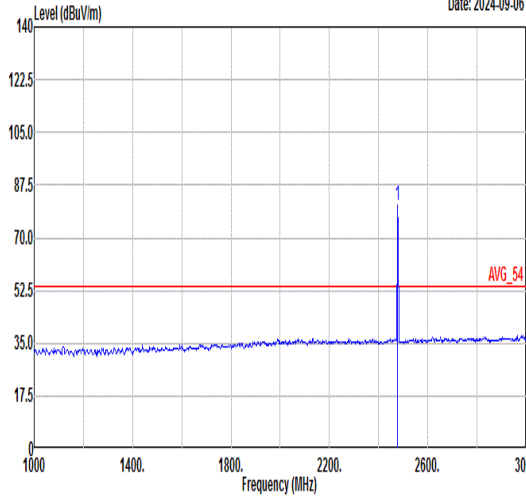

Mode	56																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz+WPC TX (For Pen Charging)																																																																																									
ANT	2																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.34</td><td>44.36</td><td>74.00</td><td>-29.64</td><td>41.79</td><td>30.70</td><td>5.47</td><td>33.60</td><td>343</td><td>243</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2495.34	44.36	74.00	-29.64	41.79	30.70	5.47	33.60	343	243	PEAK	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>82.72</td><td>-----</td><td>-----</td><td>80.16</td><td>30.70</td><td>5.45</td><td>33.59</td><td>343</td><td>243</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2478.00	82.72	-----	-----	80.16	30.70	5.45	33.59	343	243	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2495.34	44.36	74.00	-29.64	41.79	30.70	5.47	33.60	343	243	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	82.72	-----	-----	80.16	30.70	5.45	33.59	343	243	PEAK																																																																															
Avg	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.04</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>33.25</td><td>30.70</td><td>5.47</td><td>33.60</td><td>343</td><td>243</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2496.04	35.82	54.00	-18.18	33.25	30.70	5.47	33.60	343	243	AVERAGE	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>80.80</td><td>-----</td><td>-----</td><td>78.24</td><td>30.70</td><td>5.45</td><td>33.59</td><td>343</td><td>243</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2478.00	80.80	-----	-----	78.24	30.70	5.45	33.59	343	243	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2496.04	35.82	54.00	-18.18	33.25	30.70	5.47	33.60	343	243	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	80.80	-----	-----	78.24	30.70	5.45	33.59	343	243	AVERAGE																																																																															

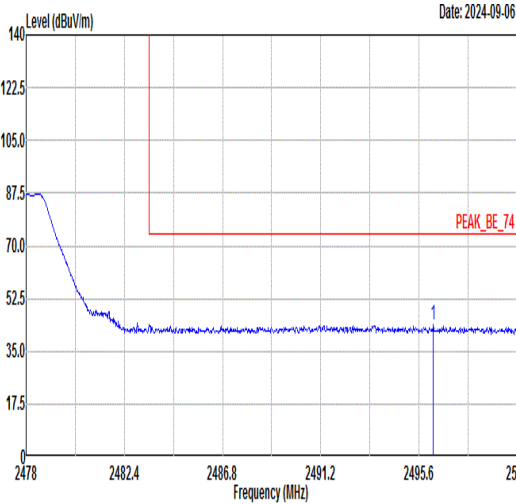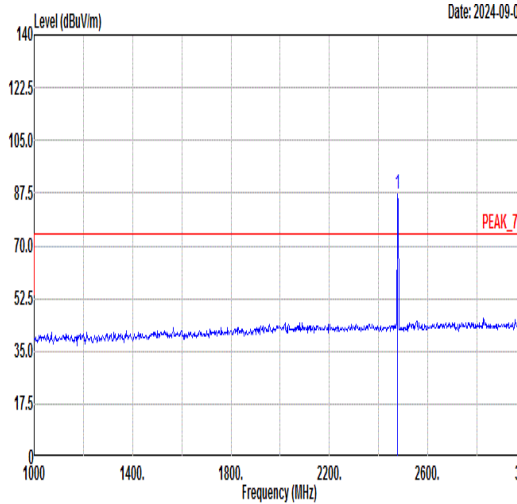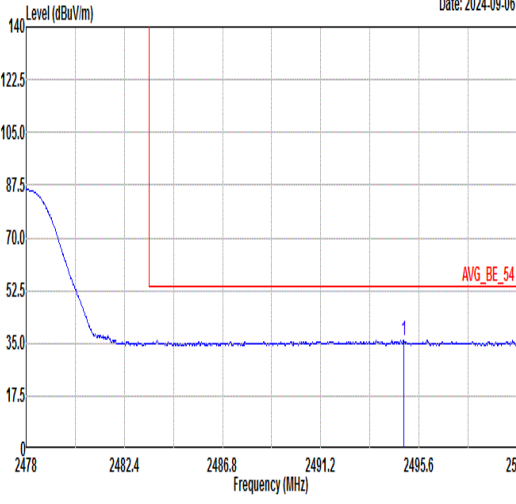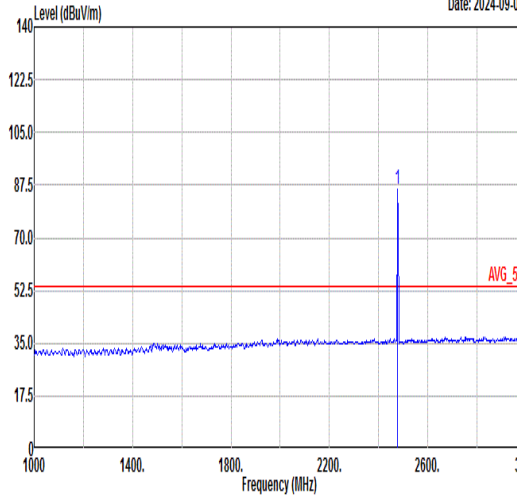

Mode	56																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz+WPC TX (For Pen Charging)																																																																																									
ANT	2																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.24</td><td>43.87</td><td>74.00</td><td>-30.13</td><td>41.30</td><td>30.70</td><td>5.47</td><td>33.60</td><td>270</td><td>107</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2496.24	43.87	74.00	-30.13	41.30	30.70	5.47	33.60	270	107	PEAK	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>87.35</td><td>-----</td><td>-----</td><td>84.79</td><td>30.70</td><td>5.45</td><td>33.59</td><td>270</td><td>107</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2478.00	87.35	-----	-----	84.79	30.70	5.45	33.59	270	107	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2496.24	43.87	74.00	-30.13	41.30	30.70	5.47	33.60	270	107	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	87.35	-----	-----	84.79	30.70	5.45	33.59	270	107	PEAK																																																																															
Avg	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.92</td><td>35.90</td><td>54.00</td><td>-18.10</td><td>33.33</td><td>30.70</td><td>5.47</td><td>33.60</td><td>270</td><td>107</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2494.92	35.90	54.00	-18.10	33.33	30.70	5.47	33.60	270	107	AVERAGE	 Date: 2024-09-06 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>86.11</td><td>-----</td><td>-----</td><td>83.55</td><td>30.70</td><td>5.45</td><td>33.59</td><td>270</td><td>107</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2478.00	86.11	-----	-----	83.55	30.70	5.45	33.59	270	107	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2494.92	35.90	54.00	-18.10	33.33	30.70	5.47	33.60	270	107	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	86.11	-----	-----	83.55	30.70	5.45	33.59	270	107	AVERAGE																																																																															




Mode	56																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz+WPC TX (For Pen Charging)																																																																																																																		
ANT	2																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2024-09-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>64.34</td><td>36.09</td><td>8.48</td><td>64.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>61.91</td><td>36.83</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.01	74.00	-29.99	64.34	36.09	8.48	64.90	---	---	Peak	2	7434.00	44.05	74.00	-29.95	61.91	36.83	10.17	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-09-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>43.58</td><td>74.00</td><td>-30.42</td><td>63.91</td><td>36.09</td><td>8.48</td><td>64.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td>63.55</td><td>36.83</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	43.58	74.00	-30.42	63.91	36.09	8.48	64.90	---	---	Peak	2	7434.00	45.69	74.00	-28.31	63.55	36.83	10.17	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4956.00	44.01	74.00	-29.99	64.34	36.09	8.48	64.90	---	---	Peak																																																																																																								
2	7434.00	44.05	74.00	-29.95	61.91	36.83	10.17	64.86	---	---	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4956.00	43.58	74.00	-30.42	63.91	36.09	8.48	64.90	---	---	Peak																																																																																																								
2	7434.00	45.69	74.00	-28.31	63.55	36.83	10.17	64.86	---	---	Peak																																																																																																								

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	Bluetooth LE 125kbps	82.18	3.0900	0.324	1kHz
0	Bluetooth LE 2Mbps	30.65	0.1900	5.263	10kHz
2	Bluetooth LE 125kbps	82.18	3.0900	0.324	1kHz
2	Bluetooth LE 2Mbps	30.65	0.1900	5.263	10kHz


<ANT0>

Bluetooth LE 125kbps

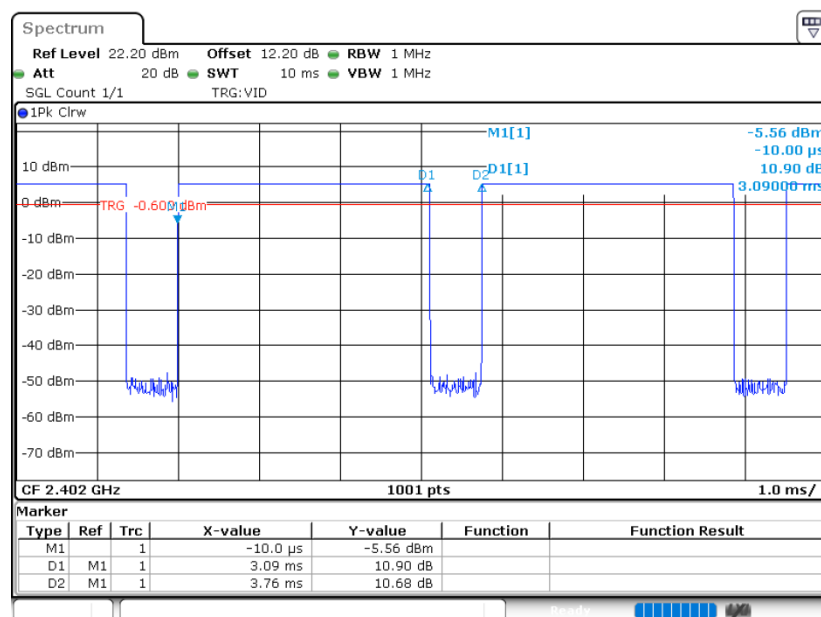




Bluetooth LE 2Mbps

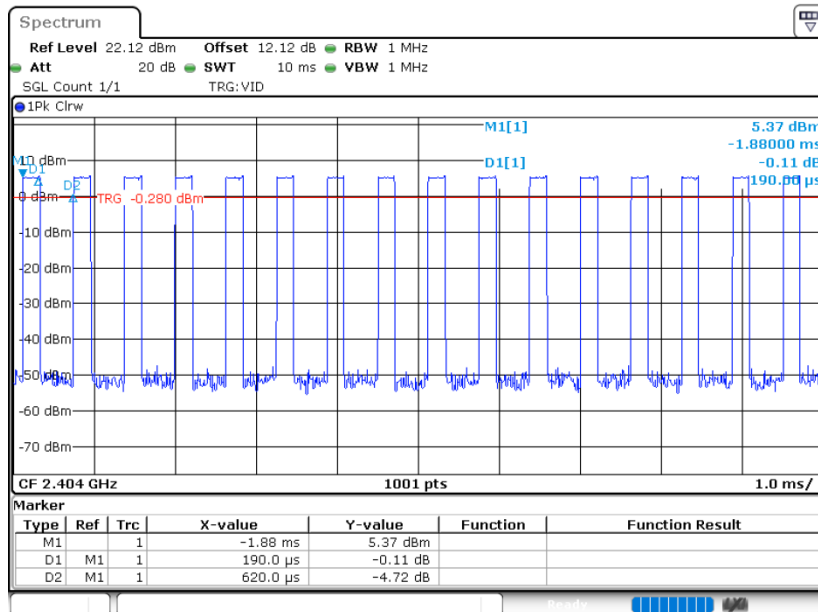

<ANT2>

Bluetooth LE 125kbps

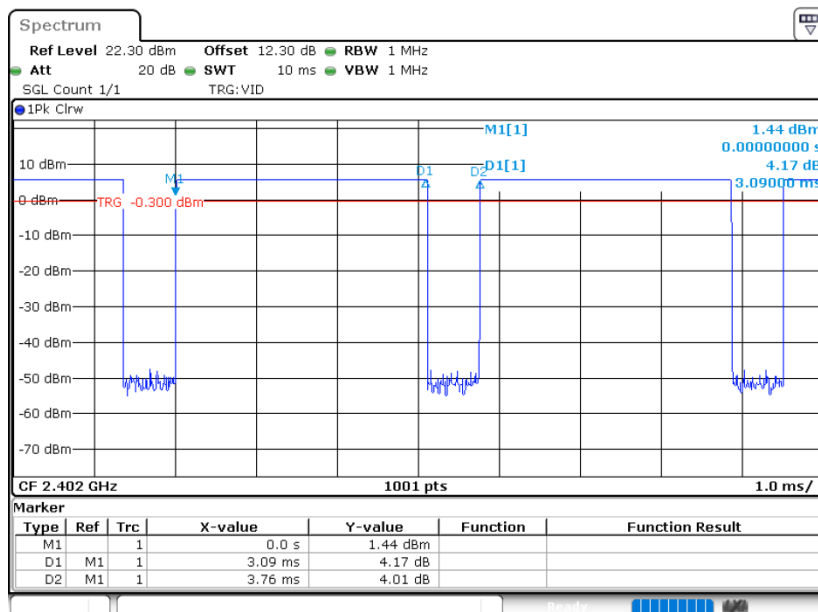



Bluetooth LE 2Mbps

