



**APPROVAL SHEET
FOR ANTENNA**

CUSTOMER: xiaomi

FA-MAIN-SZ0204

FA-DIV-SZ0205

AAC P/N: FA-3IN1-SZ0206

CUSTOMER P/N: C3S F Antenna

CUSTOMER	APPROVER	CHECKER

AAC ACOUSTIC TECHNOLOGIES HOLDINGS INC.

**Add: AAC Technology Building, NO.18., Xinxu Road, North Hi-Tech
Industrial Park, Nanshan District, Shenzhen, P.R. China 518057**

Tel : 0086 755 26054538

AAC Confidential Information



Main antenna:GSM850/900/1800/1900,WCDMA B1/5/8,FDD-LTE B1/3/5/7/8/20/28,TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 1/24

ME	张明	Check/Appr.	
Package Eng.			
RF	王啊琦	Check/Appr.	

Date	Issue	Detail changes
2022/6/14	x4	Preliminary

Table of contents

1. Scope
2. Environmental Requirement
3. Electrical Characteristic Measurement Method
4. Pictures of prototype and antenna
5. Matching Circuit
6. Passive Measurement Data
7. Active Measurement Data
8. Antenna measurement spec on RF test jig
9. Mechanical layout and Dimensions
10. Package
11. General Reliability

AAC Confidential Information



Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO.	0	Issue:	x4	Revision Date:	2022/6/15	Page:	2/24
-----	---	--------	----	----------------	-----------	-------	------

1. Scope

This document contains required environmental, electrical characteristic, mechanical, package and reliability test requirements.

2. Environmental Requirement


all components must be free from lead (Pb) and other banned or restricted substances according to customer's requirements.

3. Electrical Characteristic Measurement Method


3.1 Measurement method

To measure the Return Loss and VSWR, Smith Chart, Vector Network Analyzer Agilent E5071C was used. Satimo SG24 Anechoic chamber was used to measure the Efficiency, Gain, TRP and TIS.

3.1.1 Return Loss and VSWR

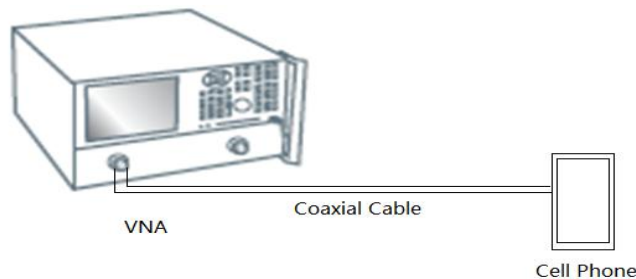


3.1.2 Efficiency, Gain, OTA measurement

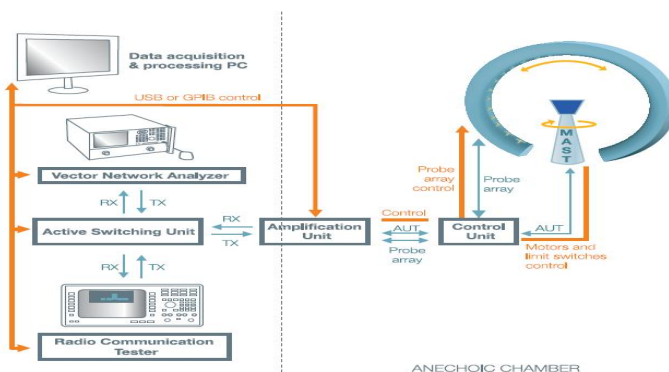


Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 3/24


3.1.3 Cutting plane and polarization

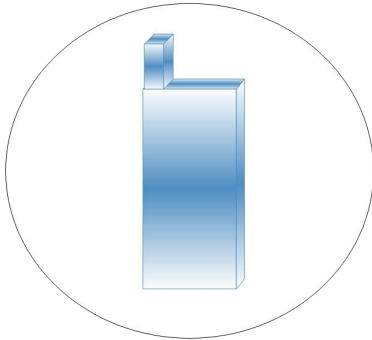


Phi=0deg

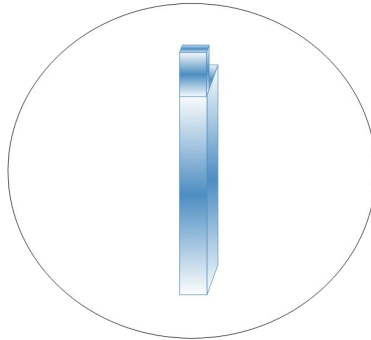

Phi=90deg

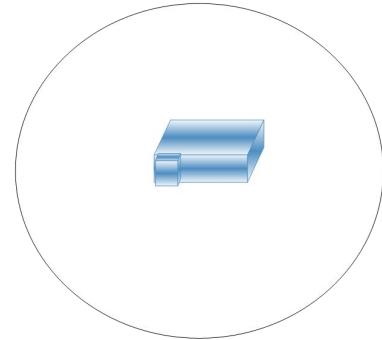

Theta=90deg

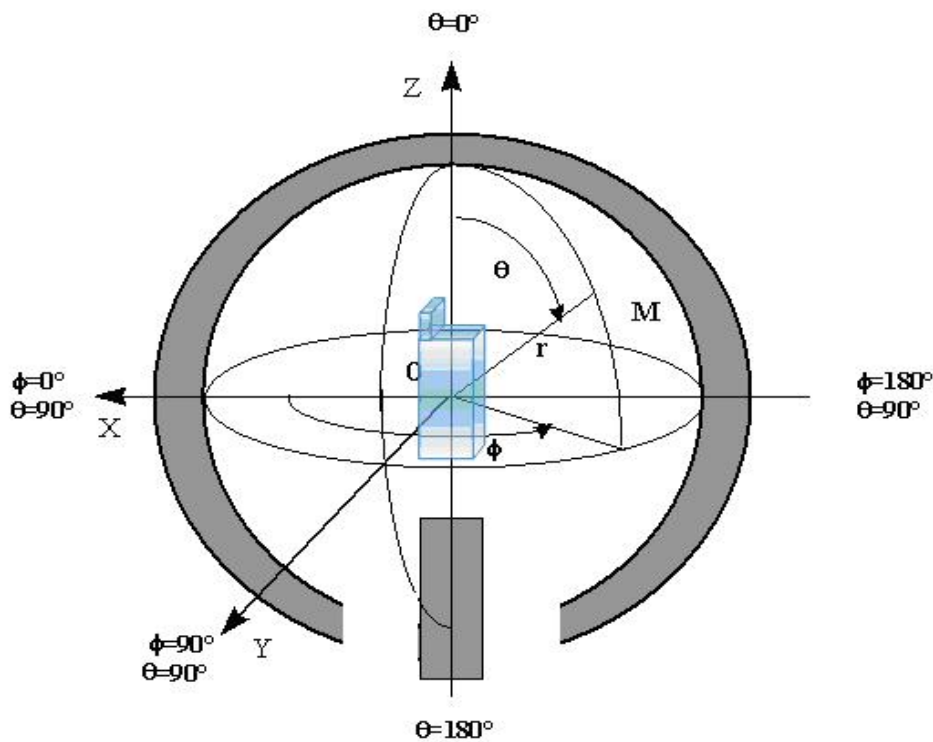


AAC Confidential Information

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;


NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 6/24

6. Passive Measurement Data


6.1 Main Ant

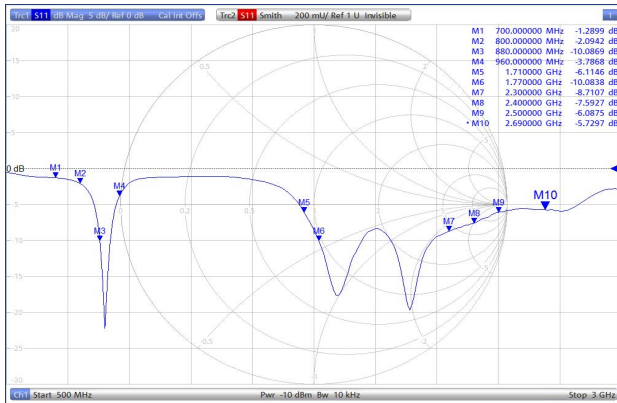


状态1

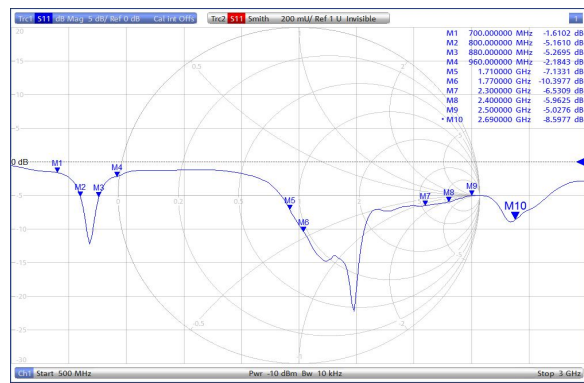

状态2

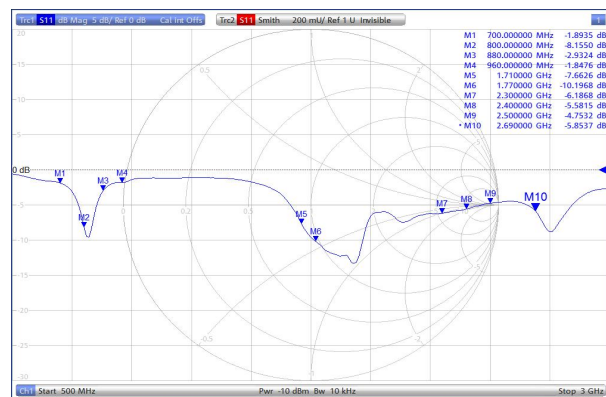

状态3

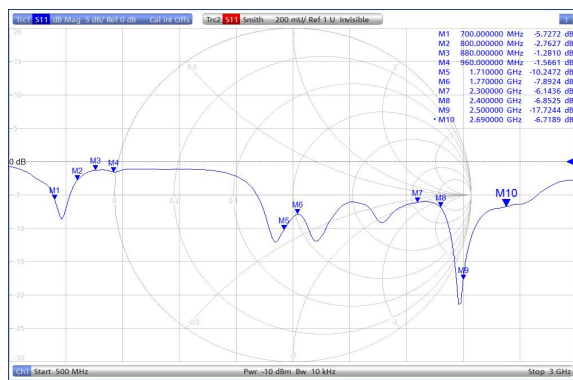


状态4


Fig. 1 Return Loss

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;


NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 7/24

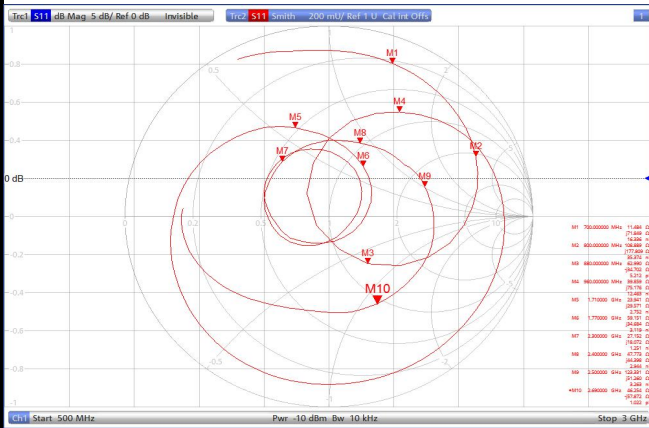


状态1

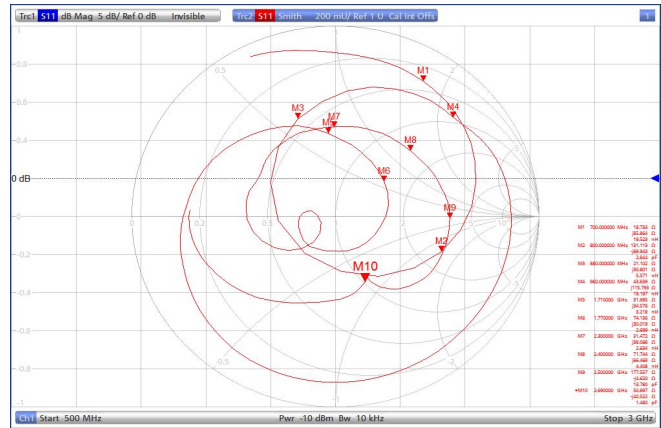

状态2

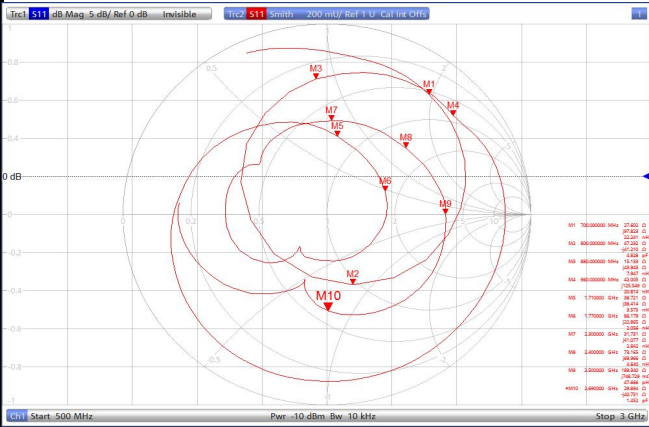

状态3

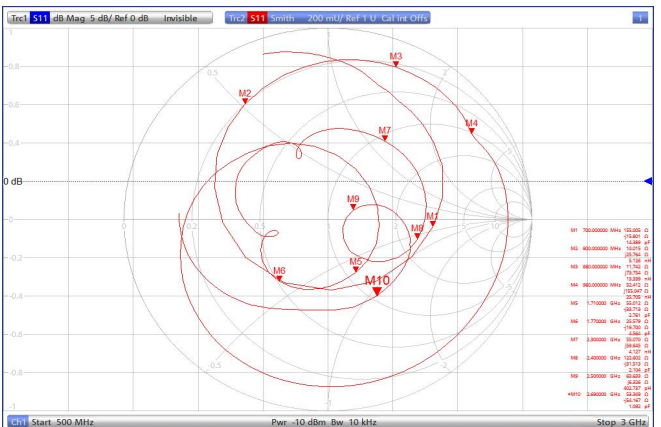

状态4

Fig.2 Smith Chart

AAC Confidential Information

DIV antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;


NO. 0

Issue: x4


Revision Date: 2022/6/15

Page: 8/24


6.2 Diversity antenna

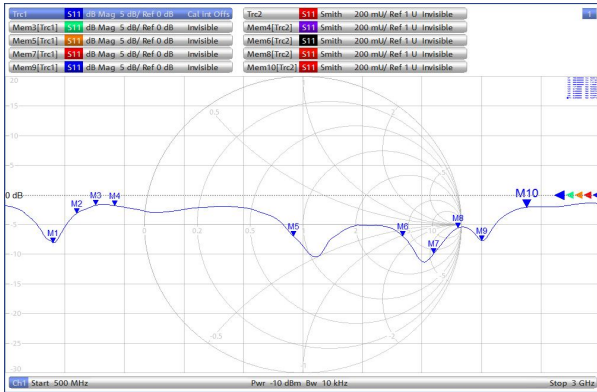


状态1

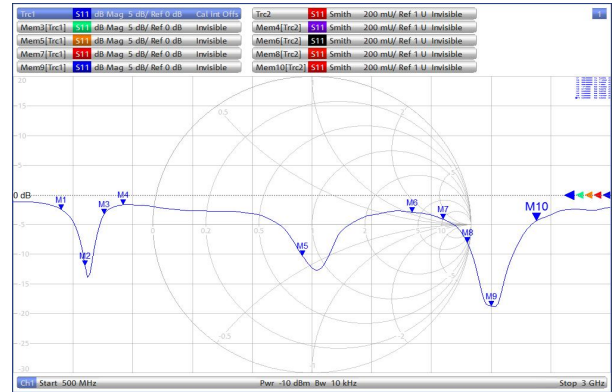

状态2

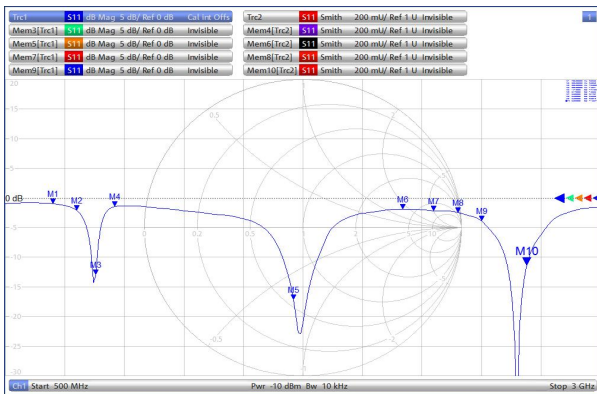

状态3

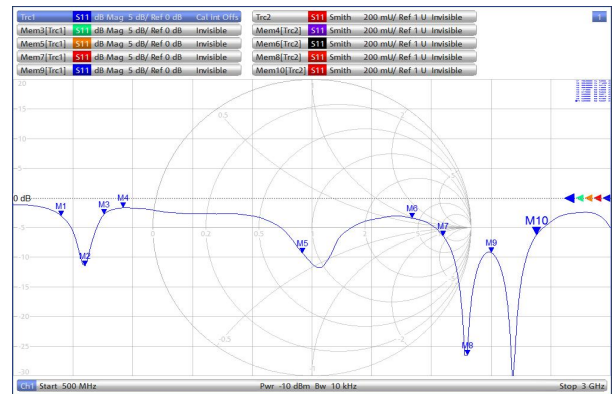


状态4

Fig.1 Return Loss


AAC Confidential Information

DIV antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;


NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 9/24

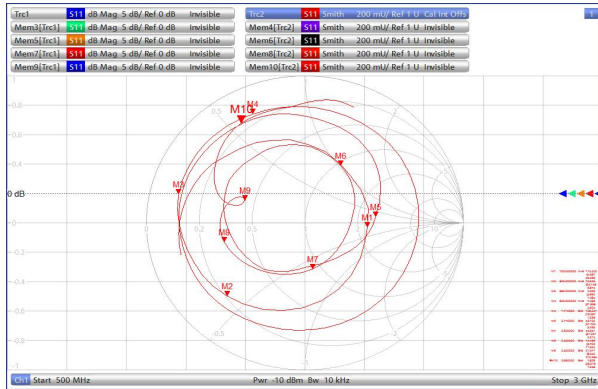


状态1

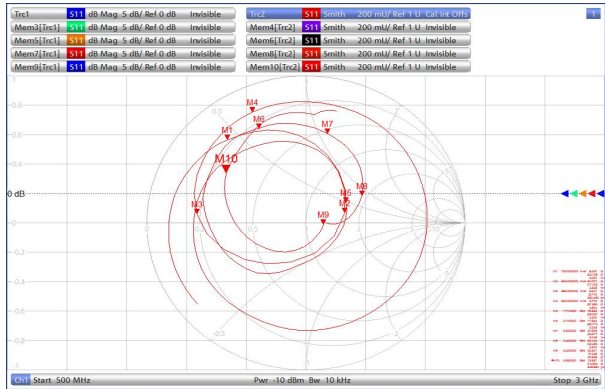

状态2

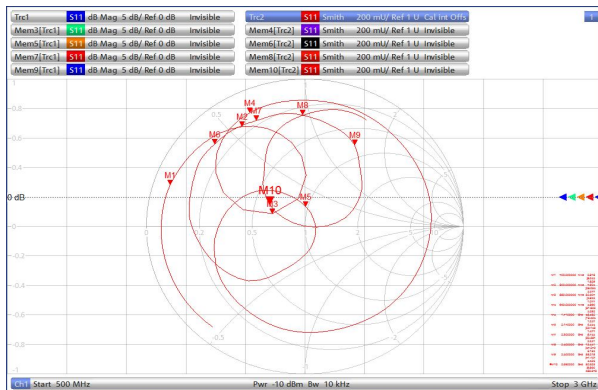

状态3

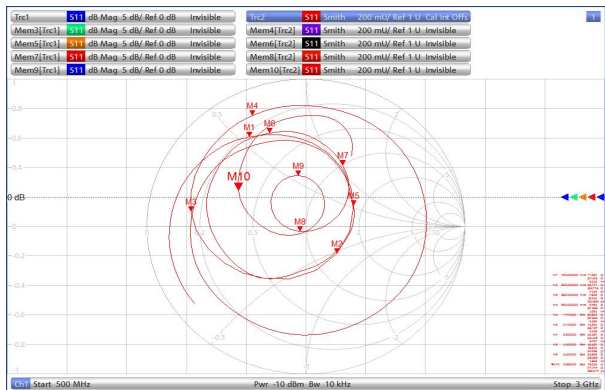

状态4

Fig.2 smith chart

GPS&WIFI antenna:GPS,WIFI 2.4G;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 10/24

6.3 GPS/BT/WIFI Ant

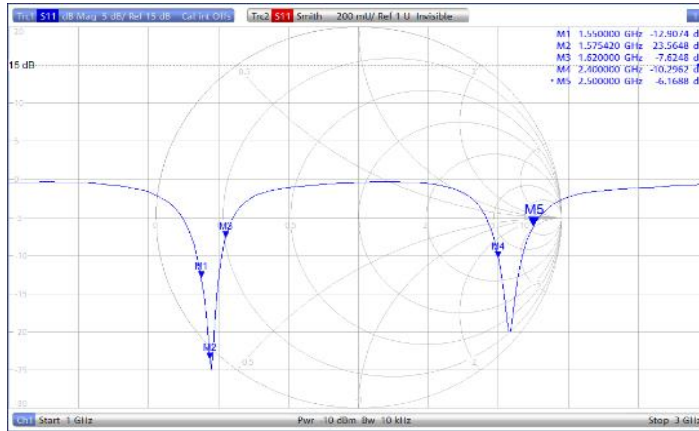


Fig.1 Return Loss

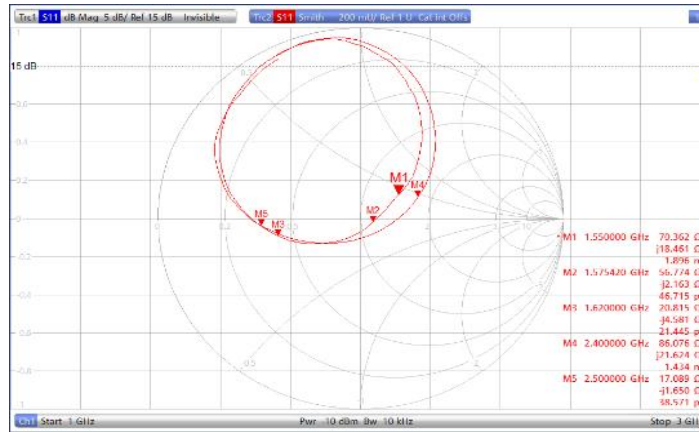


Fig.2 smith chart


AAC Confidential Information

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 11/24

6.4 Radiation Pattern

Main ant

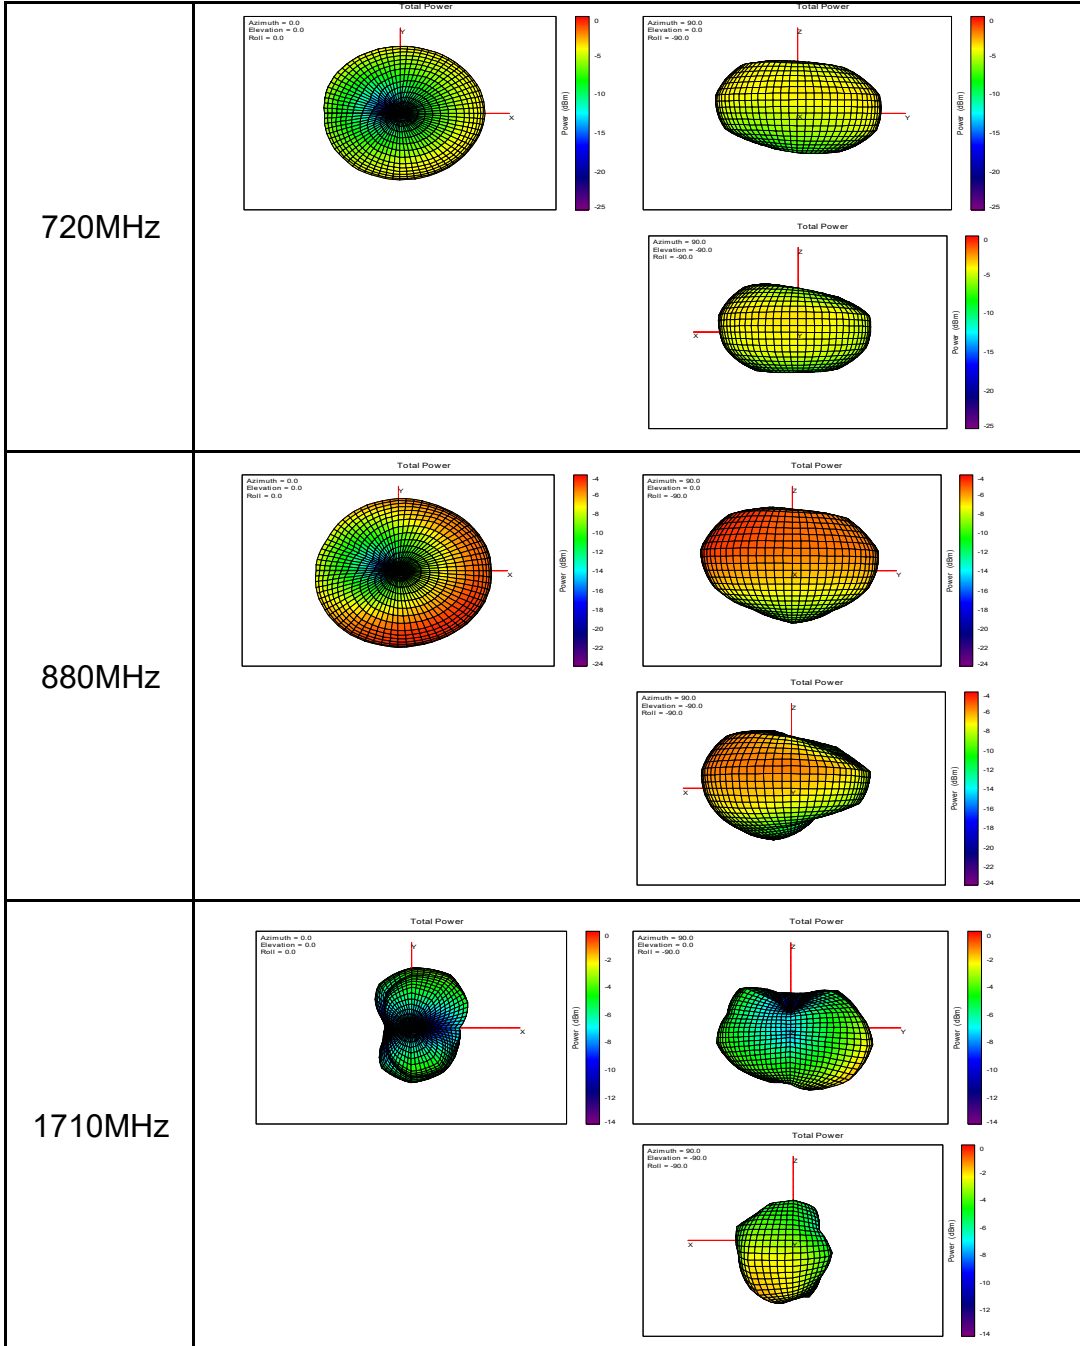


AAC Confidential Information

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 12/24

6.4 Radiation Pattern

Main ant

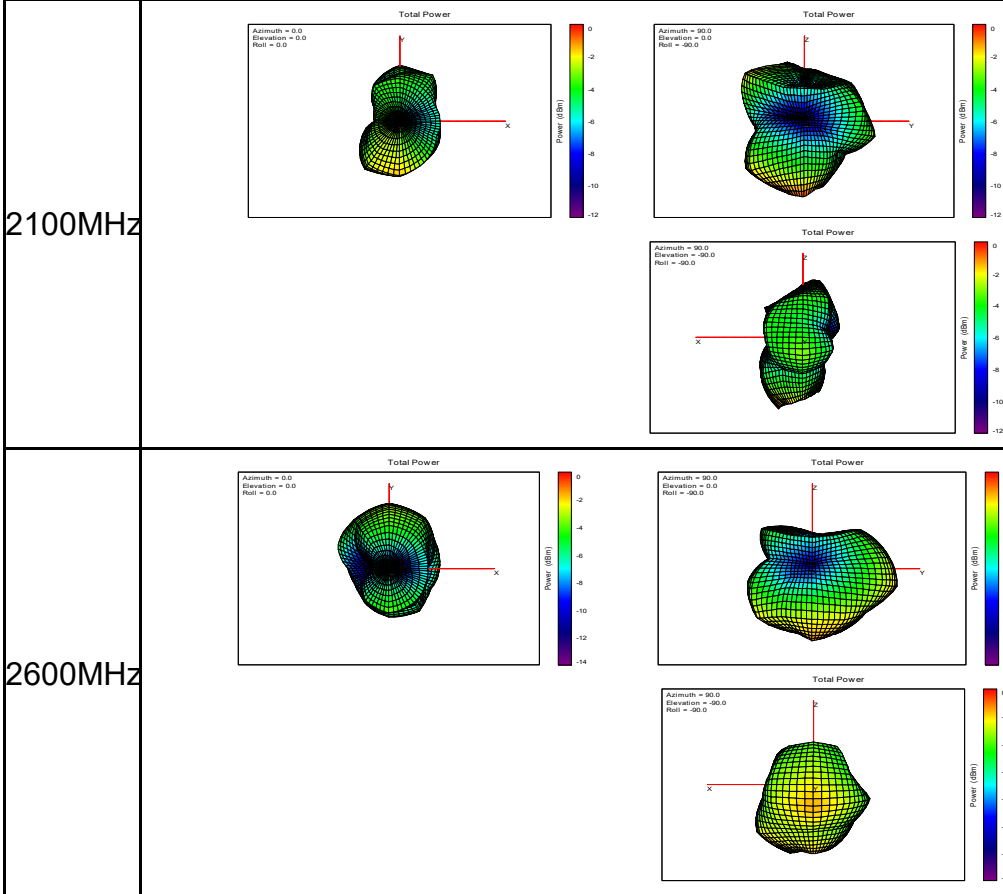


DIV antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 13/24

6.4 Radiation Pattern

Diversity ant

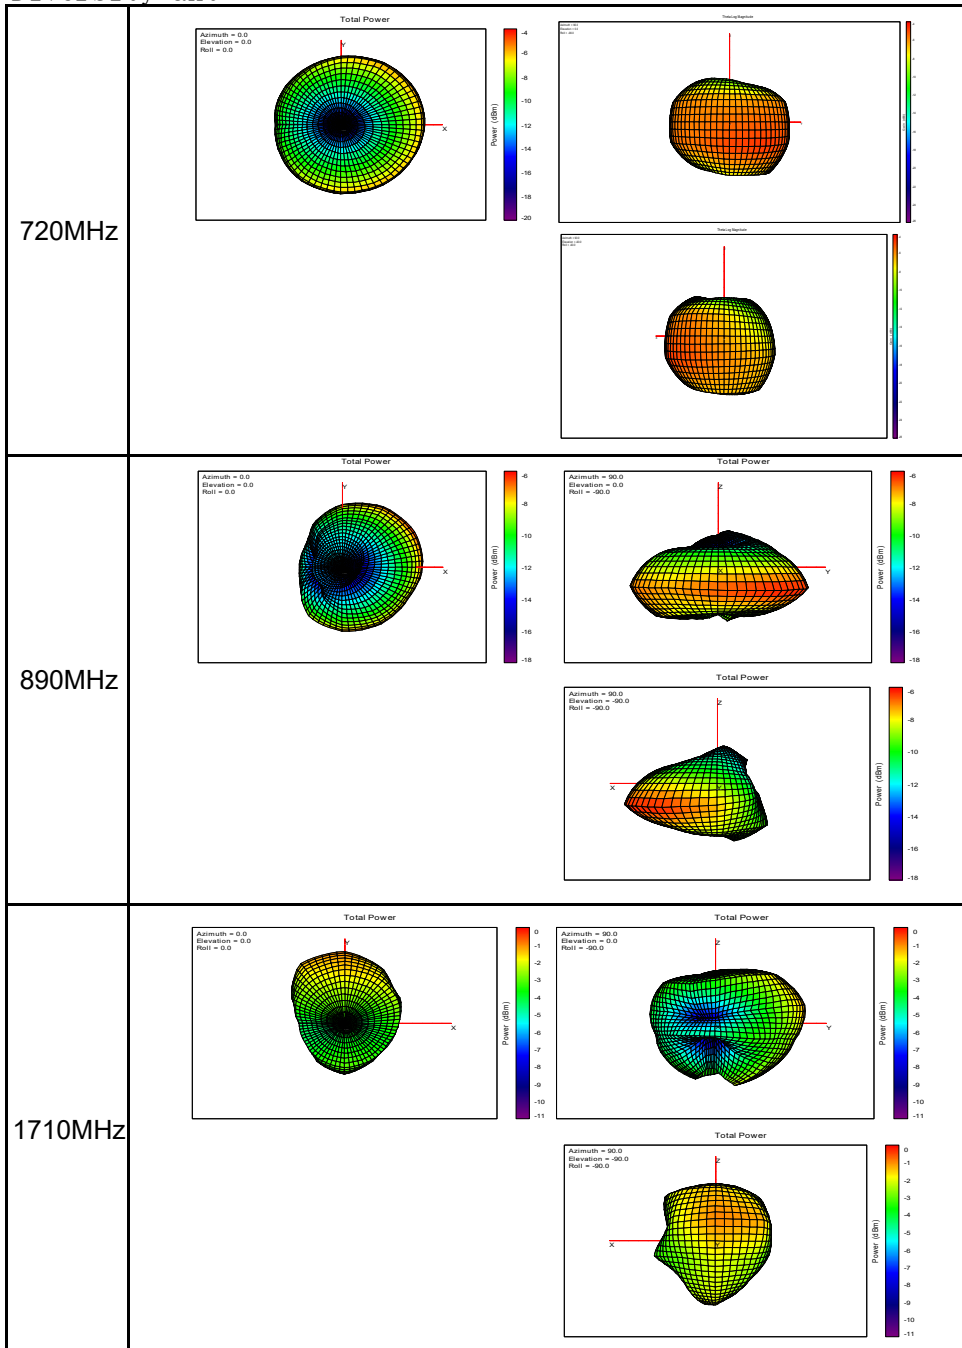




DIV antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 14/24

6.4 Radiation Pattern

Diversity ant

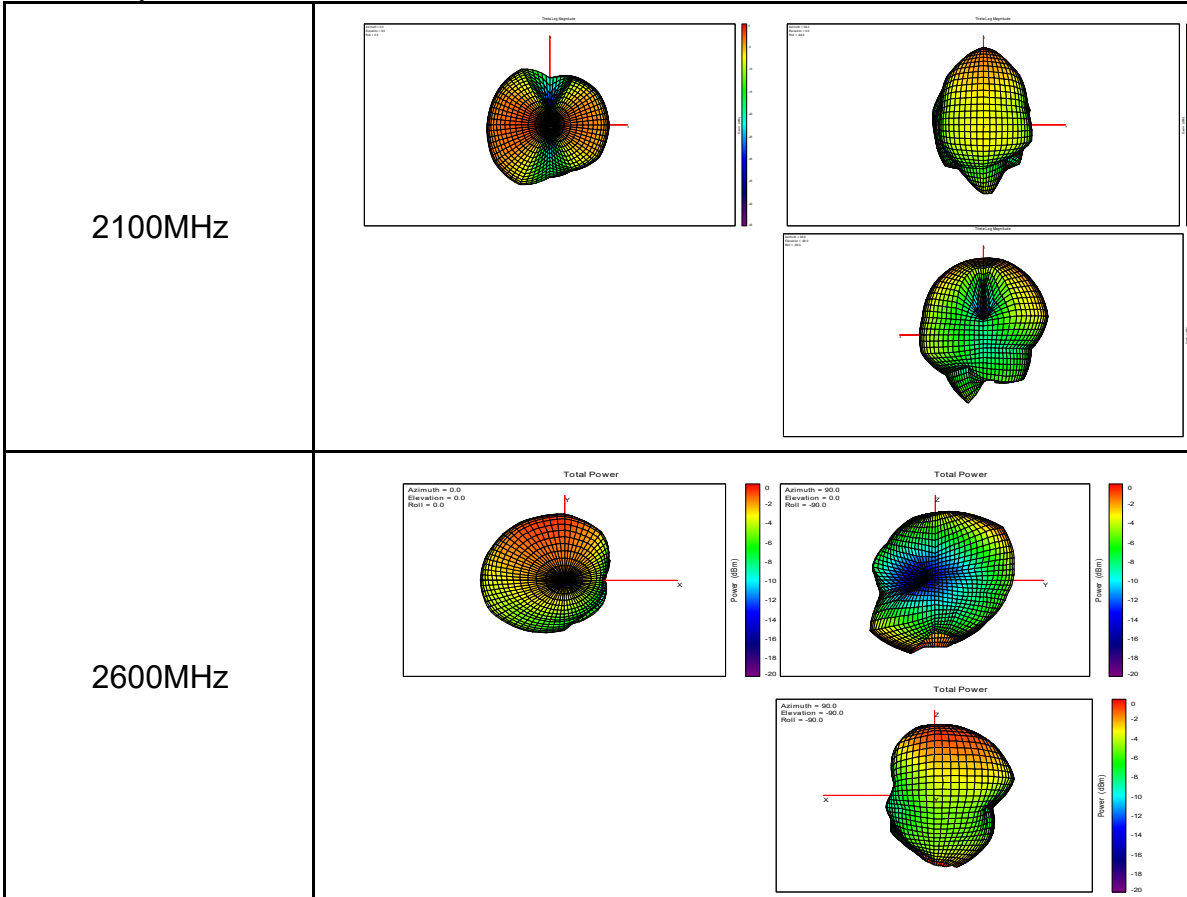

AAC Confidential Information




GPS&WIFI antenna:GPS,WIFI 2.4G;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 15/24

6.4 Radiation Pattern

GPS&wifi ant

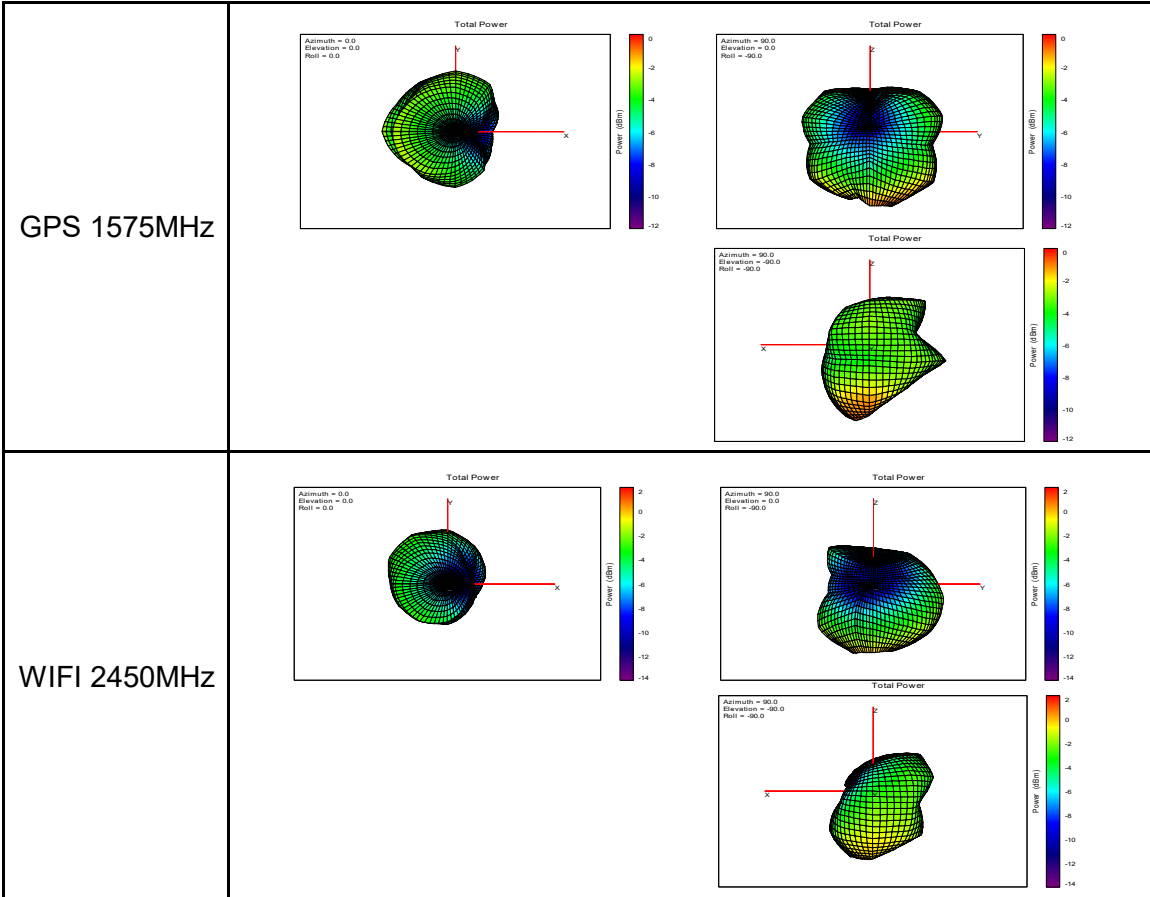

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO: 0 Issue: x4 Revision Date: 2022/6/15 Page: 16/24

6.5 Efficiency main ant

Fre (MHz)	Eff (dB)	Eff (%)	Peak Gain
700	-7.7	17.2	-4.6
720	-6.3	23.3	-3.7
740	-7.0	20.2	-4.3
760	-7.9	16.3	-5.2
780	-8.0	15.8	-4.8
800	-9.9	10.2	-6.8
820	-8.4	14.4	-4.7
840	-7.8	16.7	-4.4
860	-7.3	18.6	-4.2
880	-7.7	16.9	-4.3
900	-8.8	13.2	-5.3
920	-8.2	15.0	-4.7
940	-8.7	13.5	-5.1
960	-10.0	9.9	-6.3
1710	-5.6	27.7	-1.3
1730	-5.6	27.6	-1.3
1750	-5.3	29.7	-1.2
1770	-4.9	32.6	-0.7
1790	-5.1	30.7	-0.9
1810	-5.3	29.6	-1.0
1830	-5.3	29.8	-1.1
1850	-5.2	30.2	-0.9
1870	-5.3	29.8	-0.9
1890	-4.6	34.8	-0.5
1910	-4.9	32.3	-0.7
1930	-4.7	33.9	-0.3
1950	-4.7	34.3	-0.4
1970	-4.5	35.3	-0.4
1990	-4.5	35.8	-0.1
2010	-4.4	36.4	0.3
2030	-4.0	39.4	0.6
2050	-4.2	37.8	0.3
2070	-4.7	33.8	-0.4
2090	-5.2	30.1	-0.6
2110	-5.8	26.5	-0.7
2130	-5.6	27.4	0.3
2150	-5.7	27.0	0.9
2170	-5.3	29.2	1.6

Fre (MHz)	Eff (dB)	Eff (%)	Peak Gain
2190	-5.3	29.3	1.4
2210	-5.0	31.5	1.3
2230	-4.5	35.2	1.8
2250	-4.5	35.1	1.3
2270	-4.5	35.3	0.5
2290	-4.2	37.8	0.2
2310	-4.6	34.7	-0.6
2330	-4.9	32.0	-1.1
2350	-5.1	31.2	-1.5
2370	-5.3	29.8	-2.0
2390	-5.1	31.0	-1.6
2410	-5.0	31.5	-1.7
2430	-5.0	31.9	-1.6
2450	-5.6	27.7	-2.1
2470	-5.6	27.7	-2.2
2490	-5.6	27.5	-2.1
2510	-5.2	30.0	-0.9
2530	-5.2	30.3	-0.9
2550	-5.3	29.5	-1.3
2570	-5.4	28.6	-1.3
2590	-5.8	26.3	-1.9
2610	-5.9	26.0	-2.5
2630	-5.9	25.5	-2.9
2650	-6.3	23.6	-3.1
2670	-6.2	23.8	-3.3
2690	-6.2	23.7	-2.9

AAC Confidential Information



DIV antenna:GSM850/900/1800/1900,WCDMA B1/5/8,FDD-LTE B1/3/5/7/8/20/28,TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date 2022/6/15 Page: 17/24

6.5 Efficiency

Diversity ant

Frequency (M)	Eff. (Db)	Eff. (%)	Peak Gain
700	-8.4	14.5	-5.4
720	-7.6	17.2	-4.5
740	-8.3	14.9	-4.9
760	-9.2	12.0	-5.8
780	-7.8	16.8	-4.7
800	-7.7	16.9	-4.1
820	-7.2	19.0	-3.2
840	-7.9	16.3	-4.3
860	-8.1	15.4	-4.4
880	-7.1	19.5	-3.4
900	-7.6	17.3	-3.9
920	-9.7	10.7	-6.1
940	-12.1	6.1	-8.5
960	-13.9	4.0	-10.4
1710	-4.1	39.1	-0.9
1730	-4.0	40.1	-0.4
1750	-3.8	41.8	-0.2
1770	-3.7	42.8	-0.4
1790	-4.1	38.6	-0.9
1810	-4.9	32.7	-1.0
1830	-5.3	29.8	-1.4
1850	-5.9	25.9	-1.4
1870	-5.9	25.9	-1.2
1890	-5.2	30.4	-1.0
1910	-5.4	29.1	-1.4
1930	-5.1	31.0	-1.5
1950	-5.2	30.4	-1.5
1970	-5.2	30.0	-1.6
1990	-5.4	29.0	-1.8
2010	-5.4	29.0	-1.6
2030	-5.0	31.5	-1.3
2050	-5.1	30.8	-1.3
2070	-5.4	28.7	-1.5
2090	-5.6	27.8	-1.5
2110	-5.6	27.4	-1.6
2130	-5.1	30.7	-1.1
2150	-5.1	31.0	-0.7
2170	-5.0	31.7	-0.6

Frequency	Eff. (Db)	Eff. (%)	Peak Gain
2190	-5.2	30.0	-0.6
2210	-5.2	30.1	-0.6
2230	-5.0	31.4	-0.5
2250	-5.4	29.0	-0.3
2270	-5.7	26.7	-1.0
2290	-6.3	23.4	-1.1
2310	-6.6	22.0	-1.5
2330	-6.8	20.9	-1.5
2350	-6.7	21.3	-1.5
2370	-6.8	20.8	-2.1
2390	-6.6	21.9	-2.0
2410	-6.5	22.1	-2.0
2430	-6.7	21.5	-1.8
2450	-7.7	17.2	-2.7
2470	-8.0	15.7	-3.1
2490	-7.1	19.3	-2.2
2510	-6.8	21.1	-1.5
2530	-6.3	23.4	-0.9
2550	-5.9	25.5	-0.6
2570	-5.6	27.5	-0.4
2590	-5.4	29.1	-0.1
2610	-5.0	31.5	0.2
2630	-4.8	33.5	0.7
2650	-5.0	32.0	0.8
2670	-4.9	32.1	1.0
2690	-5.1	31.0	1.1

AAC Confidential Information

GPS&WIFI antenna:GPS,WIFI 2.4G;
NO. 0 **Issue:** x4 **Revision Date:** 2022/6/15 **Page:** 18/24

**6.5 Efficiency
GPS/WIFI**

Frequency/MHZ	Eff (dB)	Eff (%)	Gain (dB)	Upper Hem. Total Radiated Pwr (dBm)
1550	-4.6	34.6	-1.1	-5.0
1560	-4.2	37.8	-0.4	-4.7
1570	-4.3	36.8	-0.4	-4.9
1580	-4.5	35.4	-0.7	-5.2
1590	-4.8	33.5	-0.6	-5.6
1600	-4.9	32.1	-1.1	-5.9
1610	-4.9	32.3	-0.8	-6.1
1620	-4.8	32.8	-0.7	-6.0

2400	-6.0	25.2	-0.6	-7.1
2410	-5.6	27.7	-0.4	-6.7
2420	-5.2	30.2	0.0	-6.3
2430	-4.9	32.5	0.5	-5.9
2440	-4.9	32.7	0.5	-5.9
2450	-5.2	30.4	0.0	-6.2
2460	-5.2	30.3	0.1	-6.2
2470	-5.1	30.6	0.2	-6.1
2480	-5.2	30.5	0.0	-6.1
2490	-5.2	30.3	-0.1	-6.1
2500	-5.2	30.3	-0.2	-6.1

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;
NO. 0

Issue: x4

**Revision
Date:**

2022/6/15

Page: 19/24

7. Active Measurement Data

BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
GSM850	128	23.3	-106.7	DCS1800	512	23.9	-106.7
	190	24.4	-106.8		699	24.8	-107.8
	251	25.0	-104.3		885	24.1	-106.4
GSM900	975	21.9	-104.7	PCS1900	512	24.4	-105.4
	38	23.5	-106.0		661	24.1	-104.9
	124	23.9	-104.0		810	24.3	-104.6
BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
WCDMA B1	9612	18.5	-111.3	WCDMA B8	2712	14.1	-106.5
	9750	18.3	-111.6		2788	15.3	-107.6
	9888	17.9	-109.9		2863	15.7	-106.3
WCDMA B5	4132	15.6	-108.4				
	4183	15.5	-108.9				
	4233	15.7	-107.4				

AAC Confidential Information



Product Specification

P/N

FA-MAIN-SZ0204

Main antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO.	0	Issue: x4	Revision Date:	2022/6/15	Page: 20/24
-----	---	-----------	----------------	-----------	-------------

7.Active Measurement Data

BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
LTE B1 (10M)	18050	18.5	-98.8	LTE B38 (20M)	37850	17.6	-93.7
	18300	18.2	-98.8		38000	17.8	-92.5
	18550	18.0	-97.7		38150	17.8	-92.3
LTE B3 (10M)	19250	17.7	-97.3	LTE B40 (20M)	38750	18.5	-93.7
	19575	18.1	-97.8		39150	18.8	-93.9
	19900	17.3	-96.4		39550	17.3	-92.9
LTE B5 (10M)	20450	15.1	-93.6	LTE B41 (20M)	39750	17.7	-93.5
	20525	15.3	-94.4		40620	17.9	-93.8
	20600	15.5	-93.7		41490	17.9	-91.8
LTE B7 (10M)	20850	17.6	-97.1				
	21100	17.5	-96.2				
	21350	17.7	-97.4				
LTE B8 (10M)	21500	13.9	-95.6				
	21625	15.3	-95.4				
	21750	15.5	-93.9				
LTE B20 (10M)	24200	16.2	-93.2				
	24300	16.0	-93.8				
	24400	14.9	-94.3				
LTE B28 (10M)	27260	13.6	-94.9				
	27410	15.6	-93.4				
	27610	16.6	-92.7				

DIV antenna:GSM850/900/1800/1900,WCDMAB1/5/8,FDD-LTE B1/3/5/7/8/20/28,TDD-LTE B38/40/41;
NO. 0 Issue: x4 Revision Date 2022/6/15 Page: 21/24

7.Active Measurement Data

BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
GSM850	128	23.9	-106.1	DCS1800	512	24.0	-107.1
	190	24.0	-105.9		699	24.9	-108.0
	251	24.2	-103.4		885	24.8	-107.0
GSM900	975	25.2	-103.1	PCS1900	512	25.1	-104.7
	38	25.7	-104.0		661	25.2	-104.9
	124	24.9	-101.9		810	24.8	-104.2
BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
WCDMA B1	9612	17.3	-110.6	WCDMA B8	2712	15.1	-104.6
	9750	17.2	-110.4		2788	16.2	-105.6
	9888	17.1	-108.8		2863	16.0	-104.6
WCDMA B5	4132	15.0	-107.8				
	4183	15.8	-108.3				
	4233	16.7	-106.4				

AAC Confidential Information



DIV antenna: GSM850/900/1800/1900, WCDMA B1/5/8, FDD-LTE B1/3/5/7/8/20/28, TDD-LTE B38/40/41;

NO. 0 Issue: x4 Revision Date: 2022/6/15 Page: 22/24

7.Active Measurement Data

BAND	CH	TRP	TIS	BAND	CH	TRP	TIS
LTE B1 (10M)	18050	17.2	-97.4	LTE B38 (20M)	37850	19.6	-93.7
	18300	17.1	-97.7		38000	19.3	-92.8
	18550	17.1	-96.4		38150	19.1	-92.3
LTE B3 (10M)	19250	17.6	-97.3	LTE B40 (20M)	38750	18.5	-93.7
	19575	18.2	-97.6		39150	18.9	-93.3
	19900	17.9	-96.5		39550	17.9	-92.5
LTE B5 (10M)	20450	15.1	-92.5	LTE B41 (20M)	39750	19.6	-94.1
	20525	16.0	-93.2		40620	19.5	-94.3
	20600	16.7	-92.9		41490	18.0	-92.3
LTE B7 (10M)	20850	19.6	-94.9				
	21100	19.7	-94.4				
	21350	19.8	-95.5				
LTE B8 (10M)	21500	16.1	-94.0				
	21625	16.6	-94.0				
	21750	15.6	-92.0				
LTE B20 (10M)	24200	16.7	-93.5				
	24300	16.4	-94.0				
	24400	15.5	-94.7				
LTE B28 (10M)	27260	13.8	-94.4				
	27410	15.3	-93.4				
	27610	15.4	-92.6				

GPS&WIFI antenna:GPS,WIFI 2.4G;

NO.	0	Issue: x4	Revision Date: 2022/6/15	Page: 23/24
-----	---	-----------	--------------------------	-------------

7.Active Measurement Data

GPS/BT/WIFI ant

BAND	CH	TRP	TIS
		11M	11M
B	1	12.71	-81.99
	7	12.68	-81.46
	13	12.5	-81.5
		6M	54M
G	1	11.27	-69.35
	7	11.31	-68.57
	13	11.19	-68.91

GPS	
TIS	-151.5
TICN	42.2
UHS	-148.1

8. Antenna measurement spec on RF test jig

Test band	Reference frequency(MHz)	Spec(MHz)
MAIN	952 / 1067	±15
	1946 / 2622	±25
	3078 / 3499	±35
DIV	981 / 1028	±15
	2185 / 2240	±25
GPS & WIFI2.4G	1636 / 1738	±15
	2930 / 3101	±25