


# Wireless Stereo Speaker

## User Manual

### Model: B8


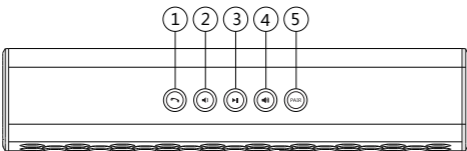


#### Safety Tips:

1. Please read through the safety and operating instructions before using the product
2. Please keep the instructions for future reference
3. Please follow all the instructions stipulated in the operation manual
4. Do not use in humid areas such as bathtub, basin, wet basement or swimming pool
5. Outdoor Use Warning: do not put this product in rainy or humid environment in case of fire and electric shock
6. Please place the product in a dry and stable position
7. Avoid any solid object or liquid falling into the cabinet
8. Do not disassemble the product for repair as it may cause safety problem



#### Specifications:

Output power	-----	5W * 2
Distortion	-----	0.5%
Frequency response range	-----	90HZ-20KHZ
SNR	-----	80DB
Bluetooth version	-----	Bluetooth 3.0
Control mode	-----	Touch control
Input source	-----	LINE, Bluetooth 3.0
Charging	-----	USB 5V / 1A
Bluetooth distance	-----	33ft
Loudspeakers	-----	2" x2





1. Hands-free button
2. Volume down button
3. Play/Pause button
4. Volume up button
5. Pairing Button
6. 3.5mm audio input interface
7. Power button
8. Charging jack


#### Power On / Off:

**POWER ON:** Long-press the power button  on the right side of the machine to turn it on  
**POWER OFF:** Long-press the power button  to turn it off when in the state of power-on

#### Touch keys Introduction:

**1. **  
 Speakerphone function: in Bluetooth mode, when a call comes in, click the CALL button to enter speakerphone mode or press for more than 1 second to reject the call; when playing music in Bluetooth mode, press the CALL button for more than 1 second to automatically redial the last dialed number.

**2. **  
 Volume down function, click to stepping decrease, long-press to continuously decrease, the LED light flashes once slowly each time the volume decreases.

**3. **  
 In Bluetooth mode press to switch between playback and pause; in LINE mode switch between mute and un-mute, the green light flashes in mute state.

#### 4.

Volume up function, click to stepping increase, long-press to continuously increase, the LED light flashes once slowly each time the volume increases.

#### 5. PAIR

Long-press to disconnect Bluetooth or re-enter pairing status in Bluetooth mode, the indicator light flashes in this case.

#### Bluetooth connectivity:

1. Press the power button to turn on the machine;
2. Please keep the unit in Bluetooth mode (default mode is Bluetooth, blue light flashing);
3. Bluetooth enabled devices connect to this unit:  
 Android devices: click on Settings> Wireless & networks> Bluetooth settings> Scan device in order;  
 iOS devices: click on Settings> Bluetooth or Settings> General> Bluetooth in order;
4. Select "B8" from the list of Bluetooth device and click "Connect", the blue indicator light will be constant on if connected successfully, then you can enjoy music from the Bluetooth device through this unit.

#### Indicators and input mode Description:

**Blue light flashing:** indicates that the Bluetooth is waiting to pair, the default power on mode is Bluetooth

**Blue light constant on:** Bluetooth connected successfully

**Green light constant on:** indicating the LINE IN input mode. It automatically switches to LINE IN mode if you insert the 3.5mm audio cable in the state of power-on.

**Blue light and green light flash simultaneously:** the battery voltage is low, please recharge.

#### Troubleshooting:

1. **The speaker will not turn on**  
 To turn on the speaker, long-press the power button for 2 seconds  
 The battery is dead, please charge, and make sure the charging current is higher than 1A.
2. **Staccato**  
 Make sure that no barrier is between this unit and the Bluetooth device, and keep up in the range of 33ft.
3. **Cannot pair a Bluetooth device with**  
 Make sure the unit is in Bluetooth mode (blue light flashing), and please select the correct Bluetooth name of the unit.

#### Connect to other devices:

If other devices have a 3.5mm audio output port, you can use the attached 3.5mm audio cable to connect it to the 3.5mm LINE IN jack of this machine to play music.

#### Charging:

Please use computer's USB port or USB power adapter (sold separately: 5V1A USB power adapter is recommended) to charge for the product, do not use the machine before fully charged. Red indicator light on, indicating that charging begins.

The power light goes out when fully charged. It may not be able to charge the unit if the power is less than 5V / 500mA. The charging process will generate heat, please do not cover the unit with towels and clothes when charging, in case of fire.

#### Packing List:

- Wireless Stereo Speaker x1
- USB charging cable x1
- 3.5mm audio cable x1
- User Manual x1

## FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device is measured RF output power is less than the SAR exclusion threshold value for human head and body. Therefore, SAR test is not necessary.