



## B3506 WIRELESS HEADSET Instruction for use

### 1.Product parameters:


Bluetooth Version	4.1	Transmission distance	10 meters without obstruction
Product Type	Dynamic Headphones	Operating voltage	3.7V
Speaker diameter	40MM	Charging voltage	sDC4.7V-6
Speaker Impedance	32Ω	Product Weight	about 250G
Battery Capacity	400mAh	Size	190x195x75mm
Battery type	Lithium battery	Headphone Accessories	B3506 headset USB charging cable Manual Line IN cable
Charging time	3 hours		
Talk/music time	≥8 hours		

### 2.Headset Pairing:

- Switch on: Press the MFB for 2 seconds and along with "DI" tone
- Pairing: Long press MFB for 5 seconds, and release it till the red and blue LEDs blink alternately (Enter pairing mode). Along with "DU" tone. After successful connecting, the blue LED of the headset quickly blinks twice or three times every 4 seconds.
- Standby: Blue LED blinks once time every 5 seconds. Play mode: Blue LED blinks once time every 5 seconds.
- Unsuccessfully paired mode: The pairing mode will last 10 minutes. Blue LED quickly blinks for 1 minute, then blinks twice times every 5 seconds. If the headset still can't pair with any BT devices after 10 minutes, it will switch off.
- Switch off: Press the MFB for 5 seconds and along with "DU" tone

### 3.Descriptions:

- Power Bottom
- Answer/End Call / Play/pause music
- Long press: Volume+ / Short press: last song. When the volume is adjusted to max, you will hear an indication tone.
- Long press: Volume- / Short press: next song. When the volume is adjusted to min, you will hear an indication tone.
- USB charging port
- Line-in port
- 3-pole Line cable to Headphones
- Line cable Answer/End Call / Play/pause music
- Microphone
- International Standard (IP) / national standards (NK) toggle key. Switch IP/NK toggle key if sound is not clear, no sound at one side. Microphone is no works.
- Connect 4-pole to smartphones, ipad, computer etc single pole devices.



### 一、产品参数


产品类型	动感耳机	传输距离	10M无阻碍物
喇叭直径	40MM	工作电压	3.7V
喇叭阻抗	32Ω	充电电压	sDC4.7V-6
电池容量	400mAh	产品重量	约250G
电池类型	聚合物锂电池	产品尺寸	190x195x75mm
充电时间	3H	耳机附件	B3506耳机1 USBC线x1 说明书x1 Line IN连接线x1
续航时间	≥8		

### 二、如何正确连接蓝牙耳机


- 开机: 在关机状态, 长按电源键 (2S 左右), 发出 "嘟..." 提示音, 蓝牙已开机;
- 配对: 在开机状态, 长按播放键 (5S 左右) LED灯以0.1S闪烁 (即进入配对状态) 同时伴有 "嘟..." 声, 配对成功后, 蓝灯长亮, 耳机进入正常工作状态;
- 待机: 蓝灯每5秒闪烁一次;
- 正常播放模式: 蓝灯每5秒闪烁一次;
- 未连接成功模式: 蓝灯以刚开始配对时0.1S 快闪1分钟30秒后进入5秒后快闪两次, 10分钟后自动关机;
- 关机: 在开机状态, 长按电源键 (5S ), 发出 "嘟..." 提示音进入关机状态, 指示灯 (蓝灯) 灭。

### 三、功能介绍

- 电源键
- >||< 接听/接听/挂断电话键, 暂停/播放键
- + >> 音量+ (上一曲) 按一下为上一曲, 长按不放为音量加 音量加到最大时有低沉的提示音
- << 音量- (下一曲) 按一下为下一曲, 长按不放为音量减, 音量减到最小时有低沉的提示音
- IP/NK = USB充电接口
- Line-In 接口
- Line线三孔插头, 插在耳机Line接口上
- Line线接听, 挂断, 暂停, 播放按键
- 麦克风
- 国际标准(IP)/国内标准 (NK)切换键, 如在用Line线时, 出现耳机一边有声音, 一边没声音, 声音不清晰, 麦克风无作用的情况下, 说明此耳机不支持该设备, 需要切换国际标准/国内标准切换键
- Line线四孔插头, 适用于手机、平板电脑、笔记本电脑等3.5四极单插孔音频设备。



图例 (1)

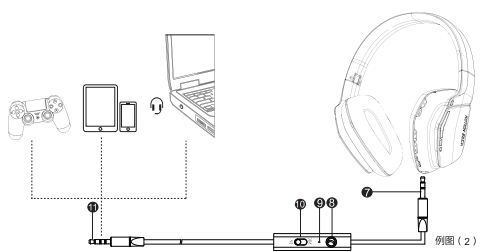

### 四、其他功能

- 当检测到有Line In插入时, 切换至Line In模式, 断开蓝牙, 指示灯全灭, 拔出Line In时,重新开机自动回蓝牙。
- 蓝牙模式, 无连接时, 搜索时间10分钟内无连接, 自动关机。
- 低电压报警, 当电压低于3.3V时, 发出蜂鸣报警声, 插入DC电源时保持工作状态。
- 欠压自动关机, 当电压低于3.1V时, 蓝牙自动关闭, 重新充电后, 即可正常使用。
- 充电智能管理, 插入DC电源时, 使用DC电源充电, 双色LED指示灯亮, 充电完成, 红灯熄灭。
- 当有电话接入时, 音乐自动暂停, 蓝牙耳机转到电话功能, 结束通话, 超长待机功能, 音乐自动接入, 当插入电源时结束通话时, 无操作可操作, 可重复拨打2次, 可重复拨打一次来电或者去电记录。
- 当在听音乐时, 连续按播放键2次, 可重复播放一次来电或者去电记录。

### 五、蓝牙耳机与电脑之间的连接

- 在电脑没有自带蓝牙功能的条件下, 请外接蓝牙适配器, 具体操作步骤如下:
  - 打开控制面板, 选择 "声音和设备"
    - 选择 "音频" 选项卡, 在 "播放设备" 里头选择你刚接好的蓝牙耳机设备
    - 再选择 "设备" 选项卡, 同样也是在 "播放设备" 里头选择你刚接好的蓝牙耳机设备
  - 蓝牙耳机 (长按耳机上的开机按钮直到蓝色的指示灯有规律的闪烁几秒钟一次, 这时就表明耳机已处于开机状态);
- 打开蓝牙管理软件, 同时按住蓝牙耳机上的功能键十秒左右, 当两种颜色的指示灯每隔几秒钟交替闪烁时, 表明蓝牙耳机已处于配对状态, 只有在这种状态下, 蓝牙耳机才有可能搜索到蓝牙耳机;
- 单击 "我的蓝牙", 选择 "搜索蓝牙设备" 来搜索附近的蓝牙设备, 如蓝牙耳机等;
- 如果搜索到附近有蓝牙设备的话, 被搜索到的设备就会列出;
- 在搜索到的设备上点击右键, 然后再选择 "配对";
- 在弹出的对话框里输入 "0000", 若有设置口令;


- 若电脑自带蓝牙适配器, 并且安装驱动软件后, 你先开始搜索, 若搜索到蓝牙耳机的话, 就直接连接, 试一下蓝牙耳机, 如果有声, 即已成功。

### 六、异常情况解决方案

- 手机无法搜索到蓝牙耳机:
  - 确认蓝牙耳机是否开机 (蓝灯亮, 蓝灯指示灯交替闪烁)
  - 如确认蓝牙耳机已开机但无法搜索到, 请重启蓝牙耳机。
- 蓝牙耳机和手机连接之后总是断断续续或有杂音:
  - 蓝牙耳机电量不足, 请尽快给蓝牙耳机充电;
  - 手机和蓝牙之间距离太远或接收距离, 请不要用手机蓝牙, 为了保持信号的连接稳定性, 请尽量保持蓝牙耳机在前方;
  - 其它蓝牙耳机用户是否会听到异常的通话内容? 耳机与蓝牙耳机配对, 会建立仅供这两个蓝牙设备使用的专用链接。根据耳机所采用的蓝牙技术, 第三方是不容易监听通话内容的, 而且蓝牙无线信号的传输功率远低于普通移动电话, 所以这些信号很难被第三方侦测到。
- 当手机与蓝牙耳机发出有效距离后会怎样?
  - 当手机与蓝牙耳机发出有效距离后, 蓝牙耳机与手机的连接会自动断开, 当回到有效距离内时, 耳机会自动与手机连接, 不需要任何设置, 但是部分手机不支持该功能, 需要在设备列表内找到蓝牙设备选择连接即可。
- 蓝牙耳机电量是否耗尽?
  - 蓝牙耳机电量大部分是内置锂电池 (有少部分蓝牙耳机是用7号电池外), 电池不能更换。
- 如何给蓝牙耳机充电?
  - 将充电器插入蓝牙耳机, 将充电器带有释放标签的一面朝下, 耳机的正面朝上。
  - 将充电器另一端插入电源插座中, 充电时, 耳机的指示灯亮起直至充电结束, 第一次充电的时间大约需要 8个小时, 以后充电3小时左右。
  - 当充电结束时 (指示灯关闭), 从充电器中取下充电器, 将充电器插入耳机中取下。
- 蓝牙耳机电量不足, 请尽快给蓝牙耳机充电。
  - 在驾车行驶时, 可用原装的车载充电器给蓝牙耳机充电。

### 七、重要事项

- 为了避免听力损伤, 请限制你在高音量下使用耳机的时间, 并将音量设定在一个安全水平, 音量越高, 安全聆听时间就越短。
- 身处有源的设备场所时, 请暂停使用耳机, 为防止过热或损坏设备。
- 请不要将耳机靠近高温的场所, 例如加热设备附近或阳光直射的场所。
- 请不要将耳机浸入水中。
- 请不要将耳机含酒精, 辛辣或腐蚀性清洁剂, 如有需要, 请使用软布进行清洁, 并用稀释的温肥皂水清洗该产品。
- 请不要将耳机存放在温度低于-15度或高于35度的地方, 在低温条件下, 电池的寿命可能会缩短。
- 请使用指定的USB充电器, 充电电压 DC4.7V-6V

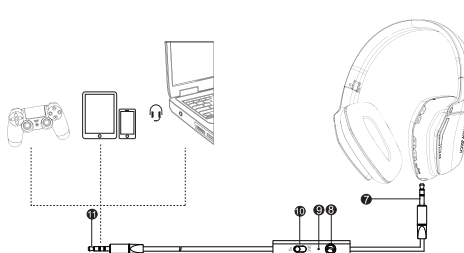

### 4.Other functions:

- It will switch to Line-in mode automatically when plug Line-in cable – disconnect the Bluetooth LED off. On the contrary, it will switch to Bluetooth mode automatically when unplug Line-in cable – connect the Bluetooth LED On
- It will turn off automatically when there is no connection within searching time during Bluetooth mode
- There will be a warning "DI \* DI" sound when the voltage is lower than 3.3V. Keep working when inserting DC power.
- Headphones will turn off automatically when the voltage is lower than 3.1V. Press the power button to turn on after charging.
- Two-color red LED will be on when Insert the DC power, two-color red LED will be off when charging is completed.
- Music will automatically disconnect when there is phone call. Music connected automatically after ending the call
- Short press MFB twice to redial dialed call or answered call when listening to music.

### 5.Connection between the Bluetooth headset and computer

- Please purchase additional Bluetooth adapter if your computer do not have Bluetooth function itself
- Insert the Bluetooth adapter into the computer's USB port, install the Bluetooth adapter drivers, and follow below steps:
  - Open the Control Panel, select the "Sounds and Audio Devices"
  - Select the "Audio" tab, Choose what Bluetooth sound device you installed in "Playback device" and "Recording equipment" and click OK, then exit.
  - then select "Voice" tab, Choose what Bluetooth sound device you installed in "Playback device" and click then exit.
- Turn on the Bluetooth headset
- Bluetooth adapter can only be searched under pairing mode.
- Click "My Bluetooth" and select "search for Bluetooth devices" to search the surrounding Bluetooth devices such as Bluetooth headsets;

- All Bluetooth devices will be listed if there is Bluetooth devices around.
- Right-click on the device and choose "Pair"
- Enter "0000" as the pairing code if needed
- It can be connected directly if your computer has a Bluetooth adapter itself and installed software and driver

### 6.Anomalies Solutions

- Bluetooth headset can not be searched by your smart phones?
  - Confirm Bluetooth headset is turned on.
  - Restart the Bluetooth headset if your Bluetooth headset still can not be searched
- There is always a disconnected or mummur after connecting the Bluetooth headset
  - Bluetooth power is low, you need to charge the Bluetooth headset as soon as possible.
  - There is a barrier between the phone and the Bluetooth or beyond the connecting distance.
- Does other Bluetooth phone users hear my conversation?
  - Because it will create only two dedicated links Route and RF power of Bluetooth wireless signal is far less than normal mobile phone, so these signals are too difficult to be detected by third parties
- What happens when the phone and Bluetooth headset beyond the effective range?
  - The Bluetooth headset will disconnect to the phone automatically, the headset will automatically connect with the phone when back within range without any set, but some phone does not support this function.
- How to charge the Bluetooth headset?
  - Connect the charger plug into the headset, with the charger release label side down.
  - Connect the other end of the charger into a power outlet, the headset indicator lights on until charging is done when charging. It takes about eight hours for first charge. Later it takes around three hours.
  - When charging is completed (LED is off), remove the charger from the power outlet, press the release button on the charger plug, remove the charger from the headset. Note: When you drive a vehicle, use the original vehicle power charger to charge the Bluetooth headset.

### 7.IMPORTANT

- In order to avoid damaging to your hearing, Please set a proper volume when listening to music. The higher volume is, the shorter safe listening time is.
- Do not use the headphones to prevent damaging or malfunction in potential dangerous places
- Do not expose the headset at high temperature places, such as in the vicinity of heating facilities
- Do not immersed headphones in water.
- Please do not use any alcoholic ammonia to clean. If necessary, use a soft cloth to clean it.
- Do not store the headphones below -15 degrees or above 35 degrees where, the battery life may be shortened under low temperatures circumstances
- Use the specified USB charging device, (Charging voltage DC4.7V-6V)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different than that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Distributed by  
**DongGuan Kotlion Electronics Tech Co.,LTD**  
Bk 35, Sanjiang Industrial Zone, Hengli Town,  
Dongguan City, Guangdong P.R. China

东莞市酷兹电子科技有限公司  
地址: 东莞市横沥镇三江工业区35栋  
Tel:+86-0769-33388111 Hot line: 400-180-2096  
Fax: 0769-86729009 Website: www.kotlion.cc

