

# **FCC Test Report**

Report No.: AGC00806201001FE02

FCC ID	С С	2AGPMHJ-802IMH
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Bluetooth 4.2 ultra-low power module
BRAND NAME	:	HongJia
MODEL NAME	i	НЈ-802ІМН, НЈ-801ІМН, НЈ-803ІМН, НЈ-805ІМН
APPLICANT	:	Tangshan HongJia electronic technology Co., LTD.
DATE OF ISSUE	s i	Nov. 02, 2020
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restructions of the stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



#### Report No.: AGC00806201001FE02 Page 2 of 46

#### **REPORT REVISE RECORD**

R	eport Version	Revise Time	Issued Date	Valid Version	Notes
)	V1.0		Nov. 02, 2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



#### **TABLE OF CONTENTS**

	1. VERIFICATION OF COMPLIANCE	5
	2. GENERAL INFORMATION	6
	2.1. PRODUCT DESCRIPTION	6
	2.2. TABLE OF CARRIER FREQUENCYS	6
	2.3. RELATED SUBMITTAL(S)/GRANT(S)	
	2.4. TEST METHODOLOGY	
	2.5. SPECIAL ACCESSORIES	7
	2.6. EQUIPMENT MODIFICATIONS	
	2.7. ANTENNA REQUIREMENT	
	3. MEASUREMENT UNCERTAINTY	8
	4. DESCRIPTION OF TEST MODES	9
	5. SYSTEM TEST CONFIGURATION	
	5.1. CONFIGURATION OF TESTED SYSTEM	
	5.2. EQUIPMENT USED IN TESTED SYSTEM	
	5.3. SUMMARY OF TEST RESULTS	
	6. TEST FACILITY	11
	7. PEAK OUTPUT POWER	
	7.1. MEASUREMENT PROCEDURE	
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	7.3. LIMITS AND MEASUREMENT RESULT	
	8. 6 DB BANDWIDTH	
	8.1. MEASUREMENT PROCEDURE	
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.3. LIMITS AND MEASUREMENT RESULTS	
	9. CONDUCTED SPURIOUS EMISSION	
	9.1. MEASUREMENT PROCEDURE	
	9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
	9.3. MEASUREMENT EQUIPMENT USED	
	9.4. LIMITS AND MEASUREMENT RESULT	
	10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
St	<b>10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY</b>	on of AGC. The test results

presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC00806201001FE02 Page 4 of 46

10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	
11. RADIATED EMISSION	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### **1. VERIFICATION OF COMPLIANCE**

Tangshan HongJia electronic technology Co., LTD.	
352 No. 2 # building power springs in Qianxi County, Tangshan City, Hebei Province	
Tangshan HongJia electronic technology Co., LTD.	
352 No. 2 # building power springs in Qianxi County, Tangshan City, Hebei Province	
Tangshan HongJia electronic technology Co., LTD.	
352 No. 2 # building power springs in Qianxi County, Tangshan City, Hebei Province	
Bluetooth 4.2 ultra-low power module	
HongJia	
HJ-802IMH	
HJ-801IMH, HJ-803IMH, HJ-805IMH	
All the same except for the model name.	
Oct. 12, 2020 to Oct. 30, 2020	
No any deviation from the test method	
Normal	
Pass	
AGCRT-US-BLE/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By

Eddy · Liu

Eddy Liu (Project Engineer)

Oct. 30, 2020

Max Zhan

hang

Reviewed By

Max Zhang (Reviewer)

Nov. 02, 2020

Approved By

Forrest Lei (Authorized Officer)

Nov. 02, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "bedicated fresh g/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Bluetooth 4.2 ultra-low power module". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	-5.808dBm (Max)		
Bluetooth Version	V4.2		
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ⊠GFSK 1Mbps □GFSK 2Mbps		
Number of channels	40 Channel		
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	2.8dBi		
Hardware Version	V1.0		
Software Version	V2.0		
Power Supply	DC 1.8V-3.8V		
Note: The EUT doesn't support	BR/EDR.		

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
		2404 MHz
2400~2483.5MHz		
	38	2478 MHz
	39	2480 MHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for FCC ID: 2AGPMHJ-802IMH filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

Web: http://cn.agc-cert.com/



#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz,  $Uc = \pm 3.9 dB$
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted,  $Uc = \pm 0.8 dB$
- Uncertainty of RF power density, conducted, Uc = ±2.6 dB
- Uncertainty of spurious emissions, conducted,  $Uc = \pm 2.7 dB$
- Uncertainty of Occupied Channel Bandwidth:  $Uc = \pm 2 \%$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel TX		
2	Middle channel TX		
3	High channel TX		

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

#### Software Setting 23 Direct Test Mode Tool View Menu Common Configuration Transmit Radio Control COM Port · dBm Port Number Payload Model PRBS9 Mode · Payload Lengt Bytes 💽 Transmitter O Receiver Common Radio Control Single channel Multiple channels Run Time Channel LE 1Mbps PHY Receiver Radio Control Nordic Semiconductor Start Close


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### **5. SYSTEM TEST CONFIGURATION**

#### 5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

#### 5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth 4.2 ultra-low power module	HJ-802IMH	2AGPMHJ-802IMH	EUT
2	Control Box	N/A	USB-TTL	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

#### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

#### TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	C N/A	N/A	N/A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 7. PEAK OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE

For peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

#### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

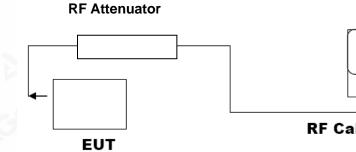

#### **Spectrum Analyzer**



**RF** Cable

Compliances Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by th g/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter aphorization of AGE presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance he test results the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### 7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT						
	FOR GFSK MOUDULAT					
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail			
2.402	-5.808	30	Pass			
2.440	-6.866	30	Pass			
2.480	-8.127	30	Pass			

CH0

📕 Keysight Spectrum Analyzer - Swept SA					
RL RF 50 Ω AC Center Freq 2.40200000		SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	09:09:43 PM Oct 13, 2020 TRACE 1 2 3 4 5 6	Frequency
	PNO: Fast +++ IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Hold:>100/100	2.401 770 GHz	Auto Tune
10 dB/div Ref 20.00 dBm				-5.808 dBm	
10.0					Center Freq 2.402000000 GHz
-10.0		<b>↓</b> 1			Start Freq 2.399500000 GHz
-20.0					Stop Freq 2.404500000 GHz
-40.0					CF Step 500.000 kHz <u>Auto</u> Mar
-60.0					Freq Offset 0 Hz
-70.0 Center 2.402000 GHz				Span 5.000 MHz	
#Res BW 1.5 MHz	#VBW	5.0 MHz	Sweep 1	.000 ms (1001 pts)	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





CH19



CH39

Keysight Spectrum Analyzer - Swept SA	CORREC SEI	NSE:INT		00-1 C-05 PM 0-5 12	
Center Freq 2.48000000	GHz	Avg T	ALIGN AUTO ype: Log-Pwr old: 100/100	09:16:05 PM Oct 13 TRACE 1 2 3 TYPE M	Frequency
10 dB/div <b>Ref 20.00 dBm</b>	PNO: Fast Trig: Free IFGain:Low Atten: 30			2.479 760 ( -8.127 d	Auto Tun
10.0					Center Fre 2.480000000 GH
10.0	<b>↓</b> <sup>1</sup>				Start Fre 2.477500000 GH
30.0				Hulling	Stop Fre 2.482500000 GH
40.0					CF Ste 500.000 kH Auto Ma
60.0					Freq Offso 0 H
-70.0 Center 2.480000 GHz				Span 5.000	MHz
#Res BW 1.5 MHz	#VBW 5.0 MHz		Sweep 1	.000 ms (1001	pts)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated frame/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da/Castra the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### 8.6 DB BANDWIDTH

#### 8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

#### **8.3. LIMITS AND MEASUREMENT RESULTS**

LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Applicable Limits					
Applicable Limits	Test Data	Criteria				
	Low Channel	698.3	PASS			
>500KHZ	Middle Channel	706.1	PASS			
	High Channel	688.7	PASS			

#### 09:09:30 PM Oct 13, 2020 Radio Std: None Center Freq: 2.40200000 GHz Trig: Free Run Avg|Hol #Atten: 30 dB Frequency 2.402000000 GHz Center Fred Avg|Hold:>100/100 Radio Device: BTS #IFGain:Low Ref 20.00 dBm **Center Freq** 2.402000000 GHz Span 3 MHz Center 2.402 GHz CF Step #Res BW 100 kHz #VBW 300 kHz Sweep 1 ms 300.000 k Auto Mar **Total Power** 1.16 dBm **Occupied Bandwidth** 1.2104 MHz Freq Offset 0 H **Transmit Freq Error** 12.424 kHz **OBW Power** 99.00 % x dB Bandwidth 698.3 kHz x dB -6.00 dB

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC00806201001FE02 Page 16 of 46



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphroization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Presting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






#### TEST RESULT FOR ENTIRE FREQUENCY RANGE GFSK MODULATION IN LOW CHANNEL

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Figure/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, be test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





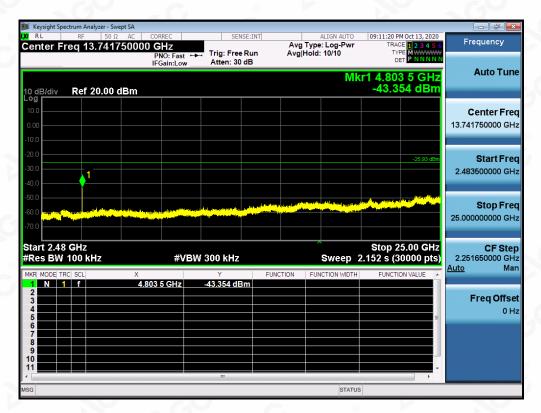

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com




Keysight Spectrum Analyzer - S			, ,		-	
Center Freq 2.4400	000000 GHz PNO: Wide ↔	Trig: Free Run		ALIGN AUTO e: Log-Pwr : 10/10	09:14:15 PM Oct 13, 2020 TRACE 1 2 3 4 5 TYPE MWWW DET P N N N N	Frequency
	IFGain:Low	Atten: 30 dB		Mkr1 2.4	439 987 7 GHz	Auto Tune
10 dB/div Ref 20.00	) dBm				-6.970 dBm	
Log 10.0						Conton From
0.00		11				Center Freq 2.440000000 GHz
						2.44000000 GH2
-10.0						
-20.0						Start Freq
-30.0				The second second		2.438500000 GHz
-40.0					N. N	
-50.0					and a start of the	Stop Freq
-60.0						2.441500000 GHz
-70.0						
Center 2.440000 GH #Res BW 100 kHz		V 300 kHz		woon 20	Span 3.000 MHz 00 ms (30000 pts)	
		V 300 KHZ			· · ·	Auto Man
MKR MODE TRC SCL	× 2.439 987 7 GHz	Y -6.970 dBm	FUNCTION FUN	NCTION WIDTH	FUNCTION VALUE	
2 3						Freq Offset
4 5						0 Hz
6						
7 8						
9						
11						
	· · · ·	m	· · ·		•	
MSG				STATUS		
🎉 Keysight Spectrum Analyzer - S				UTATOO		
						- đ ×
<b>LXI</b> RL RF 50	Ω AC CORREC	SENSE:INT		ALIGN AUTO	09:14:24 PM Oct 13, 2020	Frequency
	Ω AC CORREC D000000 GHz PNO: Fast ↔	Trig: Free Run		ALIGN AUTO	09:14:24 PM Oct 13, 2020 TRACE 1 2 3 4 5 TYPE MWWWW DET P NN NN	Frequency
<b>LXI</b> RL RF 50	Ω AC CORREC	T-1	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 12345 TYPE MWWWW DET PNNNN	Frequency
04 RL RF 50 Center Freq 1.2150	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN	Frequency Auto Tune
<b>LXI</b> RL RF 50	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 12345 TYPE MWWWW DET PNNNN	Frequency Auto Tune
W         RL         RF         50           Center Freq 1.2150           10 dB/div         Ref 20.00	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN	Frequency Auto Tune
XM         RL         RF         50           Center Freq 1.2150         10 dB/div         Ref 20.00	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN	Frequency Auto Tune Center Freq
OM         RL         RF         50           Center Freq 1.2150         1.2150           10 dB/div         Ref 20.00           10 dB/div         Ref 20.00	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN	Frequency Auto Tune Center Freq
OM         RL         RF         50           Center Freq 1.2150         10         dB/div         Ref 20.00           10 dB/div         Ref 20.00         0.00 </td <td>Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low</td> <td>Trig: Free Run</td> <td>Avg Type</td> <td>ALIGN AUTO e: Log-Pwr : 10/10</td> <td>TRACE 1 2 3 4 5 TYPE MUMMUN DET NNNNN 1 2.338 22 GHz -47.404 dBm</td> <td>Frequency Auto Tune Center Freq 1.215000000 GHz</td>	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MUMMUN DET NNNNN 1 2.338 22 GHz -47.404 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz
M         RL         RF         50           Center Freq 1.215(         10         dB/div         Ref 20.00           10 dB/div         Ref 20.00	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 12345 TYPE MWWWW DET PNNNN	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq
M         RL         RF         50           Center Freq 1.215(         10         dB/div         Ref 20.00           10 dB/div         Ref 20.00         0         0	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MUMMUM DET NNNNN 2.338 22 GHz -47.404 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq
M         RL         RF         50           Center Freq 1.215(         10 dB/div         Ref 20.00           Log	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MUMMUM DET NNNNN 2.338 22 GHz -47.404 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz
M         RE         50           Center Freq 1.215(         10         dB/div         Ref 20.00           Log	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MUMMUM DET NNNNN 2.338 22 GHz -47.404 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq
M         RE         50           Center Freq 1.215(         Ref 20.00           Log         Ref 20.00	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 2 3 4 5 TYPE MUMMUM DET NNNNN 2.338 22 GHz -47.404 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq
M         RL         RF         50           Center Freq 1.2150         Ref 20.00         Ref 20.00 <thref 20.00<="" th="">         Ref 20.00         <thr< td=""><td>Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low</td><td>Trig: Free Run</td><td>Avg Type</td><td>ALIGN AUTO e: Log-Pwr : 10/10</td><td>TRACE 1 23 4 5 TYPE MYNWW DET P NNNN 1 2.338 22 GHz -47.404 dBm -26.97 dBm</td><td>Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.400000000 GHz</td></thr<></thref>	Ω AC CORREC 000000 GHz PN0: Fast → IFGain:Low	Trig: Free Run	Avg Type	ALIGN AUTO e: Log-Pwr : 10/10	TRACE 1 23 4 5 TYPE MYNWW DET P NNNN 1 2.338 22 GHz -47.404 dBm -26.97 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.400000000 GHz
M         RE         50           Center Freq 1.215(         Ref 20.00           Log         Ref 20.00	Ω     AC     CORREC       D000000     GHz     PNO: Fast → IFGain:Low       D     Bm	Trig: Free Run		ALIGN AUTO E: Log-Pwr : 10/10 MIKT	TRACE 1 2 3 4 5 TYPE MUMMUM DET NNNNN 2.338 22 GHz -47.404 dBm	Frequency           Auto Tune           Center Freq           1.215000000 GHz           Start Freq           30.000000 MHz           Stop Freq           2.400000000 GHz           CF Step           237.000000 MHz
M         RF         50           Center Freq 1.215(         Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00           10.0         Ref 20.00         Ref 20.00           10.0 <thref 20.00<="" <="" td=""><td>Ω     AC     CORREC       D000000     GHz     PNO: Fast → IFGain:Low       D     Bm</td><td>Trig: Free Run Atten: 30 dB</td><td>Avg Type Avg Hold</td><td>ALIGN AUTO E: Log-Pwr : 10/10 MIKT</td><td>TRACE 1 2 3 4 5 TYPE MYNWW OET PNNNN 2.338 22 GHz -47.404 dBm -26.57 dBm 1 1.1 14 14 14 14 14 14 14 14 14 14 14 14 14</td><td>Frequency           Auto Tune           Center Freq           1.215000000 GHz           Start Freq           30.000000 MHz           Stop Freq           2.400000000 GHz           CF Step           237.000000 MHz</td></thref>	Ω     AC     CORREC       D000000     GHz     PNO: Fast → IFGain:Low       D     Bm	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MIKT	TRACE 1 2 3 4 5 TYPE MYNWW OET PNNNN 2.338 22 GHz -47.404 dBm -26.57 dBm 1 1.1 14 14 14 14 14 14 14 14 14 14 14 14 14	Frequency           Auto Tune           Center Freq           1.215000000 GHz           Start Freq           30.000000 MHz           Stop Freq           2.400000000 GHz           CF Step           237.000000 MHz
M         RF         50           Center Freq 1.215(         Ref 20.00           Log         Ref 20.00           Log <thref 20.00<="" th="">         Ref 20.</thref>	Ω     AC     CORREC       D00000     GHz     PN0: Fast → IFGain:Low       D     BM	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WWWW OET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1040.01 dBm -1.1040.01 -26.97 dBm -1.1040.01 -26.97 dBm -1.1040.	Frequency           Auto Tune           Center Freq           1.215000000 GHz           Start Freq           30.000000 MHz           Stop Freq           2.400000000 GHz           CF Step           237.000000 MHz
M         RF         50           Center Freq 1.215(         Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00            Ref 20.00         Re	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WWWW OET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1040.01 dBm -1.1040.01 -26.97 dBm -1.1040.01 -26.97 dBm -1.1040.	Frequency           Auto Tune           Center Freq           1.215000000 GHz           Start Freq           30.000000 MHz           Stop Freq           2.400000000 GHz           CF Step           237.000000 MHz           Auto Man
M         RF         50           Center Freq 1.2150         Freq 1.2150           I0 dB/div         Ref 20.00           Log         Interview           I0 dB/div         Ref 20.00           Log         Interview           I0 dB/div         Ref 20.00           Log         Interview           Interview         Ref 20.00           Start 30 MHz         Ref 20.00           KRR MODE TRC SCL         Interview           Interview          Inte	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WHITE DET P NNNN 2.338 22 GHz -47.404 dBm 26.97 dBm -	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man
M         I         F         50           Center Freq 1.215(         10         dB/div         Ref 20.00           Log	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WWWW OET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1.1040.01 dBm -1.10 -26.97 dBm -1.1040.01 dBm -1.1040.01 -26.97 dBm -1.1040.01 -26.97 dBm -1.1040.	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man
M         RF         50           Center Freq 1.215(         Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00           Start 30 MHz         Ref 20.00         Ref 20.00           KR         Robel Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00         Ref 20.00           Log         Ref 20.00         Ref 20.00         R	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WHITE DET P NNNN 2.338 22 GHz -47.404 dBm 26.97 dBm -	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man
M         RF         50           Center Freq 1.215(           I0 dB/div         Ref 20.00           Log	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WHITE DET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -26.97 dBm -1 -26.97 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man
M         RF         50           Center Freq 1.215(         Center Freq 1.215(           IO         dB/div         Ref 20.00           Log         Center Freq 1.215(           IO         dB/div         Ref 20.00           Log         Center Freq 1.215(           IO         dB/div         Ref 20.00           Log         Center Freq 1.215(           Start 30         Hz           #Res BW 100 kHz         KR           MKR         MODE TRC SCL         I           I         I         f         I           3         I         I         I           3         I         I         I           3         I         I         I           10         I         I         I           11         I         I         I         I	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WHITE DET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -26.97 dBm -1 -26.97 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man
M         RF         50           Center Freq 1.215(         Center Freq 1.215(           0         dB/div         Ref 20.00           10.0         Center Freq 1.215(           20.0         Center Freq 1.215(           30.0         Center Freq 1.215(           40.0         Center Freq 1.215(           50.0         Center Freq 1.215(           50.0         Center Freq 1.215(           50.0         Center Freq 1.215(           51.0         Center Freq 1.215(           51.0         Center Freq 1.215(           61.0         Freq 1.215(           7         7         7           7         7         7	Ω     AC     CORREC       D000000     GHz     PN0: Fast →       IFGain:Low     IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Type Avg Hold	ALIGN AUTO E: Log-Pwr : 10/10 MKr1 Weep 228	TRACE 1 2 3 4 5 TYPE M WHITE DET P NNNN 2.338 22 GHz -47.404 dBm -26.97 dBm -26.97 dBm -1 -26.97 dBm	Frequency Auto Tune Center Freq 1.215000000 GHz Start Freq 30.000000 MHz Stop Freq 2.40000000 GHz CF Step 237.00000 MHz Auto Man Freq Offset 0 Hz

Sompliance Dedicated Fe Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the soleciated resistanp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter exchorization of AG presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues to AGC by agc@agc-cert.com. /Inspection The test results Bf ne test report.





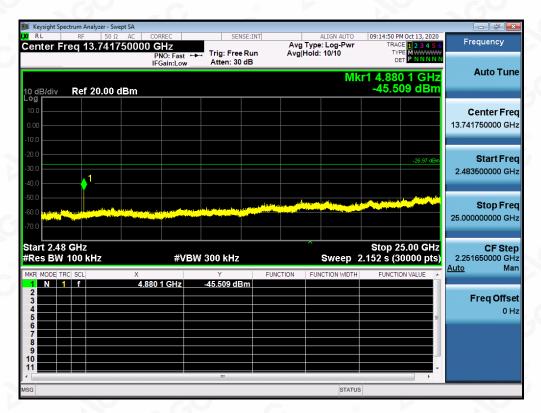

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com





#### **GFSK MODULATION IN HIGH CHANNEL**

Compliancesh Dedicated Fesh Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results be to the test of some and approver to the test of some any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





🎉 Keysight Spe													
Center Fi	RF	50 Ω 3 7500		ORREC		SENSE:	INT	Ava Tv	ALIGN AUTO		M Oct 13, 2020		Frequency
	eq 1	5.7500		PNO: Fast FGain:Low		: Free Ru en: 30 dE			id: 10/10	TY			Auto Tune
10 dB/div Log	Ref	20.00 (	dBm								35 dBm		
10.0 0.00													Center Freq 13.750000000 GHz
-10.0 -20.0 -30.0											-28.33 dBm		<b>Start Freq</b> 2.500000000 GHz
-40.0 -50.0 -60.0												:	<b>Stop Freq</b> 25.000000000 GHz
Start 2.50 #Res BW	100 k	Hz	X	#V	BW 300		FUNC	TION F		2.152 s (3	5.00 GHz 0000 pts)		<b>CF Step</b> 2.250000000 GHz <u>uto</u> Man
1 N 1 2 3 4 5				9 3 GHz	-47.3	35 dBm							<b>Freq Offset</b> 0 Hz
6 7 8 9 10													
•					Ţ	11			1	-	•		
MSG									STATU	S			

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com





#### TEST RESULT FOR BAND EDGE GFSK MODULATION IN LOW CHANNEL

#### GFSK MODULATION IN HIGH CHANNEL

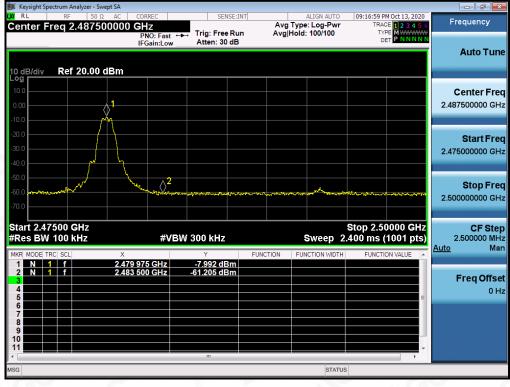

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated festing/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and horization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### **10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY**

#### **10.1. MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

#### **10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

Refer to Section 7.2.

#### **10.3. MEASUREMENT EQUIPMENT USED**

Refer to Section 6.

#### **10.4. LIMITS AND MEASUREMENT RESULT**

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-20.311	8	Pass
Middle Channel	-19.971	8	Pass
High Channel	-20.514	8	Pass

#### TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### **11. RADIATED EMISSION**

#### **11.1. MEASUREMENT PROCEDURE**


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test results of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00806201001FE02 Page 28 of 46

#### 11.2. TEST SETUP

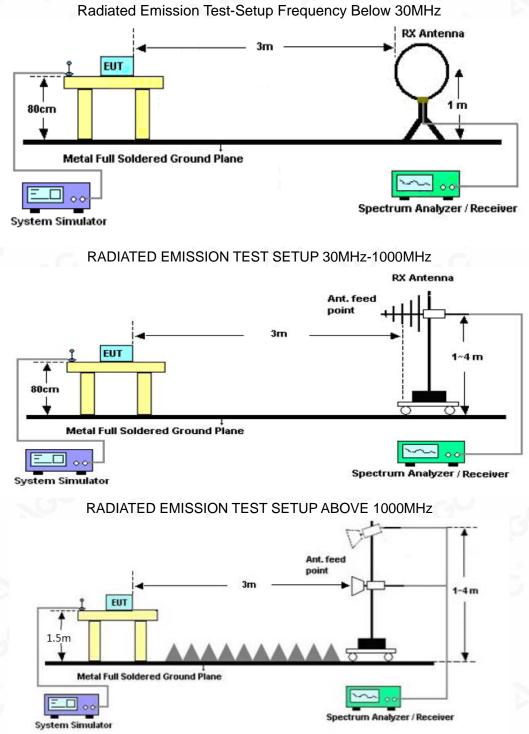

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter aphorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

#### **11.3. LIMITS AND MEASUREMENT RESULT**

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feature/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, without authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuerce of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC00806201001FE02 Page 30 of 46

#### **RADIATED EMISSION BELOW 1GHZ**

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

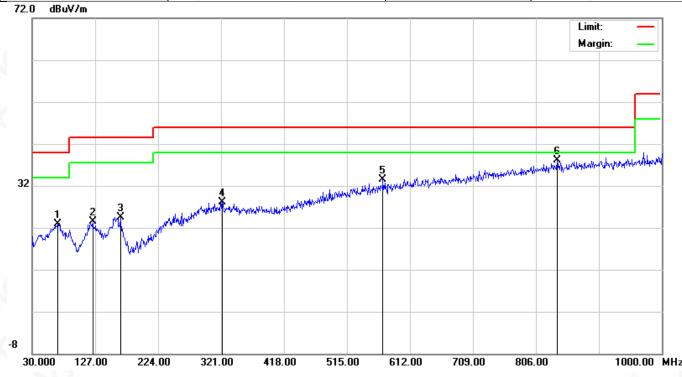

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		68.8000	5.87	16.96	22.83	40.00	-17.17	peak
2		123.1200	6.02	17.39	23.41	43.50	-20.09	peak
3		165.8000	7.62	16.85	24.47	43.50	-19.03	peak
4		322.9400	6.73	21.36	28.09	46.00	-17.91	peak
5		570.2900	7.16	26.37	33.53	46.00	-12.47	peak
6	*	838.9800	7.15	30.91	38.06	46.00	-7.94	peak

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the abeliated restriction of the stamp. Subscription of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



#### Report No.: AGC00806201001FE02 Page 31 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical
72.0 dBu∀/m	·	•	-

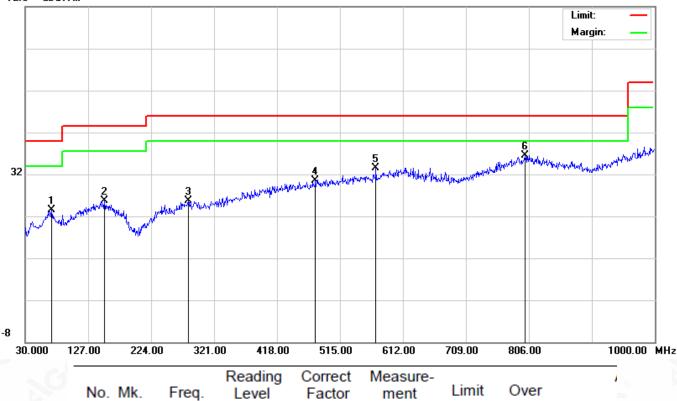

	No.	Mk.	Freq.	Level	Factor	ment	Limit	Over		
8			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	1		70.7400	6.55	16.95	23.50	40.00	-16.50	peak	-
	2		152.2200	6.51	19.21	25.72	43.50	-17.78	peak	-
	3		281.2300	5.74	19.91	25.65	46.00	-20.35	peak	
	4		477.1700	6.07	24.53	30.60	46.00	-15.40	peak	
	5		570.2900	7.06	26.37	33.43	46.00	-12.57	peak	
	6	*	800.1800	6.16	30.41	36.57	46.00	-9.43	peak	0

#### RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC00806201001FE02 Page 32 of 46

#### **RADIATED EMISSION ABOVE 1GHZ**

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	43.53	0.08	43.61	74	-30.39	peak
4804.000	35.76	0.08	35.84	54	-18.16	AVG
7206.000	39.94	2.21	42.15	74	-31.85	peak
7206.000	32.35	2.21	34.56	54	-19.44	AVG
69	O			0	0.5	
emark:			®			
actor = Anter	nna Factor + Cab	e Loss – Pre-	-amplifier.	®		

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.69	0.08	44.77	74	-29.23	peak
4804.000	34.54	0.08	34.62	54	-19.38	AVG
7206.000	39.11	2.21	41.32	74	-32.68	peak
7206.000	31.98	2.21	34.19	54	-19.81	AVG
R				0		
mark:			60		0	

Compliance Dedicated Fe Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "bedicated Past Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. g/Inspection he test results Šf the test report.



#### Report No.: AGC00806201001FE02 Page 33 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	42.43	0.14	42.57	74	-31.43	peak
4880.000	33.67	0.14	33.81	54	-20.19	AVG
7320.000	38.51	2.36	40.87	74	-33.13	peak
7320.000	31.85	2.36	34.21	54	-19.79	AVG
	©		4 109		6	
emark:				NO-	20	
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	43.02	0.14	43.16	74 💿	-30.84	peak
4880.000	33.94	0.14	34.08	54	-19.92	AVG
7320.000	38.76	2.36	41.12	74	-32.88	peak
7320.000	31.25	2.36	33.61	54	-20.39	AVG
mark:				<u> </u>		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approver, and AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC00806201001FE02 Page 34 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	41.31	0.22	41.53	74	-32.47	peak
4960.000	32.47	0.22	32.69	54	-21.31	AVG
7440.000	37.24	2.64	39.88	74	-34.12	peak
7440.000	30.12	2.64	32.76	54	-21.24	AVG
0			4	6	8	
emark:	0			0	0.5	
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Meter Reading	<ul> <li>Factor</li> </ul>	Emission Level	Limits	Margin		
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type	
41.85	0.22	42.07	74	-31.93	peak	
31.94	0.22	32.16	54 💿	-21.84	AVG	
37.63	2.64	40.27	74	-33.73	peak	
30.48	2.64	33.12	54	-20.88	AVG	
					69	
	(dBµV) 41.85 31.94 37.63	(dBµV)         (dB)           41.85         0.22           31.94         0.22           37.63         2.64	(dBµV)         (dB)         (dBµV/m)           41.85         0.22         42.07           31.94         0.22         32.16           37.63         2.64         40.27	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)           41.85         0.22         42.07         74           31.94         0.22         32.16         54           37.63         2.64         40.27         74	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dBµ           41.85         0.22         42.07         74         -31.93           31.94         0.22         32.16         54         -21.84           37.63         2.64         40.27         74         -33.73	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the store of t




#### Report No.: AGC00806201001FE02 Page 35 of 46


#### TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal



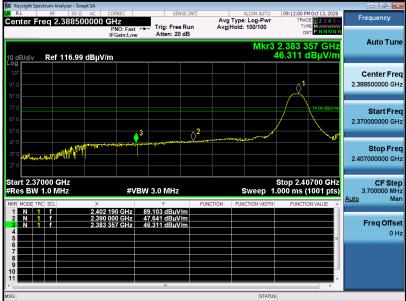

AV

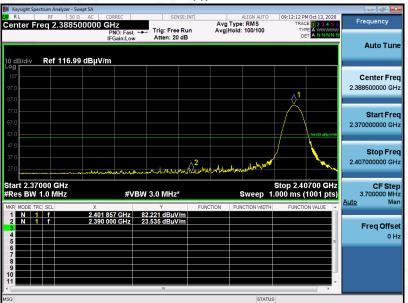

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topologicated restron/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



#### Report No.: AGC00806201001FE02 Page 36 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

PK enter Freq 2.388500000 GHz Avg Type: Log-Pw Avg Hold: 100/100 Frequency Trig: Free Run Atten: 20 dB Auto Tun Ref 116.99 dBµV/m Center Fred 2.388500000 GH Start Free 2.370000000 GHz  $\Diamond^2$ Stop Free 2.407000000 GH Stop 2.40700 GHz 1.000 ms (1001 pts) tart 2.37000 GHz Res BW 1.0 MHz CF Step 3.700000 MH #VBW 3.0 MHz Sweep 2.401 857 GHz 87.129 dBµV 2.390 000 GHz 45.739 dBµV 2.375 698 GHz 38.435 dBµV Freq Offse

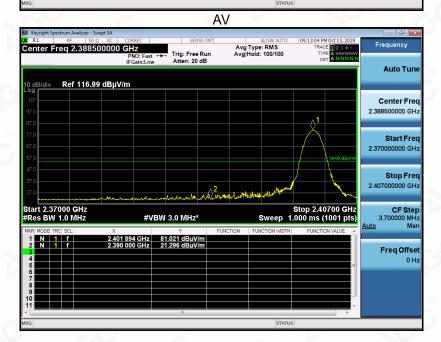

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the test results of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC00806201001FE02 Page 37 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal
	DI/		

PK

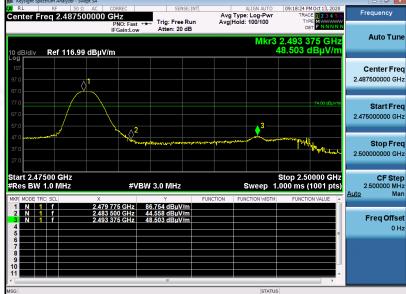

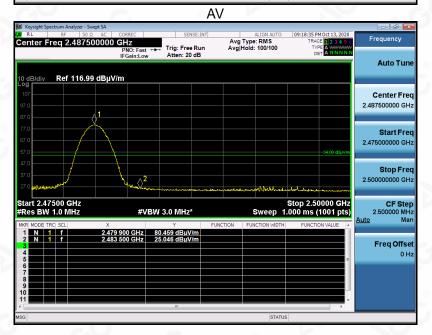


**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topologicated restron/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC00806201001FE02 Page 38 of 46

EUT	Bluetooth 4.2 ultra-low power module	Model Name	HJ-802IMH
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

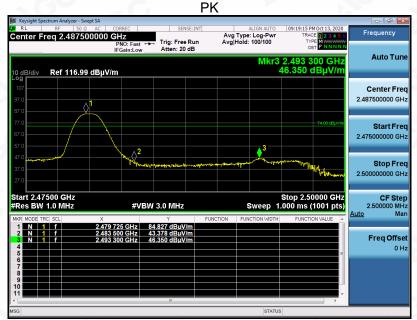

AV

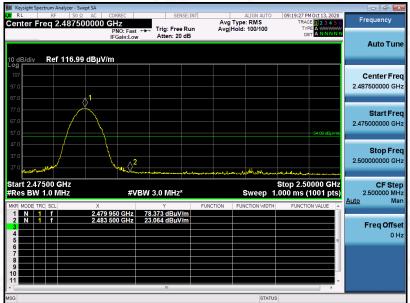

### **RESULT: PASS Note**: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

### **12. FCC LINE CONDUCTED EMISSION TEST**


#### **12.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Franciscov	Maximum RF Line Voltage				
Frequency	Q.P.( dBuV)	Average( dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

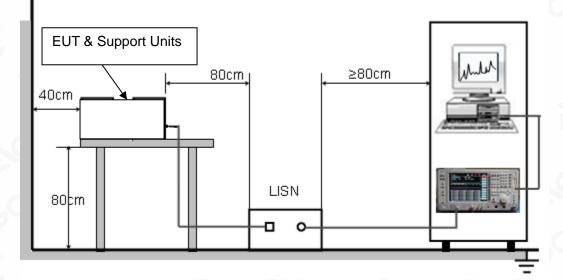

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in spectral definition of the stand in the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.3V power from control box which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topompliance strug/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

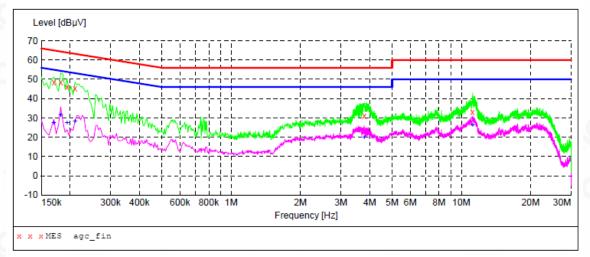

#### MEASUREMENT RESULT: "agc\_fin"

2020/10/28 23:26

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.170000 0.182000 0.194000	48.60 48.30 46.10	11.3 11.3 11.3	65 64 64	16.4 16.1 17.8	QP	L1 L1 L1
0.210000 3.786000 11.190000	45.20 31.10 33.00	11.3 11.4 12.0	63 56 60	17.8 18.0 24.9 27.0	QP	L1 L1 L1


#### MEASUREMENT RESULT: "agc fin2"

2020/10/28	23:26					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.170000	27.60	11.3	55	27.4	AV	L1
0.182000	31.20	11.3	54	23.2	AV	L1
0.194000	27.50	11.3	54	26.4	AV	ь1
0.210000	28.30	11.3	53	24.9	AV	ь1
3.786000	19.70	11.4	46	26.3	AV	ь1
11.190000	26.40	12.0	50	23.6	AV	ь1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated for the formation of the stamp. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Line Conducted Emission Test Line 2-N

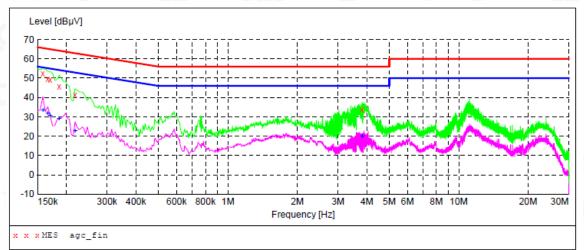

#### MEASUREMENT RESULT: "agc fin"

2020/10/28 23:30

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.158000	52.50	11.3	66	13.1	QP	N
0.166000	49.80	11.3	65	15.4	QP	N
0.170000	49.20	11.3	65	15.8	QP	N
0.186000	45.80	11.3	64	18.4	QP	N
0.218000	41.40	11.3	63	21.5	QP	N
3.814000	33.90	11.4	56	22.1	QP	N

#### MEASUREMENT RESULT: "agc\_fin2"

2020/10/28 23	:30					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.158000	33.30	11.3	56	22.3	AV	N
0.166000	31.80	11.3	55	23.4	AV	Ν
0.170000	30.40	11.3	55	24.6	AV	Ν
0.186000	28.90	11.3	54	25.3	AV	N
0.218000	22.50	11.3	53	30.4	AV	N
3.814000	19.80	11.4	46	26.2	AV	N

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/