
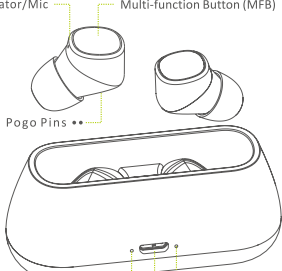

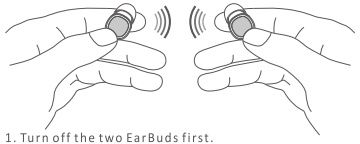



















 <p>Bluetooth headset</p>  <p>Model: BSIMB-B1</p> <p><b>User Manual</b></p>	<p><b>Overview</b> Chose eartips</p> <p>Large Medium Small</p> <p>LED Indicator/Mic Multi-function Button (MFB)</p> <p>Pogo Pins</p>  <p>LED Indicator USB Charging Port LED Indicator</p> <p>Medium eartips fit for most of the people, recommend to try it for the first time.</p>	<p><b>Start to Using</b> First use</p>  <p>Take out both 2 earbuds then re-insert them back into the case to activate the earphones. Notes: If Earbuds fail to be charged, please charge the case via USB cable (for details, please refer the following step)</p> <p><b>How to pair</b></p> <ol style="list-style-type: none"> <li>1. Activating the EarBuds.</li> <li>2. Take out the EarBuds from the case, they will auto power on and pair with each other.</li> <li>3. Left EarBud will auto enter into pairing mode while LED light on right EarBud will be turn off.</li> <li>4. Search for "T1" on mobile devices and tap to pair it to both EarBuds.</li> </ol>	<p><b>Resetting</b> Please try the following steps if fail to connect with the mobile device.</p>  <ol style="list-style-type: none"> <li>1. Turn off the two EarBuds first.</li> <li>2. Tap the multi-function buttons for 10s(LED will blink red and white light then turn off).</li> <li>3. Tap the MFB for 1s to turn on(White LED light blinks) and two Earbuds will auto pair with each other.</li> <li>4. Left EarBud will auto enter into pairing mode while LED light on right EarBud will be turn off.</li> <li>5. Search for "T1" on mobile devices and connect it with EarBuds.</li> </ol> <p><b>Wearing</b></p>  <p>Put the Earbuds into ears lightly with mic towards to the front side.</p>	<p><b>Charging</b></p> <p><b>a Charging the Earbuds</b></p>  <p>Insert the EarBuds into the charging case (pogo pins should be well-connected) LED light will be Red while charging and turns into White( will be last for 60s) once full charged.</p> <p><b>b Charging the Case</b></p>  <p>Use the USB cable to charge the case. LED light will be Red while charging and turns into White once full charged.</p>
---	---	---	--	---

<p><b>Functions</b></p> <p><b>Power-On</b> Method 1: Take out the EarBuds from the charging case, it will auto power on. Method 2: Tap the multi-function buttons for 1s</p>  <p>Hold</p> <p><b>Power-Off</b> Method 1: Put the EarBuds back into the charging case, it will auto power off. Method 2: Tap the multi-function buttons for 3s</p>  <p>Hold</p> <p><b>Answer/Hang up the call</b> Tap the multi-function button to answer the call, Tap the button again to hang up.</p>  <p>Tap</p>	<p><b>Decline a call</b> Tap the multi-function button for 1s.</p>  <p>Tap 1s</p> <p><b>Switch Audio Output</b> Under the calling status, Tap the multi-function button for 1s to switch audio output between cellphone and Earbuds.</p>  <p>Tap 1s</p> <p><b>Mute-on/off</b> Under the calling status, Tap the multi-function button twice to turn on or off the Mute function.</p>  <p>Double Tap</p>	<p><b>Re-dial the last calling number</b> Tap the multi-function button twice under the standby status, it will dial the last number have called.</p>  <p>Double Tap</p> <p><b>Play/Pause the music</b> Tap the multi-function button to play pause the music.</p>  <p>Tap</p> <p><b>Skip to next song</b> Tap the multi-function button for 1s to skip to next song.</p>  <p>Tap 1s</p>	<p><b>Voice Assistant</b> Under the standby status, tap the multi-function button third times, to activate the voice assistant (eg: Siri).</p>  <p>Thrice Tap</p> <p><b>Switch the language</b> Under the standby status, tap the multifunction button 4 times to switch the language between English and Chinese.</p>  <p>Four Tap</p> <p>Model: BSIMB-B1 Transmission Distance: 15 meters Bluetooth Version: EDR Charging Time: 2 hours Talking Time: 5 hours Battery type: li-ion Mode:HFP、HSP、A2DP、AVRCP Battery capacity: 45mAh Charging Case capacity: 600mAh</p>	<p><b>Tips</b></p> <ol style="list-style-type: none"> <li>1. Before use it, please read the user manual carefully and keep it for future references.</li> <li>2. It should be fully charged before first-time use.</li> <li>3. If it is not being used for over 1 month, please charge it before use it again.</li> <li>4. Please use the qualified adapter.</li> <li>5. If it cannot be found by your mobile devices, please check whether it is in pairing mode; if not pair it with mobile devices for a long time, it will exit pairing mode, please re-enter the pairing mode; if a procedure error occurs on mobile devices, please reset it; otherwise, reset the EarBuds.</li> <li>6. The product is too small to place label and that the label is placed in the shell.</li> </ol> <p><b>Warning</b></p> <ol style="list-style-type: none"> <li>1. Never disassemble or modify it to avoid causing any damages or dangers.</li> <li>2. Do not store it in extreme temperatures (under 0°C or over 45°C)</li> <li>3. Keep it away from the kids.</li> <li>4. Do not use it during thunderstorms.</li> <li>5. Do not use harsh chemicals or strong detergents to clean it.</li> <li>6. Keep it dry.</li> </ol> <p>      </p> <p>MADE IN CHINA</p>
--	---	---	--	---

#### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.