

承 認 書 SPECIFICATION FOR APPROVAL

客戶名稱 CUSTOMER	:	
客戶料號 CUSTOMER'S P/N	:	
料號 PART NUMBER	:	WAN2020C245T06
規格 DESCRIPTION	:	Chip Antenna 2020 M-Ant 2.45G Type T06
版本 VERSION	:	V1.3
日期 ISSUE DATE	:	2021/03/03

客戶承認
CUSTOMER APPROVED

	工 程 部 R&D CENTER	
承 認 APPROVAL	確 認 CHECKED	製 作 DRAWN
Ray	Tennyson	Snow



萬誠科技股份有限公司

112台北市北投區立功街 151號 1樓

電話: (02) 2898-2220 傳真: (02) 2898-5055

OneWave Electronic Co., Ltd.


1F, No. 151, Li Gong Street, Beitou District, Taipei City 112, Taiwan

電話: (02) 2898-2220 傳真: (02) 2898-5055



2020 Chip antenna

For Bluetooth / WLAN Applications

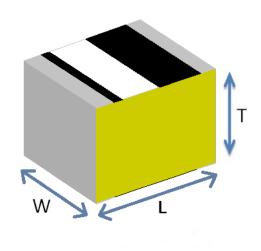

P/N: WAN2020C245T06

	Dimension (mm)
L	2.25 ± 0.20
W	2.00 ± 0.20
Т	2.10 ± 0.20



Part Number Information

WAN 2020 C 245 T 06
A B C D E F

A	Product Series	Antenna		
В	Dimension L x W	2.25X2.0mm (± 0.2mm)		
C	Material	High K material		
D	Working Frequency	2.4 ~ 2.5GHz		
E	Feeding mode	Monopole & Single Feeding		
F	Antenna type	Type = 06		

1. Electrical Specification


Specification						
Part Number	WAN2020C245T06					
Central Frequency	2450	MHz				
Bandwidth	100 (Min.)	MHz				
Return Loss	-10 (Max)	dB				
Peak Gain	3.92	dBi				
Impedance	50	Ohm				
Operating Temperature	-40~+110	$^{\circ}$ C				
Maximum Power	4	W				
Resistance to Soldering Heats	10 (@ 260°C)	sec.				
Polarization	Linear					
Azimuth Beamwidth	Omni-directional					
Termination	Cu / Sn (Leadless)					

Remark : Bandwidth & Peak Gain was measured under evaluation board of next page



2. Recommended PCB Pattern

Evaluation Board Dimension

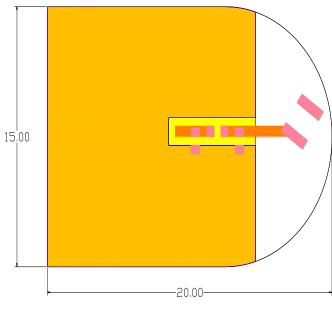

Unit: mm




Feed Line TOP Copper

Suggested Matching Circuit


重要資訊:


匹配元件建議使用精準度高的電感±0.1~0.3nH、電容±0.1pF

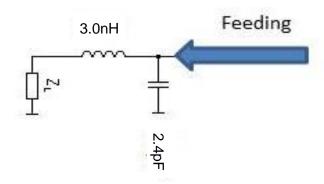



Layout Dimensions in Clearance area (Size=14.40*5.40mm)

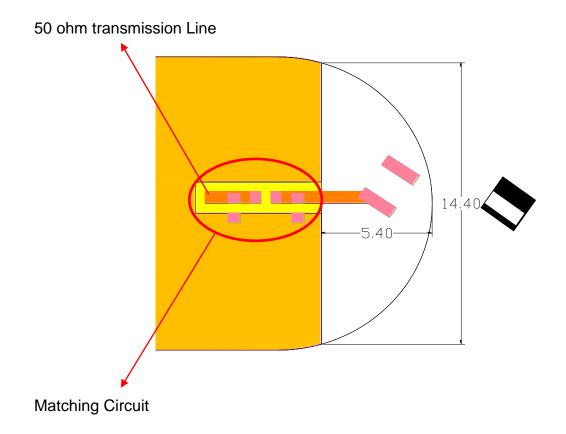

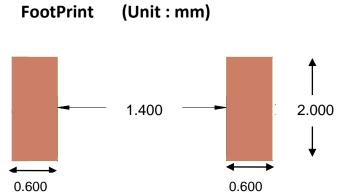


.




3. Measurement Results

Return Loss

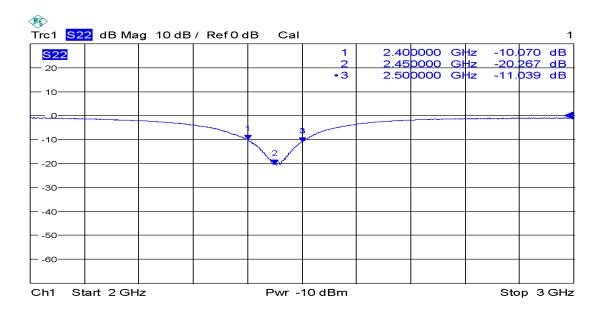




Radiation Pattern

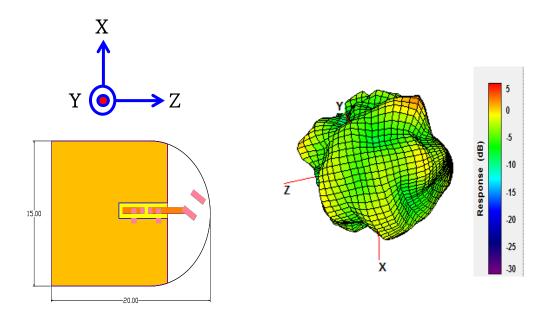

	Efficiency	Peak Gain	Directivity	
2400MHz	44.25 %	3.00 dBi	6.44 dBi	
2450MHz	51.44 %	3.92 dBi	6.81 dBi	
2500MHz	45.21 %	3.20 dBi	6.65 dBi	

Chamber Coordinate System

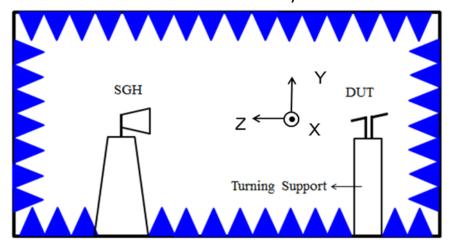




4. Reliability and Test Condictions


ITEM	REQUIR			TEST CONDITION
Solderability	2. No visib	shall exceed 90% ble mechanical dam	Pre-heating temperature:150°C/60sec. Solder temperature:230 \pm 5°C Duration:4 \pm 1sec.	
	2	230°C 150°C 60s	4±1 sec.	Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin
Solder heat	1 No visih	ole mechanical dam	`	Pro hosting tomporature:150°C /60ccc
Resistance	2. Central	Freq. change :with EMP (°C) 260°C	Pre-heating temperature:150°C/60sec. Solder temperature:260±5°C Duration:10±0.5sec. Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin	
		608	,	<u></u>
Component Adhesion (Push test)	1. No visib	ole mechanical dam	age	The device should be reflow soldered(230±5°C for 10sec.) to a tinned copper substrate A dynometer force gauge should be applied the side of the component. The device must with-ST-F 0.5 Kg without failure of the termination attached to component.
Component Adhesion (Pull test)	1. No visib	ole mechanical dam	age	Insert 10cm wire into the remaining open eye bend, the ends of even wire lengths upward and wind together. Terminal shall not be remarkably damaged.
Thermal shock		ole mechanical dam	· ·	+110°C =>30±3min -40°C =>30±3min
		Freq. change :with		Test cycle:10 cycles
	Phase	Temperature(°C)	Time(min)	The chip shall be stabilized at normal
	1	+110±5°C	30±3	condition for 2~3 hours before
	2	Room Temperature	Within 3sec	measuring.
	3	-40±2℃	30±3	
	4	Room Temperature	Within 3sec	
Resistance to High		ole mechanical dam	=	Temperature: +110±5°C Duration: 1000±12hrs
Temperature	2. Central Freq. change :within ±6%3. No disconnection or short circuit.			The chip shall be stabilized at normal condition for 2~3 hours before measuring.
Resistance to	1 No vieih	ole mechanical dam	200	Temperature:-40±5°C
Low		Freq. change :with	_	Duration: 1000±12hrs
Temperature		onnection or short of		The chip shall be stabilized at normal condition for 2~3 hours before measuring.
Humidity	1. No visih	ole mechanical dam	age	Temperature: 40±2°C
-		Freq. change :with	=	Humidity: 90% to 95% RH
		onnection or short of		Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.



5. Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.



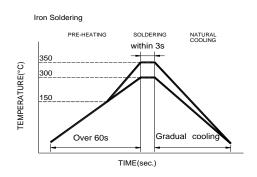

Recommended temperature profiles for re-flow soldering in Figure 1.


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- · Limit soldering time to 3 sec.




6.Packaging Information

♦ Tape Specification:

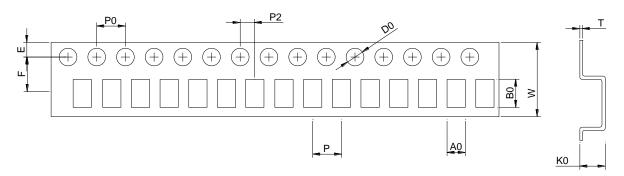

W	Ao	Во	Ко	Р	F	Е	D	D1	Ро	P2	t
12±	2.4±	2.6±	2.6±	8.0±	5.50±	1.75±	1.5±	1.5±	4.0±	2.0±	0.3±
0.3	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.05

♦ Reel Specification: (7", Φ180 mm)

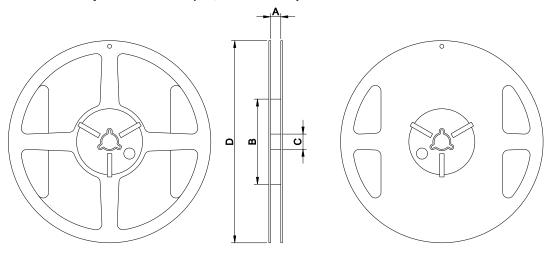

7" x 12 mm

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)	
12	12±1.0	60±2	13.5±0.5	178±2	700PCS	



7. Storage and Transportation Information

Storage Conditions

To maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: -10~ 40°C and 30~70% RH.
- 2. Recommended products should be used within 6 months from the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation Conditions

- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.