

# User Manual

## Wireless Mini Soundbar


### Torpedo Plus

BTSP-006P-BLK



www.avantree.com

### 1. Wireless speaker overview

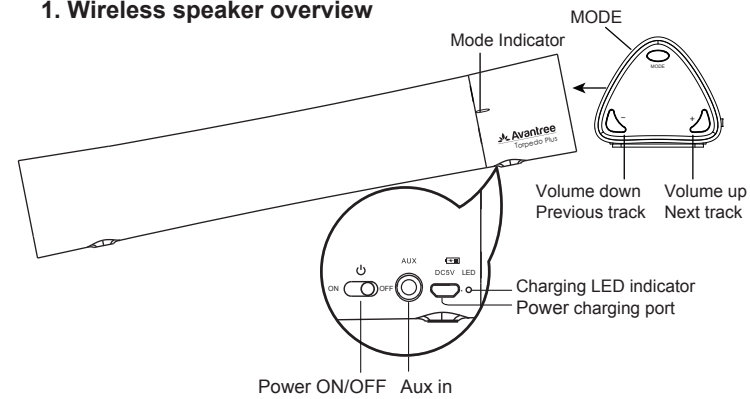


**NOTE:** All accessories are also available on avantree.com

- 1 -

### 2. What's in the box?

- Wireless mini soundbar
- AC adapter
- Micro USB charging cable
- 3.5mm audio cable
- User manual / Quick user guide

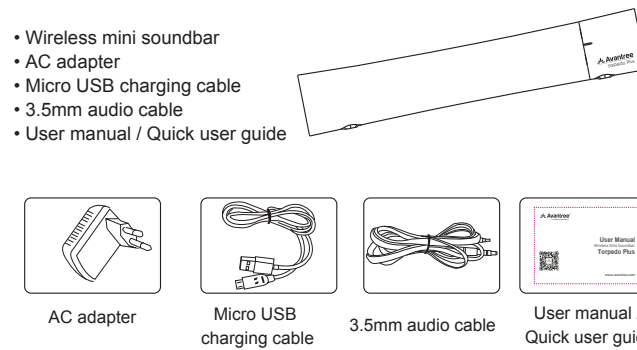


- 2 -

### 3. Power On/Off

**Power ON:** Connect Torpedo Plus to AC outlet with the adapter. Slide the on/off switch to ON.

**Power OFF:** Slide the on/off switch to OFF.

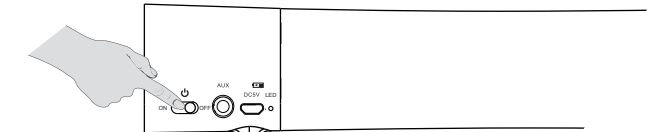


**Note:** In order to save battery and extend its life, when there is no audio input for 30 mins, Torpedo plus will turn off automatically. You need to turn off first, then turn on again for next use.

- 3 -

### 4. Pair and connect with Bluetooth-enabled devices

**STEP1** Get Torpedo Plus into pairing mode – For first time use, power on, Torpedo Plus will automatically enter pairing mode and keep flash Red and Blue alternatively.

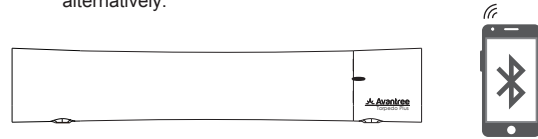

**STEP 2** Activate Bluetooth on your phone/PC/notebook and select 'Torpedo Plus'. (For PC, make sure the playback device is Torpedo Plus.)

**STEP 3** Once connected, you will hear a beep and the LED indicator will stay on.

**NOTE:**

Once disconnected, Torpedo Plus will automatically enter pairing mode. For details on how to set up with your PC/notebook, please see support.avantree.com


- 4 -

### Reconnect Bluetooth

Whenever you turn on Torpedo Plus again it will be automatically reconnected to the latest device.

### 5. Connect with non-Bluetooth-enabled devices

When the device is not Bluetooth enabled, it can be connected to the speaker by using the 3.5 mm audio cable. The speaker will automatically switch to the external audio input mode and the indicator will stay on.

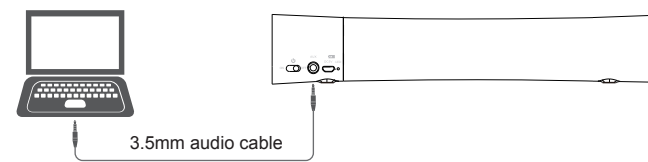


- 5 -

### 6. Connect with two devices simultaneously

**STEP1** Connect Torpedo Plus with the first device as above. Then turn off Bluetooth of the first device.

**STEP2** Connect Torpedo plus with the second device as above.

**STEP3** Turn on Bluetooth of the first device and click "Torpedo plus", it will re-connect it with Torpedo Plus.

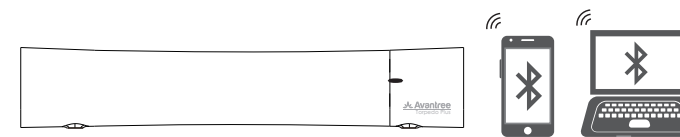

- 6 -

### 7. How to use

Once connecting successfully with another device, you can press the MODE button to switch sound modes: it will automatically go back last audio mode when power on again.


Button	Function	Operation	LED status
MODE	Balance Audio Mode	Press MODE once	Red
	Super Bass	Press MODE once	Green
	3D Surround	Press MODE once	Blue
	Manually enter pairing mode	Press and hold MODE for 3S	Flash Red and Blue alternatively
	Clear pairing history	Double click MODE (under pairing mode)	stay purple for 1s, then flash Red and Blue alternatively
+	Volume up	Press "V+" once	-
	Next track	Press and hold V+" for 2s	-
-	Volume down	Press "V-" once	-
	Previous track	Press and hold "V-" for 2s	-

- 7 -

**Warning:** Suggest to use Torpedo Plus with our provided charger in order to get high quality sound.

### 8. How to charge

If the battery is low, the mode indicator will flash. Normally it takes about 2.5 hours to fully charge the battery. The charging LED indicator will stay red when charging and will turn off when fully charged.

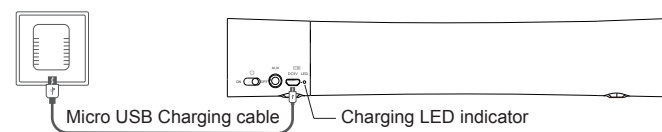

**NOTE**

When the battery power is less than 40%, the volume will become smaller as the battery become lower.

- 8 -

### 9. Product specifications

- BT Version: 4.1
- Support profiles: A2DP V1.2, AVRCP V1.4
- Built-in battery: 2200 mA / 3.7 V
- Charge time: About 2.5 hours
- Working time on battery up to 5.5 hours
- Operational range: 10 meters
- Output power: 5W×2
- Charger voltage: DC 5 V / 1.5A
- Frequency response: 50 Hz~20 KHz
- Signal-to-noise ration: >85 dB
- Product weight: 480 g
- Dimensions: 275 mm x 60mm x 50 mm

For more FAQ information, please refer to support.avantree.com

- 9 -

### 10. Warnings

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC ID: 2A1TF-BTSP-006P-BLK

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance 20cm the radiator: your body. Use only the supplied antenna.

Dispose of the packaging and this product in accordance with the latest provisions.

