



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP COMPANY LIMITED

Address: Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong

FCC ID: 2AJGM-5RX

Product Name: Amateur Radio

**Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231165351-00A

Date Of Issue: 2023/12/22

Reviewed By: Julie Tan
Title: RF Engineer

Julie Tan

Approved By: Sun Zhong
Title: Manager

Sun Zhong

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 DESCRIPTION OF TEST CONFIGURATION	6
1.2.1 EUT Operation Condition:	6
1.2.2 Support Equipment List and Details.....	6
1.2.3 Support Cable List and Details.....	6
1.2.4 Block Diagram of Test Setup	7
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES.....	11
3.1 AC LINE CONDUCTED EMISSIONS	11
3.1.1 EUT Setup.....	11
3.1.2 EMI Test Receiver Setup	11
3.1.3 Test Procedure.....	12
3.1.4 Corrected Amplitude & Margin Calculation.....	12
3.2 RADIATION SPURIOUS EMISSIONS	13
3.2.1 EUT Setup.....	13
3.2.2 Equipment Setup	14
3.2.3 Test Procedure.....	14
3.2.4 Corrected Amplitude & Margin Calculation.....	14
3.3 ANTENNA POWER CONDUCTION LIMITS FOR RECEIVERS	15
3.3.1 Applicable Standard	15
3.3.2 Test Procedure.....	15
3.4 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS.....	16
3.4.1 Applicable Standard	16
3.4.2 Test Procedure.....	16
4. TEST DATA AND RESULTS	17
4.1 AC LINE CONDUCTED EMISSIONS	17
4.2 RADIATION SPURIOUS EMISSIONS	58
4.3 ANTENNA POWER CONDUCTION LIMITS FOR RECEIVERS	139
4.4 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS.....	180
5. EUT PHOTOGRAPHS	181
6. TEST SETUP PHOTOGRAPHS.....	182

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231165351-00A	Original Report	2023/12/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

Product Name:	Amateur Radio
Test Model:	5RX
Multiple Models:	F8M, M-5R, M5E
Highest Operation Frequency:	520MHz
Rated Input Voltage:	DC 7.4V from battery DC 10V charging from charger base
Serial Number:	CE, RE: 2D94-1 RF Conducted: 2D98-1
EUT Received Date:	2023/11/7
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Fujian Baofeng Electronic Co.,Ltd	BF-1001000	Input: 100-240V~50/60Hz, 0.5A Output: 10V, 1A

Operation Frequency And Test Channel:

Operation Modes	Operation Frequency Range (MHz)	Test Frequency (MHz)
VHF Receiving	108-136	108.0125, 122, 135.9875
	136-174	136.0125, 155, 173.9875
	220-260	220.0125, 240, 259.9875
UHF Receiving	350-390	350.0125, 370, 389.9875
	400-520	400.0125, 460, 519.9875
Scanning	108-136	108-136
	136-174	136-174
	220-260	220-260
	350-390	350-390
	400-520	400-520

Note:

For scanning mode, EUT can only operating at each frequency band.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: M1: Charging & Scanning M2: Charging & Receiving
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Agilent	MXG Vector Signal Generator	N5182B	MY51350142
PO FUNG	earphone	/	/


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Coaxial Cable	No	No	2	antenna	N5182B
earphone cable	No	No	1	earphone	EUT
Power cable	No	No	0.8	adapter	charging base


1.2.4 Block Diagram of Test Setup

CE:

M1:

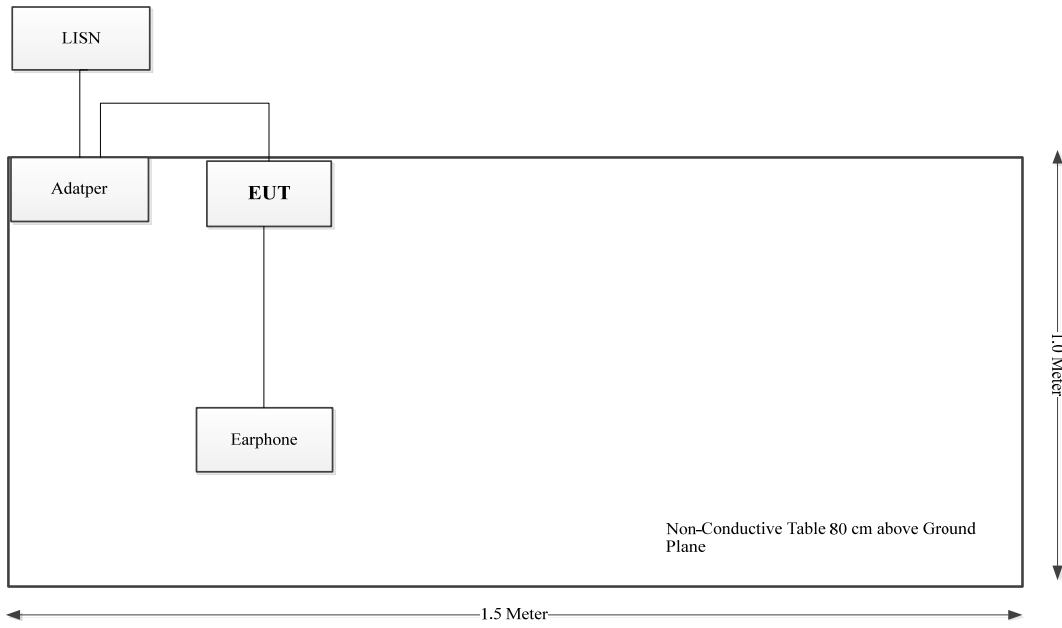


M2:

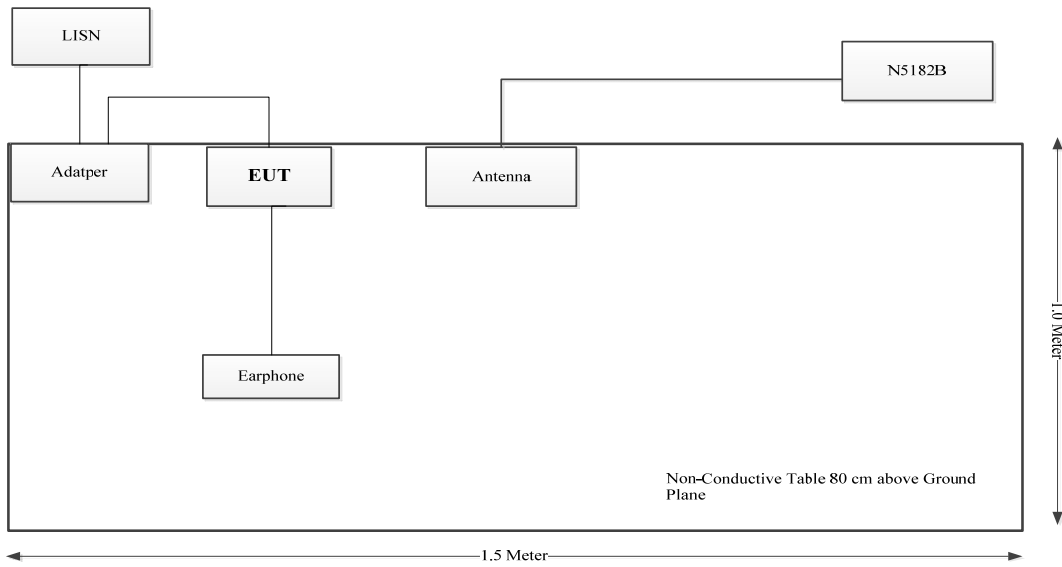


RE:

M1:

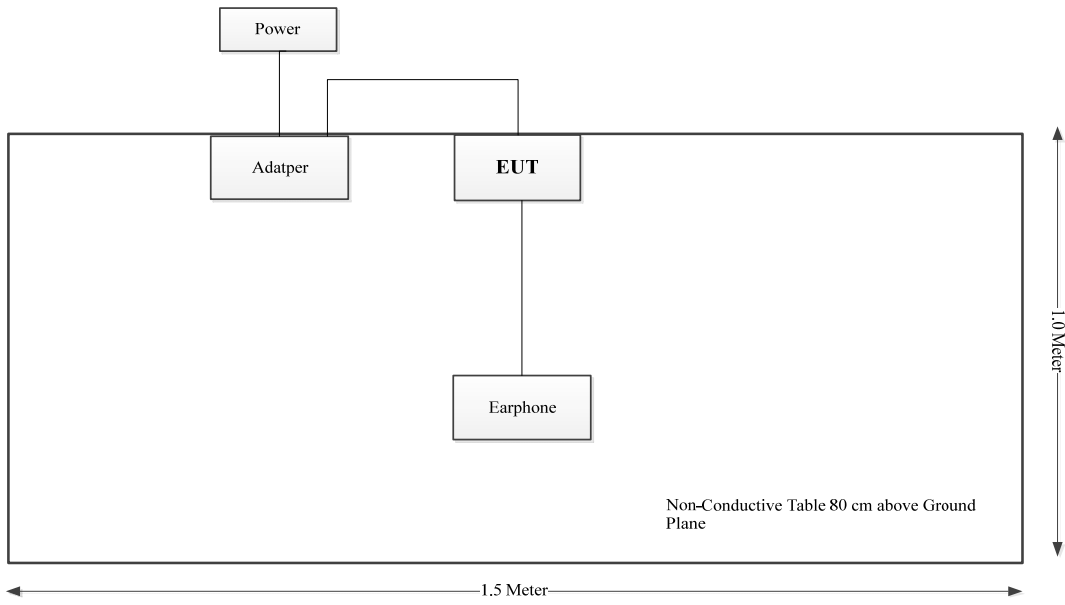

M2:

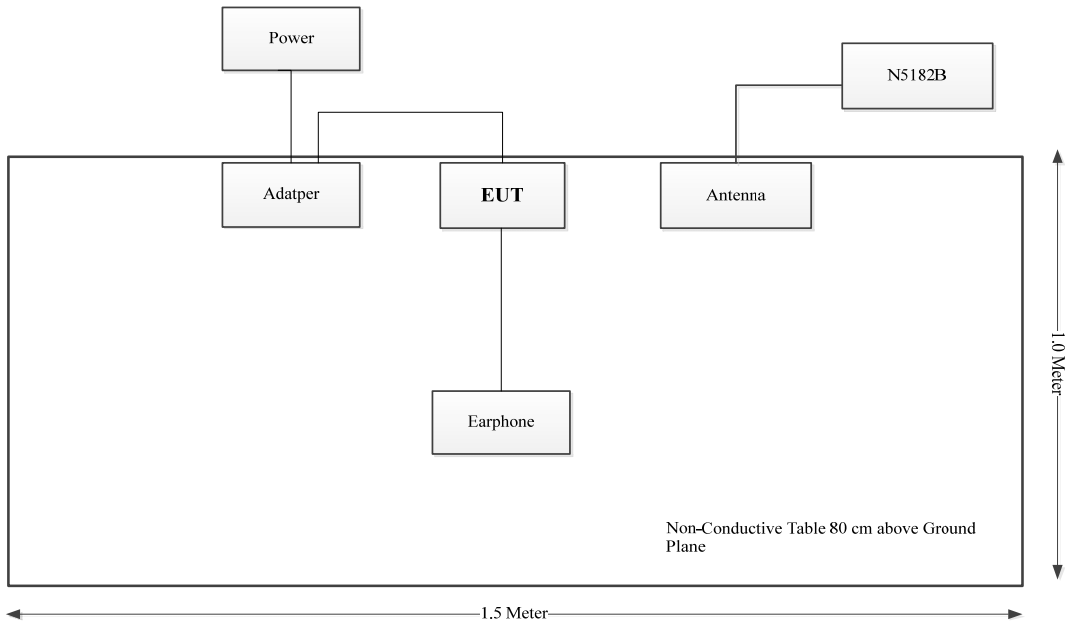

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)
Unwanted Emissions, conducted	± 1.26 dB


2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant
§15.111	Antenna power conduction limits for receivers	Compliant
§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

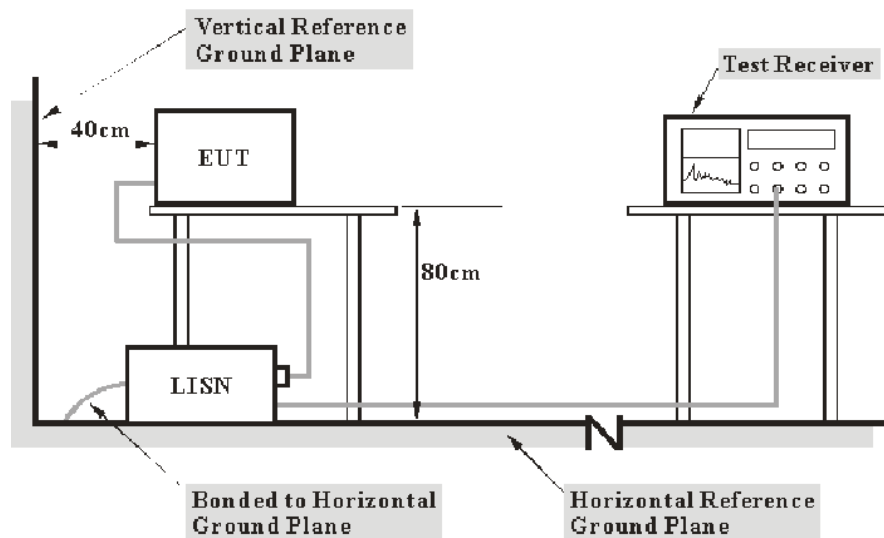

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Spurious Emissions

3.2.1 EUT Setup

Below 1GHz:

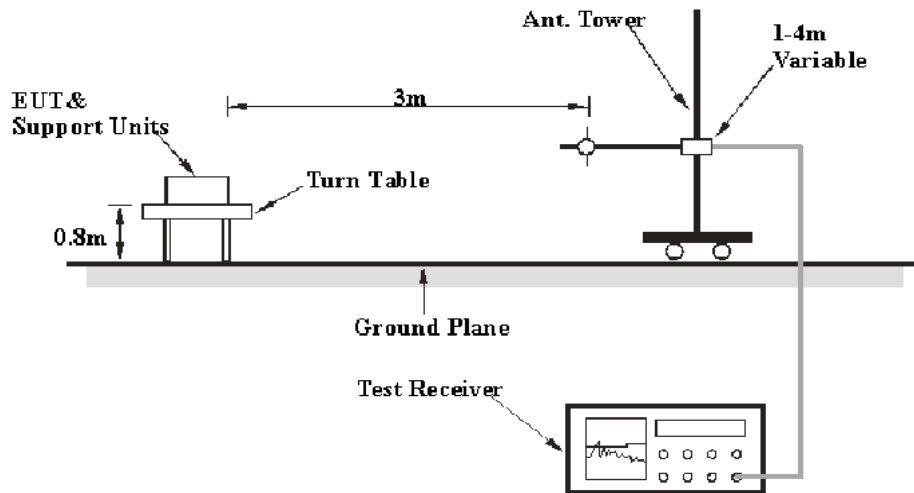

Above 1GHz:

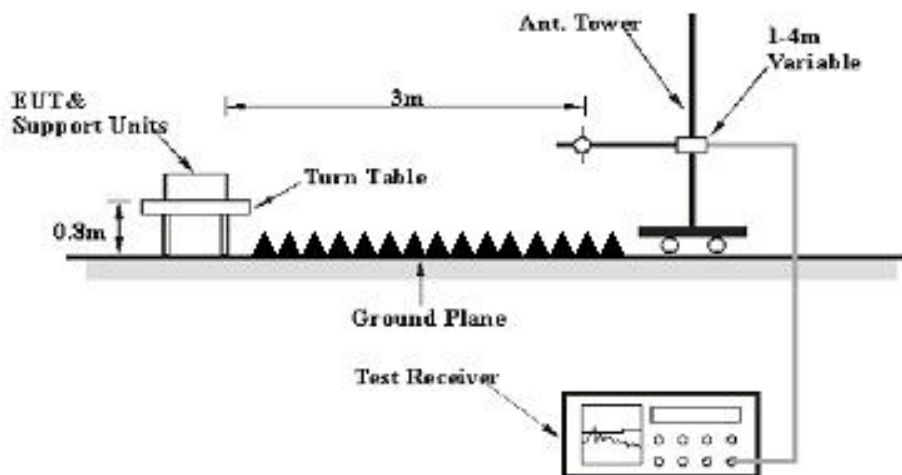

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 Equipment Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test equipment was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10Hz	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Antenna Power Conduction Limits for Receivers

3.3.1 Applicable Standard


FCC§15.111.

(a) In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of § 15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in § 15.33 shall not exceed 2.0 nanowatts.

3.3.2 Test Procedure

EUT antenna port connected to a spectrum analyzer, the traces were recorded as shown on the data pages.

Connected the EUT as the below block diagram:

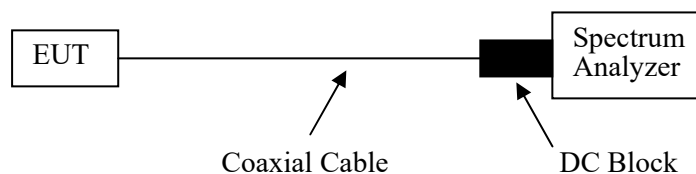

3.4 Scanning Receivers and Frequency Converters Used with Scanning Receivers


3.4.1 Applicable Standard

FCC §15.121(b).

(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

3.4.2 Test Procedure

1. Connected the EUT as the below block diagram;

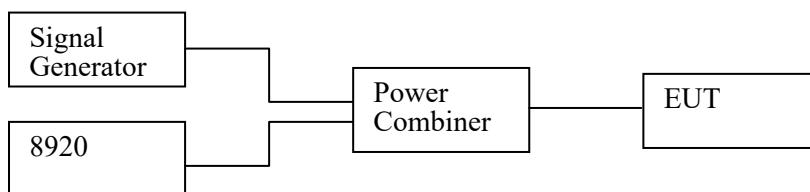

2. Apply a signal to the EUT antenna port at lowest, middle, highest channel frequencies of the operating band;
3. Adjust the audio output level of the EUT to it's rated value with the distortion less than 10%;
4. Adjust the 8920 output power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB; These output level of the 8920 at each channel frequency is the sensitivity of the EUT;
5. Select the lowest or worst case sensitivity level for all of the bands as the reference sensitivity;
6. Adjust the Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5 and its frequency to the frequency point in the Cellular Band;
7. Set the EUT squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level;
8. Set the EUT in a scanning mode and allow it to scan through it's complete receiving range;
9. If the EUT un-squelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB;
10. Repeat above procedure at the frequencies 824, 836, 849 MHz for the mobile band, and 869, 881.5 and 894 MHz for the Cellular Base Band.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2D94-1	Test Date:	2023/12/14-2023/12/15
Test Site:	CE	Test Mode:	M1,M2
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.6-26.1	Relative Humidity: (%)	44-49	ATM Pressure: (kPa)	101.2-101.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Mode: M1(108-136MHz)

Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M1 Charging& Scanning(108-136)


Date: 2023-12-14

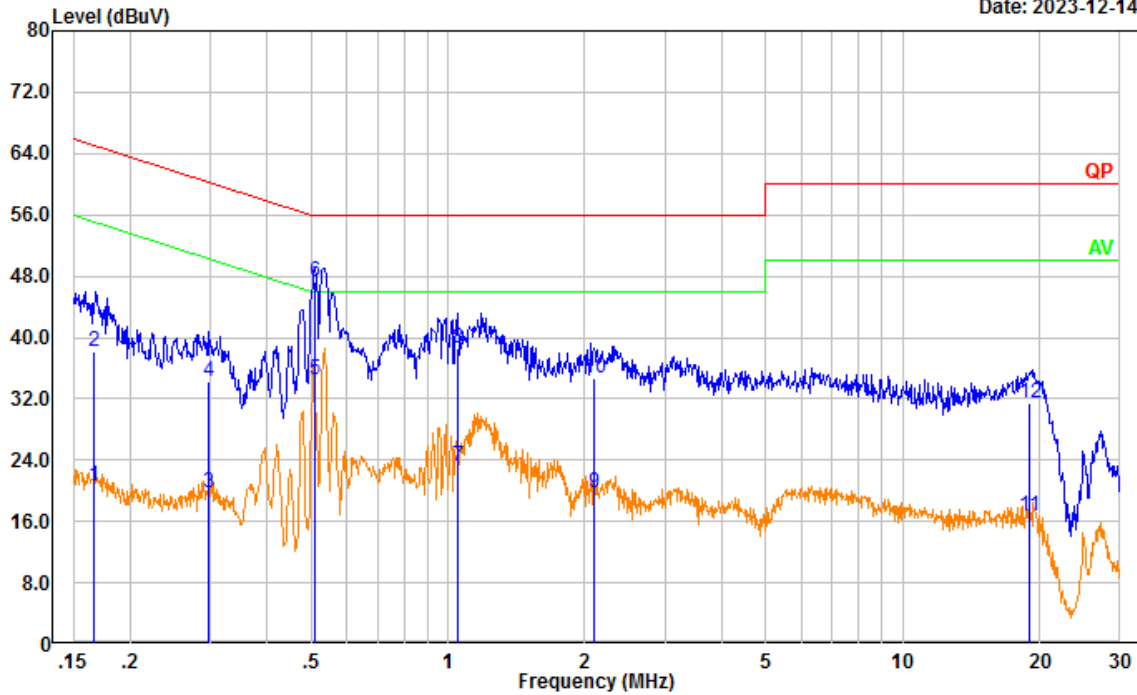

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.167	10.95	9.61	20.56	55.11	34.55	Average
2	0.167	28.48	9.61	38.09	65.11	27.02	QP
3	0.298	10.10	9.61	19.71	50.30	30.59	Average
4	0.298	24.65	9.61	34.26	60.30	26.04	QP
5	0.510	24.91	9.61	34.52	46.00	11.48	Average
6	0.510	37.75	9.61	47.36	56.00	8.64	QP
7	1.051	13.63	9.62	23.25	46.00	22.75	Average
8	1.051	28.91	9.62	38.53	56.00	17.47	QP
9	2.102	10.04	9.63	19.67	46.00	26.33	Average
10	2.102	25.07	9.63	34.70	56.00	21.30	QP
11	18.953	6.99	9.77	16.76	50.00	33.24	Average
12	18.953	21.74	9.77	31.51	60.00	28.49	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Charging& Scanning(108-136)


Date: 2023-12-14

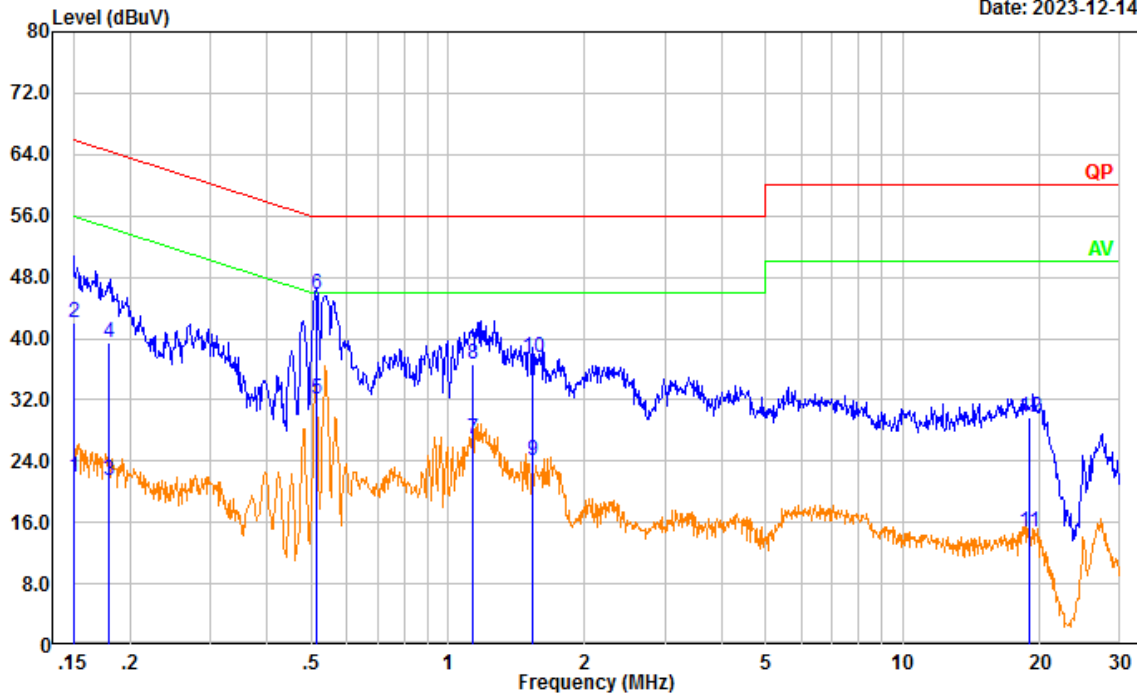

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	12.33	9.61	21.94	55.99	34.05	Average
2	0.150	32.50	9.61	42.11	65.99	23.88	QP
3	0.180	11.84	9.61	21.45	54.50	33.05	Average
4	0.180	29.78	9.61	39.39	64.50	25.11	QP
5	0.513	22.40	9.61	32.01	46.00	13.99	Average
6	0.513	36.04	9.61	45.65	56.00	10.35	QP
7	1.131	17.30	9.62	26.92	46.00	19.08	Average
8	1.131	26.92	9.62	36.54	56.00	19.46	QP
9	1.537	14.35	9.63	23.98	46.00	22.02	Average
10	1.537	27.92	9.63	37.55	56.00	18.45	QP
11	19.001	4.95	9.69	14.64	50.00	35.36	Average
12	19.001	20.05	9.69	29.74	60.00	30.26	QP

Test Mode: M1(136-174MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M1 Charging& Scanning(136-174)

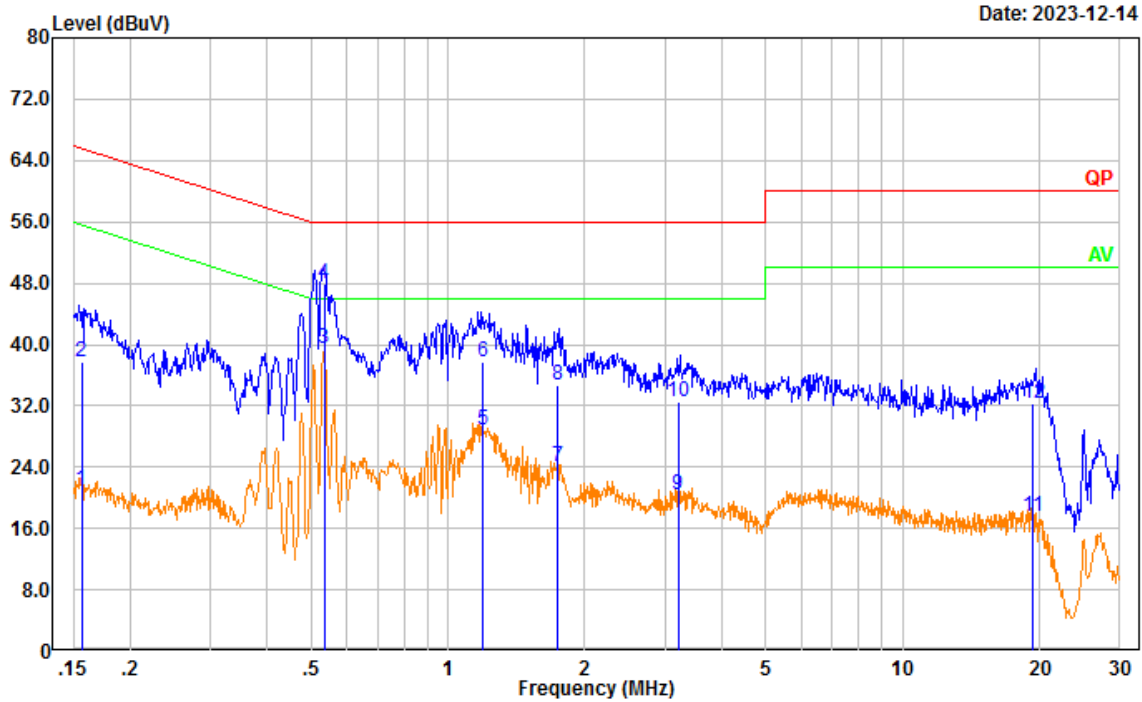

Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	11.40	9.61	21.01	55.66	34.65	Average
2	0.156	28.03	9.61	37.64	65.66	28.02	QP
3	0.534	29.77	9.61	39.38	46.00	6.62	Average
4	0.534	38.28	9.61	47.89	56.00	8.11	QP
5	1.189	19.22	9.62	28.84	46.00	17.16	Average
6	1.189	28.17	9.62	37.79	56.00	18.21	QP
7	1.746	14.34	9.63	23.97	46.00	22.03	Average
8	1.746	25.08	9.63	34.71	56.00	21.29	QP
9	3.205	10.64	9.65	20.29	46.00	25.71	Average
10	3.205	22.91	9.65	32.56	56.00	23.44	QP
11	19.317	7.86	9.78	17.64	50.00	32.36	Average
12	19.317	22.63	9.78	32.41	60.00	27.59	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Charging& Scanning(136-174)

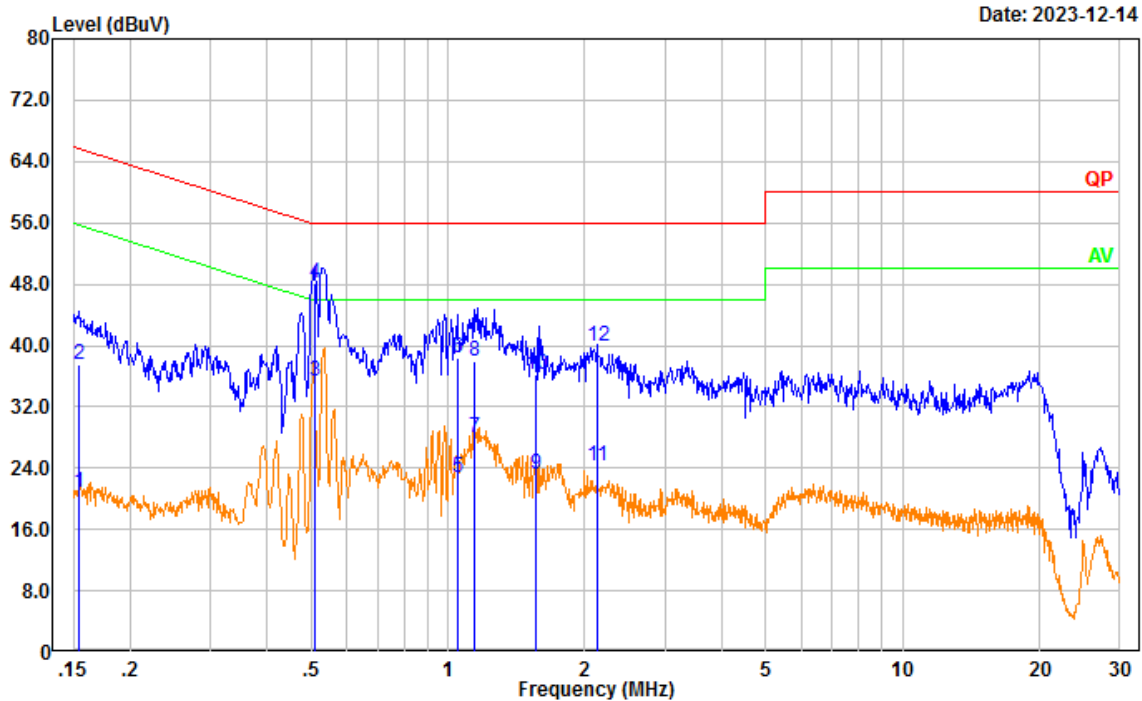


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	11.26	9.61	20.87	55.76	34.89	Average
2	0.154	27.87	9.61	37.48	65.76	28.28	QP
3	0.509	25.75	9.61	35.36	46.00	10.64	Average
4	0.509	38.46	9.61	48.07	56.00	7.93	QP
5	1.050	13.19	9.62	22.81	46.00	23.19	Average
6	1.050	28.84	9.62	38.46	56.00	17.54	QP
7	1.141	18.33	9.62	27.95	46.00	18.05	Average
8	1.141	28.25	9.62	37.87	56.00	18.13	QP
9	1.561	13.47	9.63	23.10	46.00	22.90	Average
10	1.561	26.49	9.63	36.12	56.00	19.88	QP
11	2.129	14.62	9.63	24.25	46.00	21.75	Average
12	2.129	30.23	9.63	39.86	56.00	16.14	QP

Test Mode: M1(220-260MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M1 Charging& Scanning(220-260)

Date: 2023-12-14

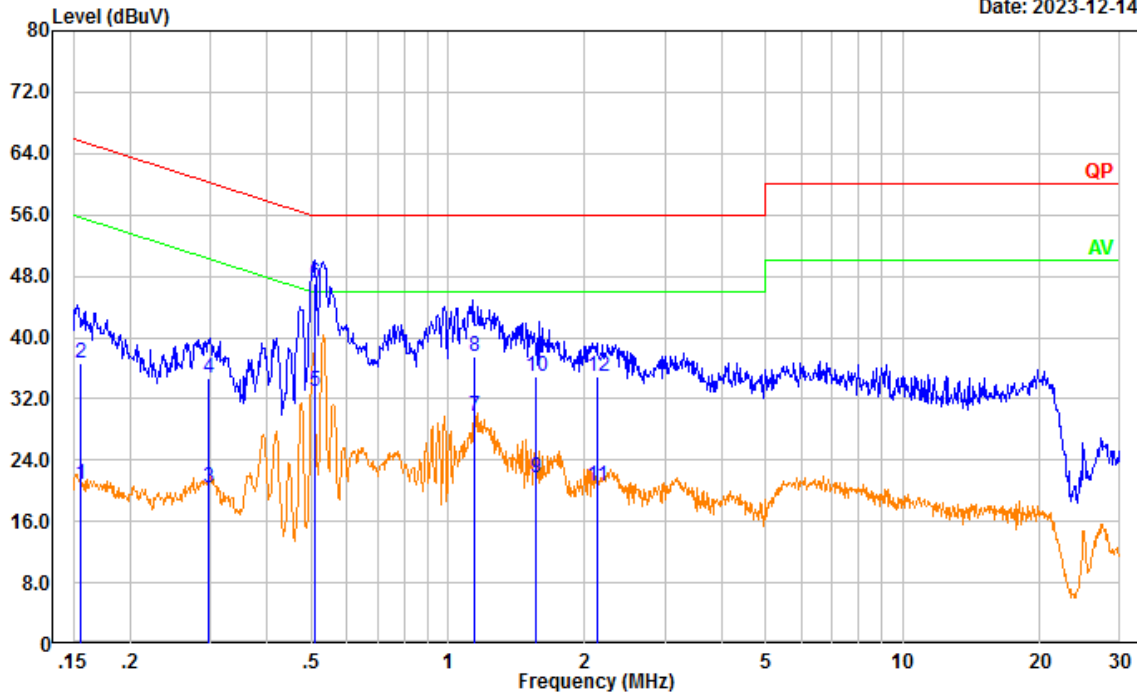

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	11.12	9.61	20.73	55.68	34.95	Average
2	0.156	26.93	9.61	36.54	65.68	29.14	QP
3	0.297	10.71	9.61	20.32	50.32	30.00	Average
4	0.297	24.98	9.61	34.59	60.32	25.73	QP
5	0.510	23.31	9.61	32.92	46.00	13.08	Average
6	0.510	37.54	9.61	47.15	56.00	8.85	QP
7	1.141	20.00	9.62	29.62	46.00	16.38	Average
8	1.141	27.96	9.62	37.58	56.00	18.42	QP
9	1.558	12.15	9.63	21.78	46.00	24.22	Average
10	1.558	25.25	9.63	34.88	56.00	21.12	QP
11	2.128	10.99	9.63	20.62	46.00	25.38	Average
12	2.128	25.19	9.63	34.82	56.00	21.18	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Charging& Scanning(220-260)

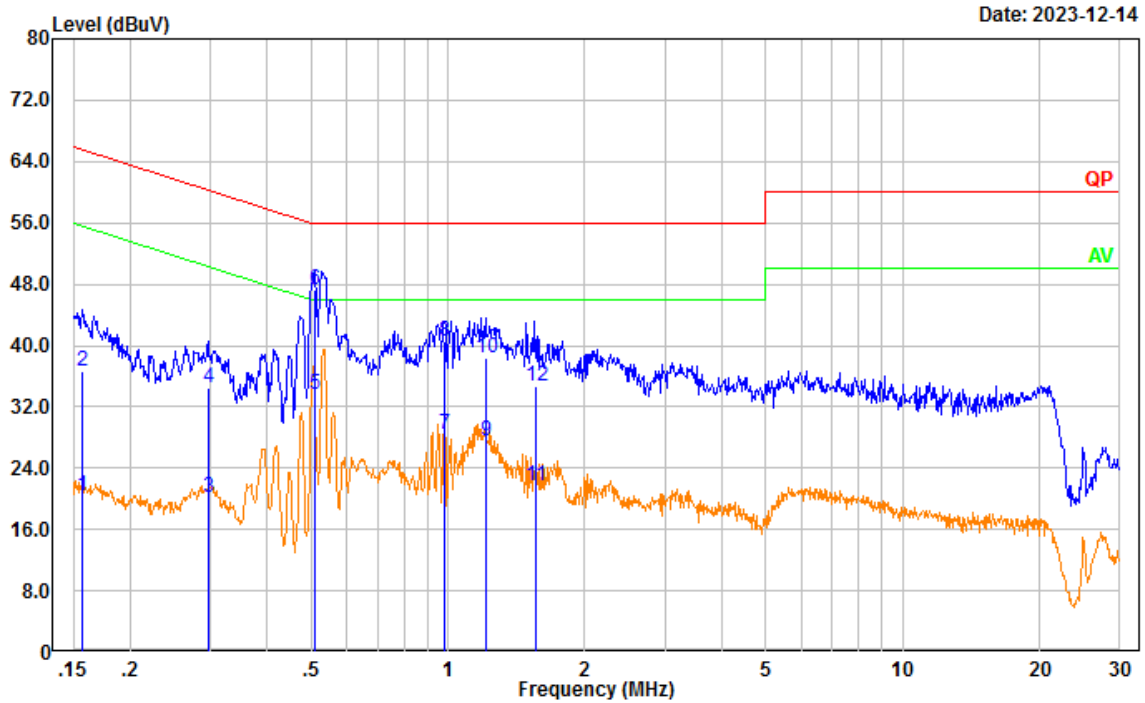


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	10.80	9.61	20.41	55.62	35.21	Average
2	0.157	27.11	9.61	36.72	65.62	28.90	QP
3	0.297	10.49	9.61	20.10	50.34	30.24	Average
4	0.297	24.91	9.61	34.52	60.34	25.82	QP
5	0.510	23.97	9.61	33.58	46.00	12.42	Average
6	0.510	37.73	9.61	47.34	56.00	8.66	QP
7	0.982	18.78	9.62	28.40	46.00	17.60	Average
8	0.982	30.93	9.62	40.55	56.00	15.45	QP
9	1.211	17.86	9.62	27.48	46.00	18.52	Average
10	1.211	28.71	9.62	38.33	56.00	17.67	QP
11	1.558	11.95	9.63	21.58	46.00	24.42	Average
12	1.558	25.09	9.63	34.72	56.00	21.28	QP

Test Mode: M1(350-390MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M1 Charging& Scanning(350-390)

Date: 2023-12-14

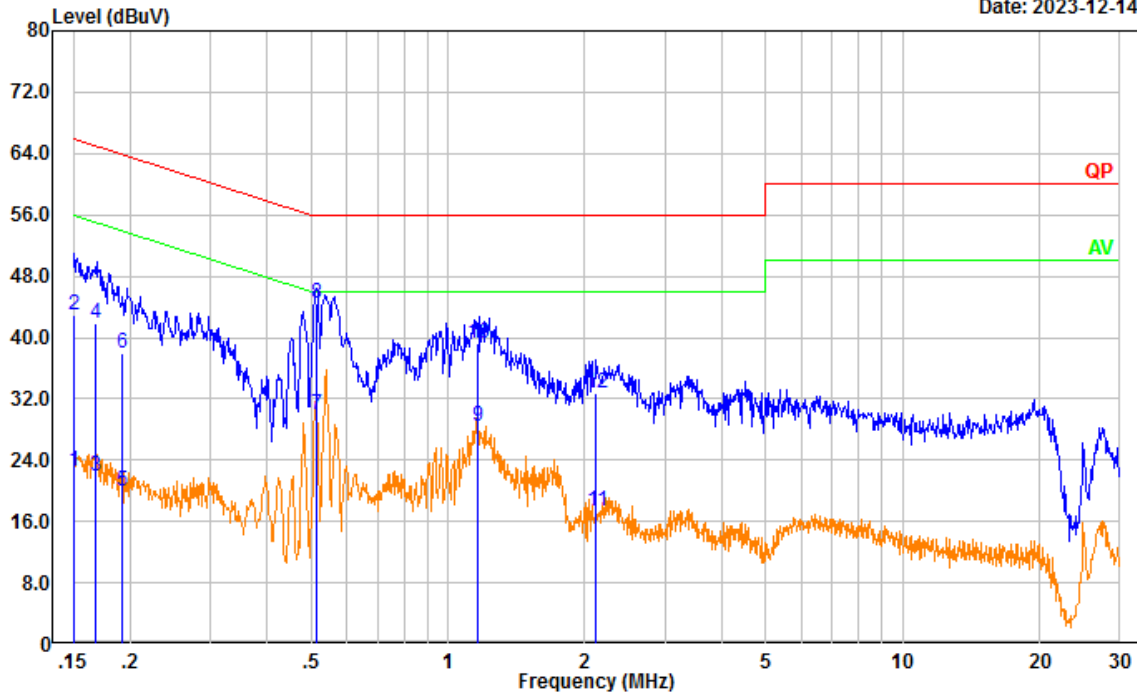

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	12.97	9.61	22.58	55.97	33.39	Average
2	0.150	33.38	9.61	42.99	65.97	22.98	QP
3	0.168	12.39	9.61	22.00	55.04	33.04	Average
4	0.168	32.13	9.61	41.74	65.04	23.30	QP
5	0.192	10.44	9.61	20.05	53.93	33.88	Average
6	0.192	28.44	9.61	38.05	63.93	25.88	QP
7	0.515	20.26	9.61	29.87	46.00	16.13	Average
8	0.515	34.77	9.61	44.38	56.00	11.62	QP
9	1.165	18.79	9.62	28.41	46.00	17.59	Average
10	1.165	29.66	9.62	39.28	56.00	16.72	QP
11	2.119	7.76	9.63	17.39	46.00	28.61	Average
12	2.119	23.19	9.63	32.82	56.00	23.18	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Charging& Scanning(350-390)

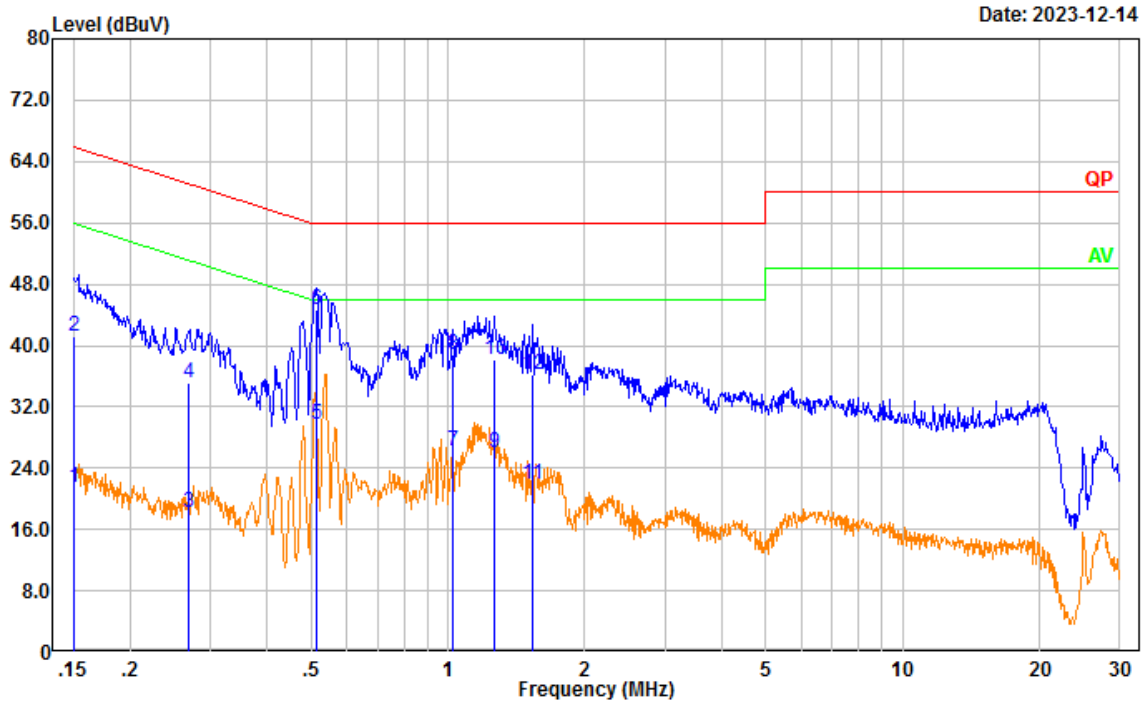


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	11.83	9.61	21.44	55.99	34.55	Average
2	0.150	31.57	9.61	41.18	65.99	24.81	QP
3	0.269	8.68	9.61	18.29	51.16	32.87	Average
4	0.269	25.45	9.61	35.06	61.16	26.10	QP
5	0.514	20.01	9.61	29.62	46.00	16.38	Average
6	0.514	35.13	9.61	44.74	56.00	11.26	QP
7	1.021	16.60	9.62	26.22	46.00	19.78	Average
8	1.021	29.09	9.62	38.71	56.00	17.29	QP
9	1.261	16.35	9.62	25.97	46.00	20.03	Average
10	1.261	28.60	9.62	38.22	56.00	17.78	QP
11	1.536	12.21	9.63	21.84	46.00	24.16	Average
12	1.536	26.64	9.63	36.27	56.00	19.73	QP

Test Mode: M1(400-520MHz)

Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M1 Charging& Scanning(400-520)


Date: 2023-12-14

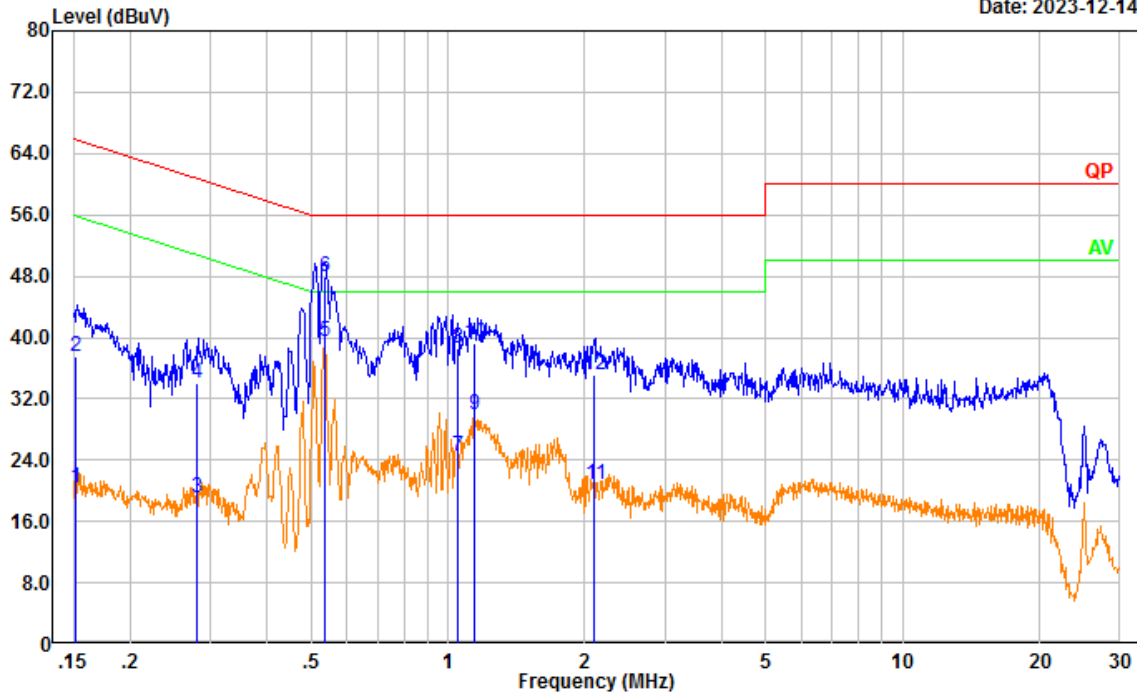

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	10.86	9.61	20.47	55.91	35.44	Average
2	0.152	27.86	9.61	37.47	65.91	28.44	QP
3	0.281	9.48	9.61	19.09	50.80	31.71	Average
4	0.281	24.50	9.61	34.11	60.80	26.69	QP
5	0.536	29.80	9.61	39.41	46.00	6.59	Average
6	0.536	38.27	9.61	47.88	56.00	8.12	QP
7	1.053	14.84	9.62	24.46	46.00	21.54	Average
8	1.053	29.05	9.62	38.67	56.00	17.33	QP
9	1.142	20.20	9.62	29.82	46.00	16.18	Average
10	1.142	29.72	9.62	39.34	56.00	16.66	QP
11	2.100	11.27	9.63	20.90	46.00	25.10	Average
12	2.100	25.57	9.63	35.20	56.00	20.80	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M1 Charging& Scanning(400-520)

Date: 2023-12-14

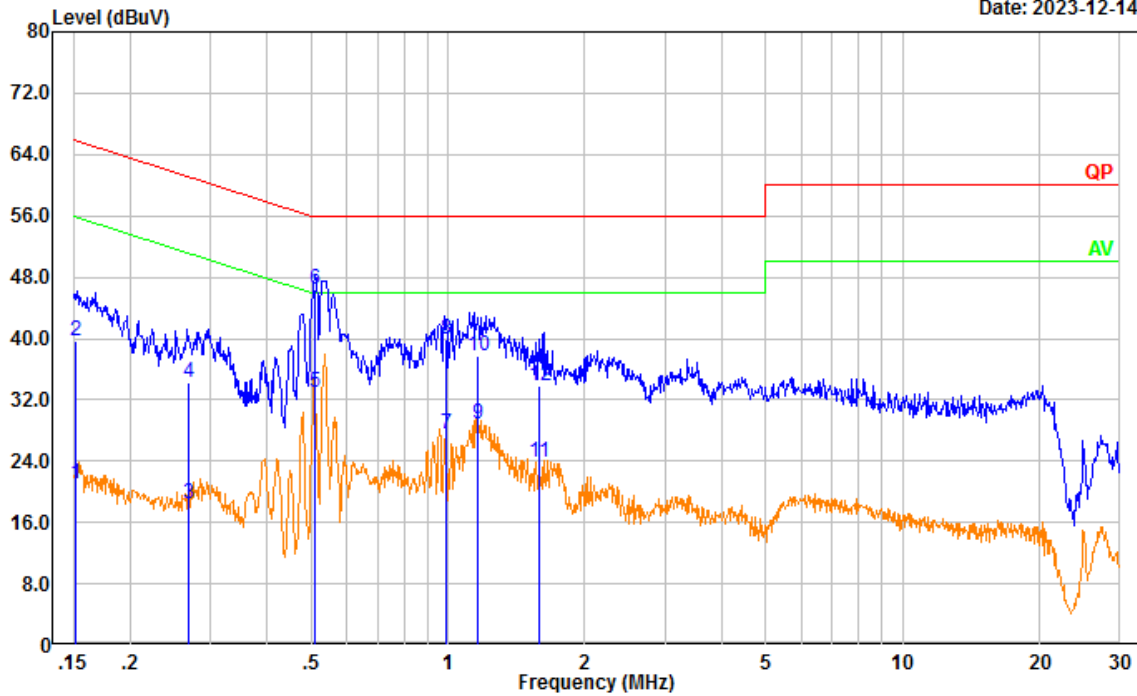


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	11.46	9.61	21.07	55.93	34.86	Average
2	0.151	30.03	9.61	39.64	65.93	26.29	QP
3	0.268	8.91	9.61	18.52	51.18	32.66	Average
4	0.268	24.75	9.61	34.36	61.18	26.82	QP
5	0.511	23.41	9.61	33.02	46.00	12.98	Average
6	0.511	36.74	9.61	46.35	56.00	9.65	QP
7	0.987	17.98	9.62	27.60	46.00	18.40	Average
8	0.987	30.24	9.62	39.86	56.00	16.14	QP
9	1.167	19.30	9.62	28.92	46.00	17.08	Average
10	1.167	28.04	9.62	37.66	56.00	18.34	QP
11	1.587	14.12	9.63	23.75	46.00	22.25	Average
12	1.587	24.19	9.63	33.82	56.00	22.18	QP

Test Mode: M2 (RX 108.0125MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(108.0125)

Date: 2023-12-14

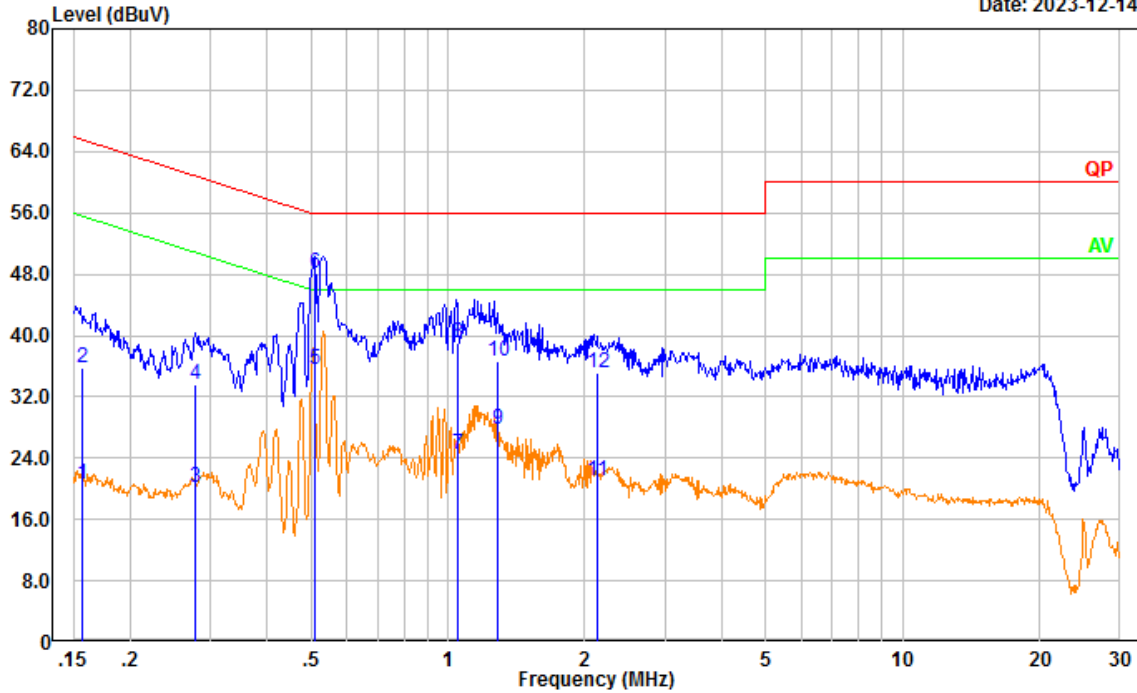

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	11.00	9.61	20.61	55.64	35.03	Average
2	0.157	26.09	9.61	35.70	65.64	29.94	QP
3	0.278	10.54	9.61	20.15	50.88	30.73	Average
4	0.278	23.99	9.61	33.60	60.88	27.28	QP
5	0.509	25.89	9.61	35.50	46.00	10.50	Average
6	0.509	38.58	9.61	48.19	56.00	7.81	QP
7	1.048	14.81	9.62	24.43	46.00	21.57	Average
8	1.048	29.49	9.62	39.11	56.00	16.89	QP
9	1.286	18.08	9.62	27.70	46.00	18.30	Average
10	1.286	27.06	9.62	36.68	56.00	19.32	QP
11	2.129	11.29	9.63	20.92	46.00	25.08	Average
12	2.129	25.56	9.63	35.19	56.00	20.81	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(108.0125)

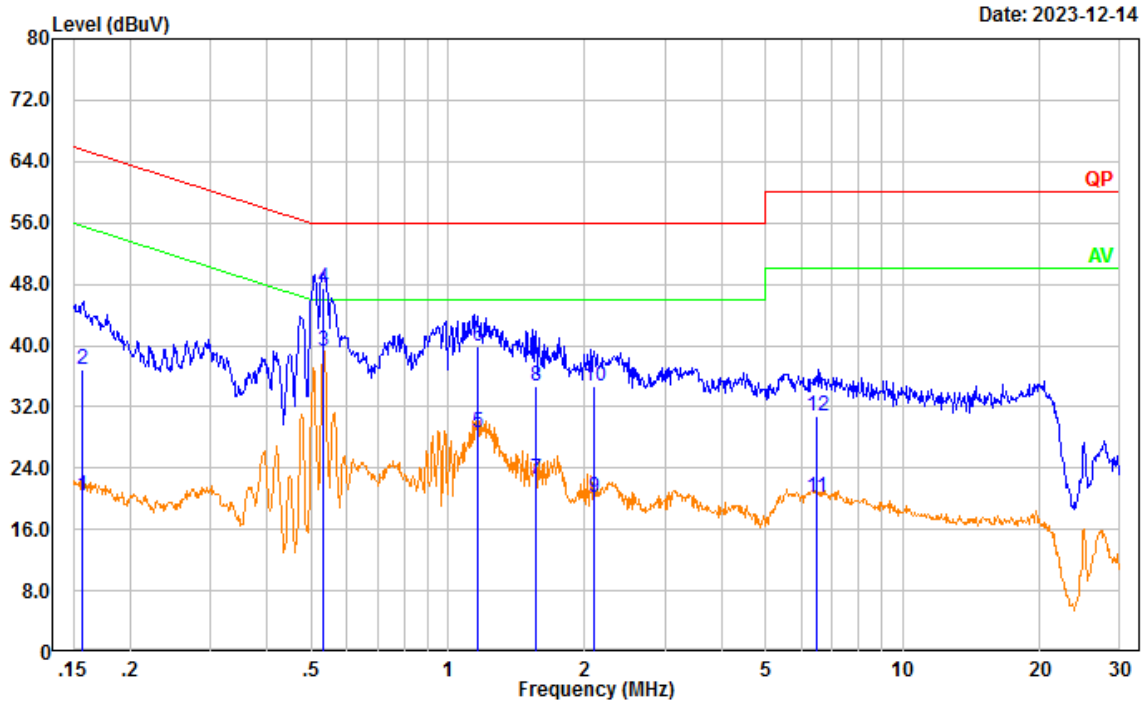


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	10.67	9.61	20.28	55.59	35.31	Average
2	0.158	27.35	9.61	36.96	65.59	28.63	QP
3	0.534	29.66	9.61	39.27	46.00	6.73	Average
4	0.534	37.87	9.61	47.48	56.00	8.52	QP
5	1.164	19.07	9.62	28.69	46.00	17.31	Average
6	1.164	30.22	9.62	39.84	56.00	16.16	QP
7	1.560	12.89	9.63	22.52	46.00	23.48	Average
8	1.560	25.02	9.63	34.65	56.00	21.35	QP
9	2.098	10.49	9.63	20.12	46.00	25.88	Average
10	2.098	25.14	9.63	34.77	56.00	21.23	QP
11	6.451	10.55	9.66	20.21	50.00	29.79	Average
12	6.451	21.02	9.66	30.68	60.00	29.32	QP

Test Mode: M2 (RX 122MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(122)

Date: 2023-12-14

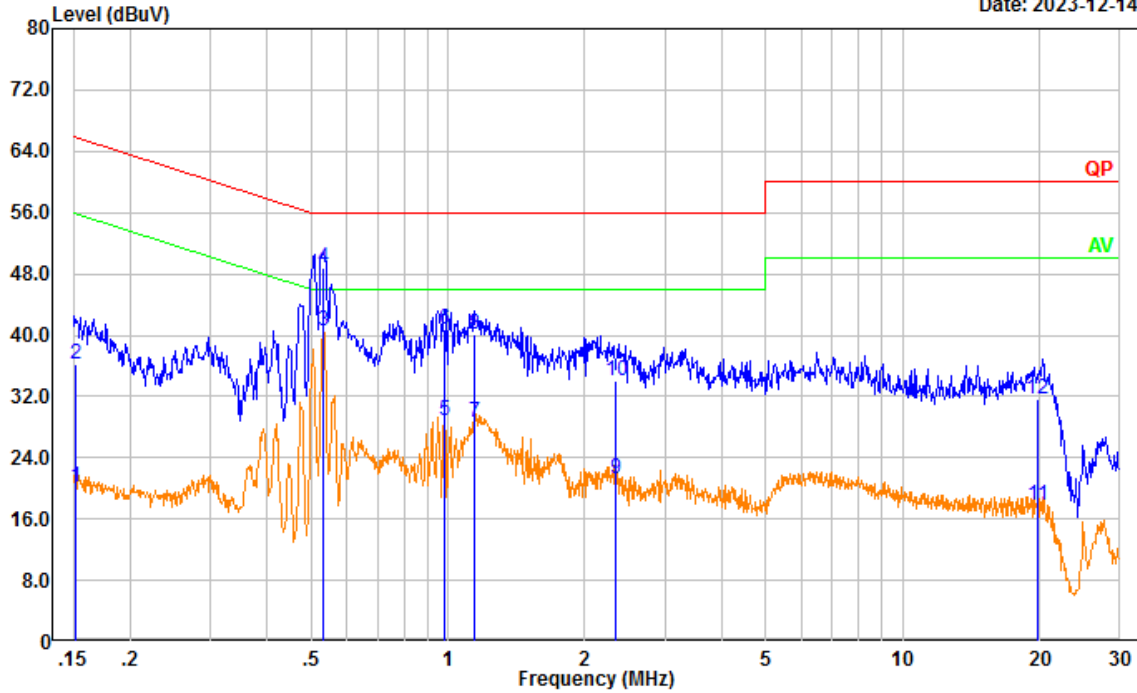

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	10.52	9.61	20.13	55.93	35.80	Average
2	0.151	26.69	9.61	36.30	65.93	29.63	QP
3	0.533	30.94	9.61	40.55	46.00	5.45	Average
4	0.533	39.09	9.61	48.70	56.00	7.30	QP
5	0.981	19.12	9.62	28.74	46.00	17.26	Average
6	0.981	31.13	9.62	40.75	56.00	15.25	QP
7	1.140	19.06	9.62	28.68	46.00	17.32	Average
8	1.140	30.57	9.62	40.19	56.00	15.81	QP
9	2.346	11.55	9.64	21.19	46.00	24.81	Average
10	2.346	24.47	9.64	34.11	56.00	21.89	QP
11	19.719	7.89	9.79	17.68	50.00	32.32	Average
12	19.719	21.90	9.79	31.69	60.00	28.31	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(122)

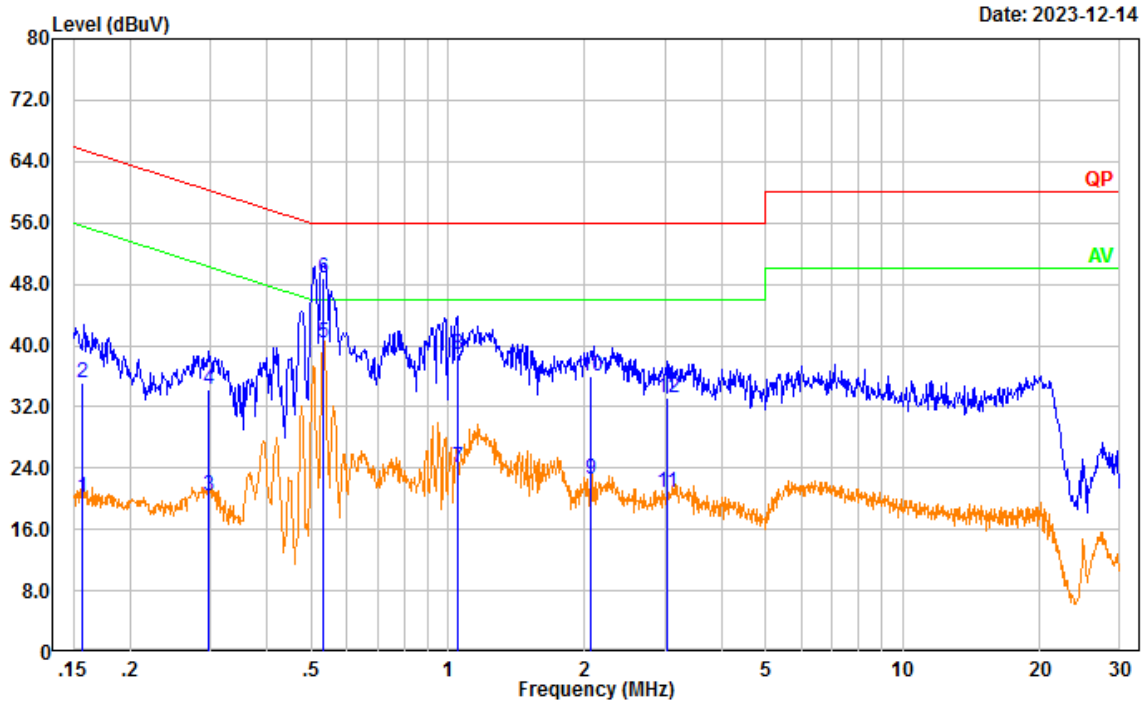


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	10.51	9.61	20.12	55.65	35.53	Average
2	0.156	25.45	9.61	35.06	65.65	30.59	QP
3	0.297	10.76	9.61	20.37	50.32	29.95	Average
4	0.297	24.57	9.61	34.18	60.32	26.14	QP
5	0.533	30.74	9.61	40.35	46.00	5.65	Average
6	0.533	39.08	9.61	48.69	56.00	7.31	QP
7	1.050	14.55	9.62	24.17	46.00	21.83	Average
8	1.050	29.24	9.62	38.86	56.00	17.14	QP
9	2.061	13.00	9.63	22.63	46.00	23.37	Average
10	2.061	26.45	9.63	36.08	56.00	19.92	QP
11	3.032	11.18	9.65	20.83	46.00	25.17	Average
12	3.032	23.52	9.65	33.17	56.00	22.83	QP

Test Mode: M2 (RX 135.9875MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(135.9875)

Date: 2023-12-15

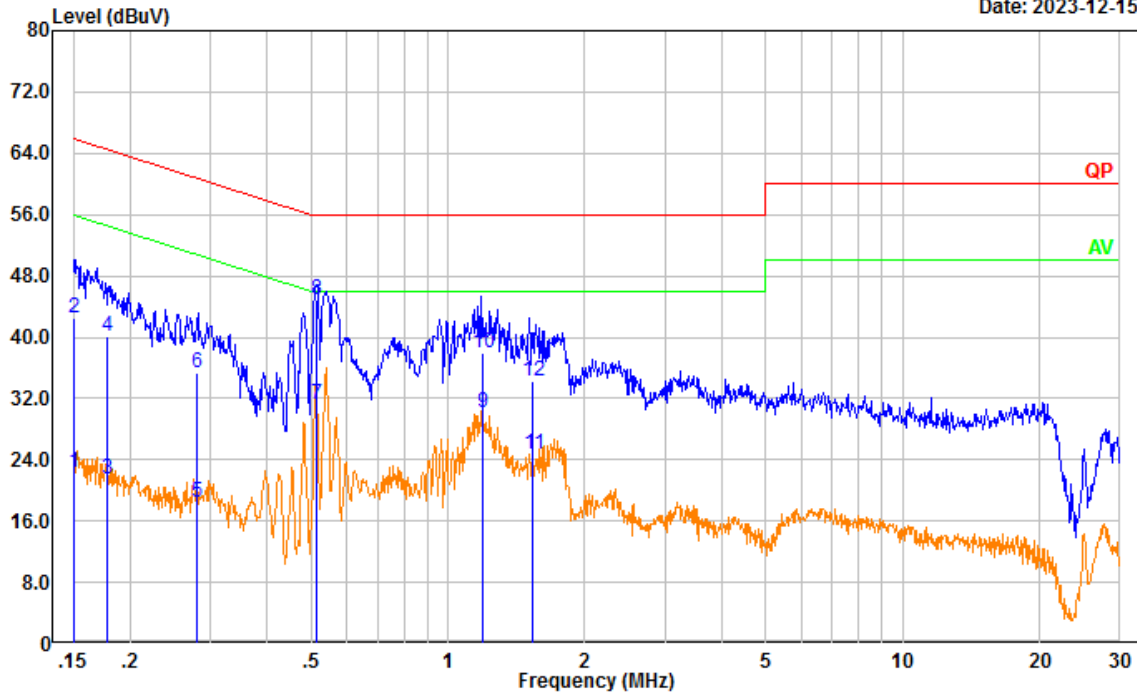

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	12.68	9.61	22.29	55.97	33.68	Average
2	0.151	32.86	9.61	42.47	65.97	23.50	QP
3	0.179	11.77	9.61	21.38	54.55	33.17	Average
4	0.179	30.52	9.61	40.13	64.55	24.42	QP
5	0.281	8.76	9.61	18.37	50.78	32.41	Average
6	0.281	25.75	9.61	35.36	60.78	25.42	QP
7	0.514	21.65	9.61	31.26	46.00	14.74	Average
8	0.514	35.32	9.61	44.93	56.00	11.07	QP
9	1.188	20.41	9.62	30.03	46.00	15.97	Average
10	1.188	28.29	9.62	37.91	56.00	18.09	QP
11	1.537	15.06	9.63	24.69	46.00	21.31	Average
12	1.537	24.66	9.63	34.29	56.00	21.71	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(135.9875)

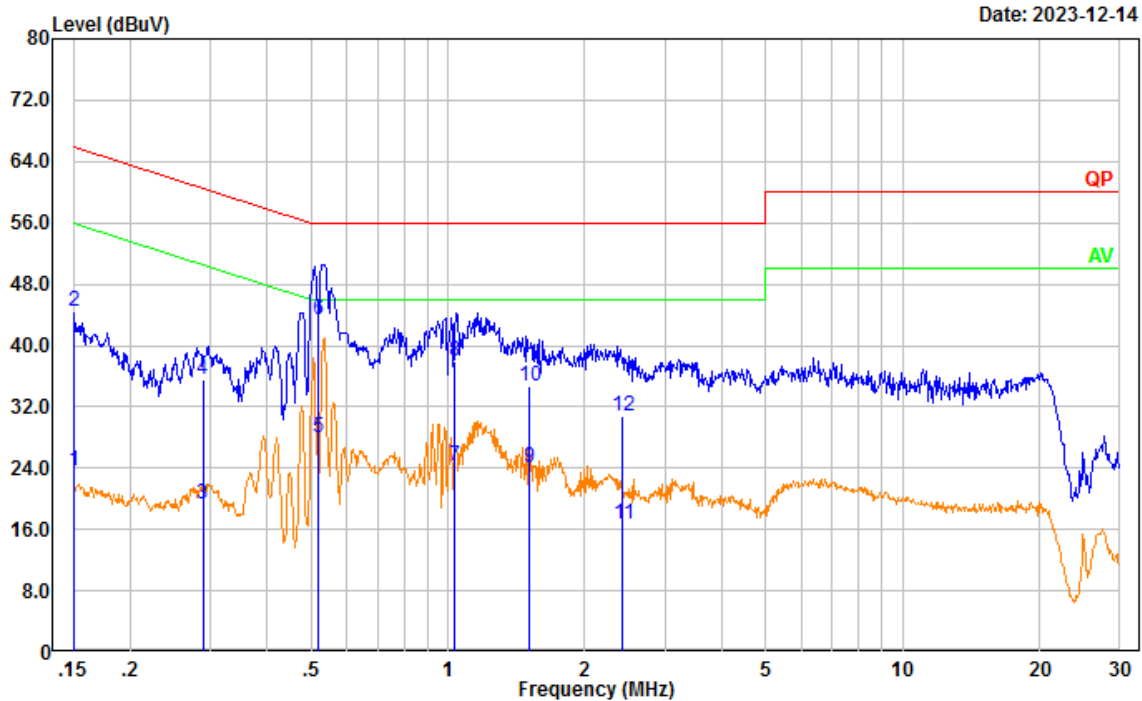


Date: 2023-12-14

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	13.95	9.61	23.56	56.00	32.44	Average
2	0.150	34.88	9.61	44.49	66.00	21.51	QP
3	0.289	9.67	9.61	19.28	50.56	31.28	Average
4	0.289	26.03	9.61	35.64	60.56	24.92	QP
5	0.518	18.31	9.61	27.92	46.00	18.08	Average
6	0.518	33.68	9.61	43.29	56.00	12.71	QP
7	1.030	14.69	9.62	24.31	46.00	21.69	Average
8	1.030	28.27	9.62	37.89	56.00	18.11	QP
9	1.513	14.40	9.63	24.03	46.00	21.97	Average
10	1.513	25.08	9.63	34.71	56.00	21.29	QP
11	2.423	7.03	9.64	16.67	46.00	29.33	Average
12	2.423	21.07	9.64	30.71	56.00	25.29	QP

Test Mode: M2 (RX 136.0125MHz)

Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(136.0125)


Date: 2023-12-15

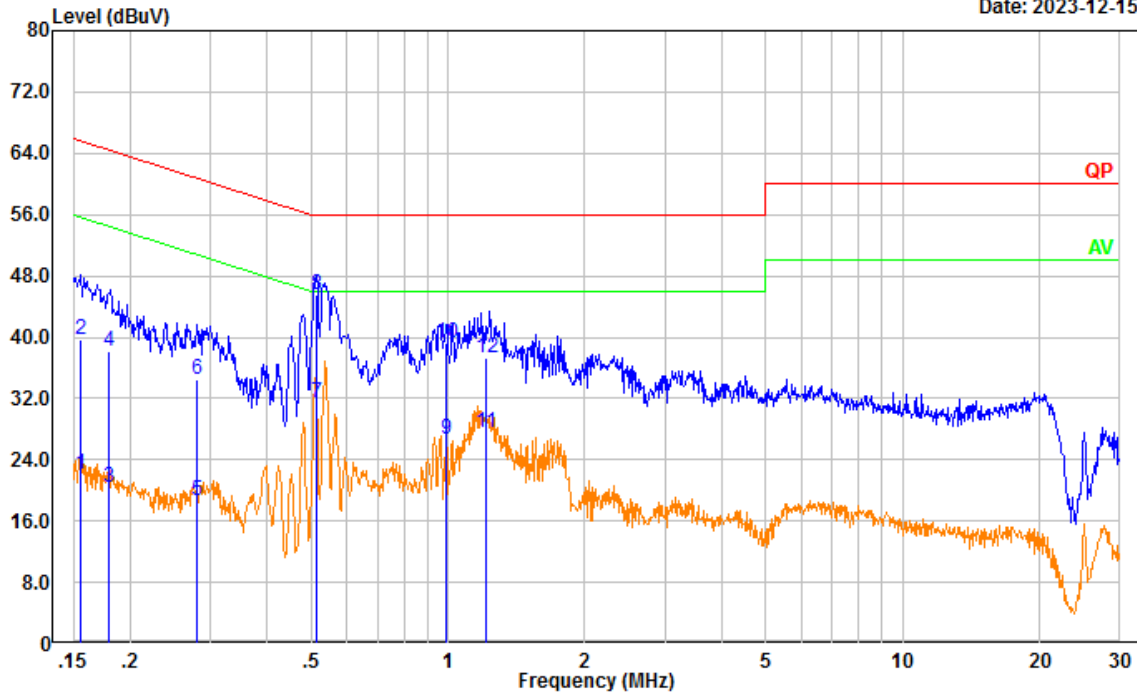

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	12.45	9.61	22.06	55.66	33.60	Average
2	0.156	30.13	9.61	39.74	65.66	25.92	QP
3	0.180	10.78	9.61	20.39	54.49	34.10	Average
4	0.180	28.50	9.61	38.11	64.49	26.38	QP
5	0.280	8.98	9.61	18.59	50.81	32.22	Average
6	0.280	24.84	9.61	34.45	60.81	26.36	QP
7	0.514	21.75	9.61	31.36	46.00	14.64	Average
8	0.514	35.86	9.61	45.47	56.00	10.53	QP
9	0.992	16.98	9.62	26.60	46.00	19.40	Average
10	0.992	29.72	9.62	39.34	56.00	16.66	QP
11	1.212	17.95	9.62	27.57	46.00	18.43	Average
12	1.212	27.61	9.62	37.23	56.00	18.77	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(136.0125)

Date: 2023-12-15

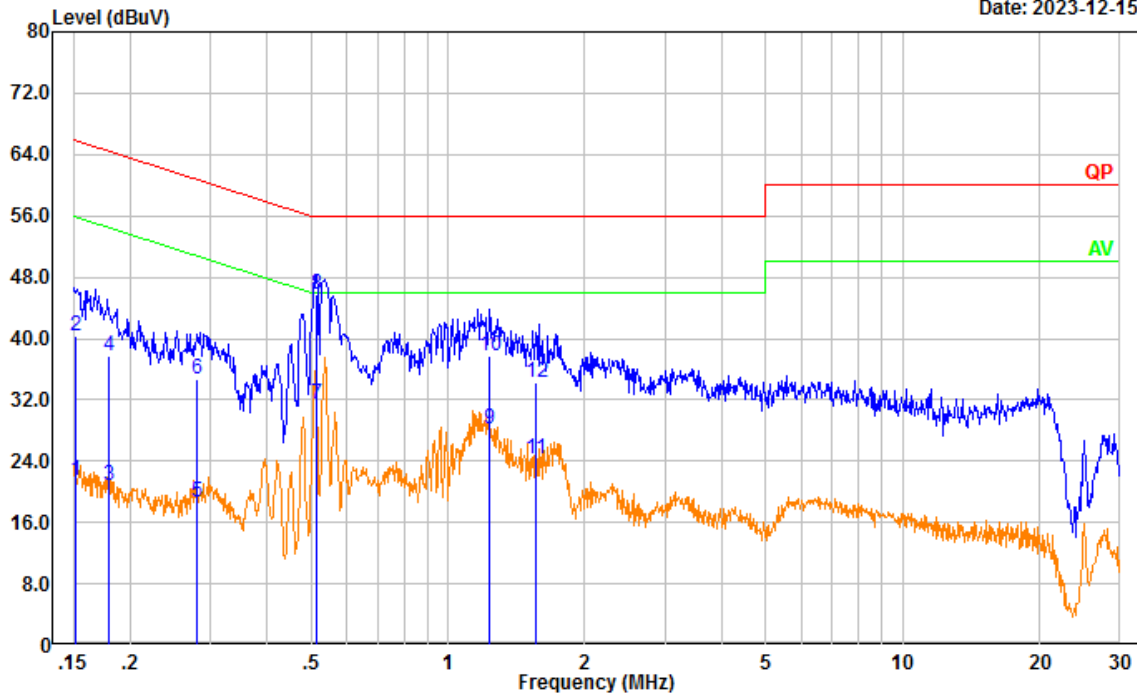


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	11.78	9.61	21.39	55.91	34.52	Average
2	0.152	30.82	9.61	40.43	65.91	25.48	QP
3	0.179	11.13	9.61	20.74	54.52	33.78	Average
4	0.179	28.12	9.61	37.73	64.52	26.79	QP
5	0.280	9.11	9.61	18.72	50.81	32.09	Average
6	0.280	25.00	9.61	34.61	60.81	26.20	QP
7	0.513	21.76	9.61	31.37	46.00	14.63	Average
8	0.513	36.14	9.61	45.75	56.00	10.25	QP
9	1.236	18.67	9.62	28.29	46.00	17.71	Average
10	1.236	28.05	9.62	37.67	56.00	18.33	QP
11	1.560	14.60	9.63	24.23	46.00	21.77	Average
12	1.560	24.59	9.63	34.22	56.00	21.78	QP

Test Mode: M2 (RX 155MHz)

Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(155)


Date: 2023-12-15

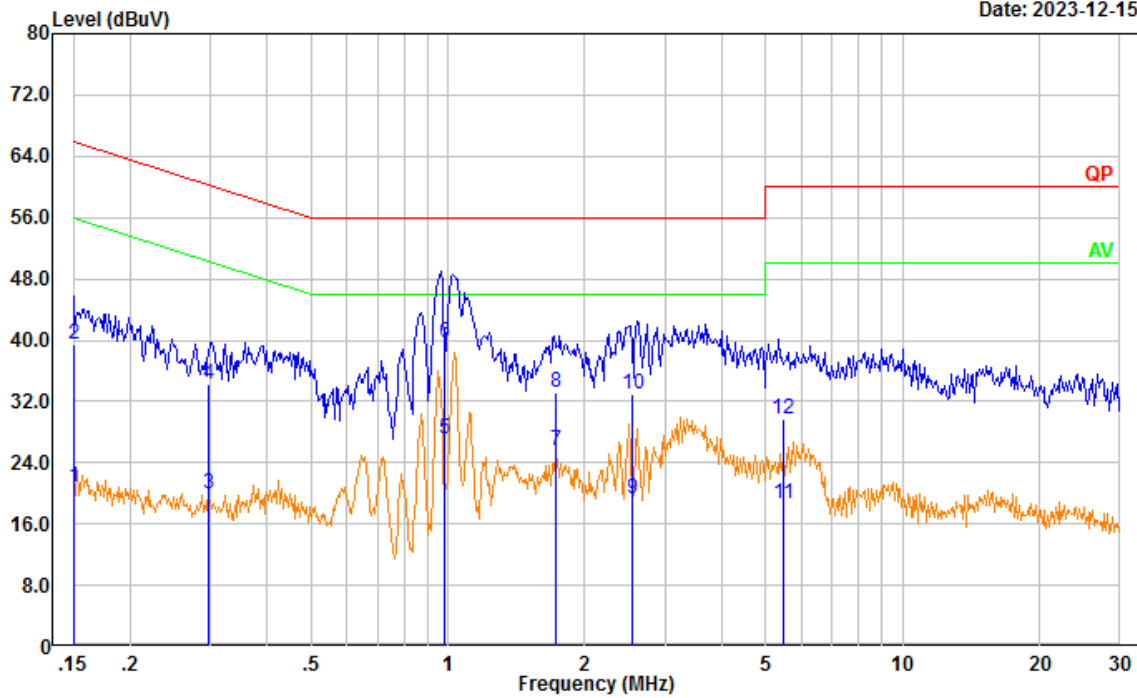

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	11.30	9.61	20.91	55.96	35.05	Average
2	0.151	29.80	9.61	39.41	65.96	26.55	QP
3	0.298	10.25	9.61	19.86	50.29	30.43	Average
4	0.298	24.68	9.61	34.29	60.29	26.00	QP
5	0.985	17.56	9.62	27.18	46.00	18.82	Average
6	0.985	30.02	9.62	39.64	56.00	16.36	QP
7	1.730	15.86	9.63	25.49	46.00	20.51	Average
8	1.730	23.46	9.63	33.09	56.00	22.91	QP
9	2.539	9.74	9.64	19.38	46.00	26.62	Average
10	2.539	23.38	9.64	33.02	56.00	22.98	QP
11	5.443	8.96	9.66	18.62	50.00	31.38	Average
12	5.443	20.12	9.66	29.78	60.00	30.22	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(155)


Date: 2023-12-15

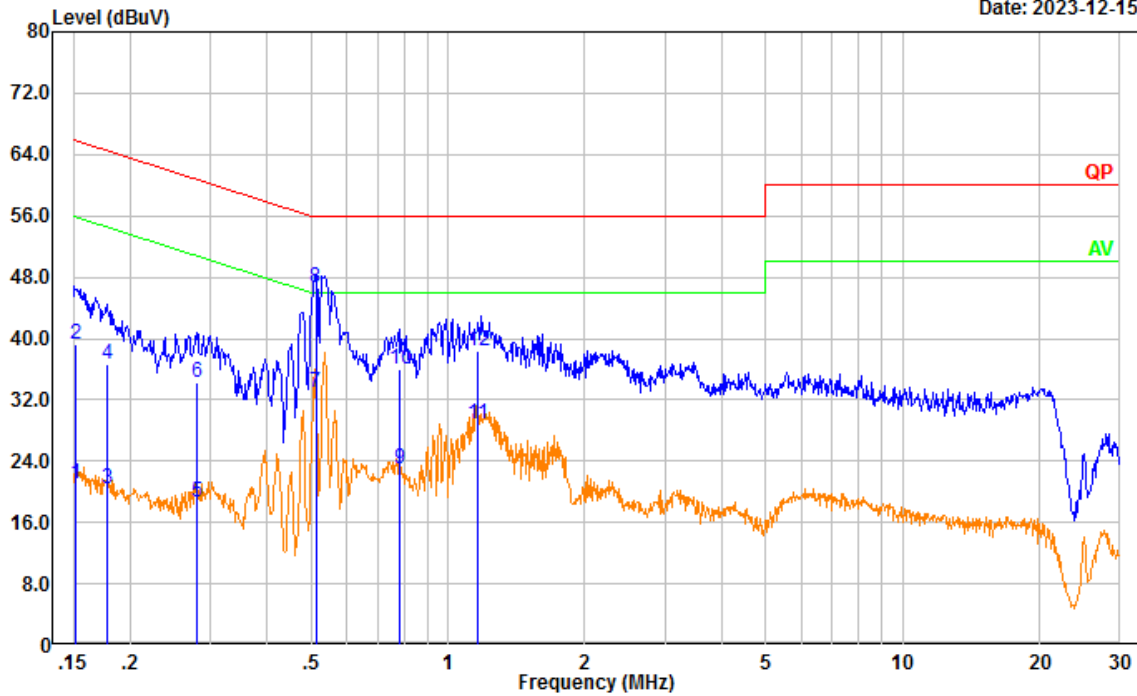

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	11.46	9.61	21.07	55.87	34.80	Average
2	0.152	29.62	9.61	39.23	65.87	26.64	QP
3	0.179	10.72	9.61	20.33	54.54	34.21	Average
4	0.179	27.03	9.61	36.64	64.54	27.90	QP
5	0.280	9.02	9.61	18.63	50.80	32.17	Average
6	0.280	24.59	9.61	34.20	60.80	26.60	QP
7	0.512	23.37	9.61	32.98	46.00	13.02	Average
8	0.512	36.96	9.61	46.57	56.00	9.43	QP
9	0.783	13.40	9.62	23.02	46.00	22.98	Average
10	0.783	26.41	9.62	36.03	56.00	19.97	QP
11	1.164	19.27	9.62	28.89	46.00	17.11	Average
12	1.164	28.79	9.62	38.41	56.00	17.59	QP

Test Mode: M2 (RX 173.9875MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(173.9875)

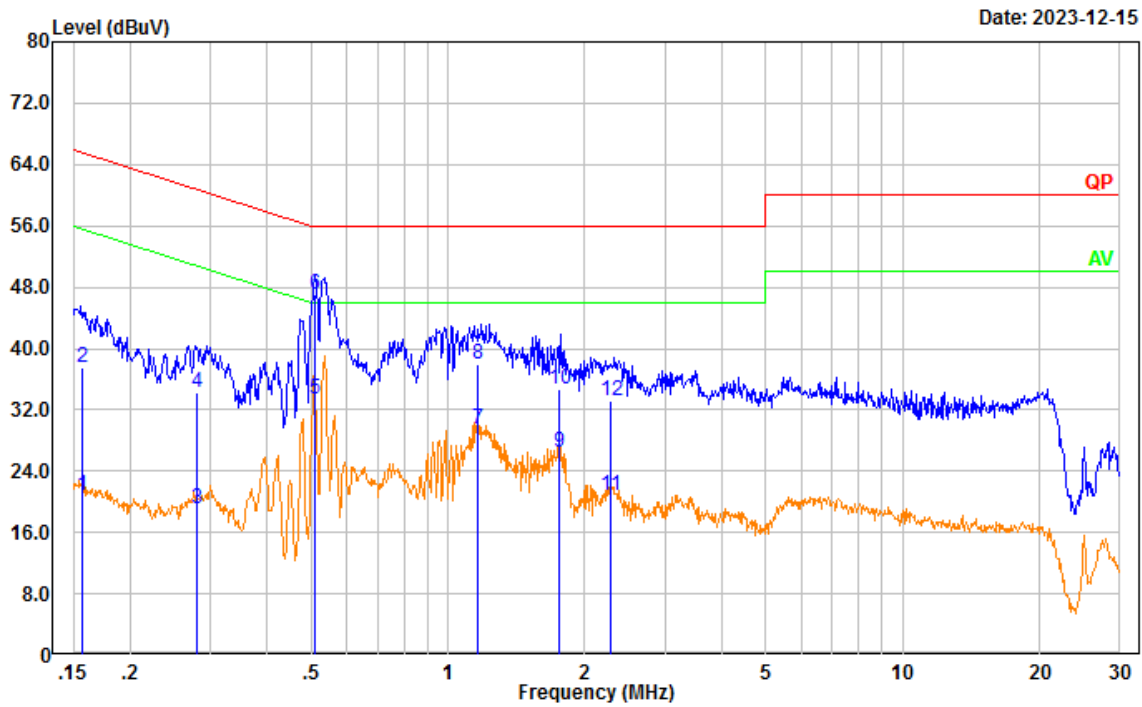

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	11.19	9.61	20.80	55.60	34.80	Average
2	0.157	27.88	9.61	37.49	65.60	28.11	QP
3	0.280	9.47	9.61	19.08	50.81	31.73	Average
4	0.280	24.59	9.61	34.20	60.81	26.61	QP
5	0.511	23.72	9.61	33.33	46.00	12.67	Average
6	0.511	37.33	9.61	46.94	56.00	9.06	QP
7	1.164	19.87	9.62	29.49	46.00	16.51	Average
8	1.164	28.42	9.62	38.04	56.00	17.96	QP
9	1.757	16.81	9.63	26.44	46.00	19.56	Average
10	1.757	25.12	9.63	34.75	56.00	21.25	QP
11	2.272	11.25	9.64	20.89	46.00	25.11	Average
12	2.272	23.61	9.64	33.25	56.00	22.75	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(173.9875)

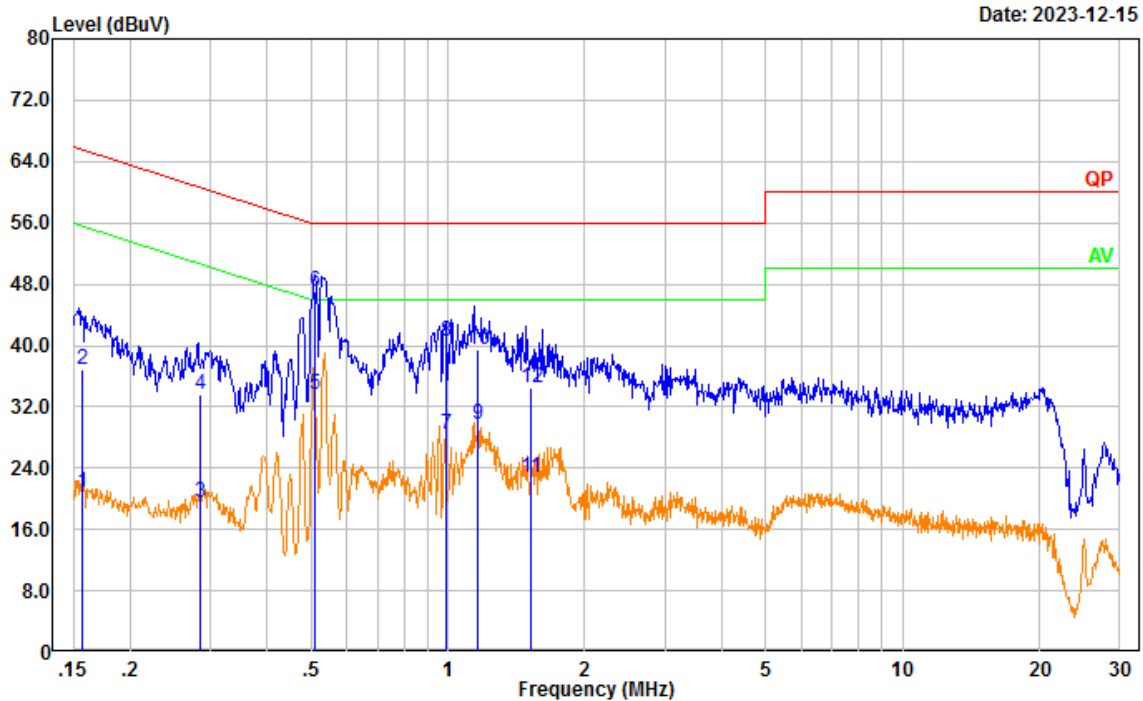


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	11.13	9.61	20.74	55.62	34.88	Average
2	0.157	27.34	9.61	36.95	65.62	28.67	QP
3	0.285	9.83	9.61	19.44	50.66	31.22	Average
4	0.285	24.04	9.61	33.65	60.66	27.01	QP
5	0.511	24.01	9.61	33.62	46.00	12.38	Average
6	0.511	37.49	9.61	47.10	56.00	8.90	QP
7	0.987	18.79	9.62	28.41	46.00	17.59	Average
8	0.987	30.83	9.62	40.45	56.00	15.55	QP
9	1.164	20.11	9.62	29.73	46.00	16.27	Average
10	1.164	29.80	9.62	39.42	56.00	16.58	QP
11	1.518	13.21	9.63	22.84	46.00	23.16	Average
12	1.518	24.80	9.63	34.43	56.00	21.57	QP

Test Mode: M2(RX 220.0125MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(220.0125)

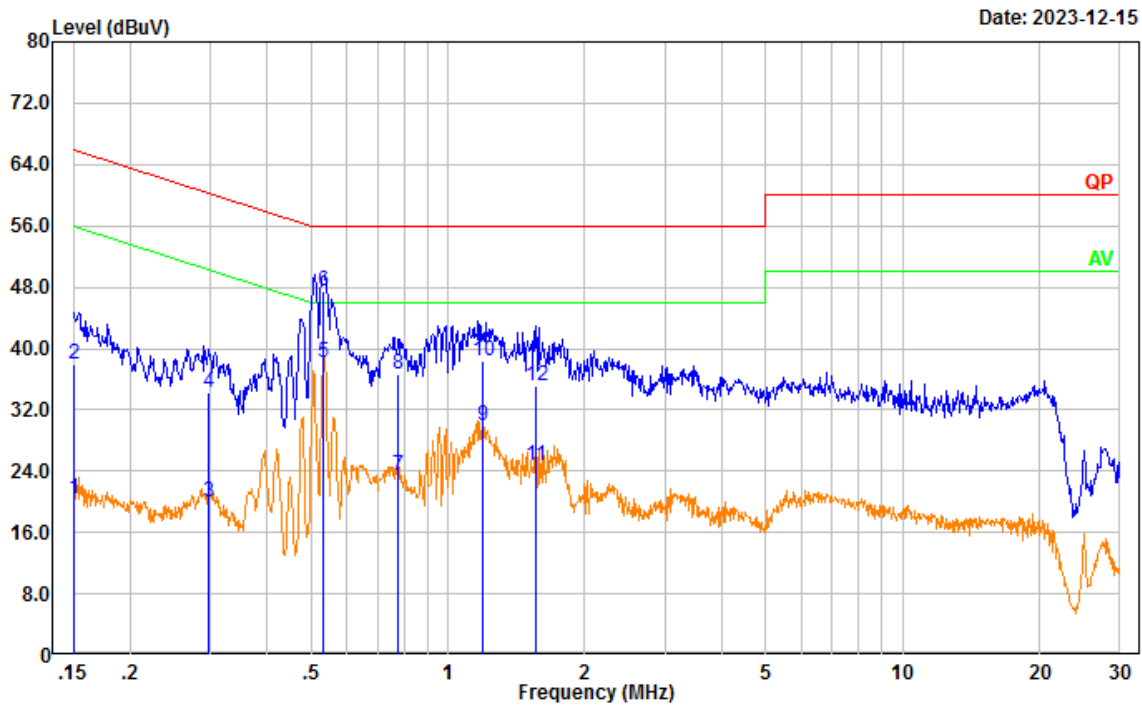

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	10.74	9.61	20.35	55.98	35.63	Average
2	0.150	28.36	9.61	37.97	65.98	28.01	QP
3	0.297	10.40	9.61	20.01	50.33	30.32	Average
4	0.297	24.74	9.61	34.35	60.33	25.98	QP
5	0.533	28.59	9.61	38.20	46.00	7.80	Average
6	0.533	37.77	9.61	47.38	56.00	8.62	QP
7	0.779	13.79	9.62	23.41	46.00	22.59	Average
8	0.779	26.93	9.62	36.55	56.00	19.45	QP
9	1.188	20.28	9.62	29.90	46.00	16.10	Average
10	1.188	28.66	9.62	38.28	56.00	17.72	QP
11	1.560	14.99	9.63	24.62	46.00	21.38	Average
12	1.560	25.54	9.63	35.17	56.00	20.83	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(220.0125)

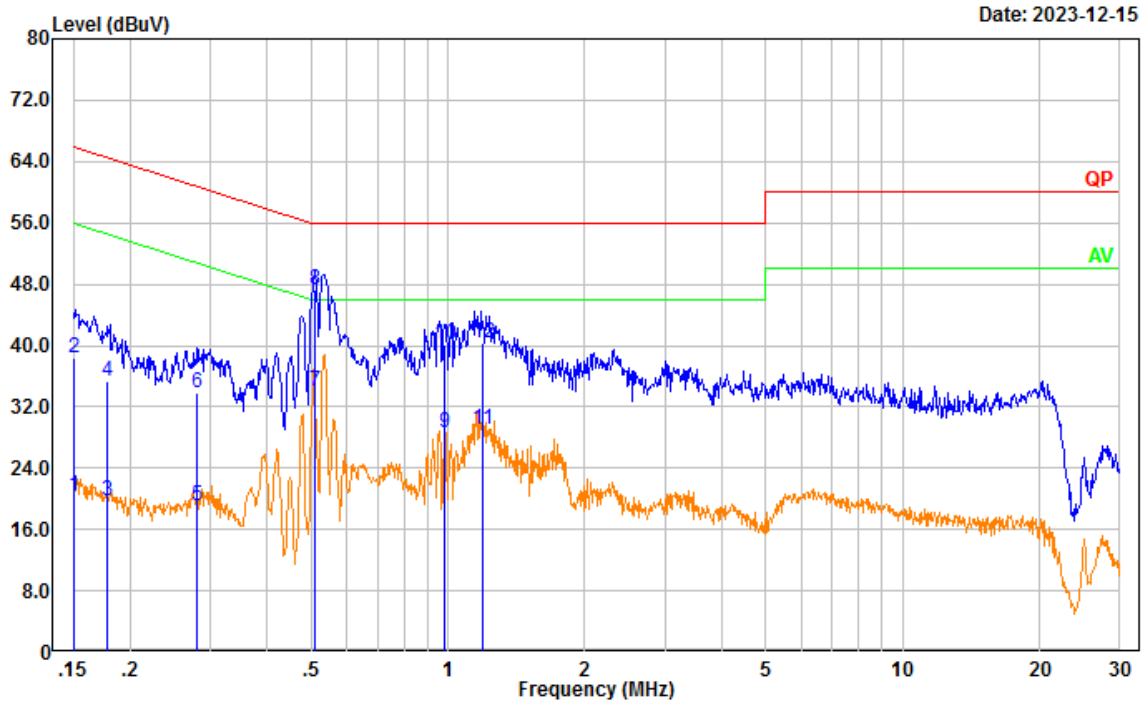


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	10.85	9.61	20.46	55.94	35.48	Average
2	0.151	28.85	9.61	38.46	65.94	27.48	QP
3	0.177	10.21	9.61	19.82	54.60	34.78	Average
4	0.177	25.82	9.61	35.43	64.60	29.17	QP
5	0.279	9.53	9.61	19.14	50.83	31.69	Average
6	0.279	24.15	9.61	33.76	60.83	27.07	QP
7	0.511	24.47	9.61	34.08	46.00	11.92	Average
8	0.511	37.69	9.61	47.30	56.00	8.70	QP
9	0.985	18.99	9.62	28.61	46.00	17.39	Average
10	0.985	30.49	9.62	40.11	56.00	15.89	QP
11	1.188	19.39	9.62	29.01	46.00	16.99	Average
12	1.188	30.60	9.62	40.22	56.00	15.78	QP

Test Mode: M2 (RX 240MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(240)

Date: 2023-12-15

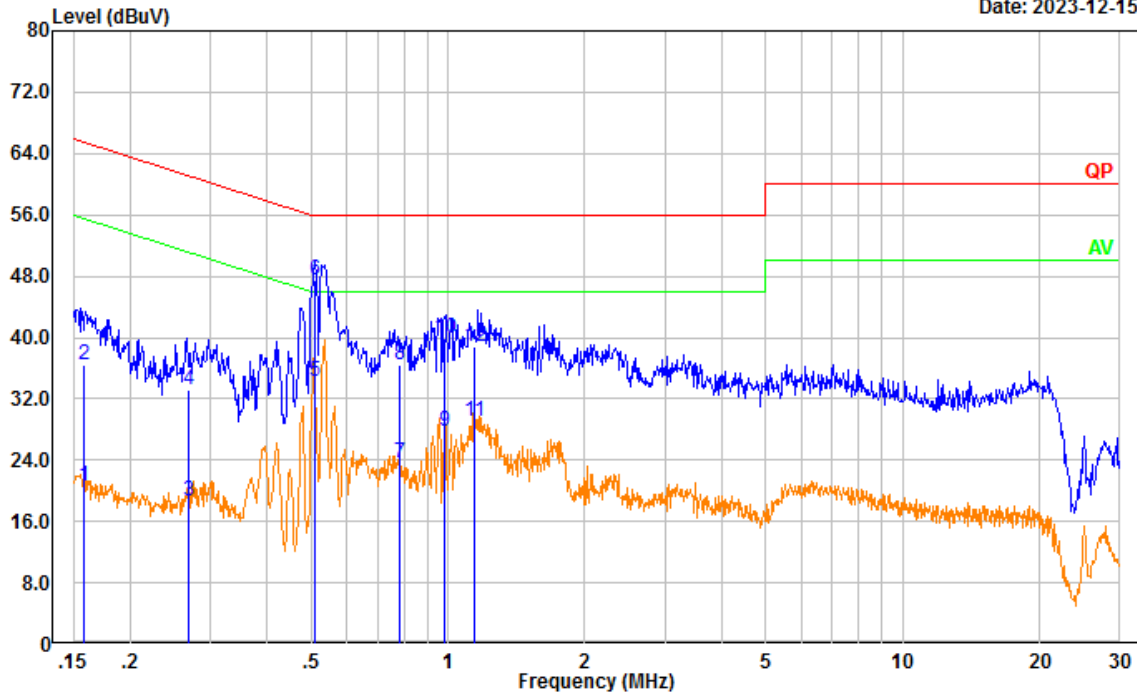

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	11.00	9.61	20.61	55.56	34.95	Average
2	0.158	26.81	9.61	36.42	65.56	29.14	QP
3	0.268	9.01	9.61	18.62	51.17	32.55	Average
4	0.268	23.62	9.61	33.23	61.17	27.94	QP
5	0.511	24.73	9.61	34.34	46.00	11.66	Average
6	0.511	37.88	9.61	47.49	56.00	8.51	QP
7	0.780	14.05	9.62	23.67	46.00	22.33	Average
8	0.780	26.85	9.62	36.47	56.00	19.53	QP
9	0.984	18.10	9.62	27.72	46.00	18.28	Average
10	0.984	30.37	9.62	39.99	56.00	16.01	QP
11	1.140	19.54	9.62	29.16	46.00	16.84	Average
12	1.140	29.09	9.62	38.71	56.00	17.29	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(240)

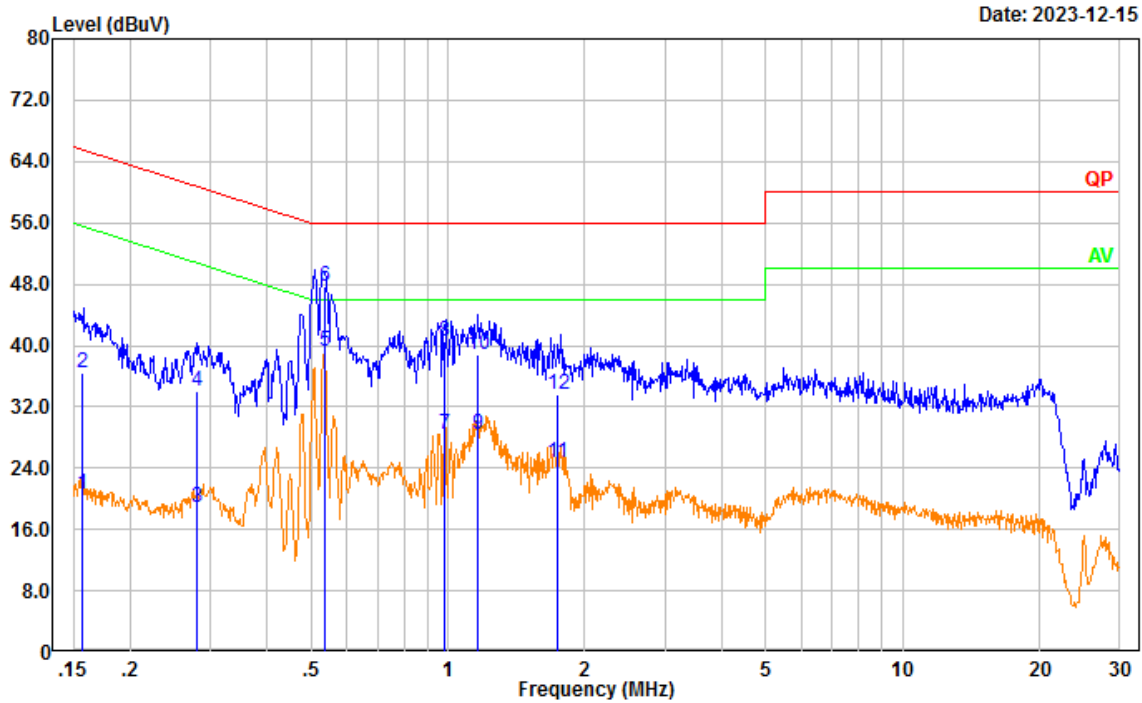


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	11.08	9.61	20.69	55.63	34.94	Average
2	0.157	26.76	9.61	36.37	65.63	29.26	QP
3	0.281	9.20	9.61	18.81	50.79	31.98	Average
4	0.281	24.38	9.61	33.99	60.79	26.80	QP
5	0.534	29.67	9.61	39.28	46.00	6.72	Average
6	0.534	38.15	9.61	47.76	56.00	8.24	QP
7	0.985	18.79	9.62	28.41	46.00	17.59	Average
8	0.985	30.86	9.62	40.48	56.00	15.52	QP
9	1.163	18.84	9.62	28.46	46.00	17.54	Average
10	1.163	29.25	9.62	38.87	56.00	17.13	QP
11	1.740	14.99	9.63	24.62	46.00	21.38	Average
12	1.740	23.97	9.63	33.60	56.00	22.40	QP

Test Mode: M2 (RX 259.9875MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(259.9875)

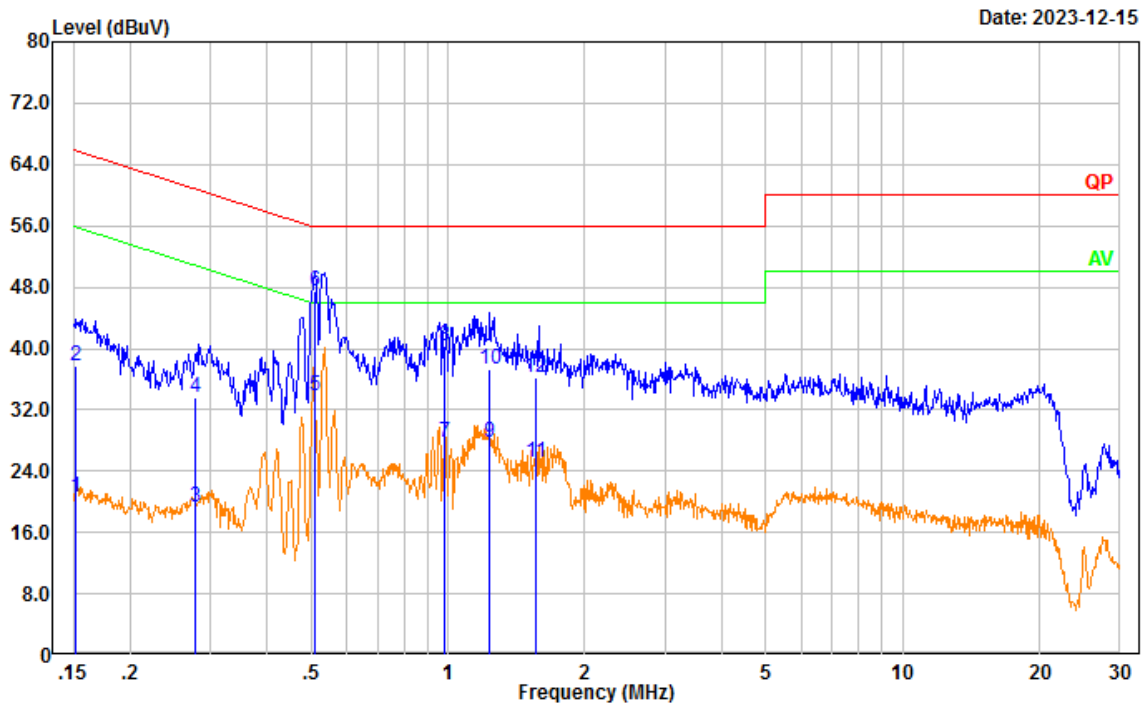

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	10.94	9.61	20.55	55.88	35.33	Average
2	0.152	28.06	9.61	37.67	65.88	28.21	QP
3	0.279	9.64	9.61	19.25	50.85	31.60	Average
4	0.279	23.96	9.61	33.57	60.85	27.28	QP
5	0.511	24.29	9.61	33.90	46.00	12.10	Average
6	0.511	37.80	9.61	47.41	56.00	8.59	QP
7	0.984	18.11	9.62	27.73	46.00	18.27	Average
8	0.984	30.60	9.62	40.22	56.00	15.78	QP
9	1.236	18.22	9.62	27.84	46.00	18.16	Average
10	1.236	27.67	9.62	37.29	56.00	18.71	QP
11	1.554	15.61	9.63	25.24	46.00	20.76	Average
12	1.554	26.59	9.63	36.22	56.00	19.78	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(259.9875)

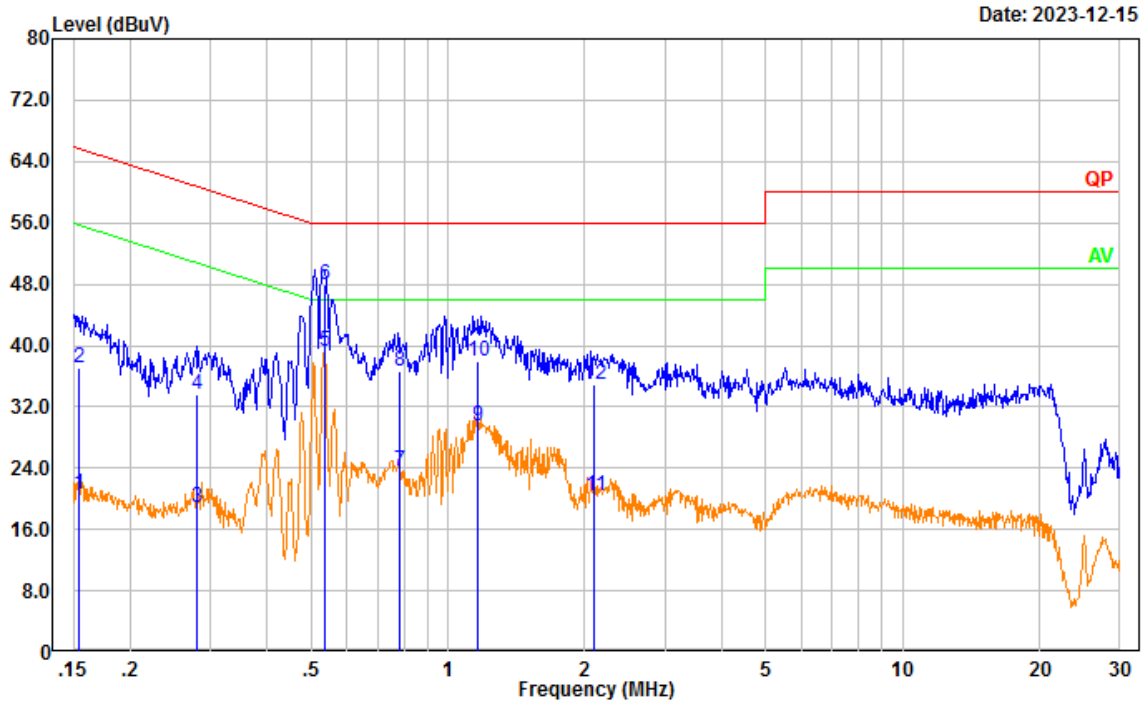


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	11.04	9.61	20.65	55.78	35.13	Average
2	0.154	27.43	9.61	37.04	65.78	28.74	QP
3	0.280	9.30	9.61	18.91	50.80	31.89	Average
4	0.280	24.06	9.61	33.67	60.80	27.13	QP
5	0.534	29.73	9.61	39.34	46.00	6.66	Average
6	0.534	38.21	9.61	47.82	56.00	8.18	QP
7	0.781	13.97	9.62	23.59	46.00	22.41	Average
8	0.781	27.09	9.62	36.71	56.00	19.29	QP
9	1.165	19.88	9.62	29.50	46.00	16.50	Average
10	1.165	28.43	9.62	38.05	56.00	17.95	QP
11	2.102	10.67	9.63	20.30	46.00	25.70	Average
12	2.102	25.32	9.63	34.95	56.00	21.05	QP

Test Mode: M2 (RX350.0125MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(350.0125)

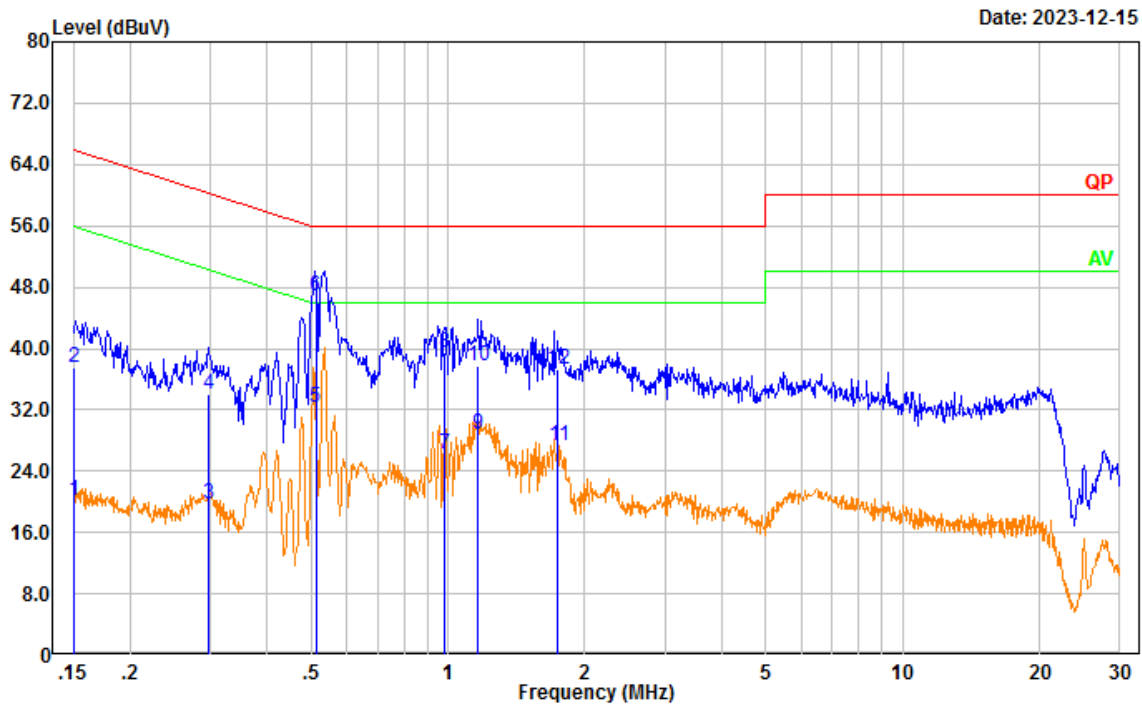

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	10.53	9.61	20.14	55.96	35.82	Average
2	0.151	27.97	9.61	37.58	65.96	28.38	QP
3	0.297	10.22	9.61	19.83	50.33	30.50	Average
4	0.297	24.43	9.61	34.04	60.33	26.29	QP
5	0.512	22.76	9.61	32.37	46.00	13.63	Average
6	0.512	37.19	9.61	46.80	56.00	9.20	QP
7	0.982	16.70	9.62	26.32	46.00	19.68	Average
8	0.982	29.88	9.62	39.50	56.00	16.50	QP
9	1.163	19.19	9.62	28.81	46.00	17.19	Average
10	1.163	28.15	9.62	37.77	56.00	18.23	QP
11	1.745	17.74	9.63	27.37	46.00	18.63	Average
12	1.745	27.61	9.63	37.24	56.00	18.76	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(350.0125)

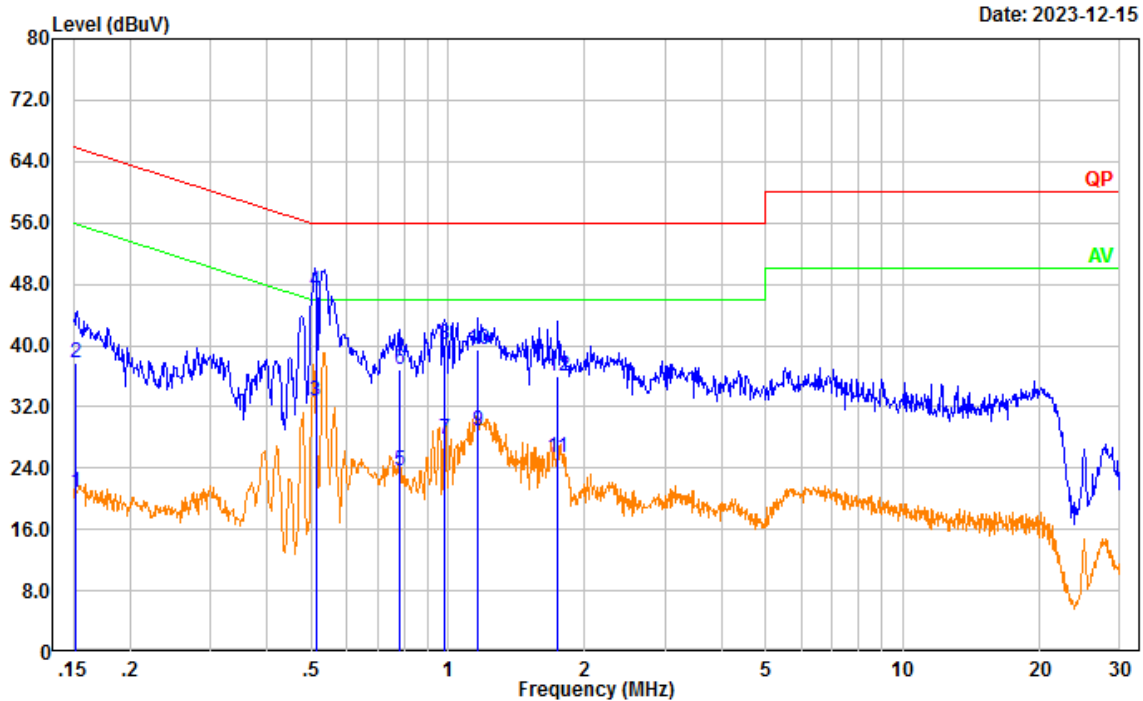


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	11.13	9.61	20.74	55.91	35.17	Average
2	0.152	28.03	9.61	37.64	65.91	28.27	QP
3	0.512	23.13	9.61	32.74	46.00	13.26	Average
4	0.512	37.38	9.61	46.99	56.00	9.01	QP
5	0.781	13.95	9.62	23.57	46.00	22.43	Average
6	0.781	27.26	9.62	36.88	56.00	19.12	QP
7	0.984	18.19	9.62	27.81	46.00	18.19	Average
8	0.984	30.43	9.62	40.05	56.00	15.95	QP
9	1.164	19.25	9.62	28.87	46.00	17.13	Average
10	1.164	29.81	9.62	39.43	56.00	16.57	QP
11	1.741	15.64	9.63	25.27	46.00	20.73	Average
12	1.741	26.37	9.63	36.00	56.00	20.00	QP

Test Mode: M2 (RX370MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(370)

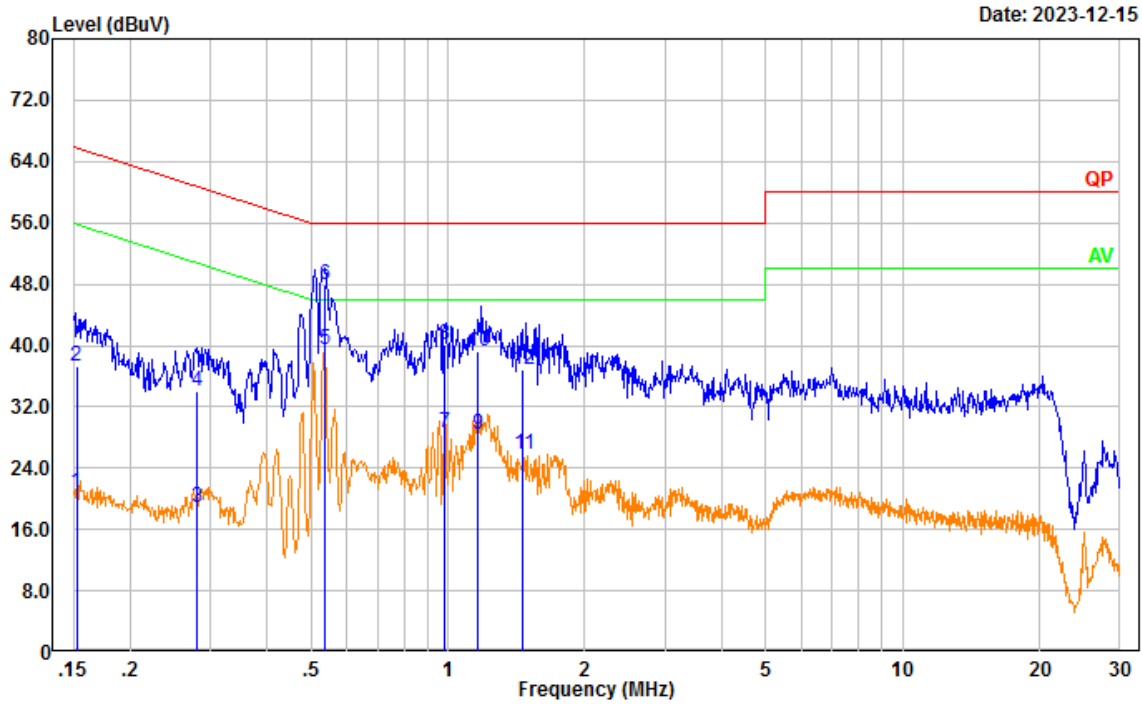

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	11.26	9.61	20.87	55.87	35.00	Average
2	0.152	27.76	9.61	37.37	65.87	28.50	QP
3	0.281	9.28	9.61	18.89	50.80	31.91	Average
4	0.281	24.43	9.61	34.04	60.80	26.76	QP
5	0.534	29.85	9.61	39.46	46.00	6.54	Average
6	0.534	38.36	9.61	47.97	56.00	8.03	QP
7	0.985	18.94	9.62	28.56	46.00	17.44	Average
8	0.985	30.59	9.62	40.21	56.00	15.79	QP
9	1.163	18.68	9.62	28.30	46.00	17.70	Average
10	1.163	29.57	9.62	39.19	56.00	16.81	QP
11	1.464	16.28	9.62	25.90	46.00	20.10	Average
12	1.464	27.30	9.62	36.92	56.00	19.08	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(370)

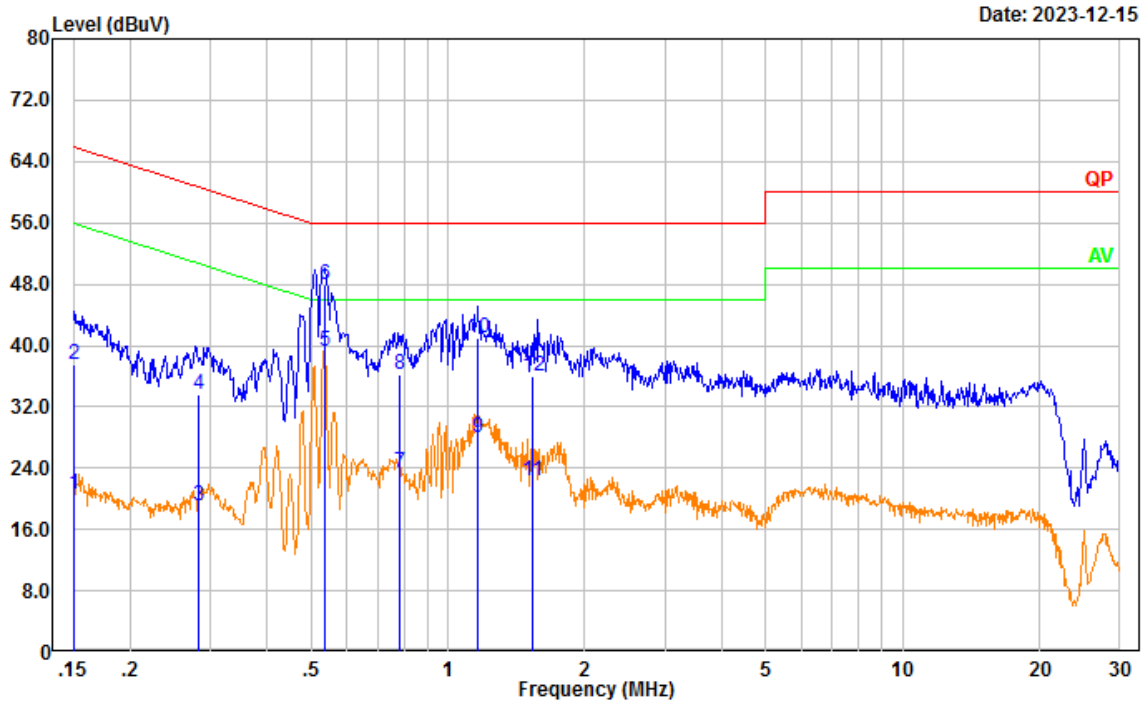


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	11.09	9.61	20.70	55.95	35.25	Average
2	0.151	27.93	9.61	37.54	65.95	28.41	QP
3	0.284	9.56	9.61	19.17	50.70	31.53	Average
4	0.284	23.99	9.61	33.60	60.70	27.10	QP
5	0.534	29.74	9.61	39.35	46.00	6.65	Average
6	0.534	38.33	9.61	47.94	56.00	8.06	QP
7	0.783	13.69	9.62	23.31	46.00	22.69	Average
8	0.783	26.68	9.62	36.30	56.00	19.70	QP
9	1.165	18.39	9.62	28.01	46.00	17.99	Average
10	1.165	31.45	9.62	41.07	56.00	14.93	QP
11	1.530	12.74	9.63	22.37	46.00	23.63	Average
12	1.530	26.28	9.63	35.91	56.00	20.09	QP

Test Mode: M2 (RX389.9875MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(389.9875)

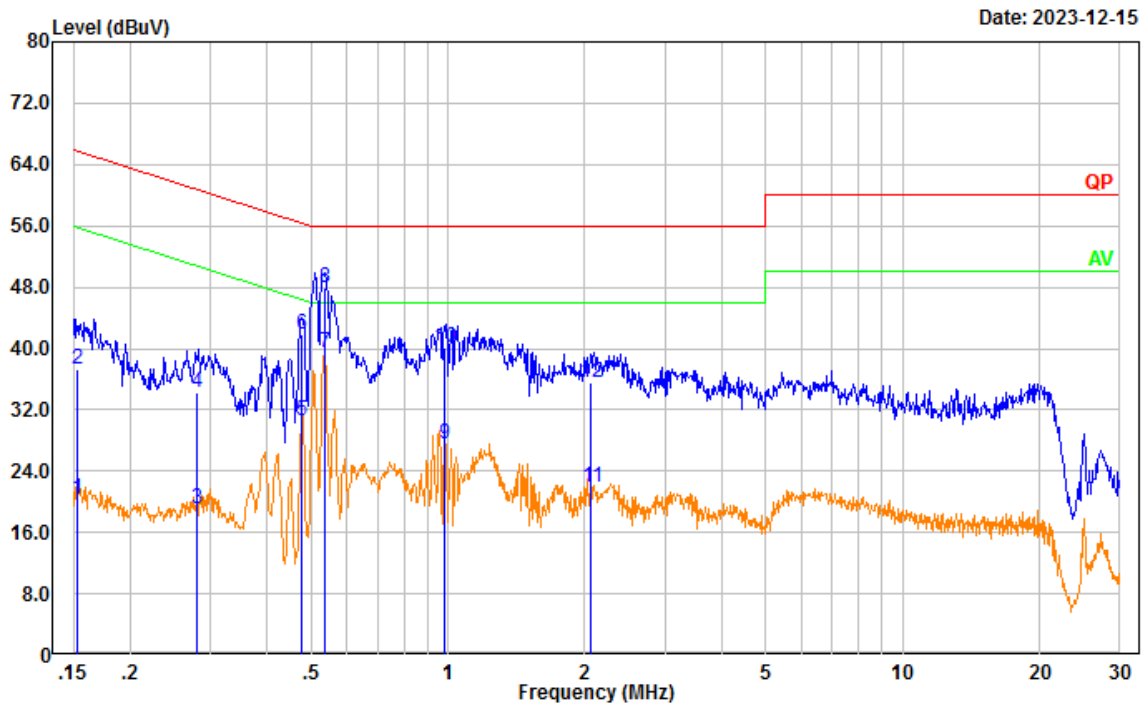

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.153	10.84	9.61	20.45	55.86	35.41	Average
2	0.153	27.68	9.61	37.29	65.86	28.57	QP
3	0.280	9.36	9.61	18.97	50.81	31.84	Average
4	0.280	24.65	9.61	34.26	60.81	26.55	QP
5	0.478	20.87	9.61	30.48	46.37	15.89	Average
6	0.478	32.32	9.61	41.93	56.37	14.44	QP
7	0.535	29.83	9.61	39.44	46.00	6.56	Average
8	0.535	38.24	9.61	47.85	56.00	8.15	QP
9	0.985	17.94	9.62	27.56	46.00	18.44	Average
10	0.985	30.52	9.62	40.14	56.00	15.86	QP
11	2.065	12.32	9.63	21.95	46.00	24.05	Average
12	2.065	26.03	9.63	35.66	56.00	20.34	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(389.9875)

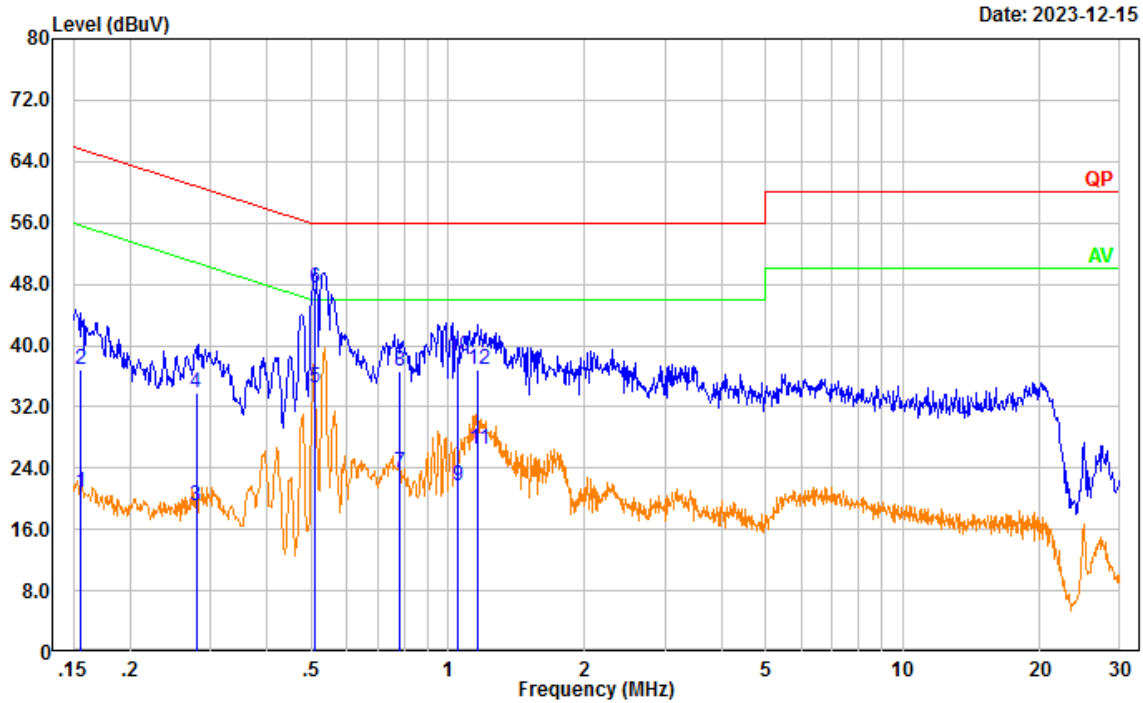


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	11.12	9.61	20.73	55.70	34.97	Average
2	0.155	27.34	9.61	36.95	65.70	28.75	QP
3	0.279	9.51	9.61	19.12	50.83	31.71	Average
4	0.279	24.17	9.61	33.78	60.83	27.05	QP
5	0.511	24.83	9.61	34.44	46.00	11.56	Average
6	0.511	37.90	9.61	47.51	56.00	8.49	QP
7	0.781	13.75	9.62	23.37	46.00	22.63	Average
8	0.781	26.94	9.62	36.56	56.00	19.44	QP
9	1.053	12.14	9.62	21.76	46.00	24.24	Average
10	1.053	28.98	9.62	38.60	56.00	17.40	QP
11	1.165	16.82	9.62	26.44	46.00	19.56	Average
12	1.165	27.21	9.62	36.83	56.00	19.17	QP

Test Mode: M2 (RX400.0125MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(400.0125)

Date: 2023-12-15

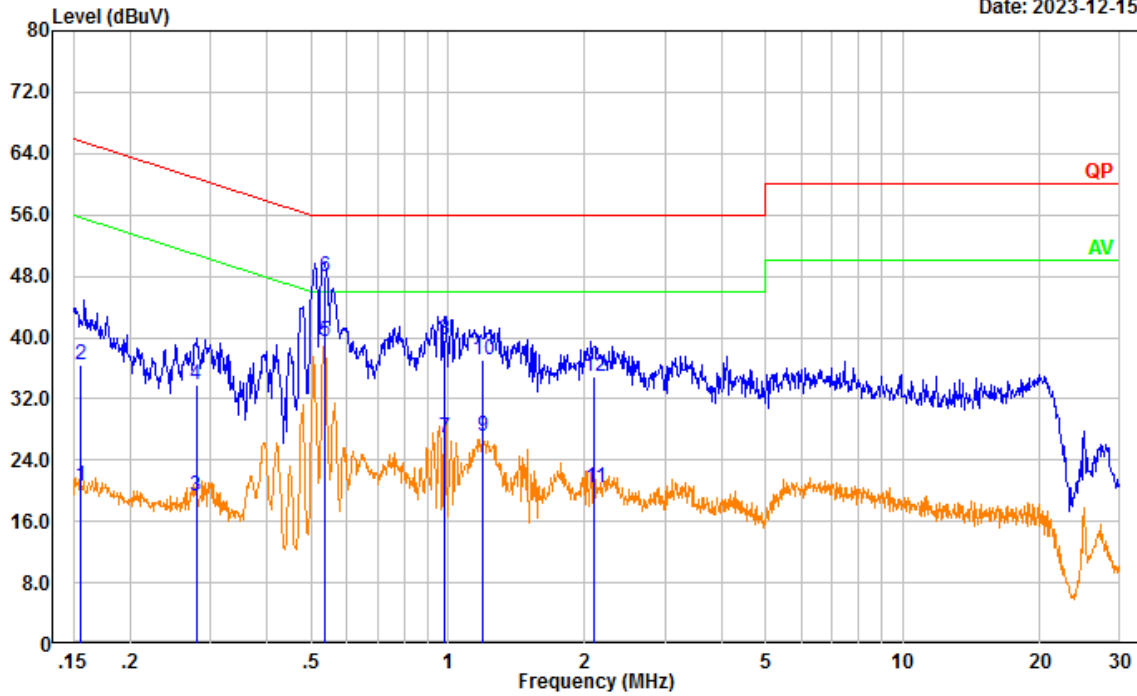

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	10.99	9.61	20.60	55.70	35.10	Average
2	0.156	26.86	9.61	36.47	65.70	29.23	QP
3	0.279	9.76	9.61	19.37	50.83	31.46	Average
4	0.279	24.16	9.61	33.77	60.83	27.06	QP
5	0.535	29.82	9.61	39.43	46.00	6.57	Average
6	0.535	38.31	9.61	47.92	56.00	8.08	QP
7	0.984	17.20	9.62	26.82	46.00	19.18	Average
8	0.984	30.11	9.62	39.73	56.00	16.27	QP
9	1.189	17.52	9.62	27.14	46.00	18.86	Average
10	1.189	27.41	9.62	37.03	56.00	18.97	QP
11	2.102	10.78	9.63	20.41	46.00	25.59	Average
12	2.102	25.35	9.63	34.98	56.00	21.02	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(400.0125)

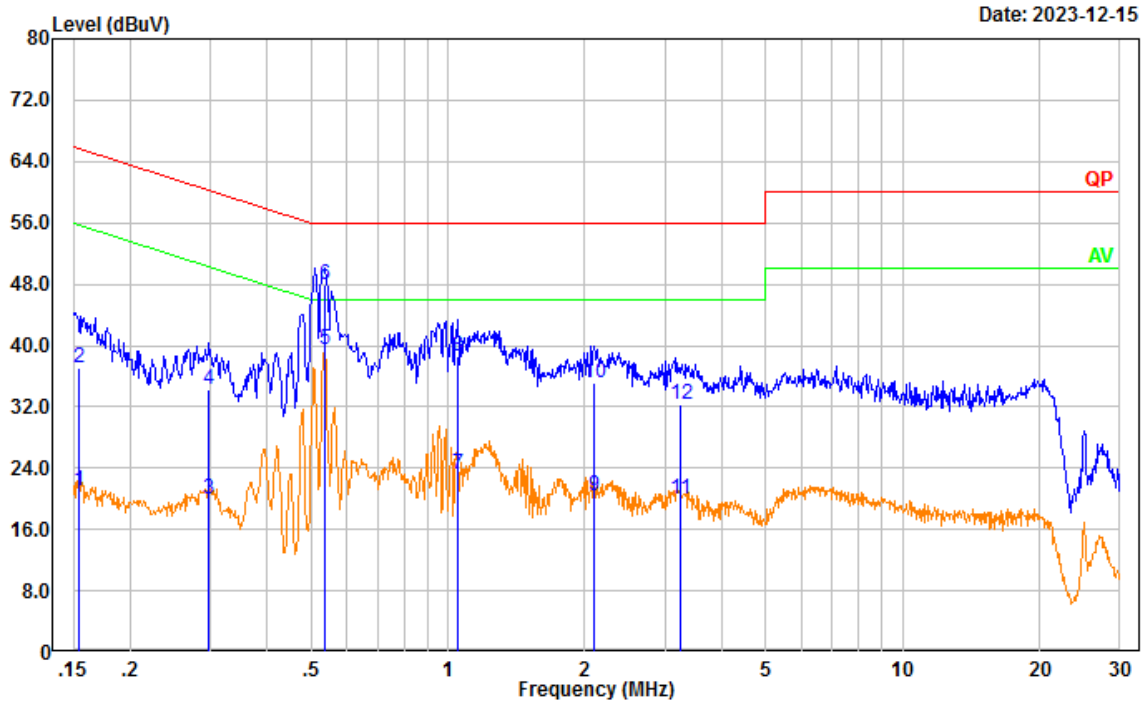


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	11.39	9.61	21.00	55.79	34.79	Average
2	0.154	27.48	9.61	37.09	65.79	28.70	QP
3	0.298	10.32	9.61	19.93	50.30	30.37	Average
4	0.298	24.74	9.61	34.35	60.30	25.95	QP
5	0.535	29.75	9.61	39.36	46.00	6.64	Average
6	0.535	38.30	9.61	47.91	56.00	8.09	QP
7	1.053	13.55	9.62	23.17	46.00	22.83	Average
8	1.053	28.96	9.62	38.58	56.00	17.42	QP
9	2.103	10.81	9.63	20.44	46.00	25.56	Average
10	2.103	25.40	9.63	35.03	56.00	20.97	QP
11	3.247	10.38	9.65	20.03	46.00	25.97	Average
12	3.247	22.73	9.65	32.38	56.00	23.62	QP

Test Mode: M2 (RX 460MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(460)

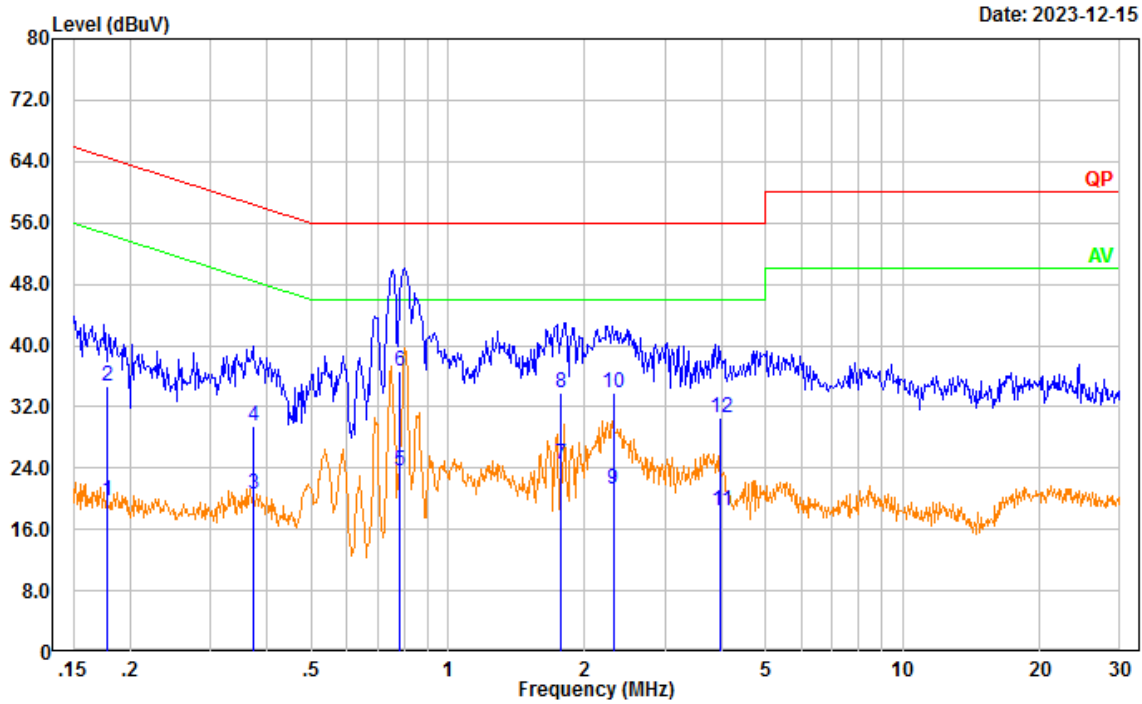

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.178	10.06	9.61	19.67	54.57	34.90	Average
2	0.178	25.18	9.61	34.79	64.57	29.78	QP
3	0.374	10.96	9.61	20.57	48.40	27.83	Average
4	0.374	19.98	9.61	29.59	58.40	28.81	QP
5	0.782	13.95	9.62	23.57	46.00	22.43	Average
6	0.782	27.06	9.62	36.68	56.00	19.32	QP
7	1.764	14.78	9.63	24.41	46.00	21.59	Average
8	1.764	24.26	9.63	33.89	56.00	22.11	QP
9	2.308	11.55	9.64	21.19	46.00	24.81	Average
10	2.308	24.18	9.64	33.82	56.00	22.18	QP
11	3.986	8.75	9.65	18.40	46.00	27.60	Average
12	3.986	20.89	9.65	30.54	56.00	25.46	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(460)

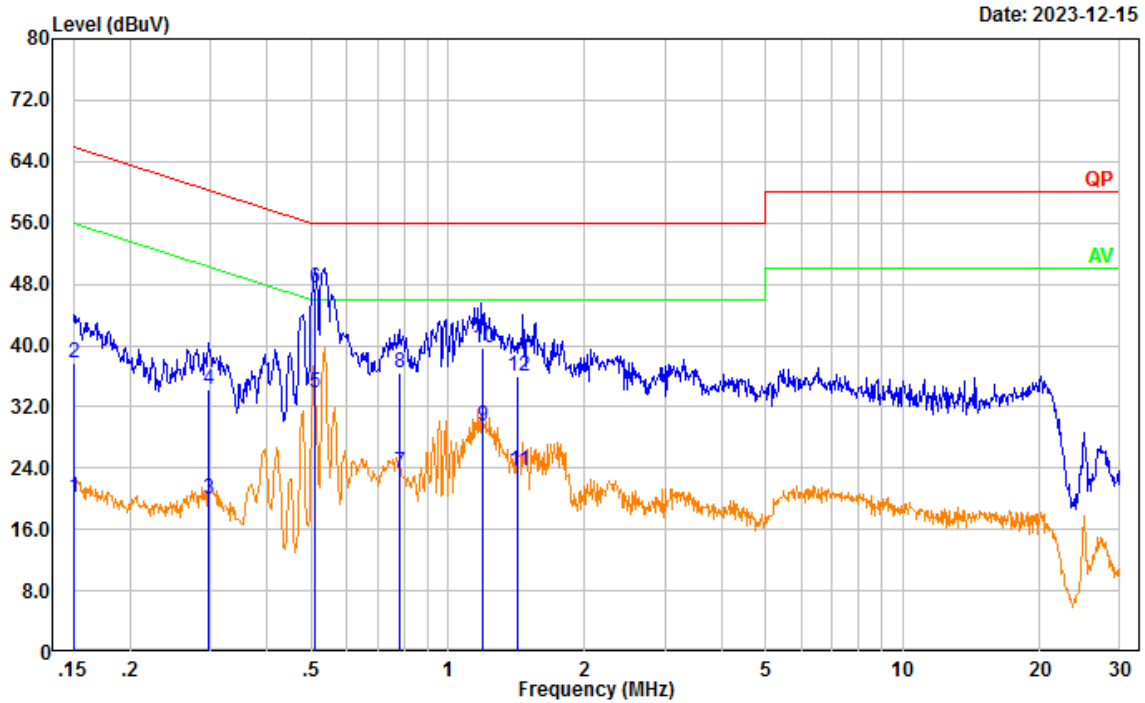


Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	10.62	9.61	20.23	55.96	35.73	Average
2	0.151	28.11	9.61	37.72	65.96	28.24	QP
3	0.298	10.37	9.61	19.98	50.29	30.31	Average
4	0.298	24.71	9.61	34.32	60.29	25.97	QP
5	0.512	24.31	9.61	33.92	46.00	12.08	Average
6	0.512	37.79	9.61	47.40	56.00	8.60	QP
7	0.782	13.84	9.62	23.46	46.00	22.54	Average
8	0.782	26.84	9.62	36.46	56.00	19.54	QP
9	1.190	19.96	9.62	29.58	46.00	16.42	Average
10	1.190	30.07	9.62	39.69	56.00	16.31	QP
11	1.428	14.12	9.62	23.74	46.00	22.26	Average
12	1.428	26.30	9.62	35.92	56.00	20.08	QP

Test Mode: M2 (RX 519.9875MHz)


Project No.: CR231165351-RF
 Tester: David Huang
 Port: Line
 Note: M2 Charging&Receiving(519.9875)

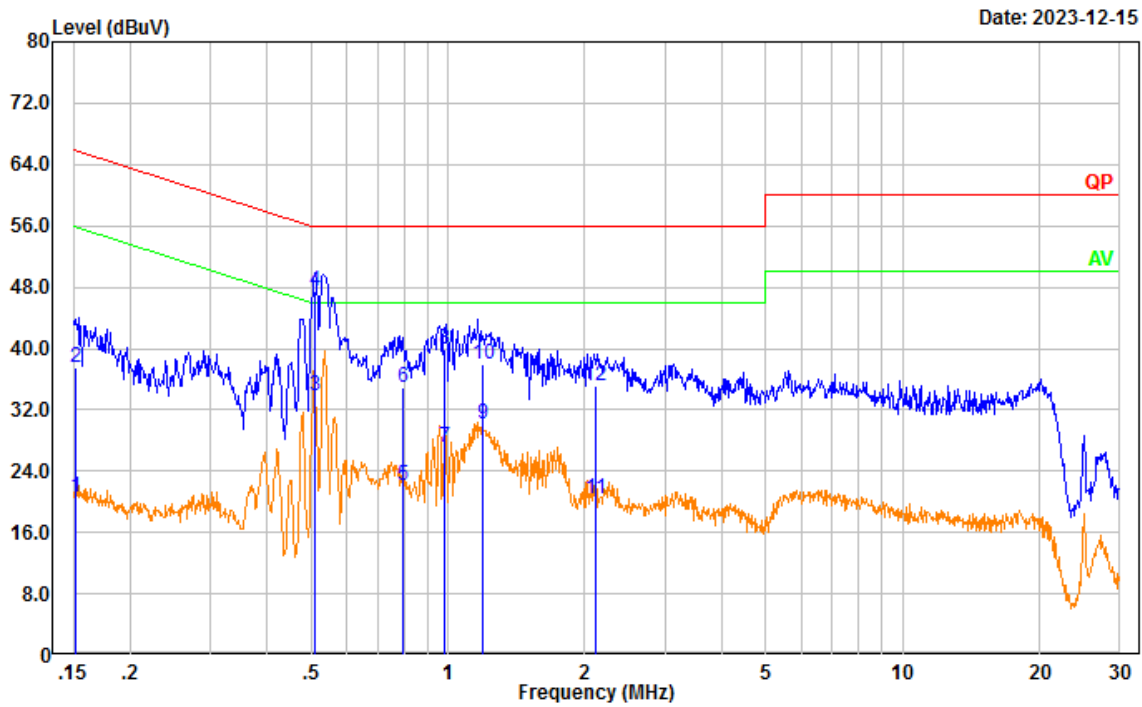

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	11.03	9.61	20.64	55.88	35.24	Average
2	0.152	27.96	9.61	37.57	65.88	28.31	QP
3	0.512	24.28	9.61	33.89	46.00	12.11	Average
4	0.512	37.77	9.61	47.38	56.00	8.62	QP
5	0.799	12.50	9.62	22.12	46.00	23.88	Average
6	0.799	25.22	9.62	34.84	56.00	21.16	QP
7	0.984	17.58	9.62	27.20	46.00	18.80	Average
8	0.984	30.30	9.62	39.92	56.00	16.08	QP
9	1.192	20.47	9.62	30.09	46.00	15.91	Average
10	1.192	28.35	9.62	37.97	56.00	18.03	QP
11	2.104	10.80	9.63	20.43	46.00	25.57	Average
12	2.104	25.47	9.63	35.10	56.00	20.90	QP

Project No.: CR231165351-RF
 Tester: David Huang
 Port: neutral
 Note: M2 Charging&Receiving(519.9875)

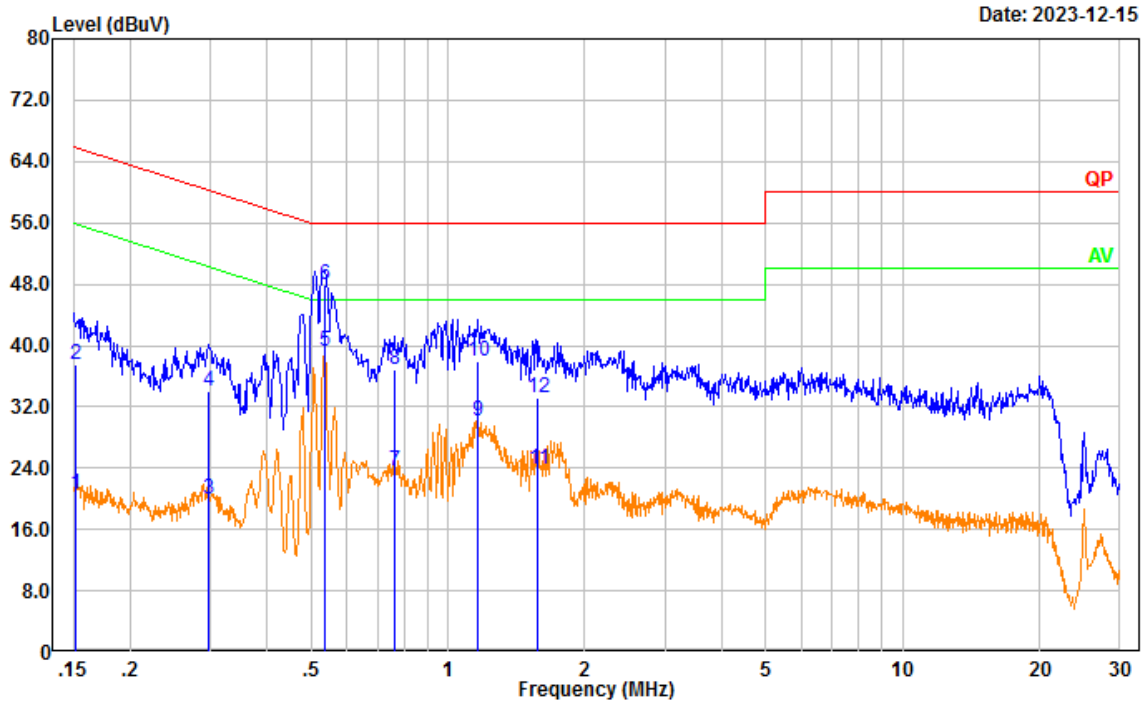

Date: 2023-12-15

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	10.90	9.61	20.51	55.88	35.37	Average
2	0.152	27.99	9.61	37.60	65.88	28.28	QP
3	0.299	10.29	9.61	19.90	50.28	30.38	Average
4	0.299	24.50	9.61	34.11	60.28	26.17	QP
5	0.535	29.64	9.61	39.25	46.00	6.75	Average
6	0.535	38.23	9.61	47.84	56.00	8.16	QP
7	0.764	13.91	9.62	23.53	46.00	22.47	Average
8	0.764	27.33	9.62	36.95	56.00	19.05	QP
9	1.166	20.59	9.62	30.21	46.00	15.79	Average
10	1.166	28.26	9.62	37.88	56.00	18.12	QP
11	1.577	14.31	9.63	23.94	46.00	22.06	Average
12	1.577	23.51	9.63	33.14	56.00	22.86	QP

4.2 Radiation Spurious Emissions

Serial Number:	2D94-1	Test Date:	2023/11/27~2023/12/12
Test Site:	966-1/966-2	Test Mode:	M1-M2
Tester:	Jeff Luo, Tao Zhu	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.1-25.4	Relative Humidity: (%)	46-55	ATM Pressure: (kPa)	101.1-101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1- 1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1- 2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is Y axes:

1) 30MHz-1GHz:


Test Mode: M1(108-136MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M1 Charging& Scanning(108-136)

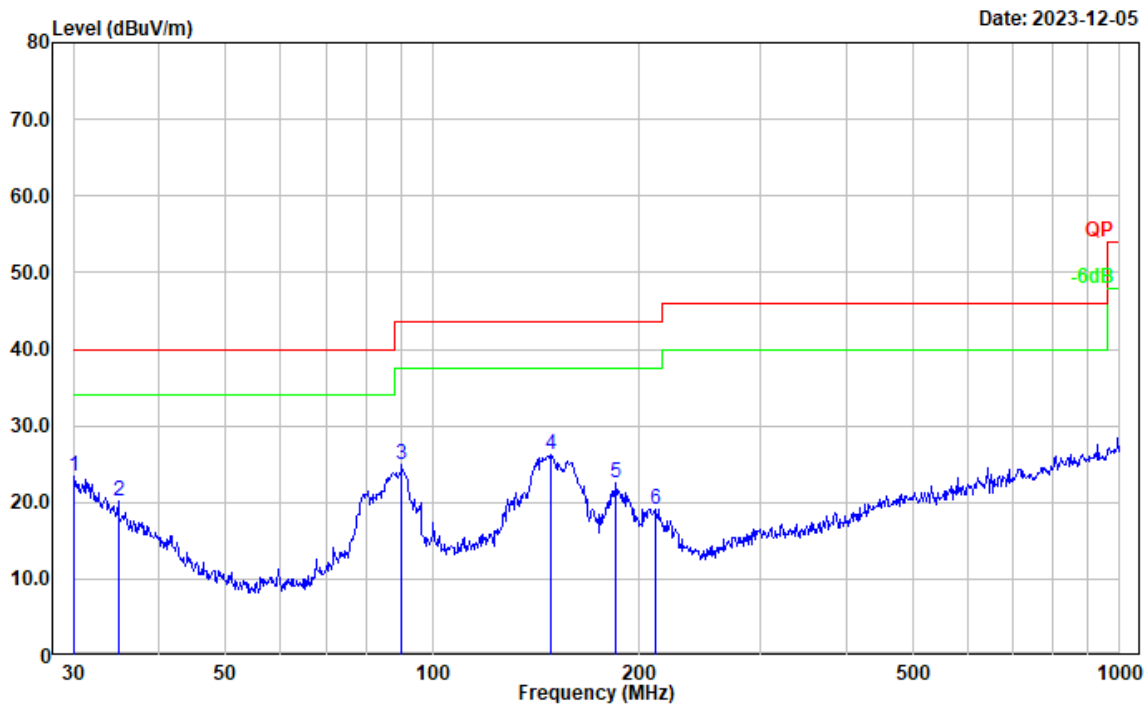

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.54	-4.20	23.34	40.00	16.66	Peak
2	34.882	28.02	-7.86	20.16	40.00	19.84	Peak
3	90.220	42.18	-17.18	25.00	43.50	18.50	Peak
4	148.963	38.50	-12.21	26.29	43.50	17.21	Peak
5	185.138	36.41	-13.83	22.58	43.50	20.92	Peak
6	211.527	32.08	-12.97	19.11	43.50	24.39	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M1 Charging& Scanning(108-136)

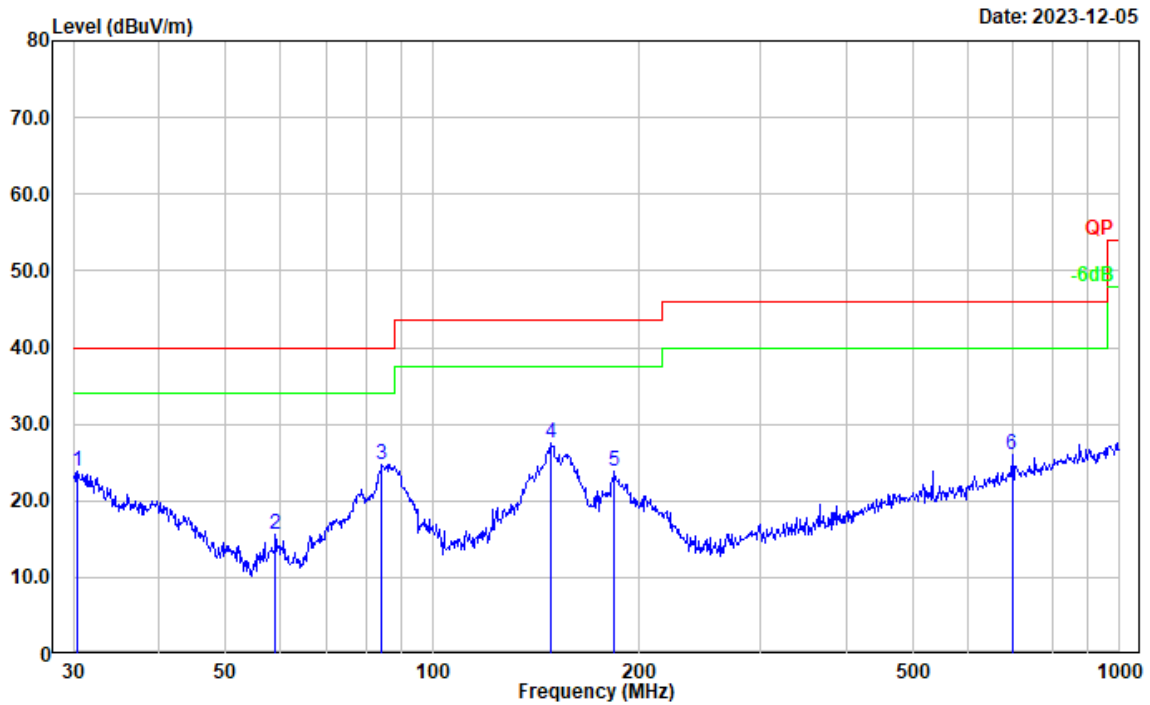

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	28.21	-4.45	23.76	40.00	16.24	Peak
2	59.025	33.16	-17.64	15.52	40.00	24.48	Peak
3	84.405	42.27	-17.55	24.72	40.00	15.28	Peak
4	148.441	39.66	-12.21	27.45	43.50	16.05	Peak
5	183.844	37.63	-13.82	23.81	43.50	19.69	Peak
6	696.857	29.95	-3.99	25.96	46.00	20.04	Peak


Test Mode: M1(136-174MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M1 Charging& Scanning(136-174)

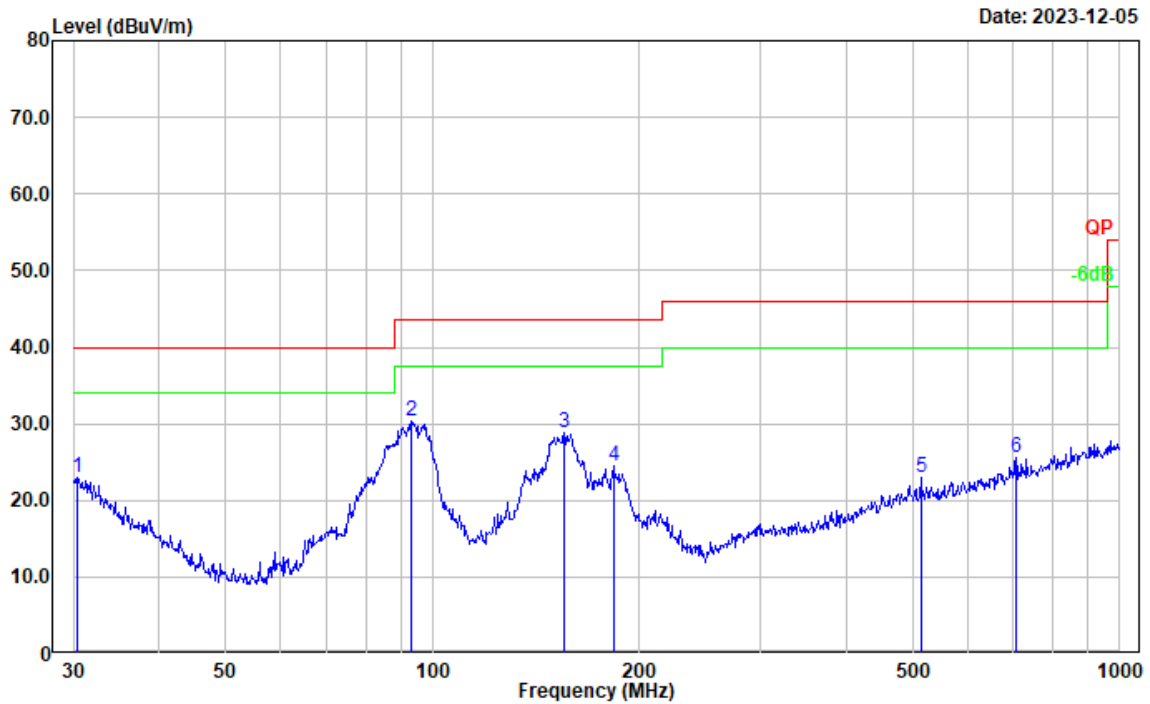

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	27.35	-4.45	22.90	40.00	17.10	Peak
2	93.113	46.71	-16.42	30.29	43.50	13.21	Peak
3	155.364	41.19	-12.34	28.85	43.50	14.65	Peak
4	183.201	38.41	-13.84	24.57	43.50	18.93	Peak
5	513.633	29.28	-6.30	22.98	46.00	23.02	Peak
6	706.700	29.36	-3.81	25.55	46.00	20.45	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M1 Charging& Scanning(136-174)

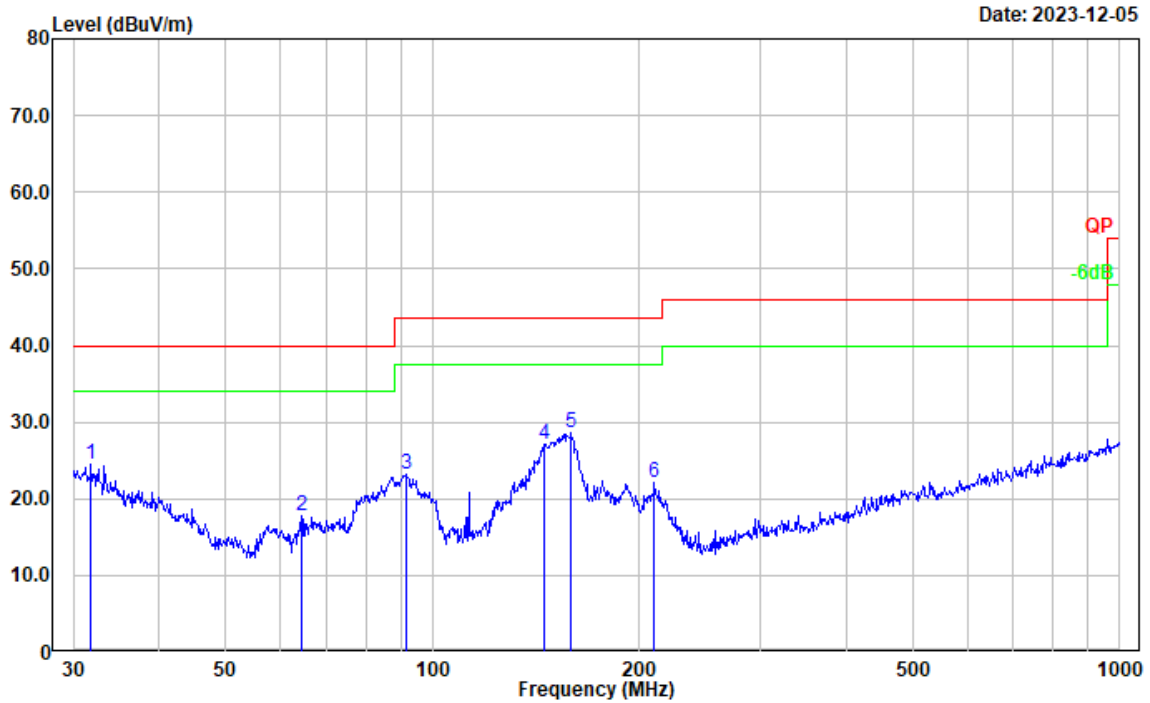

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.843	29.90	-5.51	24.39	40.00	15.61	Peak
2	64.433	35.15	-17.33	17.82	40.00	22.18	Peak
3	91.495	40.03	-16.87	23.16	43.50	20.34	Peak
4	145.351	39.30	-12.15	27.15	43.50	16.35	Peak
5	159.225	40.96	-12.36	28.60	43.50	14.90	Peak
6	210.048	35.07	-12.93	22.14	43.50	21.36	Peak


Test Mode: M1(220-260MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M1 Charging& Scanning(220-260)

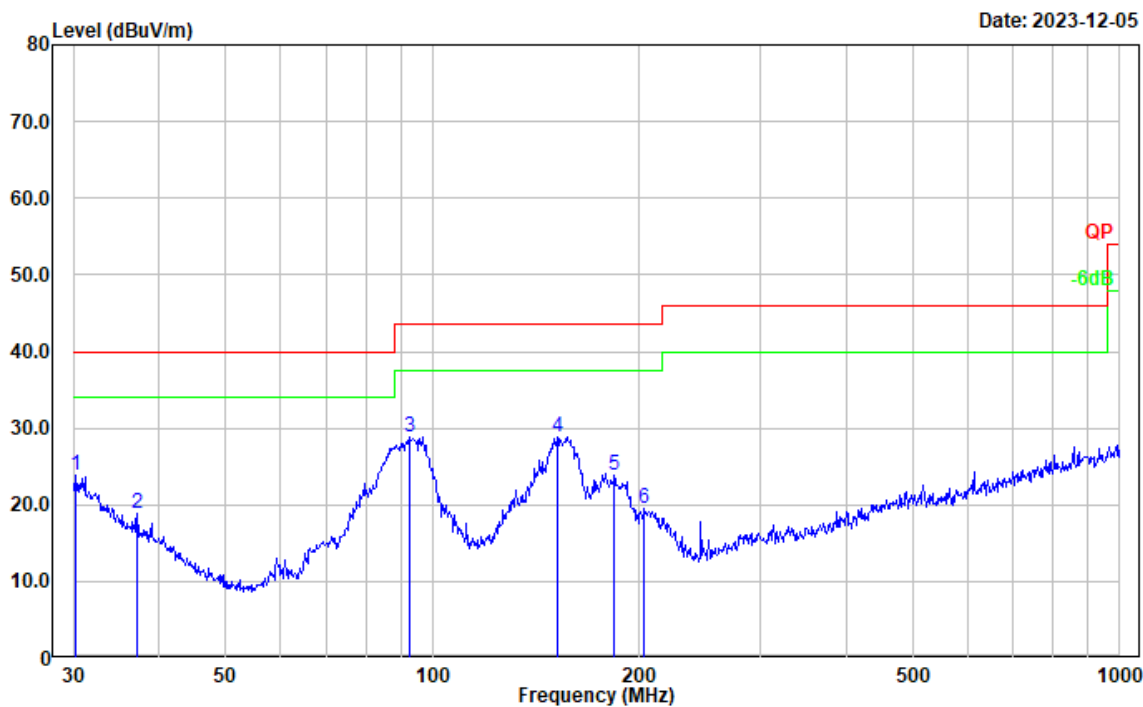

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	28.24	-4.36	23.88	40.00	16.12	Peak
2	37.155	28.38	-9.56	18.82	40.00	21.18	Peak
3	92.462	45.49	-16.61	28.88	43.50	14.62	Peak
4	151.597	41.19	-12.26	28.93	43.50	14.57	Peak
5	183.844	37.59	-13.82	23.77	43.50	19.73	Peak
6	203.523	32.26	-12.76	19.50	43.50	24.00	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M1 Charging& Scanning(220-260)

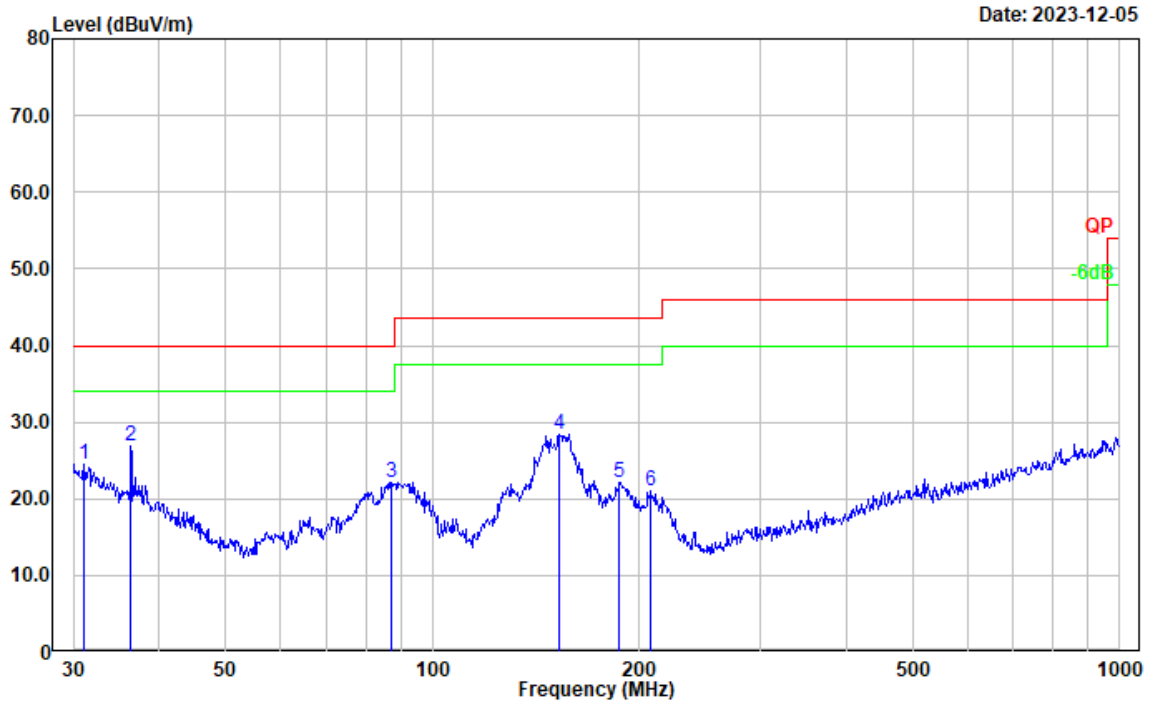

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.071	29.54	-4.94	24.60	40.00	15.40	Peak
2	36.381	35.83	-8.99	26.84	40.00	13.16	Peak
3	87.112	39.61	-17.41	22.20	40.00	17.80	Peak
4	152.664	40.62	-12.26	28.36	43.50	15.14	Peak
5	187.096	36.02	-13.85	22.17	43.50	21.33	Peak
6	207.850	33.85	-12.90	20.95	43.50	22.55	Peak


Test Mode: M1(350-390MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M1 Charging& Scanning(350-390)

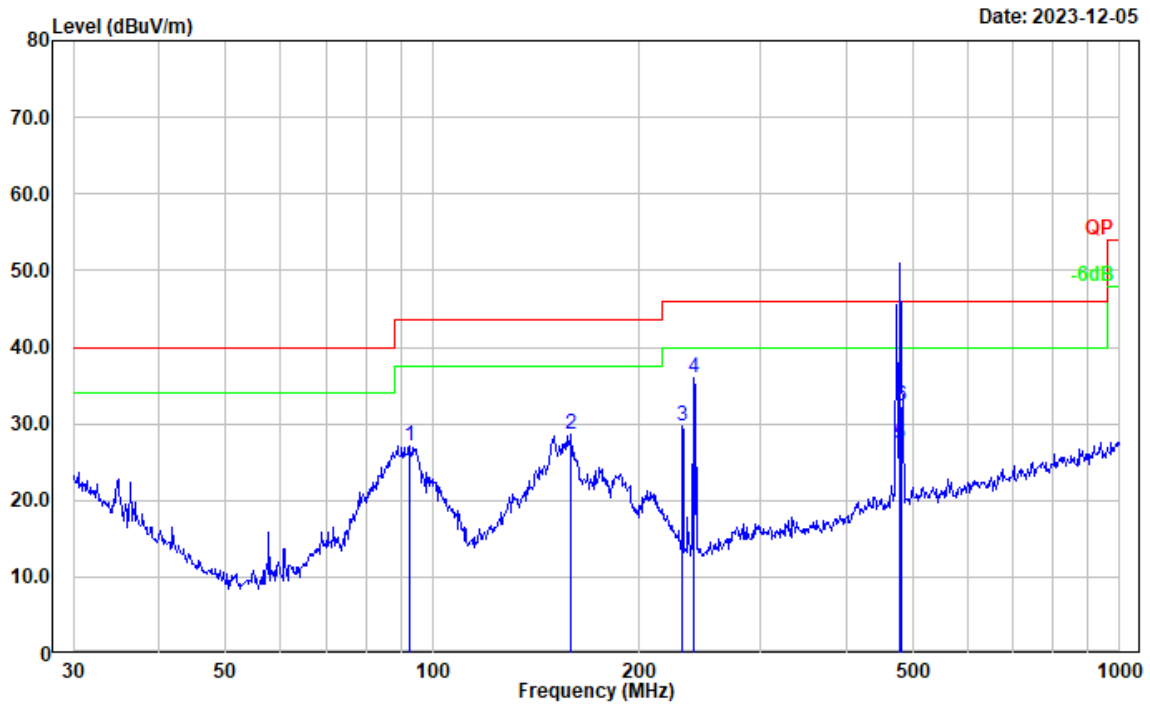

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	92.462	43.76	-16.61	27.15	43.50	16.35	Peak
2	159.225	41.05	-12.36	28.69	43.50	14.81	Peak
3	230.907	43.14	-13.34	29.80	46.00	16.20	Peak
4	239.987	49.51	-13.47	36.04	46.00	9.96	Peak
5	478.846	34.08	-6.75	27.33	46.00	18.67	QP
6	480.893	38.94	-6.72	32.22	46.00	13.78	QP


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M1 Charging& Scanning(350-390)

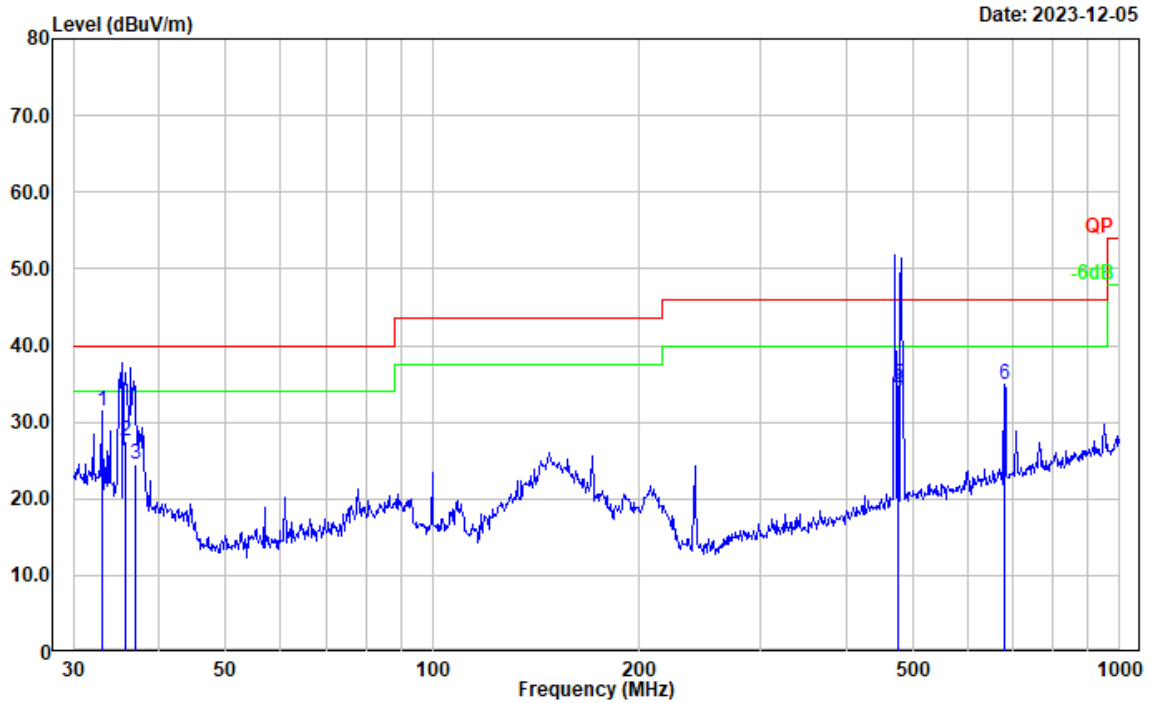

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	32.979	37.95	-6.41	31.54	40.00	8.46	Peak
2	35.646	36.00	-8.44	27.56	40.00	12.44	QP
3	36.891	33.77	-9.37	24.40	40.00	15.60	QP
4	475.995	40.82	-6.76	34.06	46.00	11.94	QP
5	476.918	41.62	-6.76	34.86	46.00	11.14	QP
6	679.960	39.22	-4.29	34.93	46.00	11.07	Peak


Test Mode: M1(400-520MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M1 Charging& Scanning(400-520)

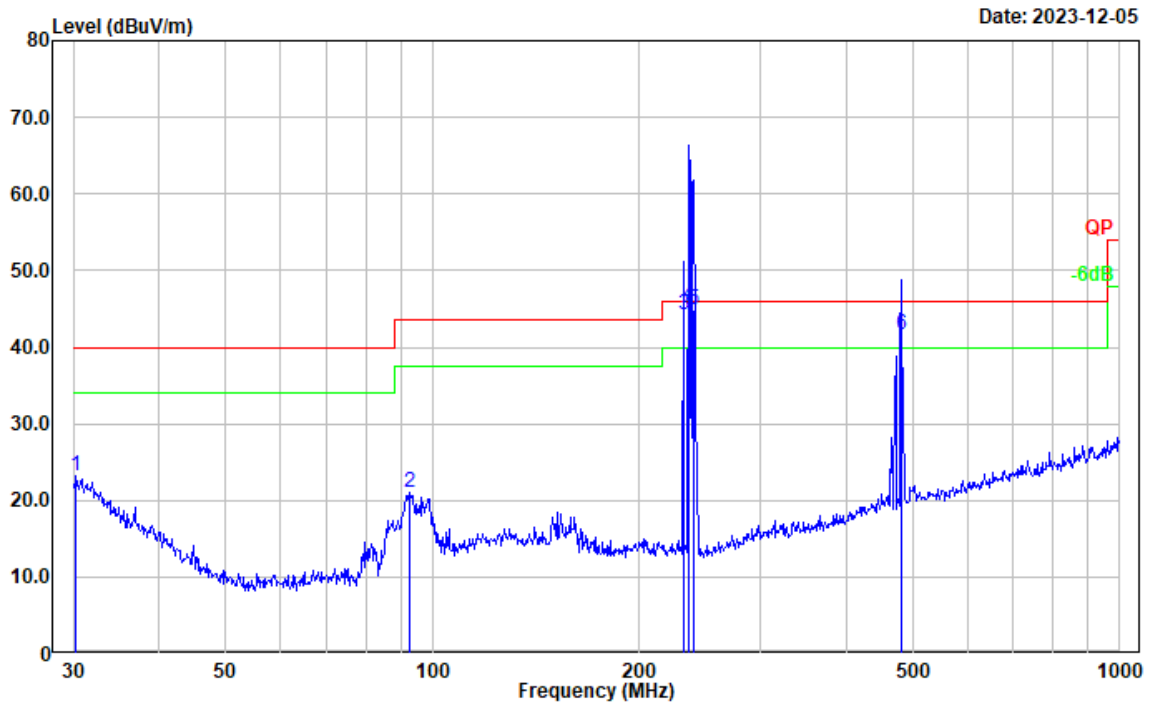

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	27.56	-4.36	23.20	40.00	16.80	Peak
2	92.787	37.55	-16.52	21.03	43.50	22.47	Peak
3	231.718	57.57	-13.36	44.21	46.00	1.79	QP
4	235.816	58.88	-13.45	45.43	46.00	0.57	QP
5	239.987	58.28	-13.47	44.81	46.00	1.19	QP
6	480.528	48.43	-6.72	41.71	46.00	4.29	QP

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M1 Charging& Scanning(400-520)

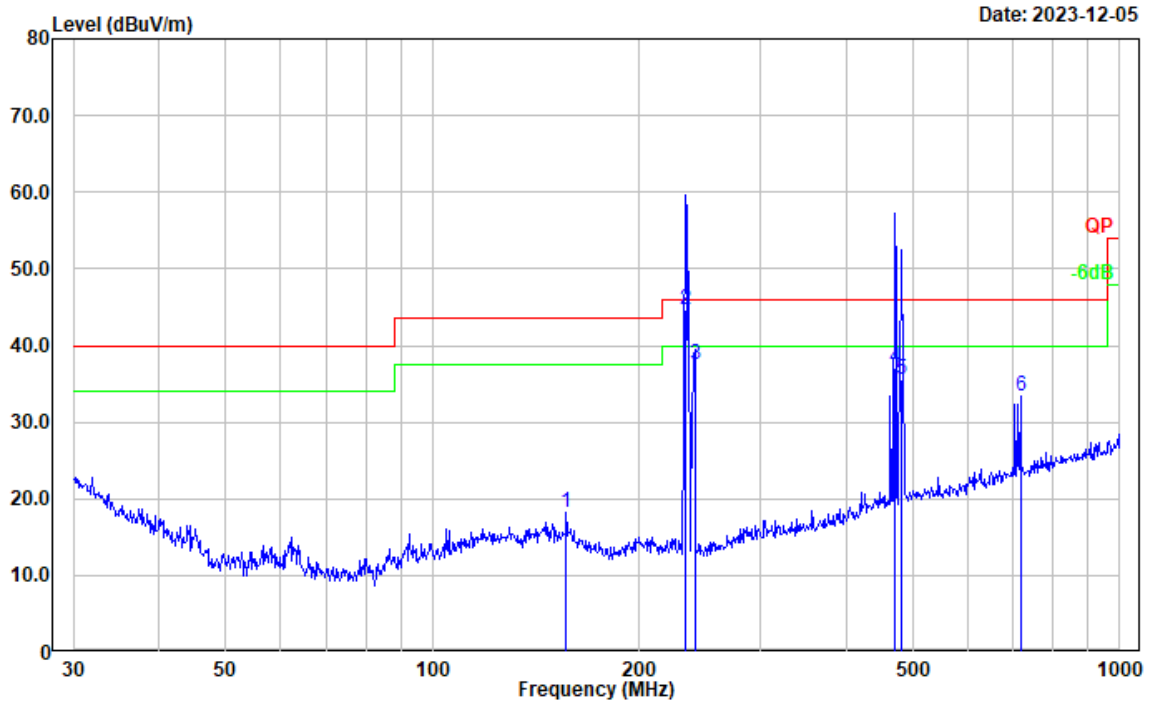


Date: 2023-12-05

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	156.458	30.52	-12.34	18.18	43.50	25.32	Peak
2	233.349	58.10	-13.39	44.71	46.00	1.29	QP
3	240.830	50.95	-13.48	37.47	46.00	8.53	QP
4	470.523	44.02	-6.85	37.17	46.00	8.83	QP
5	480.528	42.17	-6.72	35.45	46.00	10.55	QP
6	716.682	37.15	-3.69	33.46	46.00	12.54	Peak


Test Mode: M2 (RX 108.0125MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(108.0125)

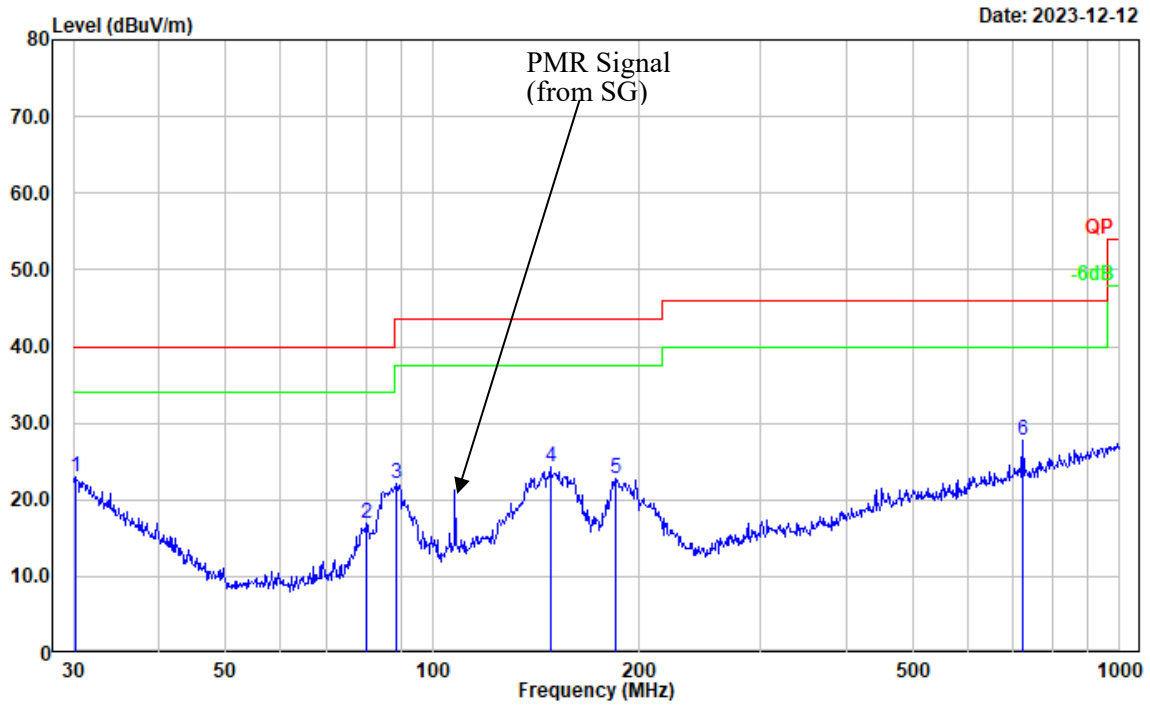

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	27.31	-4.36	22.95	40.00	17.05	Peak
2	80.081	34.72	-17.81	16.91	40.00	23.09	Peak
3	88.342	39.55	-17.34	22.21	43.50	21.29	Peak
4	148.441	36.51	-12.21	24.30	43.50	19.20	Peak
5	185.138	36.66	-13.83	22.83	43.50	20.67	Peak
6	724.261	31.30	-3.62	27.68	46.00	18.32	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(108.0125)

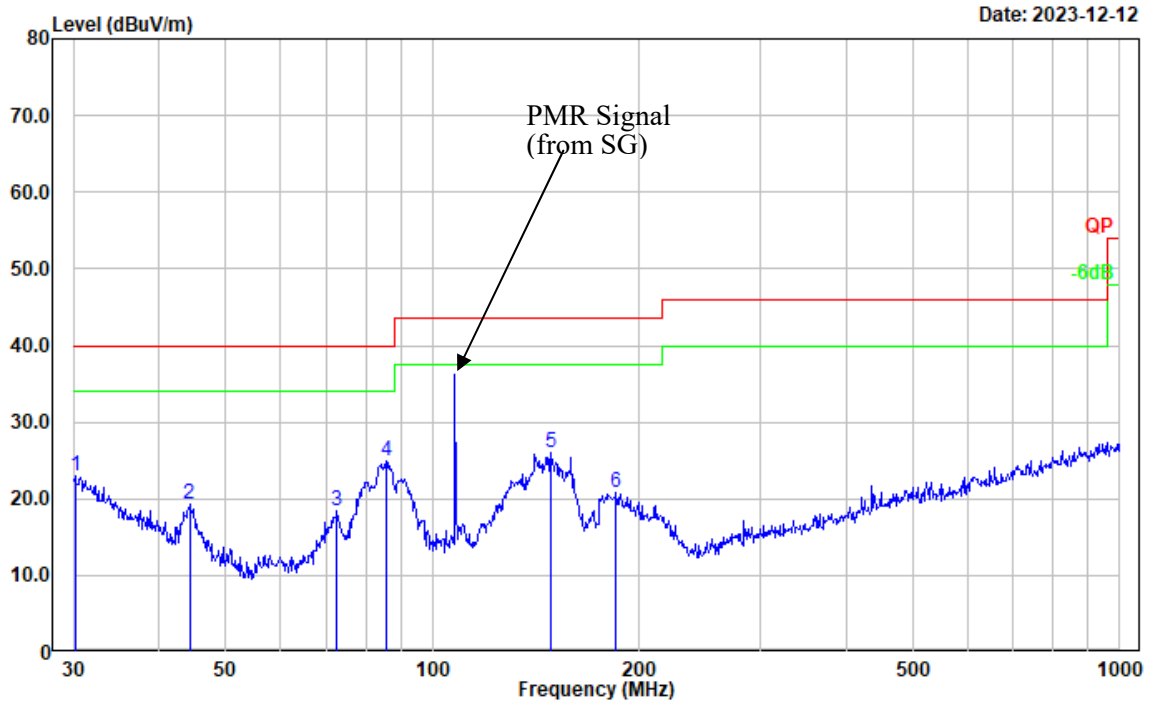

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.34	-4.28	23.06	40.00	16.94	Peak
2	44.275	33.53	-14.17	19.36	40.00	20.64	Peak
3	72.592	35.65	-17.15	18.50	40.00	21.50	Peak
4	85.598	42.50	-17.49	25.01	40.00	14.99	Peak
5	148.441	38.23	-12.21	26.02	43.50	17.48	Peak
6	185.138	34.75	-13.83	20.92	43.50	22.58	Peak


Test Mode: M2 (RX 122MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(122)

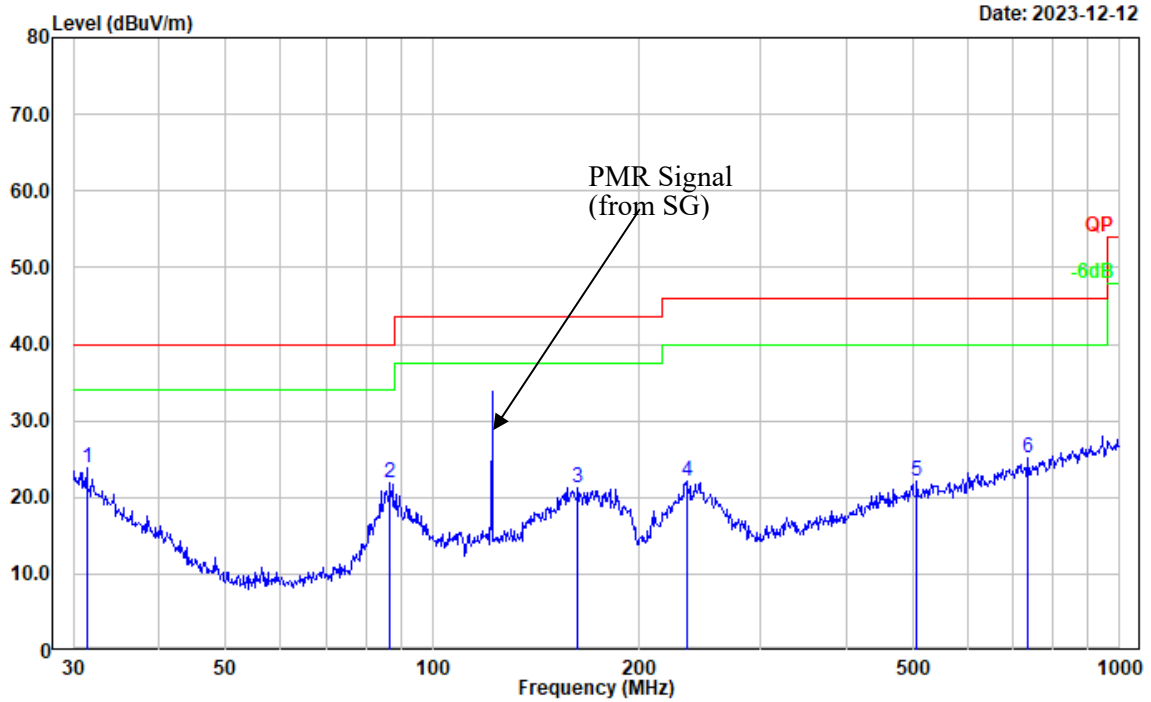

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.399	29.06	-5.19	23.87	40.00	16.13	Peak
2	86.807	39.26	-17.43	21.83	40.00	18.17	Peak
3	162.611	33.88	-12.60	21.28	43.50	22.22	Peak
4	234.168	35.50	-13.41	22.09	46.00	23.91	Peak
5	506.479	28.47	-6.33	22.14	46.00	23.86	Peak
6	734.491	28.56	-3.47	25.09	46.00	20.91	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(122)

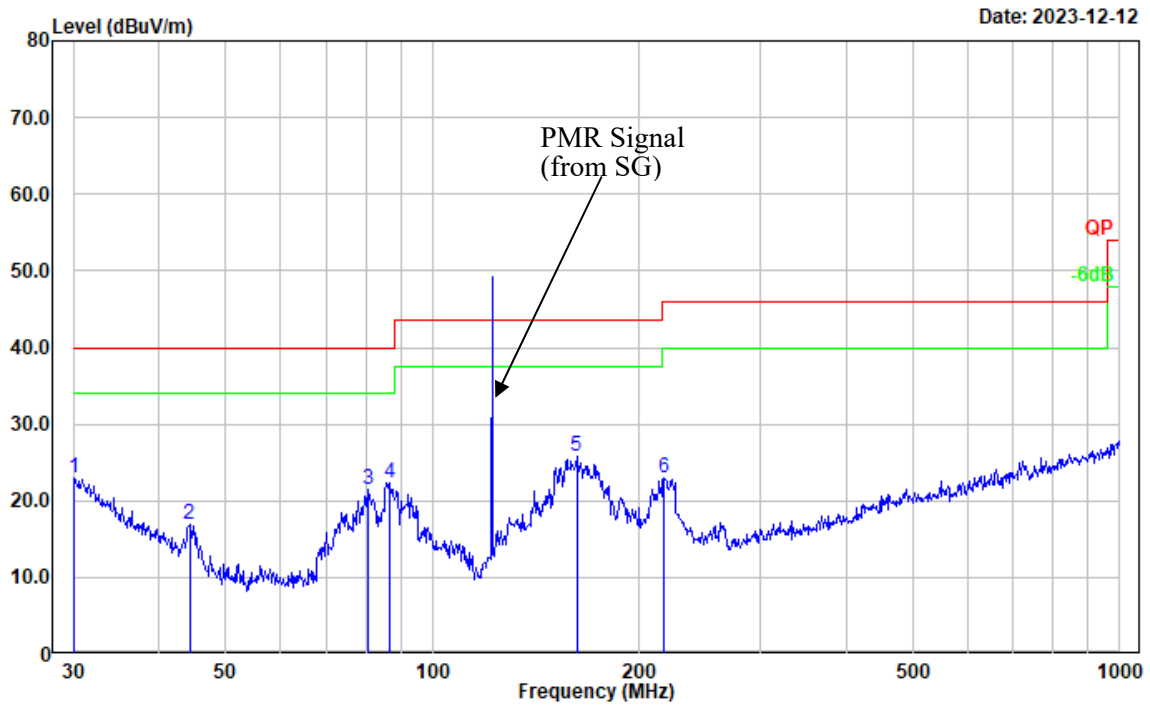

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.18	-4.20	22.98	40.00	17.02	Peak
2	44.275	31.19	-14.17	17.02	40.00	22.98	Peak
3	80.362	39.30	-17.78	21.52	40.00	18.48	Peak
4	86.807	39.79	-17.43	22.36	40.00	17.64	Peak
5	162.041	38.40	-12.56	25.84	43.50	17.66	Peak
6	216.783	36.11	-13.11	23.00	46.00	23.00	Peak


Test Mode: M2 (RX 135.9875MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(135.9875)

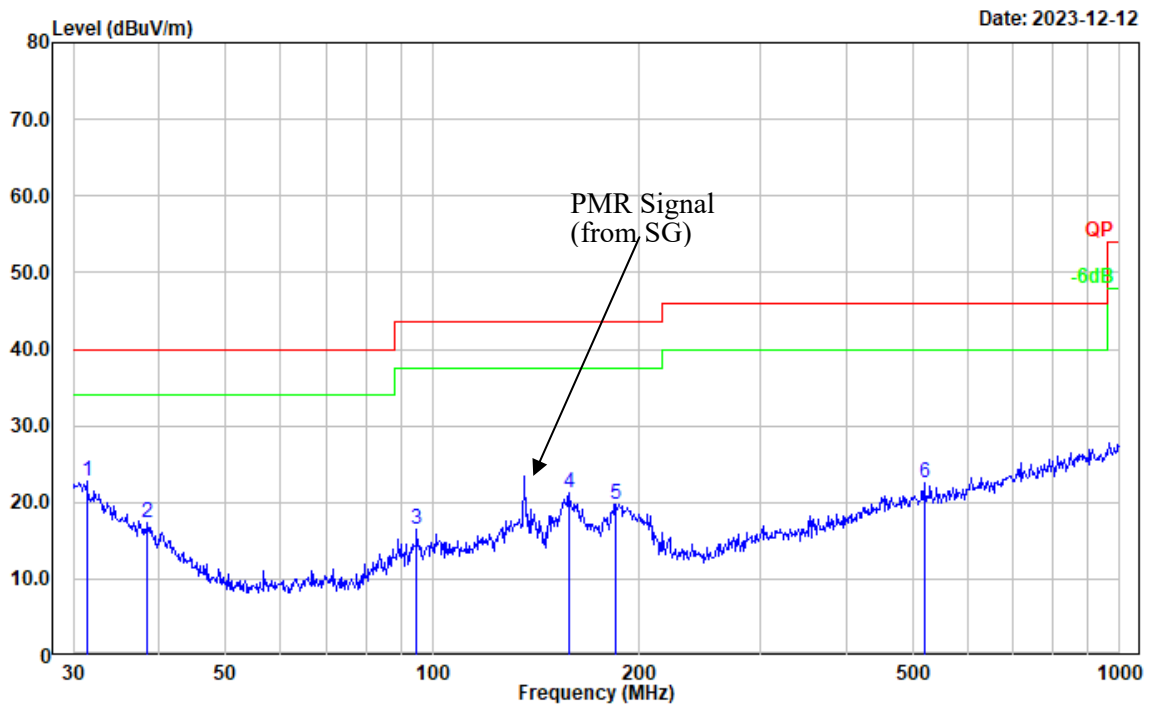

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.399	27.98	-5.19	22.79	40.00	17.21	Peak
2	38.481	27.95	-10.53	17.42	40.00	22.58	Peak
3	94.760	32.41	-16.00	16.41	43.50	27.09	Peak
4	158.112	33.66	-12.36	21.30	43.50	22.20	Peak
5	184.490	33.64	-13.82	19.82	43.50	23.68	Peak
6	519.065	28.82	-6.28	22.54	46.00	23.46	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(135.9875)

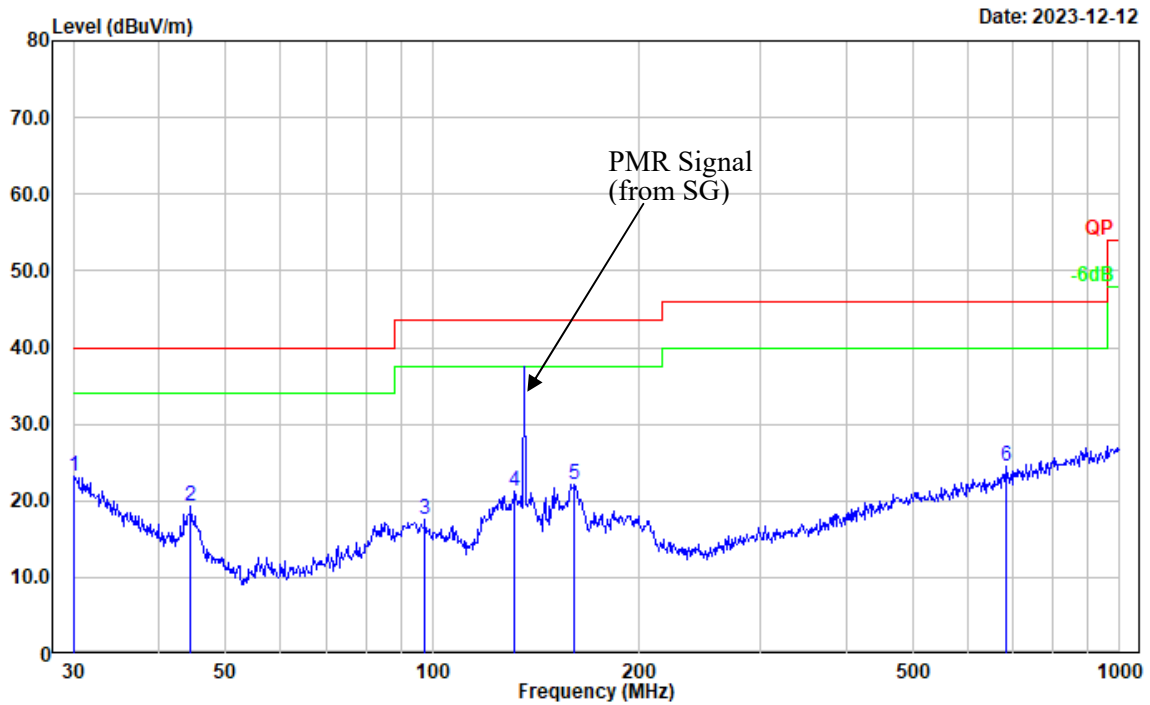

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.000	27.34	-4.12	23.22	40.00	16.78	Peak
2	44.431	33.48	-14.25	19.23	40.00	20.77	Peak
3	97.456	32.87	-15.26	17.61	43.50	25.89	Peak
4	131.758	32.95	-11.67	21.28	43.50	22.22	Peak
5	160.909	34.57	-12.46	22.11	43.50	21.39	Peak
6	682.348	28.69	-4.24	24.45	46.00	21.55	Peak


Test Mode: M2 (RX 136.0125MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(136.0125)

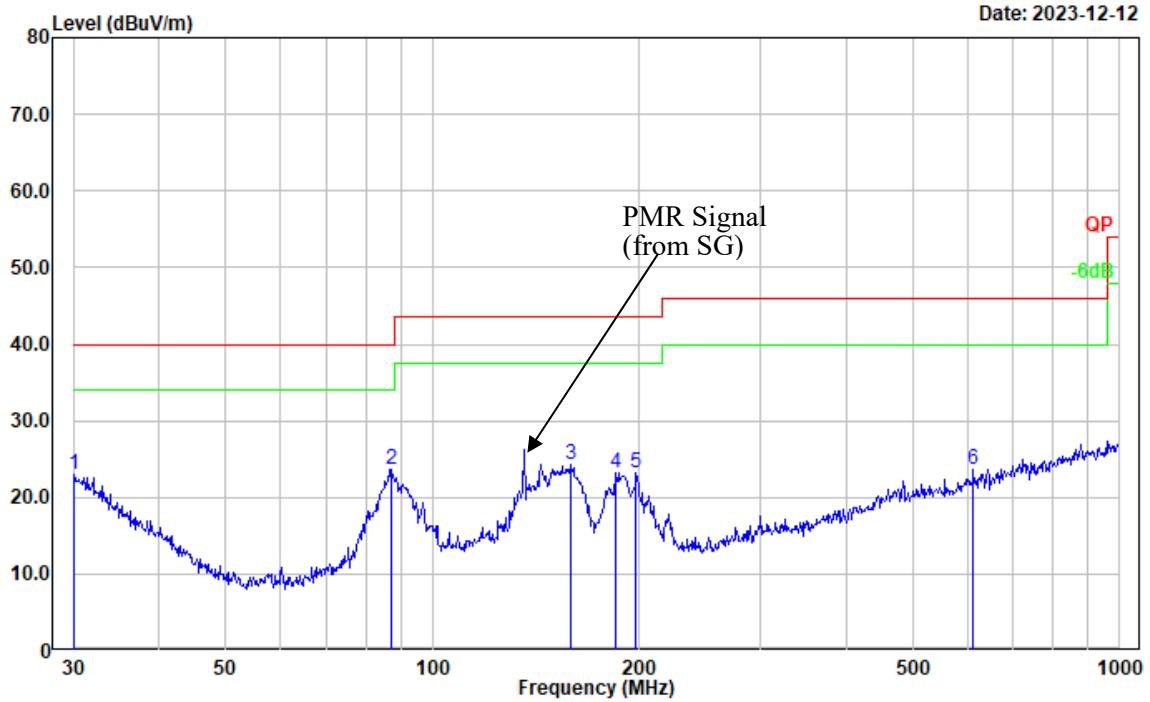

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.07	-4.20	22.87	40.00	17.13	Peak
2	87.112	41.12	-17.41	23.71	40.00	16.29	Peak
3	159.225	36.71	-12.36	24.35	43.50	19.15	Peak
4	185.138	37.07	-13.83	23.24	43.50	20.26	Peak
5	197.893	35.97	-12.82	23.15	43.50	20.35	Peak
6	612.064	28.81	-5.10	23.71	46.00	22.29	Peak

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(136.0125)

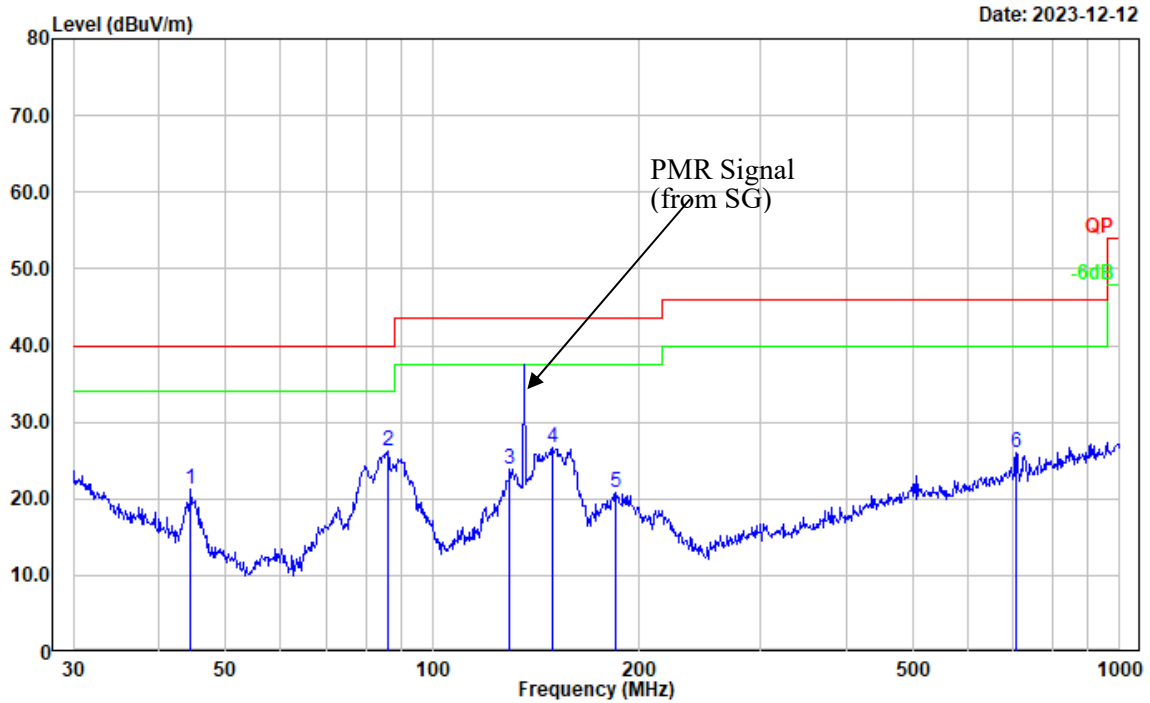


Date: 2023-12-12

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	44.431	35.45	-14.25	21.20	40.00	18.80	Peak
2	86.200	43.73	-17.47	26.26	40.00	13.74	Peak
3	129.468	35.42	-11.63	23.79	43.50	19.71	Peak
4	149.486	38.86	-12.22	26.64	43.50	16.86	Peak
5	184.490	34.67	-13.82	20.85	43.50	22.65	Peak
6	706.700	29.78	-3.81	25.97	46.00	20.03	Peak


Test Mode: M2 (RX 155MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(155)

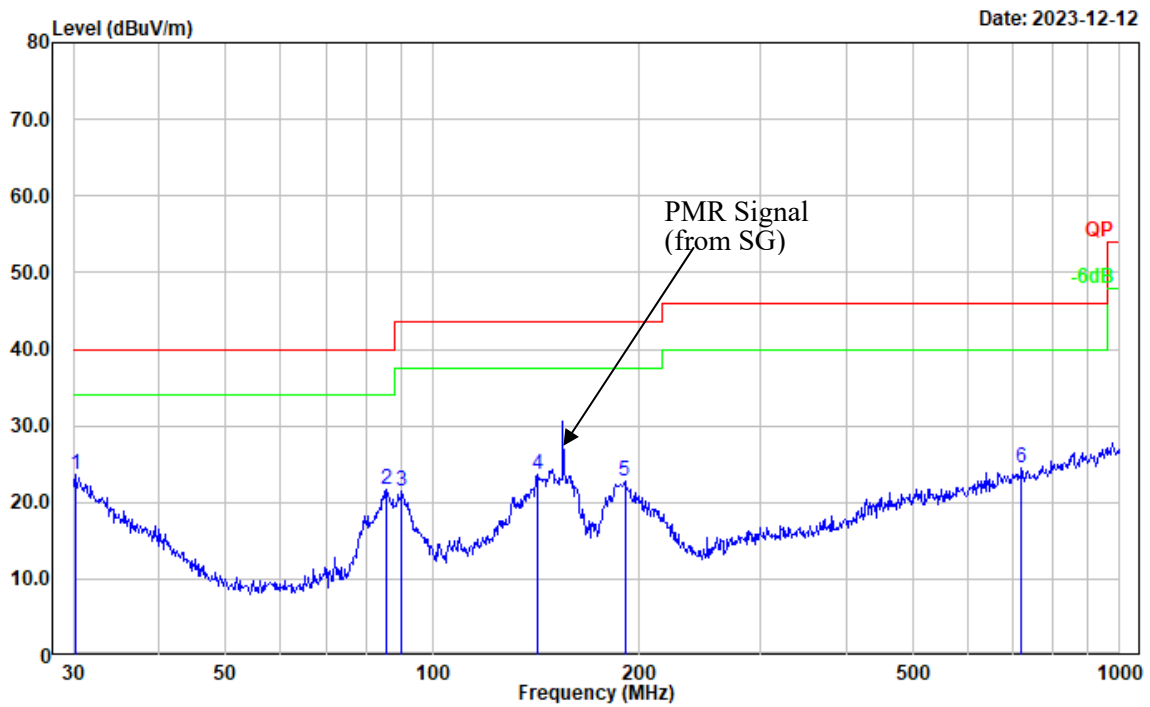

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.96	-4.28	23.68	40.00	16.32	Peak
2	85.598	39.20	-17.49	21.71	40.00	18.29	Peak
3	90.220	38.71	-17.18	21.53	43.50	21.97	Peak
4	141.826	35.74	-12.11	23.63	43.50	19.87	Peak
5	190.405	36.52	-13.74	22.78	43.50	20.72	Peak
6	719.200	28.10	-3.65	24.45	46.00	21.55	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(155)

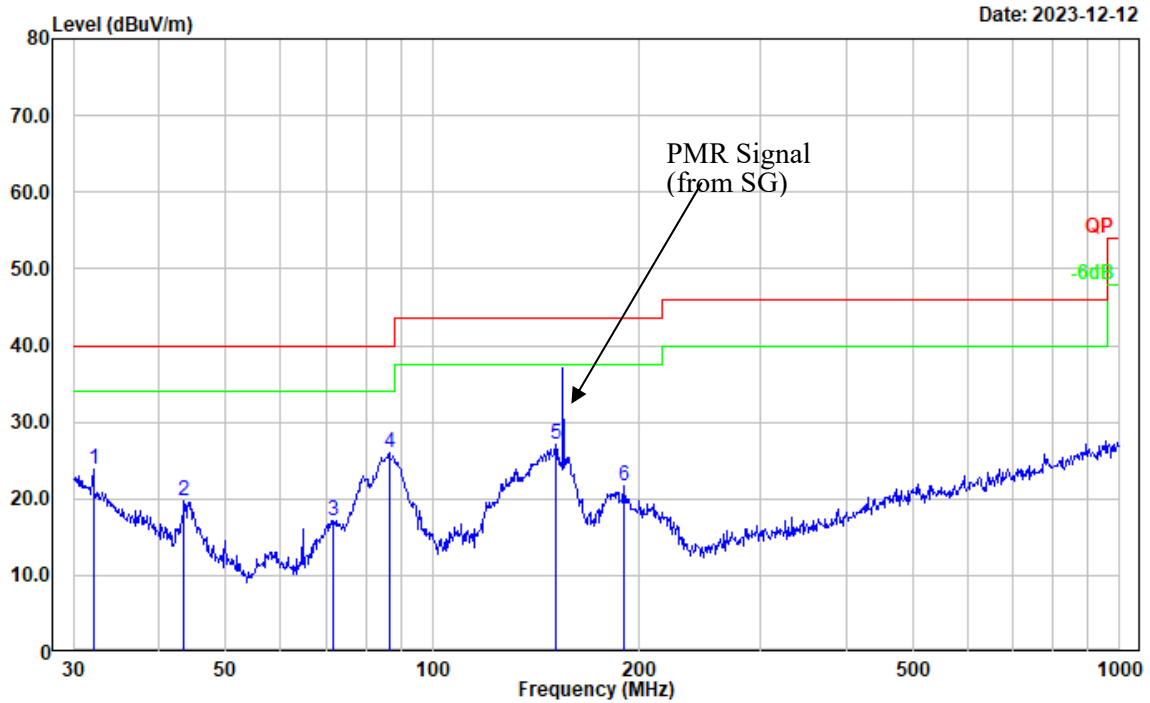

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	32.067	29.49	-5.68	23.81	40.00	16.19	Peak
2	43.506	33.41	-13.73	19.68	40.00	20.32	Peak
3	71.581	34.27	-17.08	17.19	40.00	22.81	Peak
4	86.503	43.41	-17.44	25.97	40.00	14.03	Peak
5	151.067	39.28	-12.27	27.01	43.50	16.49	Peak
6	189.739	35.41	-13.79	21.62	43.50	21.88	Peak


Test Mode: M2 (RX 173.9875MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(173.9875)

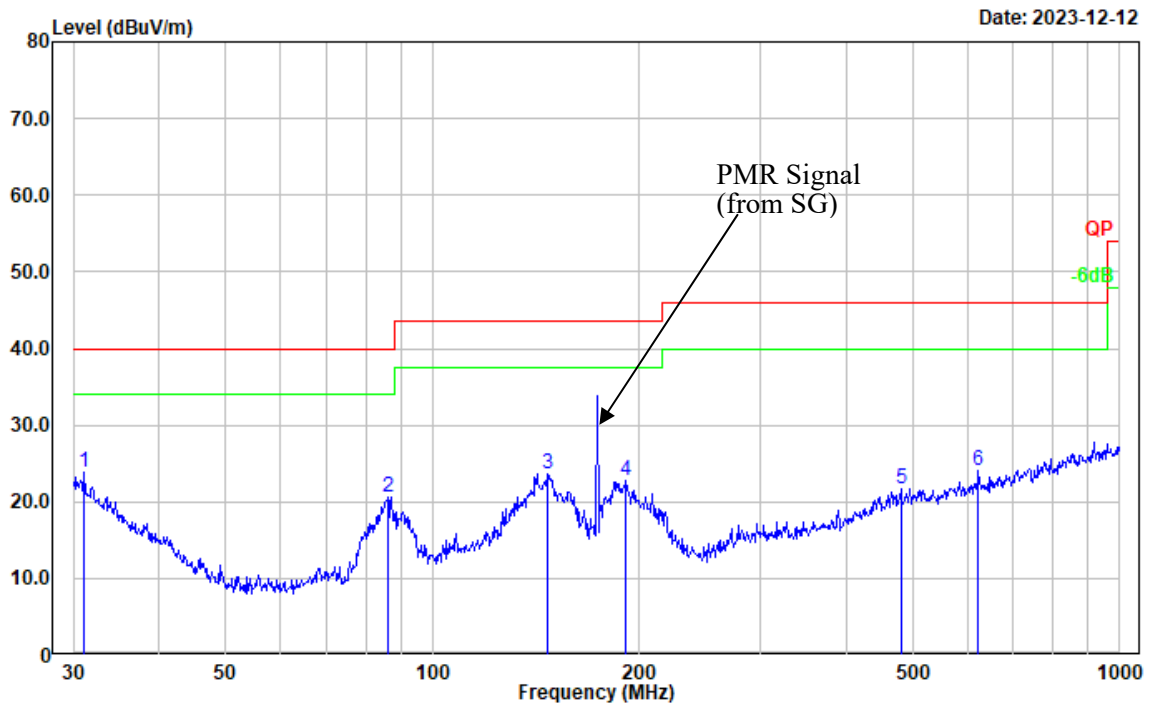

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.071	28.73	-4.94	23.79	40.00	16.21	Peak
2	86.200	38.17	-17.47	20.70	40.00	19.30	Peak
3	146.888	35.89	-12.18	23.71	43.50	19.79	Peak
4	191.074	36.39	-13.65	22.74	43.50	20.76	Peak
5	480.528	28.33	-6.72	21.61	46.00	24.39	Peak
6	622.890	29.02	-4.93	24.09	46.00	21.91	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(173.9875)

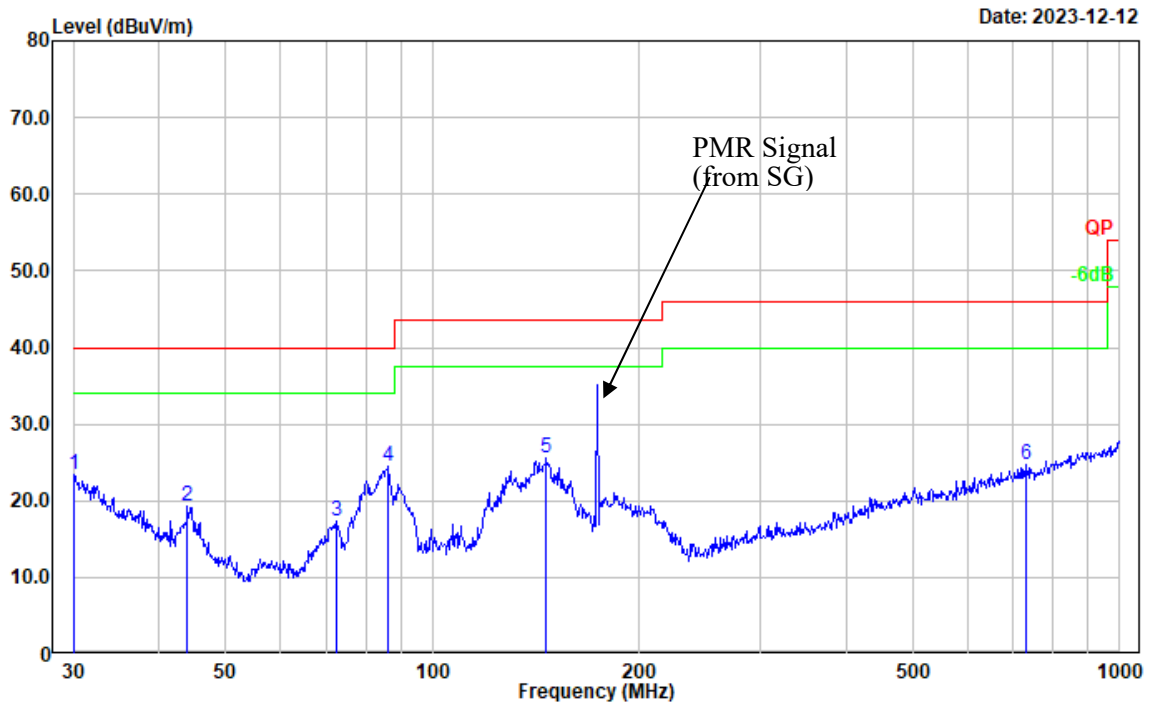

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.51	-4.20	23.31	40.00	16.69	Peak
2	43.966	33.19	-14.00	19.19	40.00	20.81	Peak
3	72.338	34.42	-17.14	17.28	40.00	22.72	Peak
4	86.200	41.98	-17.47	24.51	40.00	15.49	Peak
5	146.374	37.74	-12.18	25.56	43.50	17.94	Peak
6	729.358	28.22	-3.57	24.65	46.00	21.35	Peak


Test Mode: M2(RX 220.0125MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(220.0125)

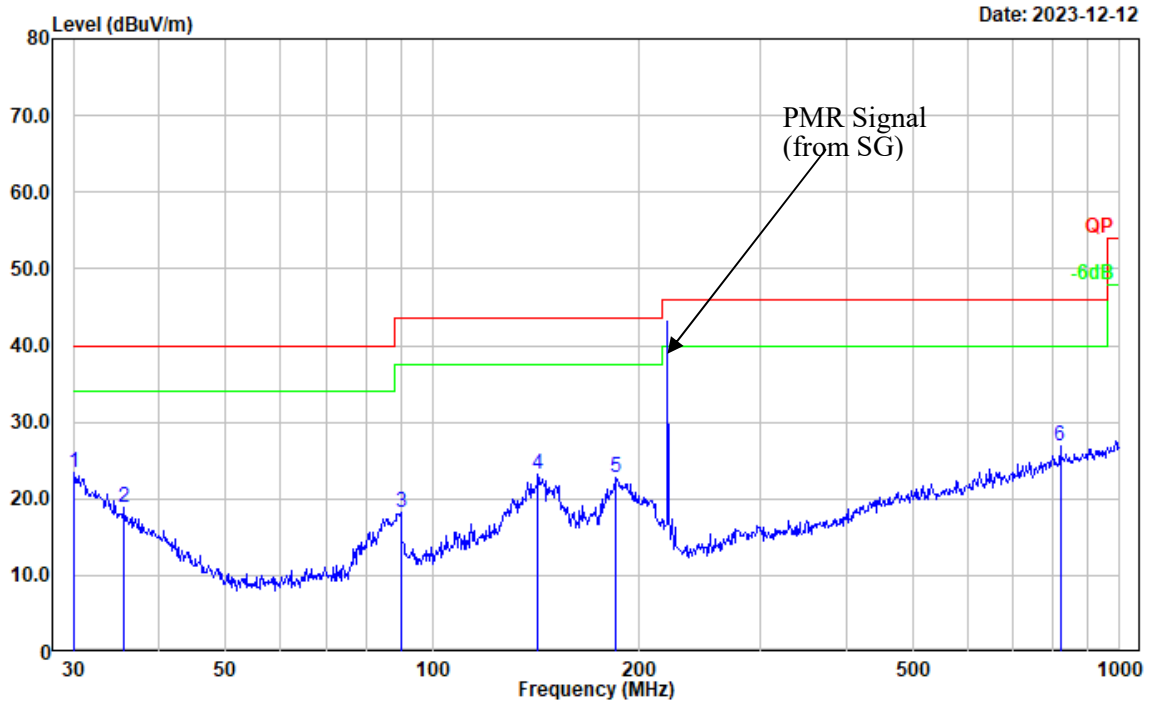

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.49	-4.12	23.37	40.00	16.63	Peak
2	35.624	27.26	-8.42	18.84	40.00	21.16	Peak
3	89.905	35.49	-17.24	18.25	43.50	25.25	Peak
4	142.324	35.34	-12.11	23.23	43.50	20.27	Peak
5	185.138	36.65	-13.83	22.82	43.50	20.68	Peak
6	818.834	28.97	-2.16	26.81	46.00	19.19	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(220.0125)

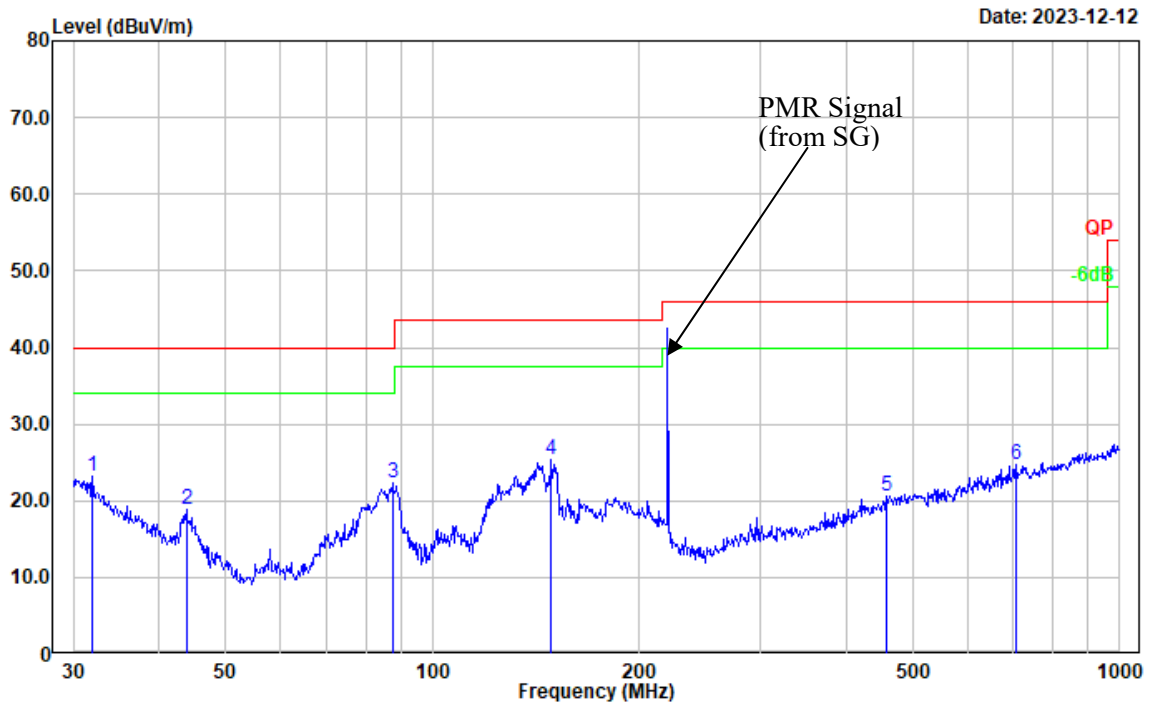

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.955	28.70	-5.60	23.10	40.00	16.90	Peak
2	43.812	32.86	-13.91	18.95	40.00	21.05	Peak
3	87.418	39.70	-17.40	22.30	40.00	17.70	Peak
4	148.963	37.65	-12.21	25.44	43.50	18.06	Peak
5	457.507	27.78	-7.11	20.67	46.00	25.33	Peak
6	706.700	28.56	-3.81	24.75	46.00	21.25	Peak


Test Mode: M2 (RX 240MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(240)

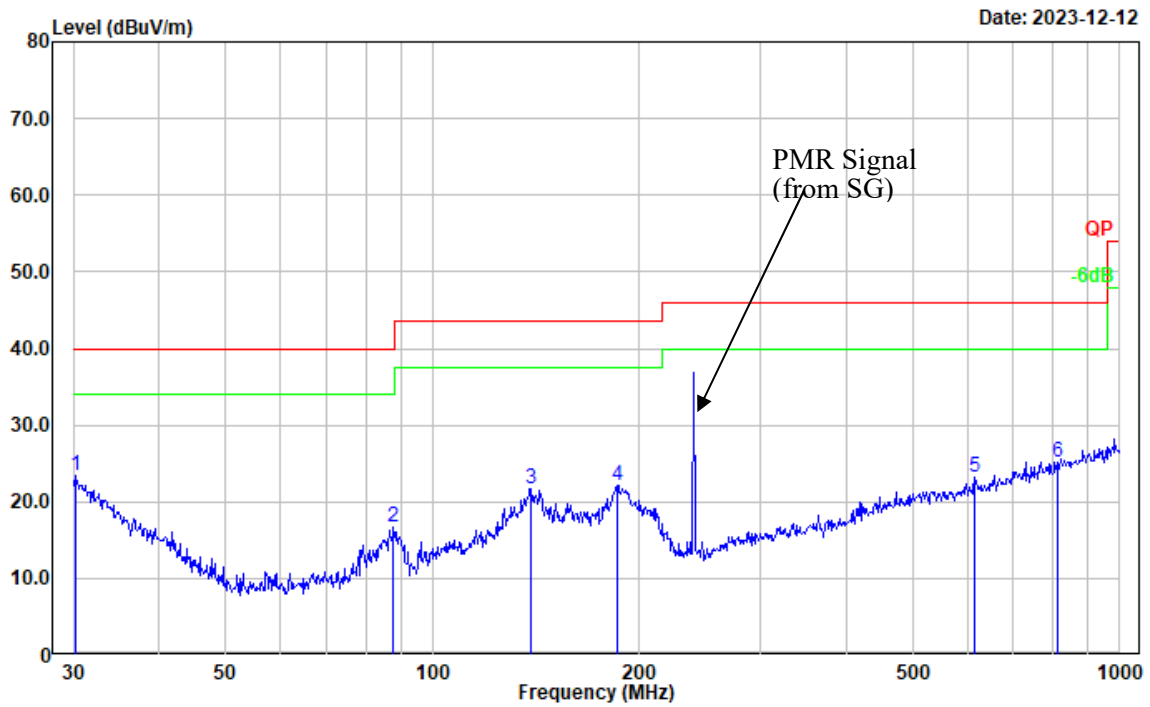

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.64	-4.28	23.36	40.00	16.64	Peak
2	87.725	34.08	-17.37	16.71	40.00	23.29	Peak
3	139.361	33.81	-12.03	21.78	43.50	21.72	Peak
4	185.788	36.01	-13.84	22.17	43.50	21.33	Peak
5	614.214	28.35	-5.05	23.30	46.00	22.70	Peak
6	810.265	27.53	-2.28	25.25	46.00	20.75	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(240)

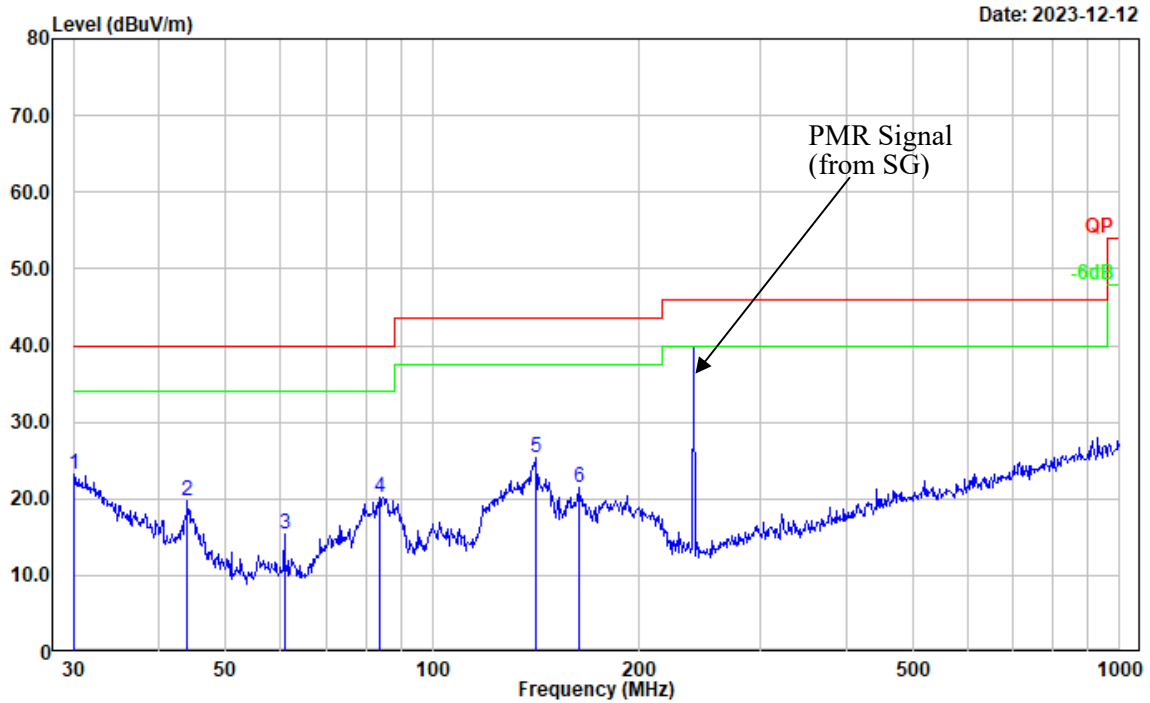

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	27.36	-4.20	23.16	40.00	16.84	Peak
2	43.966	33.68	-14.00	19.68	40.00	20.32	Peak
3	60.918	32.92	-17.61	15.31	40.00	24.69	Peak
4	83.816	37.68	-17.57	20.11	40.00	19.89	Peak
5	141.330	37.46	-12.12	25.34	43.50	18.16	Peak
6	163.182	34.13	-12.63	21.50	43.50	22.00	Peak


Test Mode: M2 (RX 259.9875MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(259.9875)

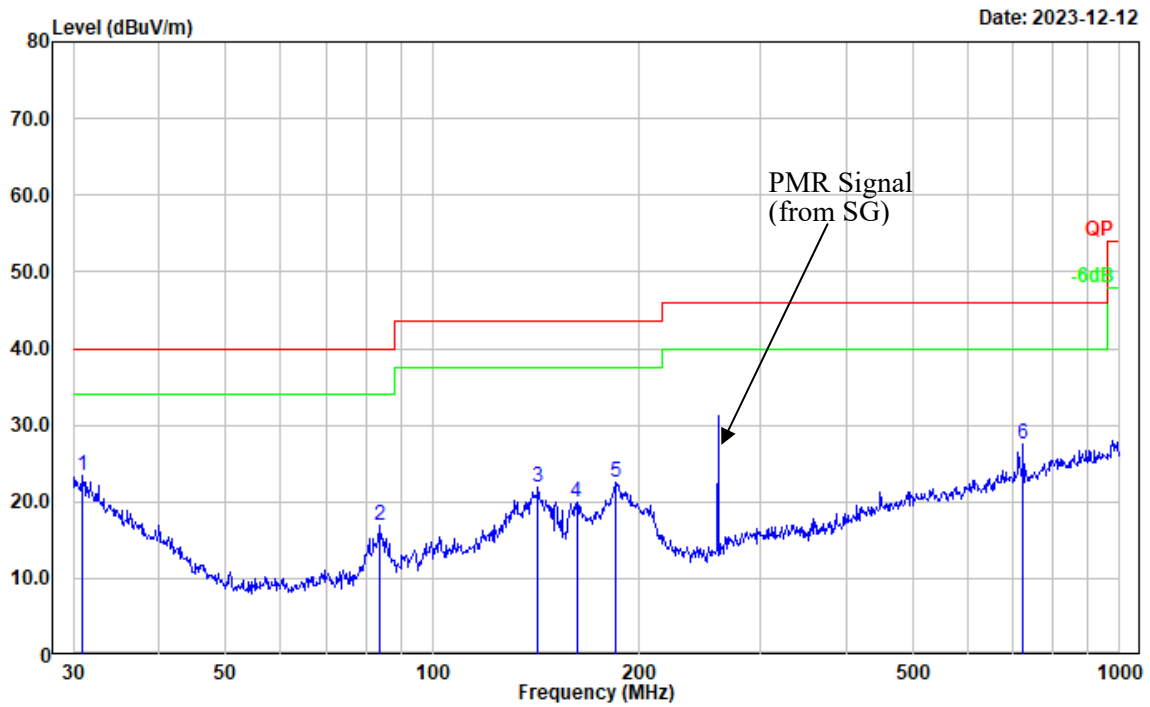

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	28.10	-4.78	23.32	40.00	16.68	Peak
2	83.816	34.37	-17.57	16.80	40.00	23.20	Peak
3	142.324	34.02	-12.11	21.91	43.50	21.59	Peak
4	162.041	32.41	-12.56	19.85	43.50	23.65	Peak
5	184.490	36.39	-13.82	22.57	43.50	20.93	Peak
6	724.261	31.21	-3.62	27.59	46.00	18.41	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(259.9875)

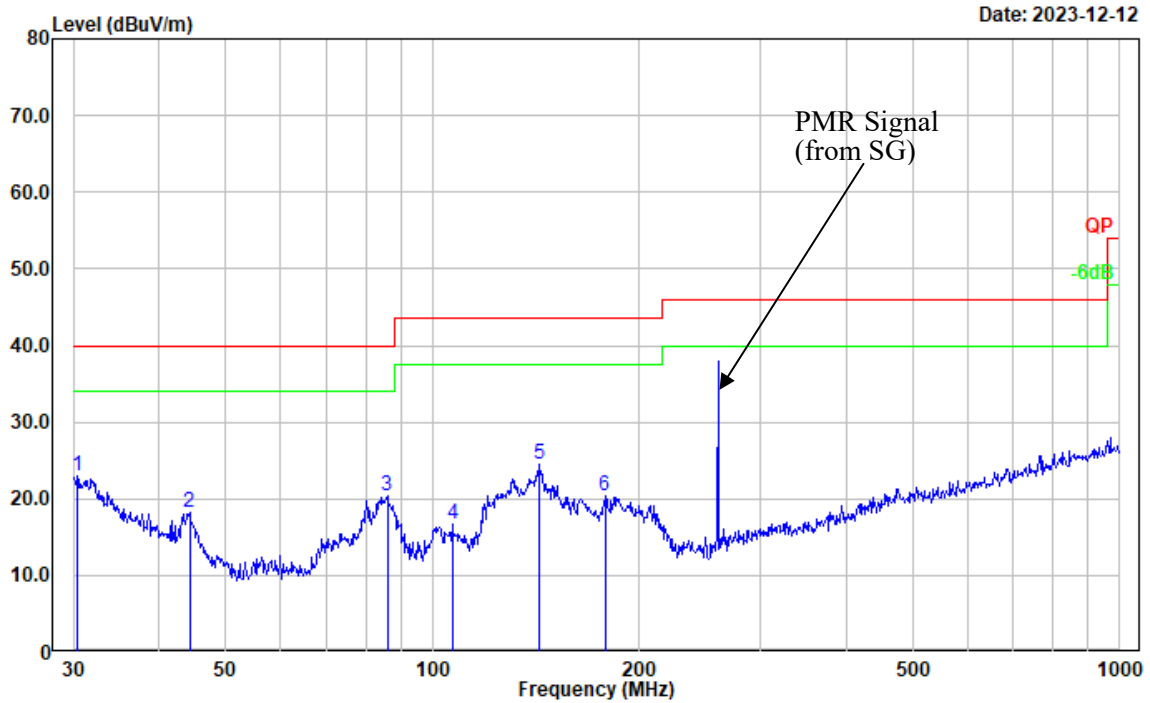

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	27.50	-4.45	23.05	40.00	16.95	Peak
2	44.275	32.41	-14.17	18.24	40.00	21.76	Peak
3	85.898	37.78	-17.49	20.29	40.00	19.71	Peak
4	106.759	29.93	-13.29	16.64	43.50	26.86	Peak
5	142.824	36.55	-12.11	24.44	43.50	19.06	Peak
6	178.133	33.97	-13.70	20.27	43.50	23.23	Peak


Test Mode: M2 (RX350.0125MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(350.0125)

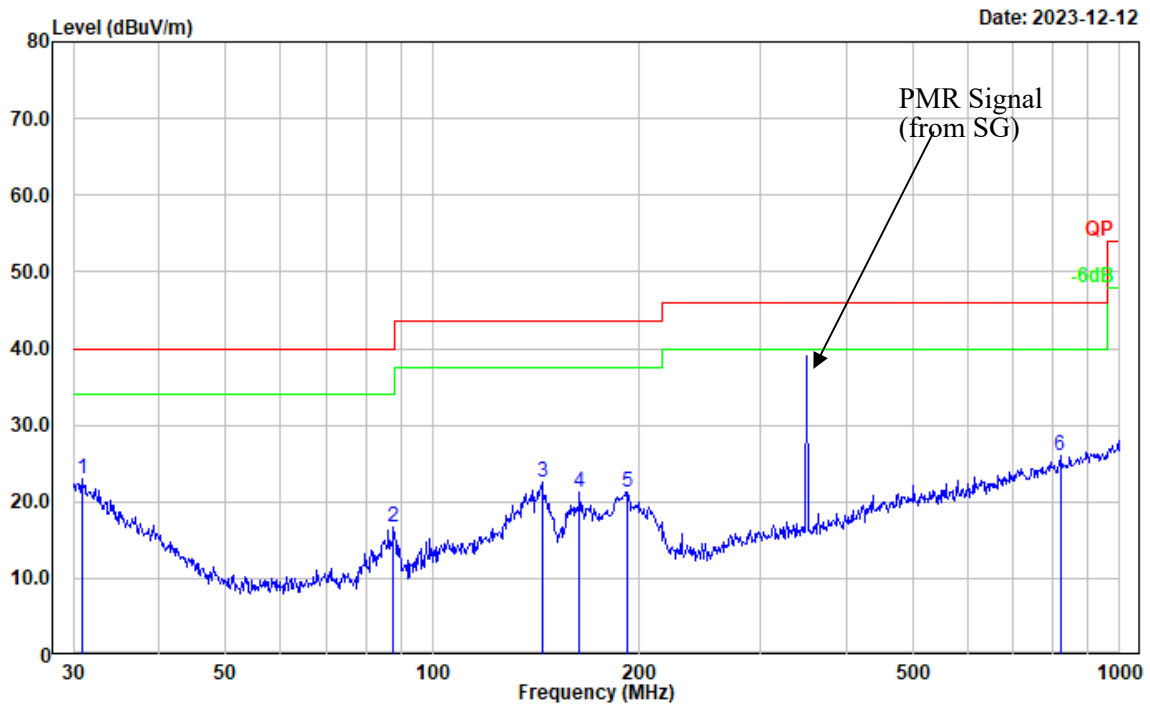

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	27.84	-4.78	23.06	40.00	16.94	Peak
2	87.725	34.10	-17.37	16.73	40.00	23.27	Peak
3	144.335	34.58	-12.14	22.44	43.50	21.06	Peak
4	163.755	33.81	-12.67	21.14	43.50	22.36	Peak
5	192.419	34.72	-13.49	21.23	43.50	22.27	Peak
6	818.834	28.20	-2.16	26.04	46.00	19.96	Peak

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(350.0125)

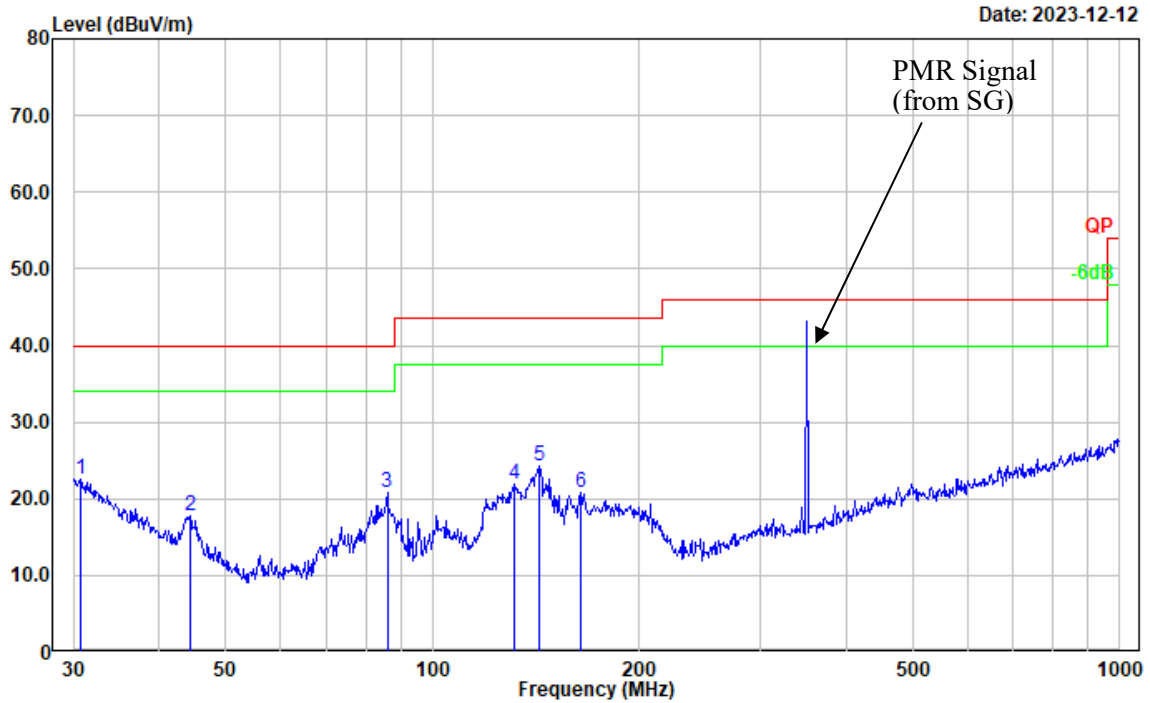


Date: 2023-12-12

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	27.15	-4.69	22.46	40.00	17.54	Peak
2	44.431	32.09	-14.25	17.84	40.00	22.16	Peak
3	85.898	38.25	-17.49	20.76	40.00	19.24	Peak
4	131.297	33.54	-11.66	21.88	43.50	21.62	Peak
5	143.326	36.30	-12.13	24.17	43.50	19.33	Peak
6	164.330	33.46	-12.73	20.73	43.50	22.77	Peak


Test Mode: M2 (RX370MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(370)

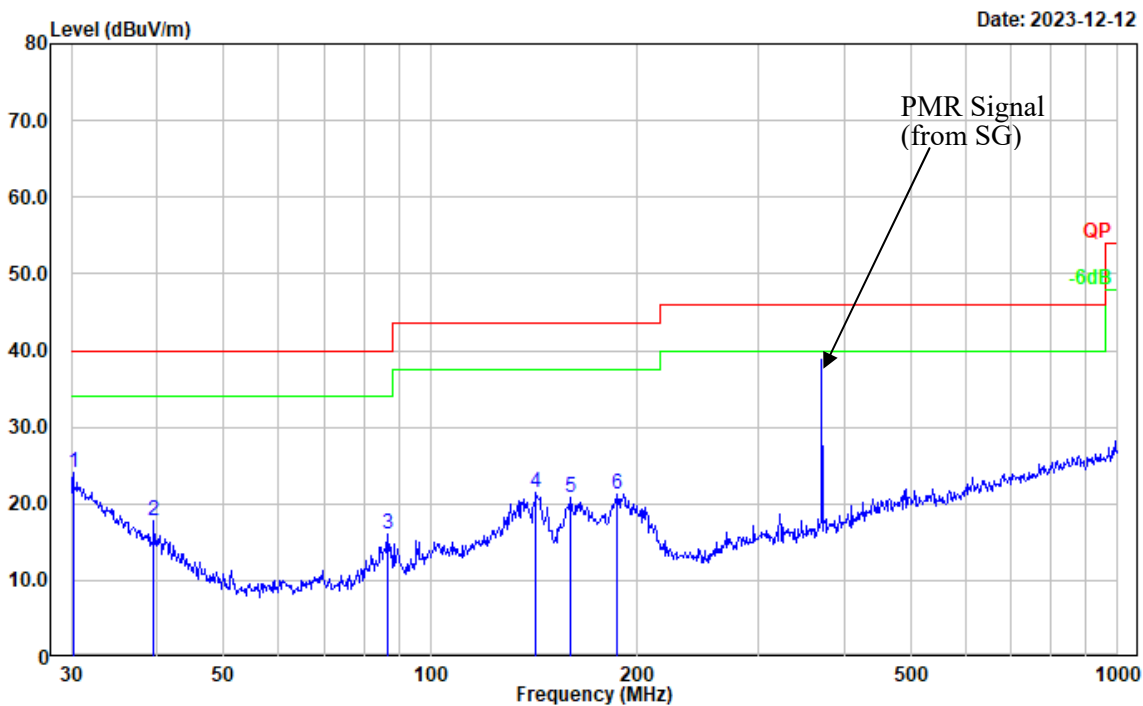

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	28.43	-4.28	24.15	40.00	15.85	Peak
2	39.576	29.09	-11.39	17.70	40.00	22.30	Peak
3	86.503	33.52	-17.44	16.08	40.00	23.92	Peak
4	142.324	33.57	-12.11	21.46	43.50	22.04	Peak
5	159.784	33.14	-12.36	20.78	43.50	22.72	Peak
6	187.096	35.16	-13.85	21.31	43.50	22.19	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(370)

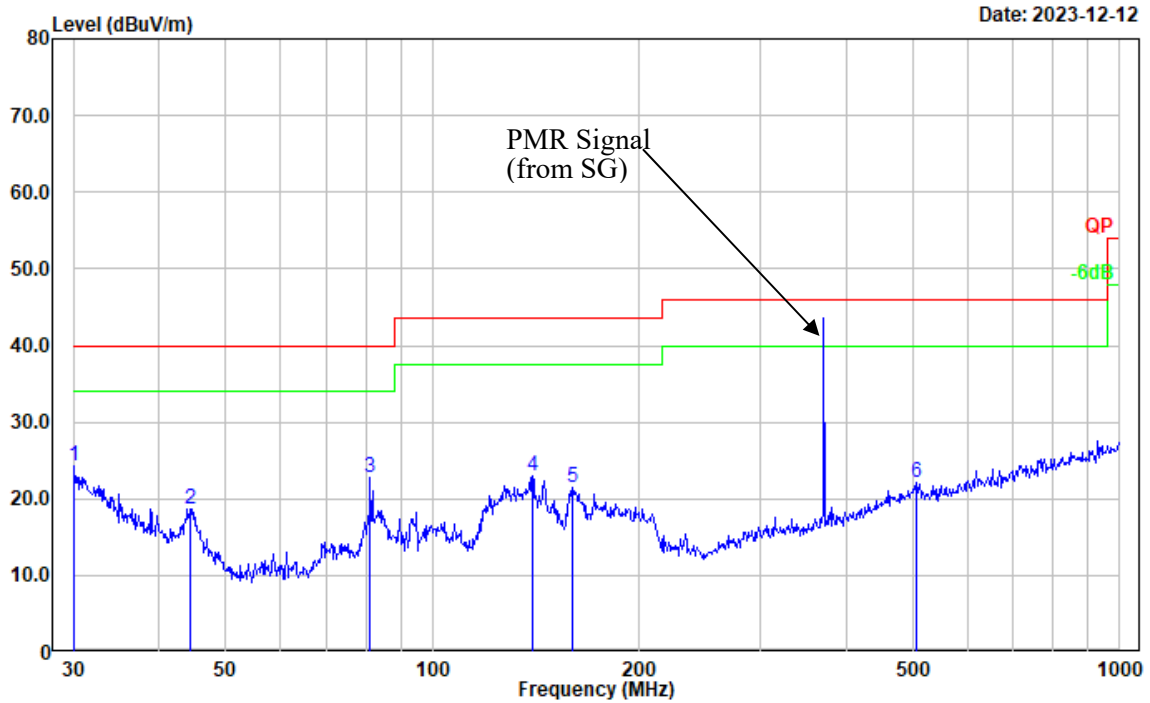

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	28.42	-4.20	24.22	40.00	15.78	Peak
2	44.431	32.91	-14.25	18.66	40.00	21.34	Peak
3	81.212	40.58	-17.74	22.84	40.00	17.16	Peak
4	139.851	34.92	-12.04	22.88	43.50	20.62	Peak
5	159.784	33.92	-12.36	21.56	43.50	21.94	Peak
6	506.479	28.42	-6.33	22.09	46.00	23.91	Peak


Test Mode: M2 (RX389.9875MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(389.9875)

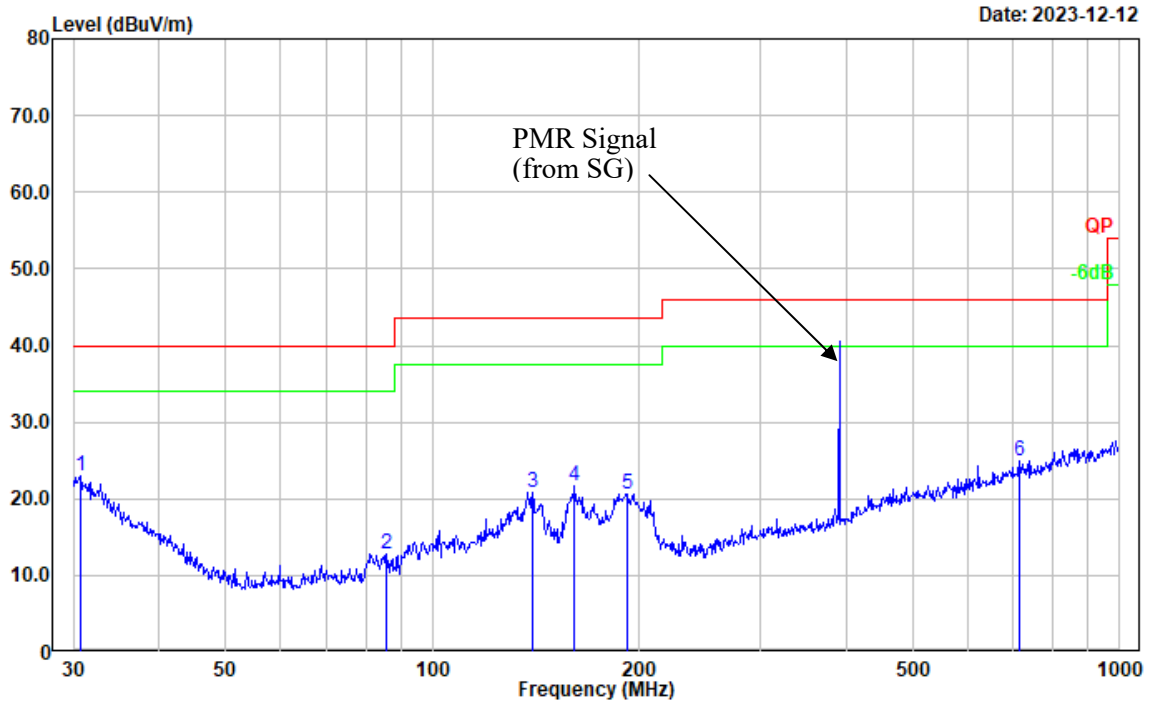

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	27.70	-4.69	23.01	40.00	16.99	Peak
2	85.598	30.33	-17.49	12.84	40.00	27.16	Peak
3	139.851	32.93	-12.04	20.89	43.50	22.61	Peak
4	160.909	34.13	-12.46	21.67	43.50	21.83	Peak
5	192.419	34.15	-13.49	20.66	43.50	22.84	Peak
6	714.173	28.74	-3.73	25.01	46.00	20.99	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(389.9875)

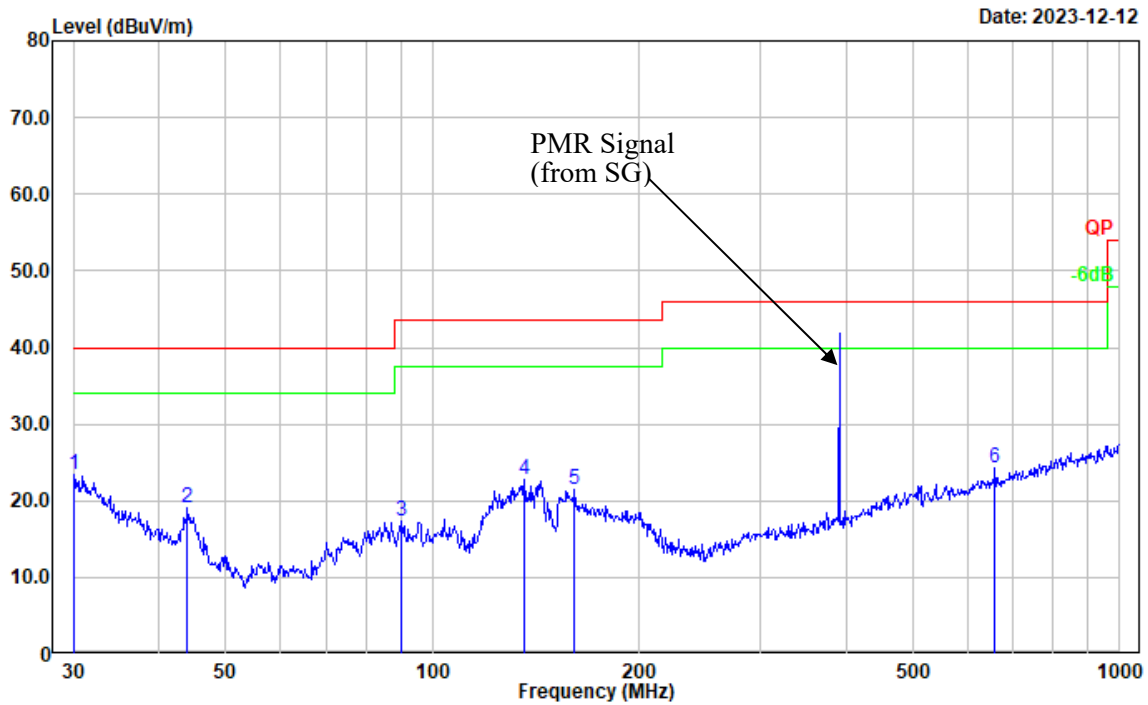

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.50	-4.12	23.38	40.00	16.62	Peak
2	43.966	33.05	-14.00	19.05	40.00	20.95	Peak
3	90.220	34.52	-17.18	17.34	43.50	26.16	Peak
4	135.982	34.62	-11.87	22.75	43.50	20.75	Peak
5	160.909	33.97	-12.46	21.51	43.50	21.99	Peak
6	658.836	28.94	-4.58	24.36	46.00	21.64	Peak


Test Mode: M2 (RX400.0125MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(400.0125)

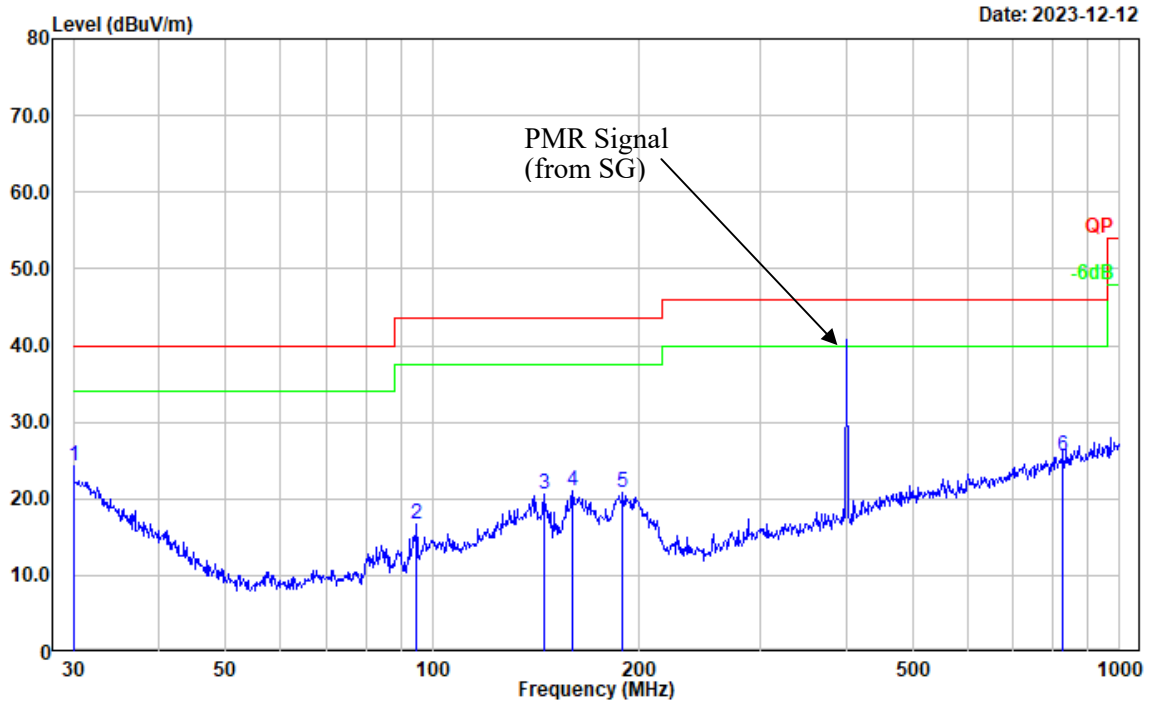

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	28.36	-4.12	24.24	40.00	15.76	Peak
2	94.760	32.62	-16.00	16.62	43.50	26.88	Peak
3	145.351	32.65	-12.15	20.50	43.50	23.00	Peak
4	159.784	33.35	-12.36	20.99	43.50	22.51	Peak
5	189.074	34.51	-13.78	20.73	43.50	22.77	Peak
6	824.597	27.67	-2.07	25.60	46.00	20.40	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(400.0125)

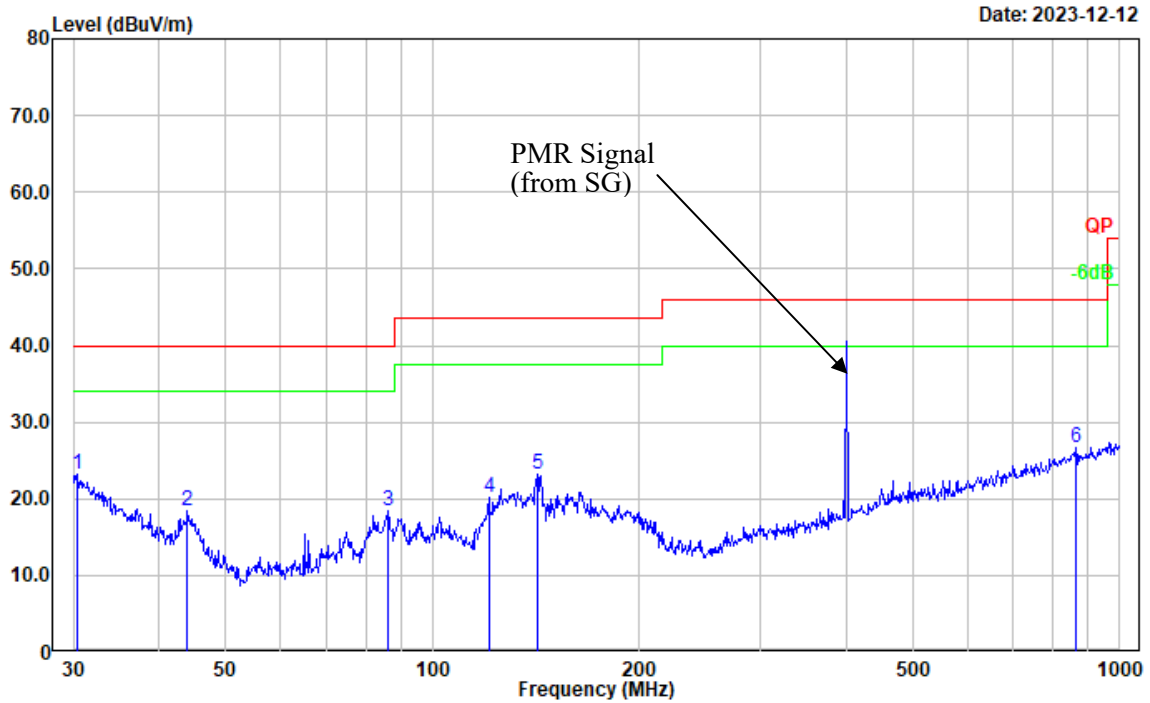

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	27.72	-4.45	23.27	40.00	16.73	Peak
2	43.966	32.36	-14.00	18.36	40.00	21.64	Peak
3	86.200	35.88	-17.47	18.41	40.00	21.59	Peak
4	120.699	32.03	-11.80	20.23	43.50	23.27	Peak
5	142.324	35.26	-12.11	23.15	43.50	20.35	Peak
6	863.056	28.27	-1.56	26.71	46.00	19.29	Peak


Test Mode: M2 (RX 460MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(460)

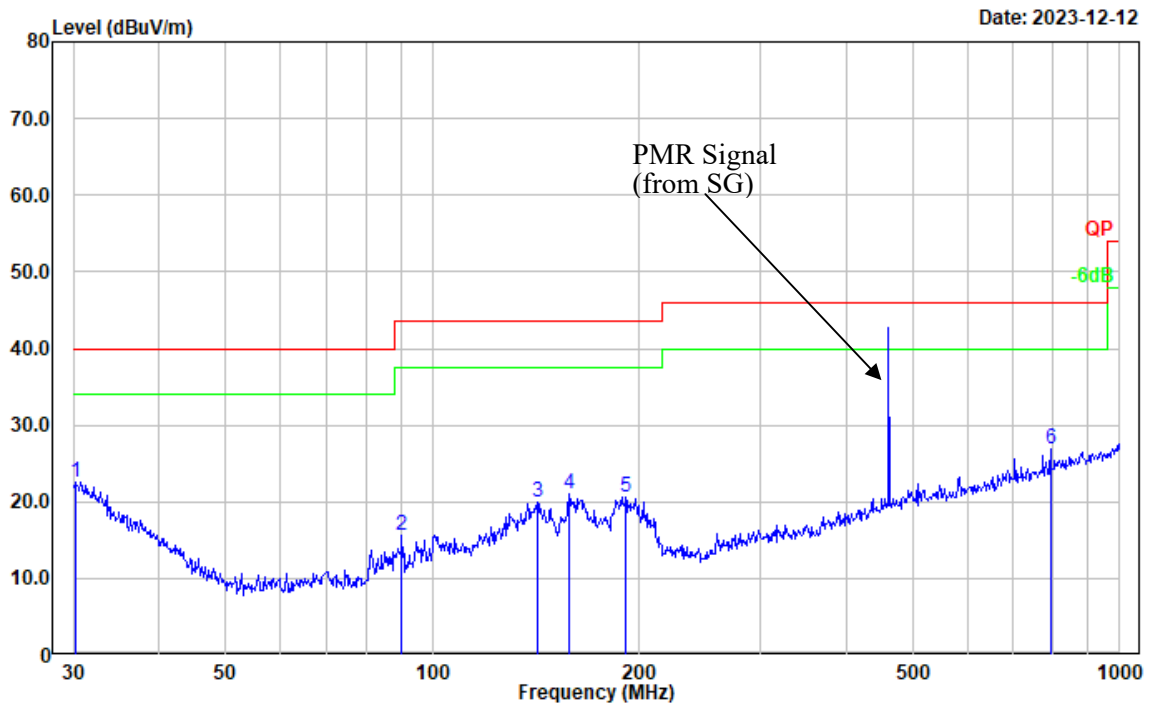

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	26.83	-4.28	22.55	40.00	17.45	Peak
2	90.220	32.86	-17.18	15.68	43.50	27.82	Peak
3	141.826	32.13	-12.11	20.02	43.50	23.48	Peak
4	158.112	33.30	-12.36	20.94	43.50	22.56	Peak
5	191.074	34.19	-13.65	20.54	43.50	22.96	Peak
6	793.396	29.45	-2.56	26.89	46.00	19.11	Peak


Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(460)

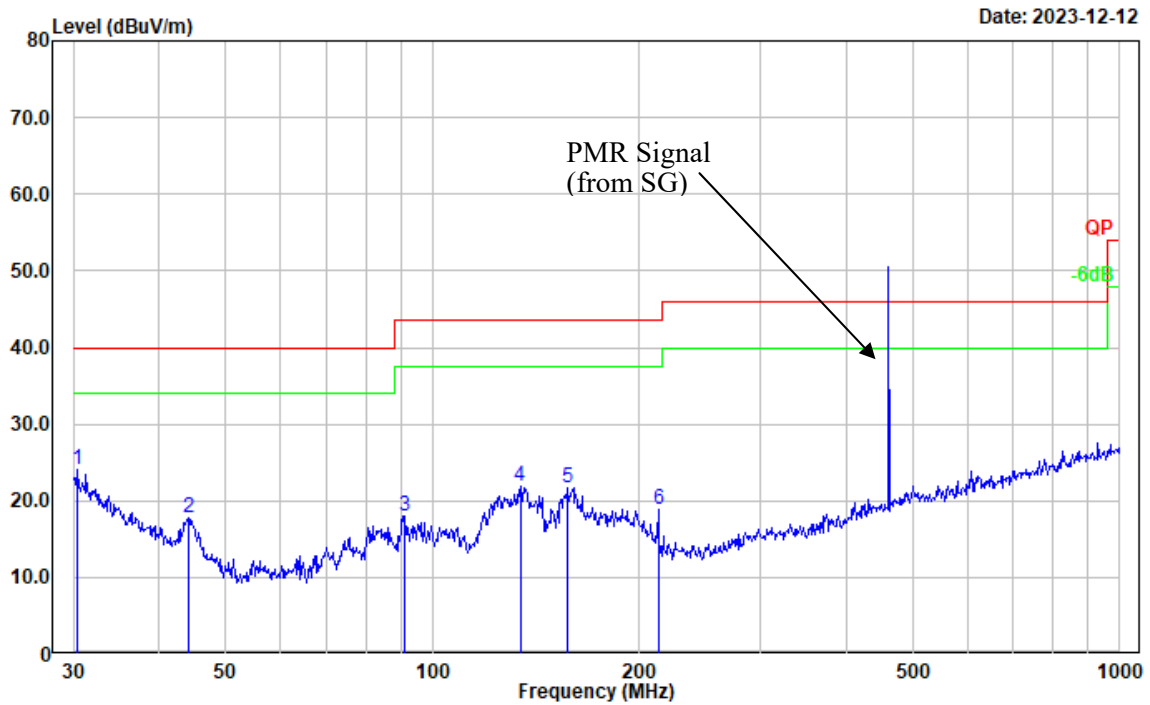

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	28.47	-4.45	24.02	40.00	15.98	Peak
2	44.120	31.79	-14.08	17.71	40.00	22.29	Peak
3	91.175	34.94	-16.94	18.00	43.50	25.50	Peak
4	134.088	33.60	-11.79	21.81	43.50	21.69	Peak
5	157.559	34.03	-12.35	21.68	43.50	21.82	Peak
6	213.015	31.78	-13.01	18.77	43.50	24.73	Peak


Test Mode: M2 (RX 519.9875MHz)

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note: M2 Charging&Receiving(519.9875)

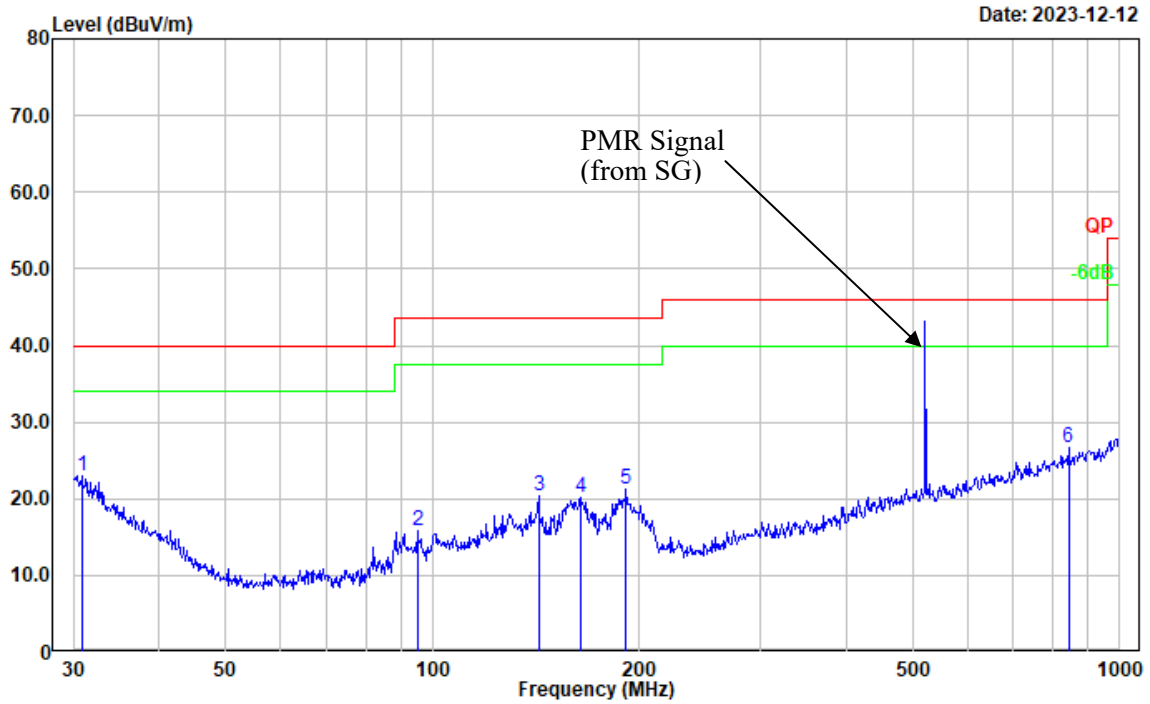

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	27.82	-4.78	23.04	40.00	16.96	Peak
2	95.093	31.81	-15.91	15.90	43.50	27.60	Peak
3	142.824	32.57	-12.11	20.46	43.50	23.04	Peak
4	164.330	32.99	-12.73	20.26	43.50	23.24	Peak
5	191.074	34.91	-13.65	21.26	43.50	22.24	Peak
6	842.130	28.50	-1.85	26.65	46.00	19.35	Peak

Project No.: CR231165351-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note: M2 Charging&Receiving(519.9875)

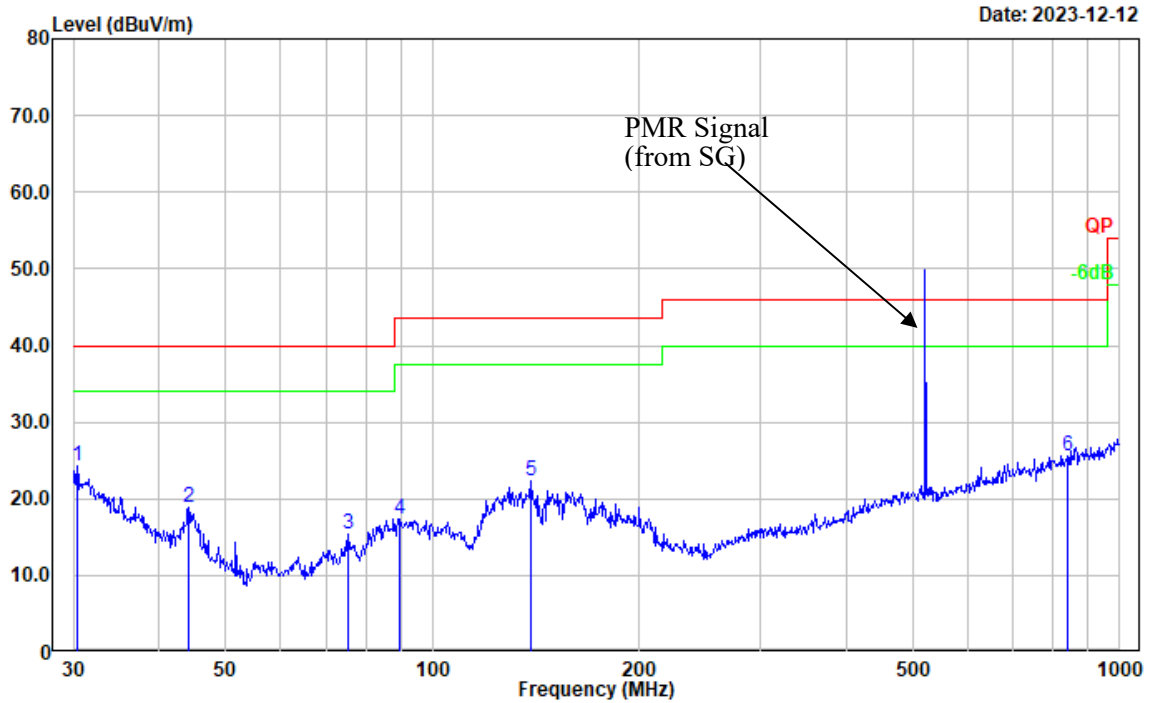


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	28.77	-4.45	24.32	40.00	15.68	Peak
2	44.120	33.04	-14.08	18.96	40.00	21.04	Peak
3	75.182	32.67	-17.37	15.30	40.00	24.70	Peak
4	89.590	34.63	-17.27	17.36	43.50	26.14	Peak
5	138.874	34.35	-12.01	22.34	43.50	21.16	Peak
6	839.182	27.59	-1.90	25.69	46.00	20.31	Peak

2) Above 1GHz

Test Mode: M1(108-136MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(108-136)
 Polarization: horizontal
 Note:

Date: 2023-11-27

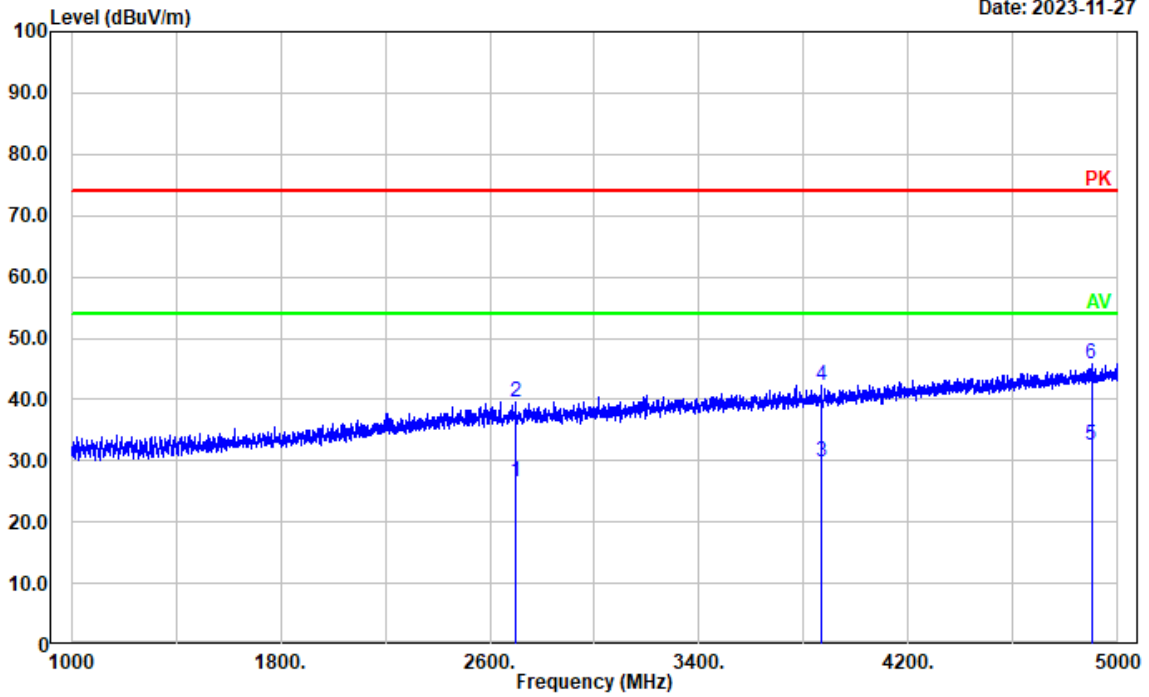

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2697.139	21.78	4.80	26.58	54.00	27.42	Average
2	2697.139	34.87	4.80	39.67	74.00	34.33	Peak
3	3864.573	22.07	7.81	29.88	54.00	24.12	Average
4	3864.573	34.53	7.81	42.34	74.00	31.66	Peak
5	4899.180	20.84	11.57	32.41	54.00	21.59	Average
6	4899.180	34.11	11.57	45.68	74.00	28.32	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(108-136)
 Polarization: vertical
 Note:

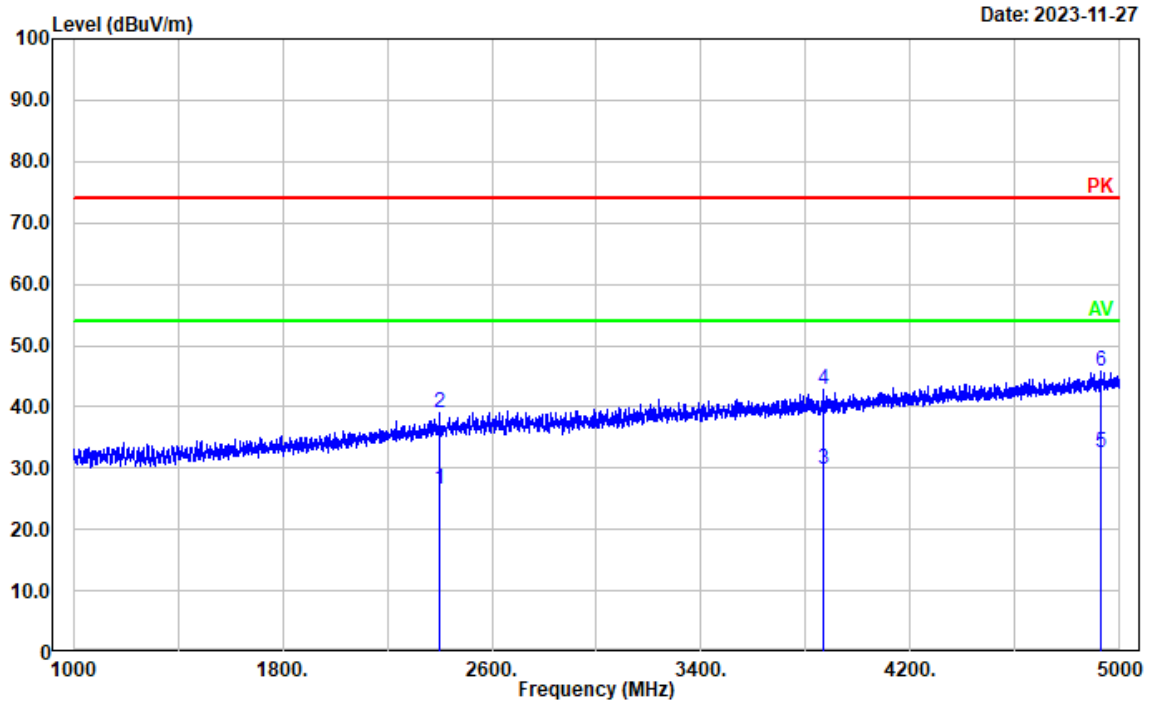


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2399.480	22.77	3.81	26.58	54.00	27.42	Average
2	2399.480	35.33	3.81	39.14	74.00	34.86	Peak
3	3866.173	21.92	7.82	29.74	54.00	24.26	Average
4	3866.173	35.12	7.82	42.94	74.00	31.06	Peak
5	4927.186	20.74	11.67	32.41	54.00	21.59	Average
6	4927.186	34.15	11.67	45.82	74.00	28.18	Peak

Test Mode: M1(136-174MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(136-174)
 Polarization: horizontal
 Note:

Date: 2023-11-27

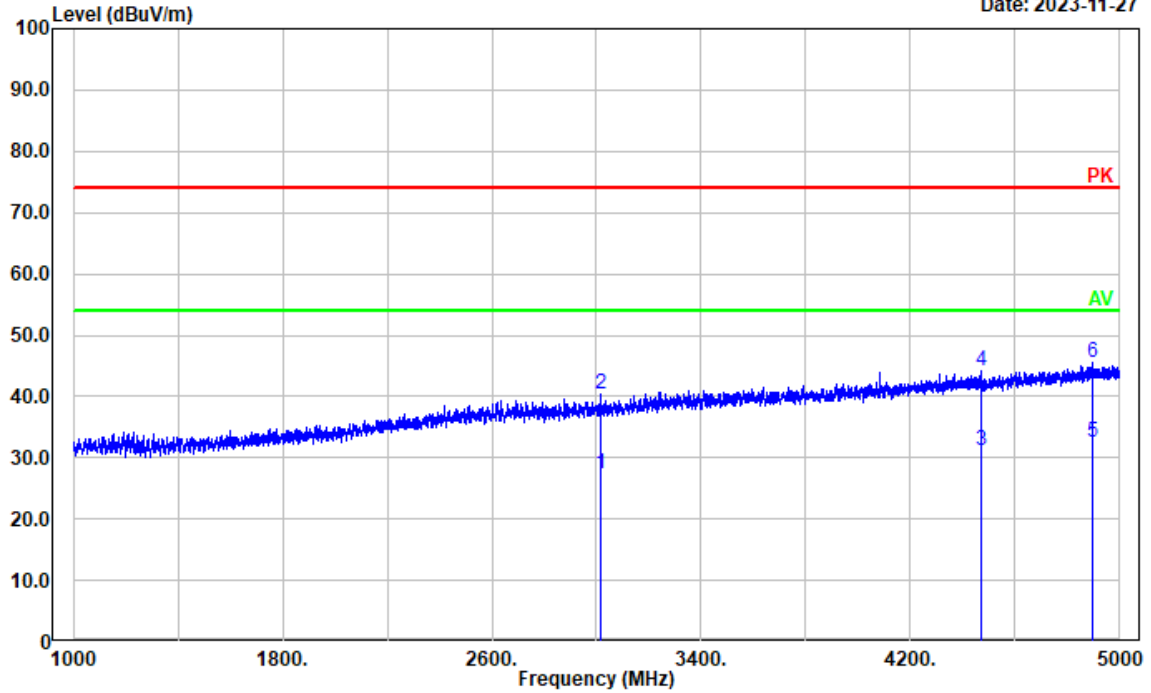

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	3014.003	21.97	5.44	27.41	54.00	26.59	Average
2	3014.003	34.86	5.44	40.30	74.00	33.70	Peak
3	4471.094	21.57	9.69	31.26	54.00	22.74	Average
4	4471.094	34.53	9.69	44.22	74.00	29.78	Peak
5	4895.179	20.92	11.54	32.46	54.00	21.54	Average
6	4895.179	33.95	11.54	45.49	74.00	28.51	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(136-174)
 Polarization: vertical
 Note:

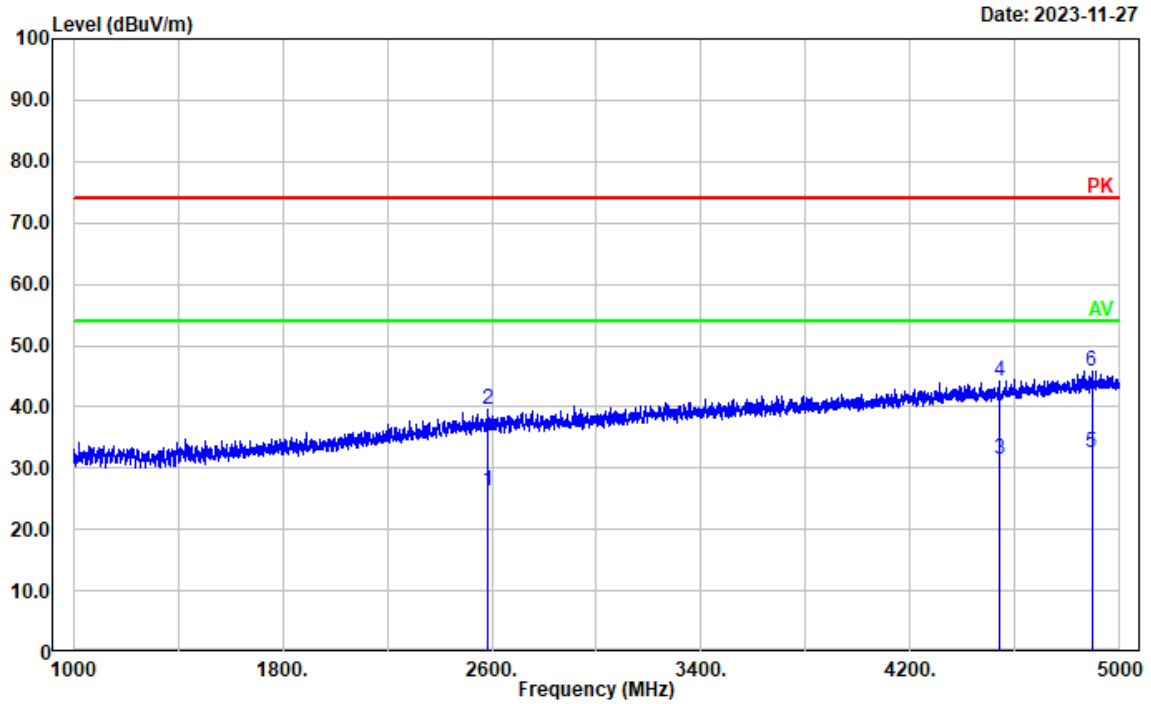


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2583.517	21.86	4.53	26.39	54.00	27.61	Average
2	2583.517	34.93	4.53	39.46	74.00	34.54	Peak
3	4541.508	21.45	10.00	31.45	54.00	22.55	Average
4	4541.508	34.06	10.00	44.06	74.00	29.94	Peak
5	4892.778	20.93	11.54	32.47	54.00	21.53	Average
6	4892.778	34.33	11.54	45.87	74.00	28.13	Peak

Test Mode: M1(220-260MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(220-260)
 Polarization: horizontal
 Note:

Date: 2023-11-27

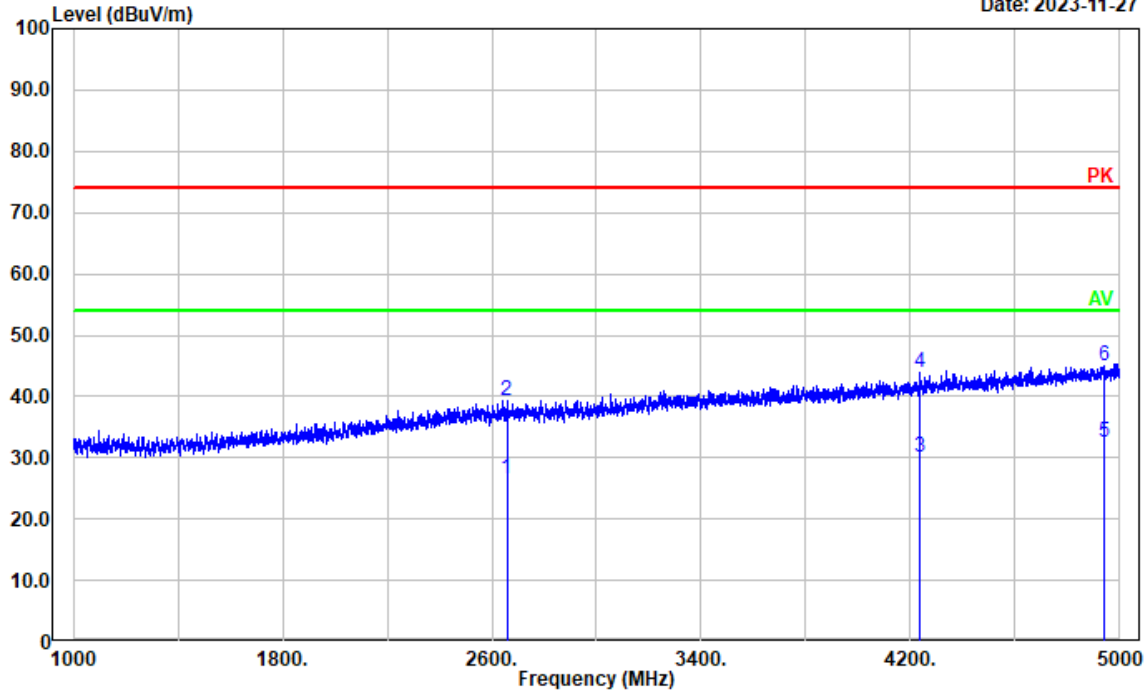

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2657.131	21.80	4.67	26.47	54.00	27.53	Average
2	2657.131	34.57	4.67	39.24	74.00	34.76	Peak
3	4236.647	21.13	8.99	30.12	54.00	23.88	Average
4	4236.647	34.87	8.99	43.86	74.00	30.14	Peak
5	4937.587	20.83	11.72	32.55	54.00	21.45	Average
6	4937.587	33.39	11.72	45.11	74.00	28.89	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(220-260)
 Polarization: vertical
 Note:

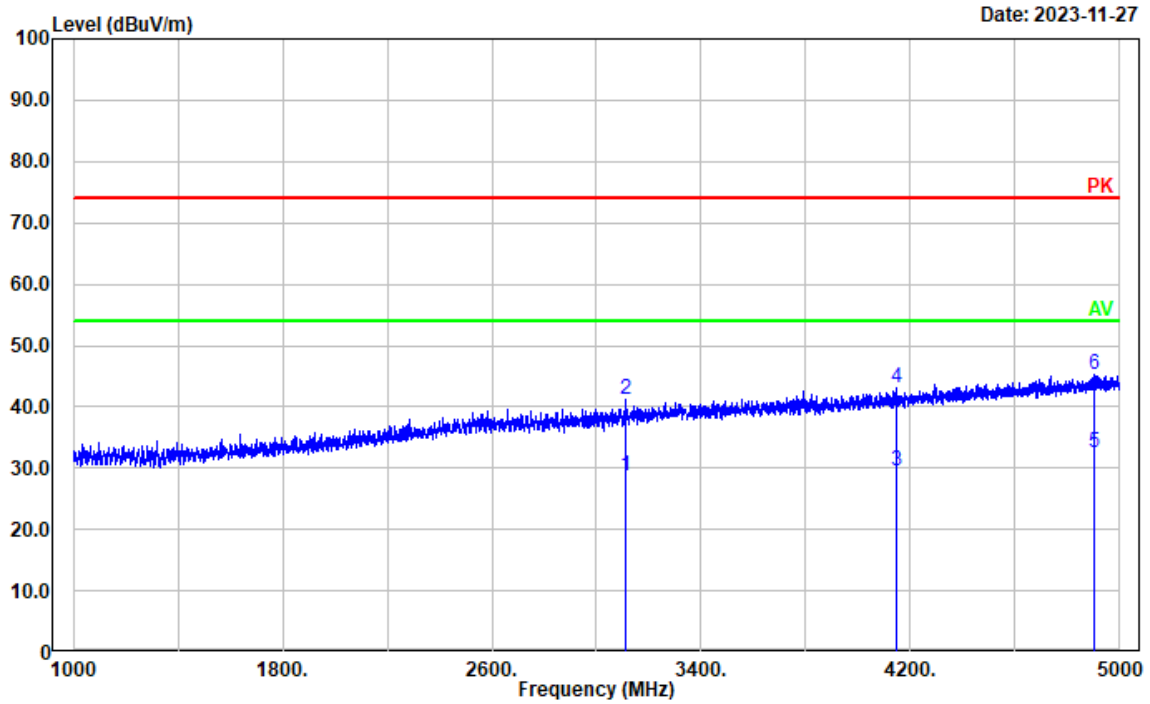


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	3111.622	23.01	5.73	28.74	54.00	25.26	Average
2	3111.622	35.55	5.73	41.28	74.00	32.72	Peak
3	4143.829	21.06	8.57	29.63	54.00	24.37	Average
4	4143.829	34.39	8.57	42.96	74.00	31.04	Peak
5	4903.981	20.90	11.58	32.48	54.00	21.52	Average
6	4903.981	33.60	11.58	45.18	74.00	28.82	Peak

Test Mode: MI(350-390MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(350-390)
 Polarization: horizontal
 Note:

Date: 2023-11-27

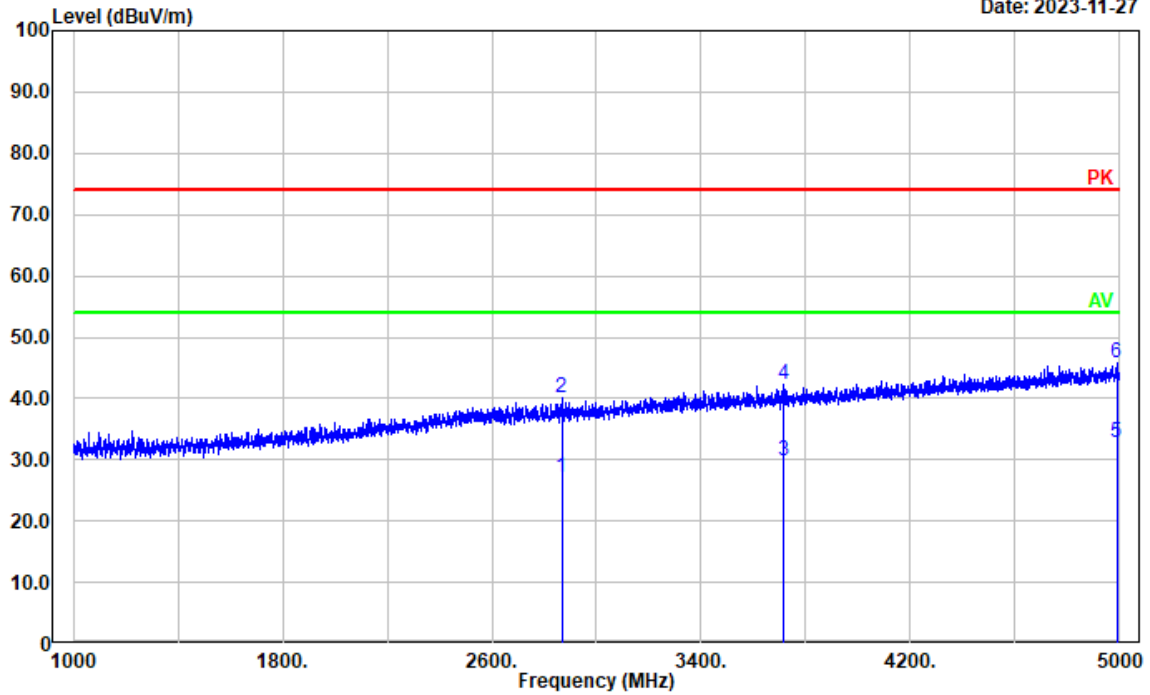

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2866.773	22.03	5.09	27.12	54.00	26.88	Average
2	2866.773	34.90	5.09	39.99	74.00	34.01	Peak
3	3714.943	22.22	7.47	29.69	54.00	24.31	Average
4	3714.943	34.68	7.47	42.15	74.00	31.85	Peak
5	4987.998	20.95	11.79	32.74	54.00	21.26	Average
6	4987.998	33.97	11.79	45.76	74.00	28.24	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(350-390)
 Polarization: vertical
 Note:

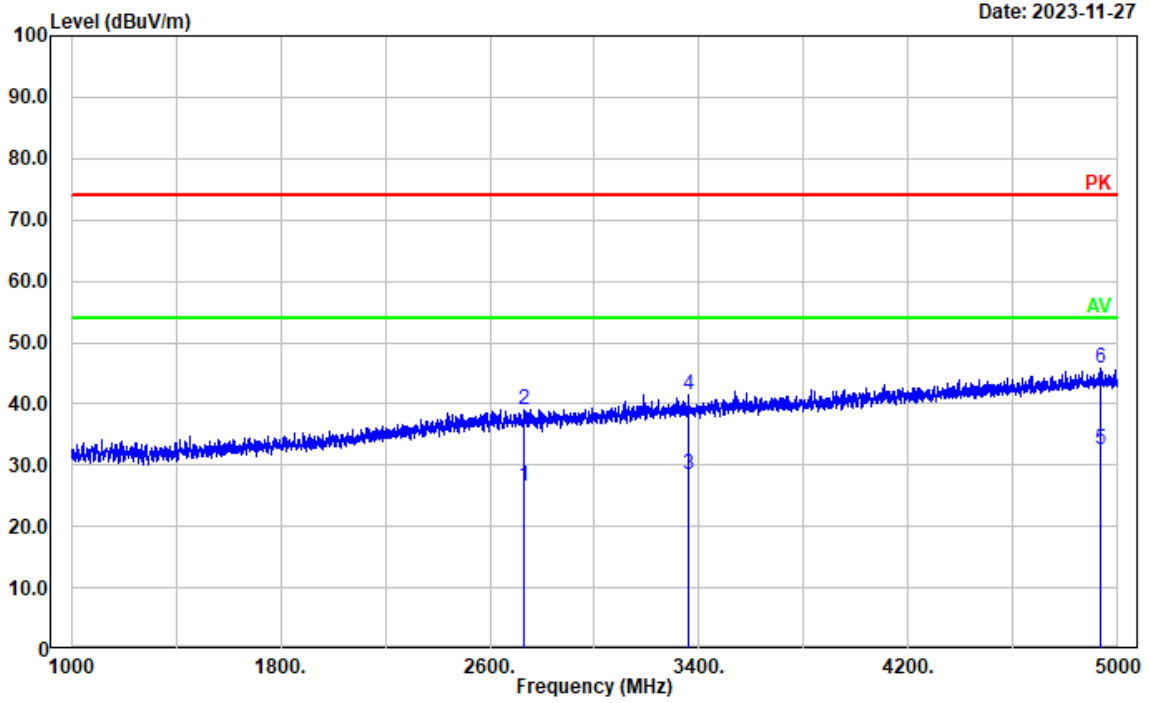


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2733.147	21.73	4.85	26.58	54.00	27.42	Average
2	2733.147	34.27	4.85	39.12	74.00	34.88	Peak
3	3360.472	21.92	6.44	28.36	54.00	25.64	Average
4	3360.472	35.05	6.44	41.49	74.00	32.51	Peak
5	4936.788	20.69	11.71	32.40	54.00	21.60	Average
6	4936.788	34.11	11.71	45.82	74.00	28.18	Peak

Test Mode: M1(400-520MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(400-520)
 Polarization: horizontal
 Note:

Date: 2023-11-27

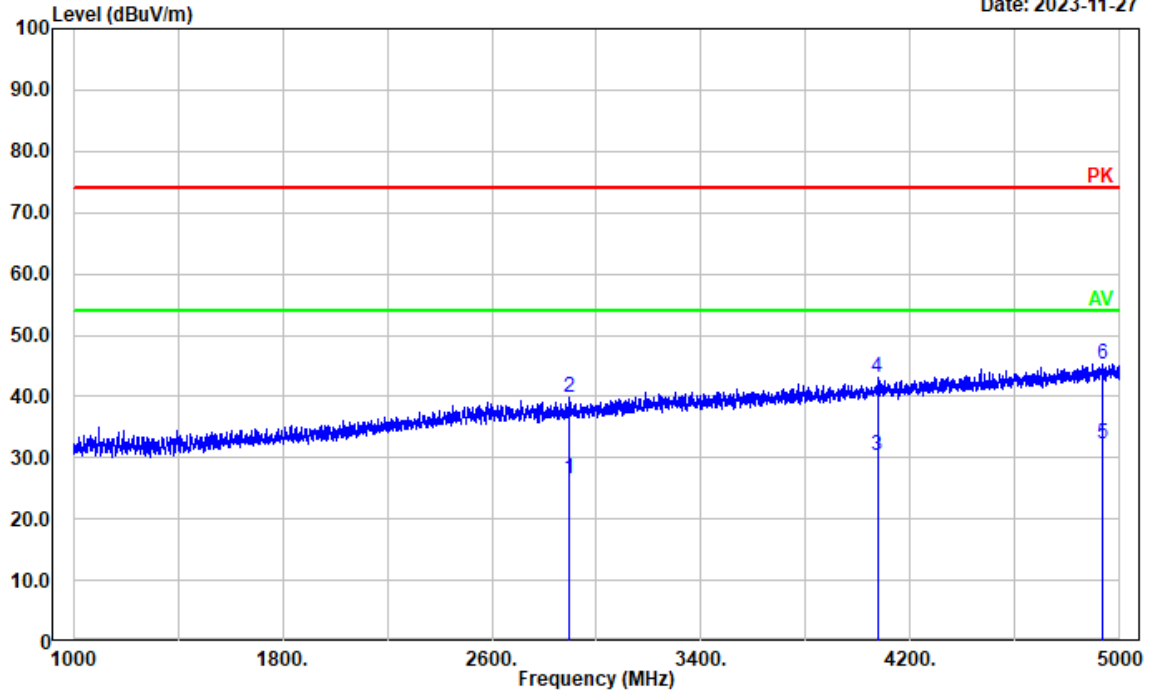

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2897.979	21.42	5.17	26.59	54.00	27.41	Average
2	2897.979	34.58	5.17	39.75	74.00	34.25	Peak
3	4073.415	22.02	8.44	30.46	54.00	23.54	Average
4	4073.415	34.59	8.44	43.03	74.00	30.97	Peak
5	4931.986	20.49	11.69	32.18	54.00	21.82	Average
6	4931.986	33.61	11.69	45.30	74.00	28.70	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Scanning(400-520)
 Polarization: vertical
 Note:

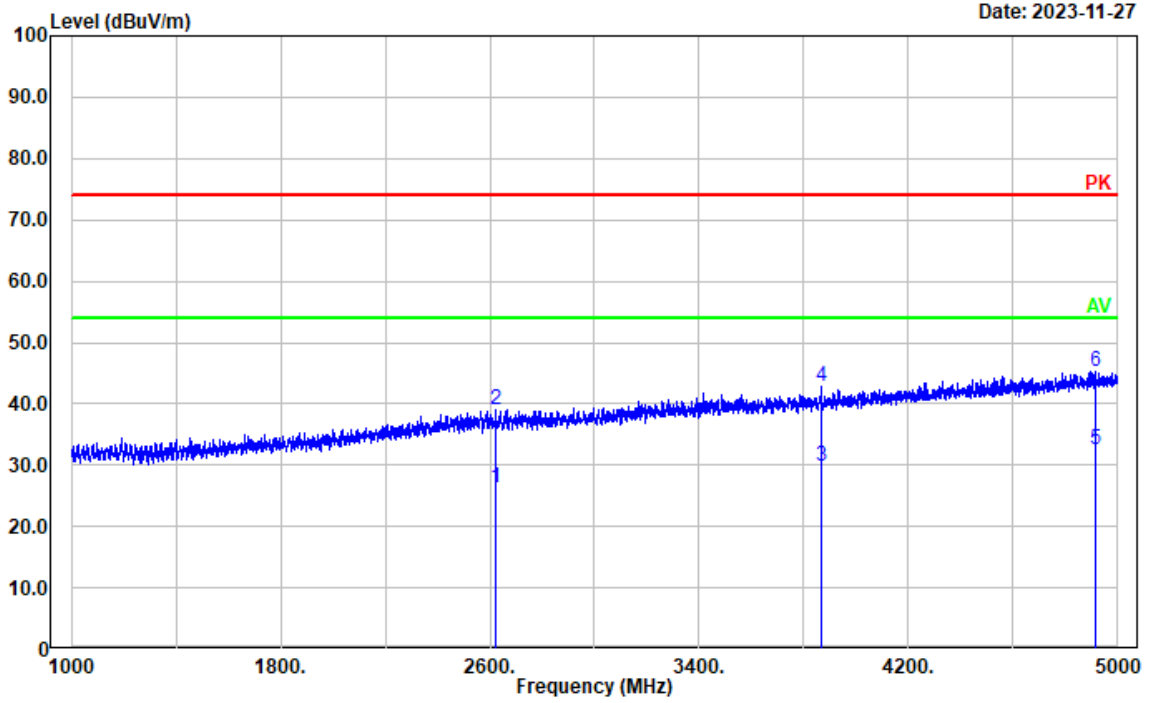


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2621.924	21.77	4.62	26.39	54.00	27.61	Average
2	2621.924	34.41	4.62	39.03	74.00	34.97	Peak
3	3867.773	21.97	7.82	29.79	54.00	24.21	Average
4	3867.773	34.94	7.82	42.76	74.00	31.24	Peak
5	4911.982	20.85	11.61	32.46	54.00	21.54	Average
6	4911.982	33.65	11.61	45.26	74.00	28.74	Peak

Test Mode: M2 (RX 108.0125MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(108.0125)
 Polarization: horizontal
 Note:

Date: 2023-11-27

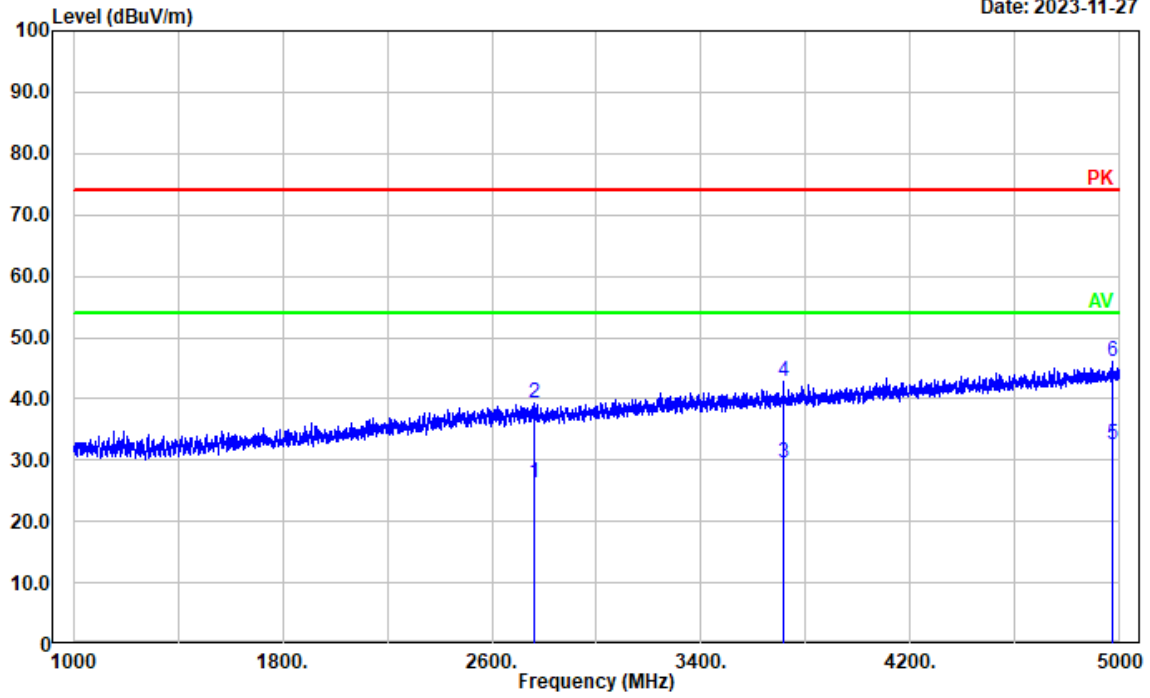

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2764.353	21.49	4.90	26.39	54.00	27.61	Average
2	2764.353	34.51	4.90	39.41	74.00	34.59	Peak
3	3714.943	22.17	7.47	29.64	54.00	24.36	Average
4	3714.943	35.41	7.47	42.88	74.00	31.12	Peak
5	4973.595	20.67	11.78	32.45	54.00	21.55	Average
6	4973.595	34.16	11.78	45.94	74.00	28.06	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(108.0125)
 Polarization: vertical
 Note:

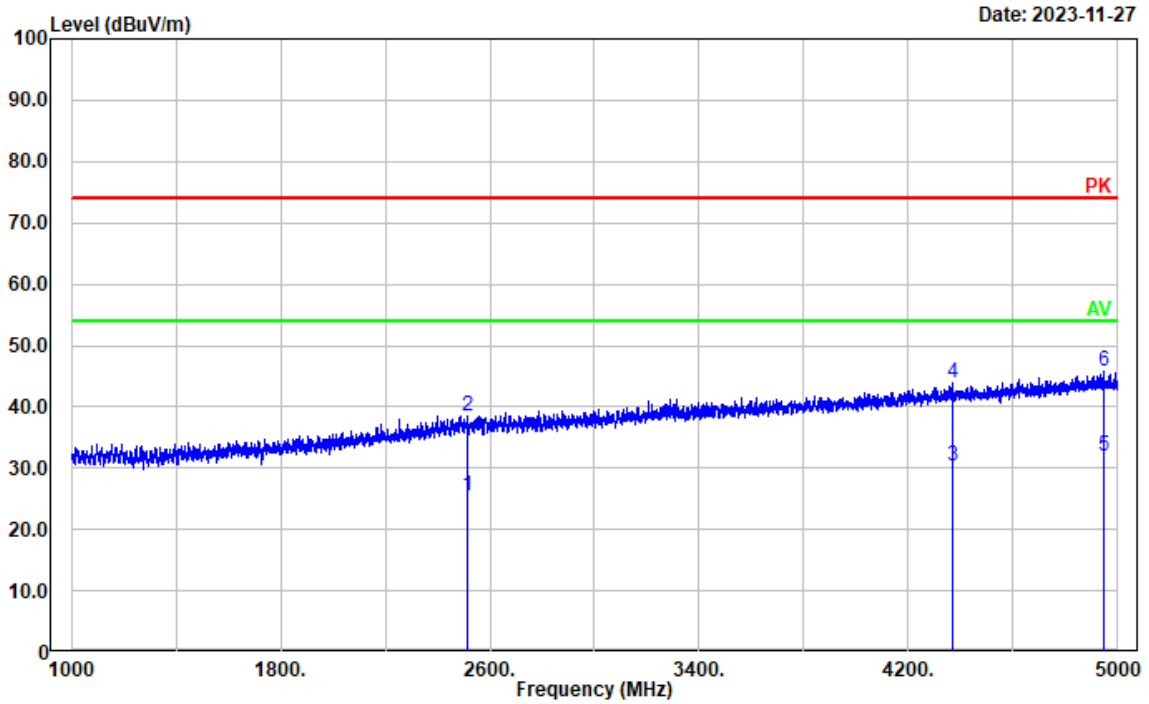


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2516.303	21.07	4.29	25.36	54.00	28.64	Average
2	2516.303	34.23	4.29	38.52	74.00	35.48	Peak
3	4366.273	21.06	9.35	30.41	54.00	23.59	Average
4	4366.273	34.50	9.35	43.85	74.00	30.15	Peak
5	4946.389	20.36	11.75	32.11	54.00	21.89	Average
6	4946.389	33.95	11.75	45.70	74.00	28.30	Peak

Test Mode: M2 (RX 122MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(122)
 Polarization: horizontal
 Note:

Date: 2023-11-27

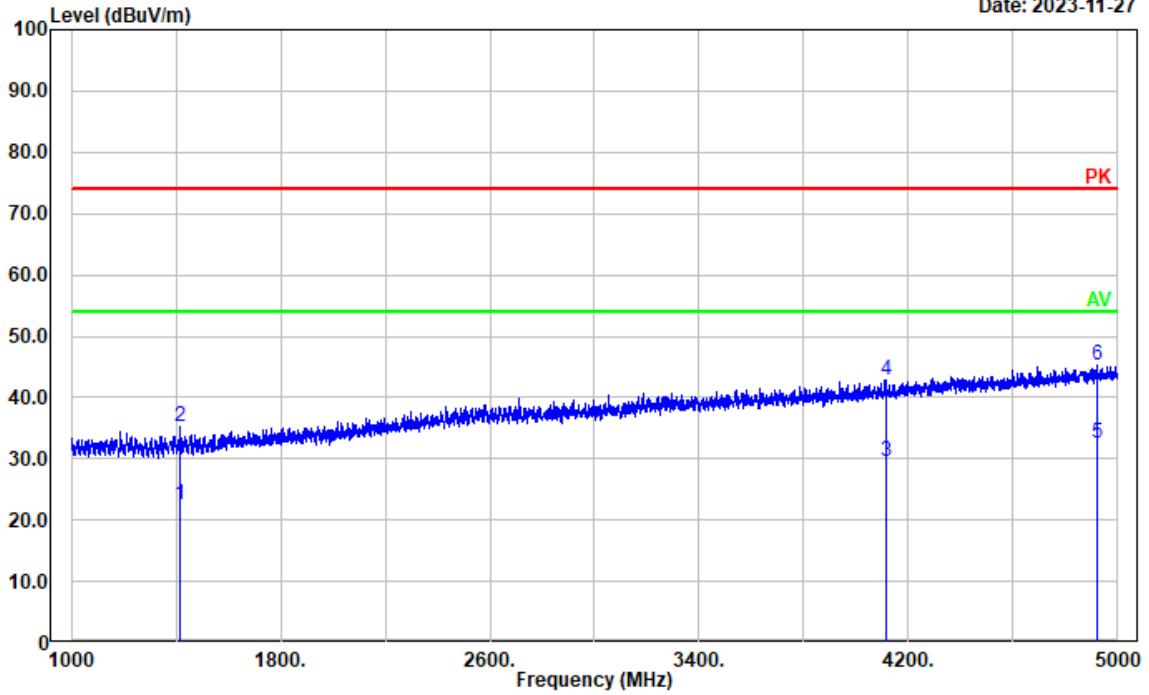

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1413.683	23.42	-0.90	22.52	54.00	31.48	Average
2	1413.683	36.11	-0.90	35.21	74.00	38.79	Peak
3	4111.822	20.89	8.57	29.46	54.00	24.54	Average
4	4111.822	34.13	8.57	42.70	74.00	31.30	Peak
5	4922.384	20.76	11.65	32.41	54.00	21.59	Average
6	4922.384	33.52	11.65	45.17	74.00	28.83	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(122)
 Polarization: vertical
 Note:

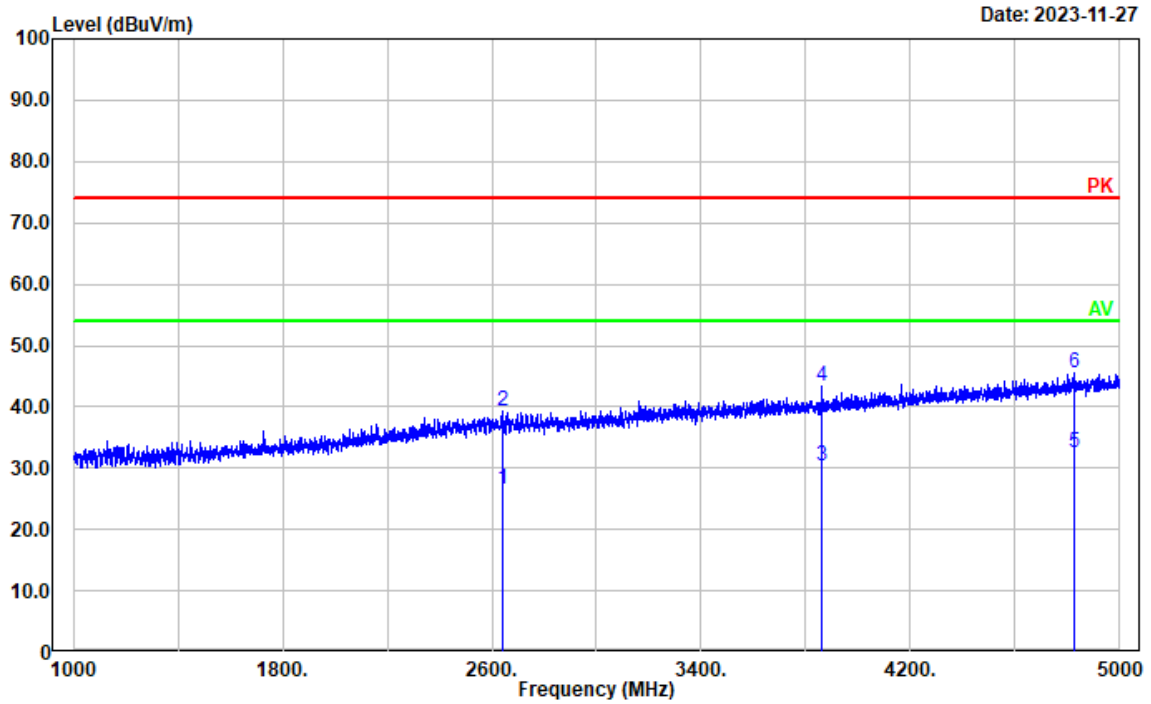


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2638.728	21.94	4.64	26.58	54.00	27.42	Average
2	2638.728	34.75	4.64	39.39	74.00	34.61	Peak
3	3862.172	22.67	7.80	30.47	54.00	23.53	Average
4	3862.172	35.60	7.80	43.40	74.00	30.60	Peak
5	4827.166	21.22	11.27	32.49	54.00	21.51	Average
6	4827.166	34.18	11.27	45.45	74.00	28.55	Peak

Test Mode: M2 (RX 135.9875MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(135.9875)
 Polarization: horizontal
 Note:

Date: 2023-11-27

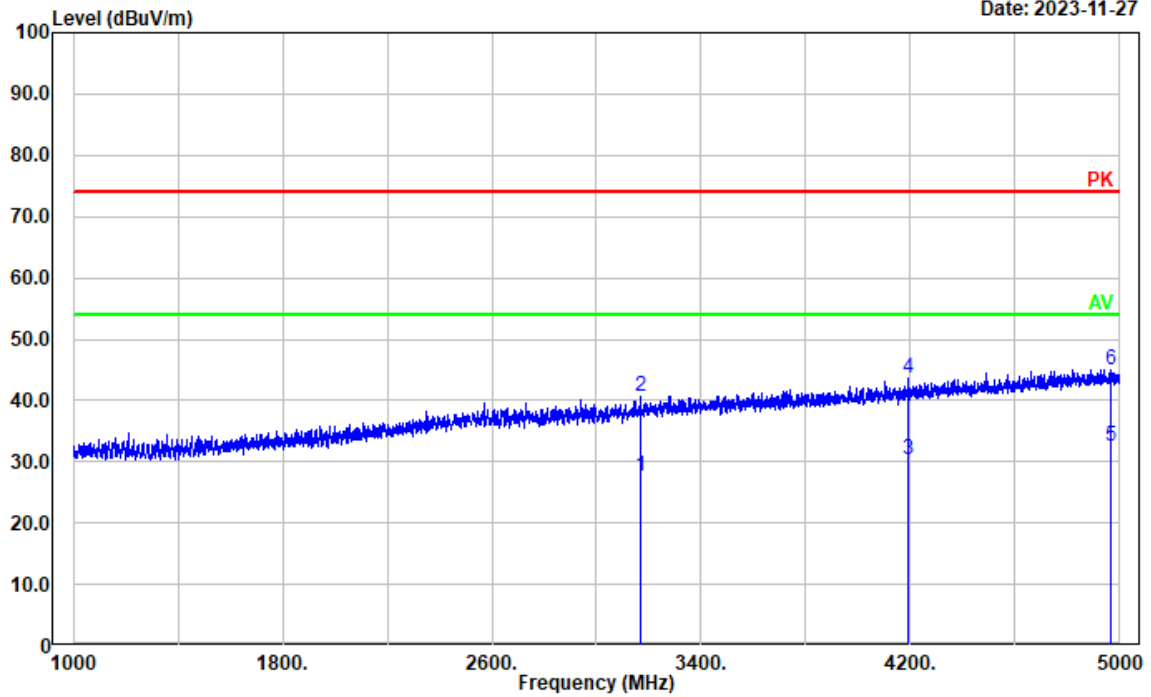

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	3167.634	21.70	5.96	27.66	54.00	26.34	Average
2	3167.634	34.73	5.96	40.69	74.00	33.31	Peak
3	4188.638	21.67	8.80	30.47	54.00	23.53	Average
4	4188.638	34.85	8.80	43.65	74.00	30.35	Peak
5	4966.393	20.64	11.77	32.41	54.00	21.59	Average
6	4966.393	33.29	11.77	45.06	74.00	28.94	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(135.9875)
 Polarization: vertical
 Note:

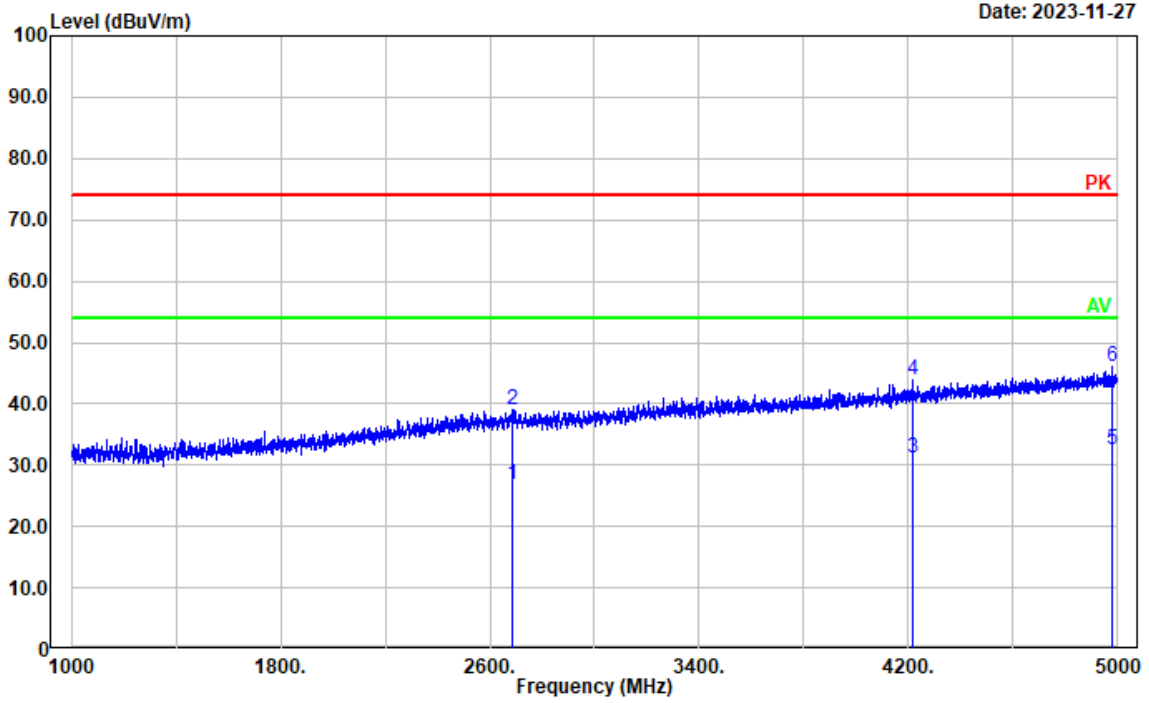


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2683.537	22.13	4.75	26.88	54.00	27.12	Average
2	2683.537	34.37	4.75	39.12	74.00	34.88	Peak
3	4218.244	22.22	8.92	31.14	54.00	22.86	Average
4	4218.244	35.08	8.92	44.00	74.00	30.00	Peak
5	4978.396	20.80	11.78	32.58	54.00	21.42	Average
6	4978.396	34.20	11.78	45.98	74.00	28.02	Peak

Test Mode: M2 (RX 136.0125MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(136.0125)
 Polarization: horizontal
 Note:

Date: 2023-11-27

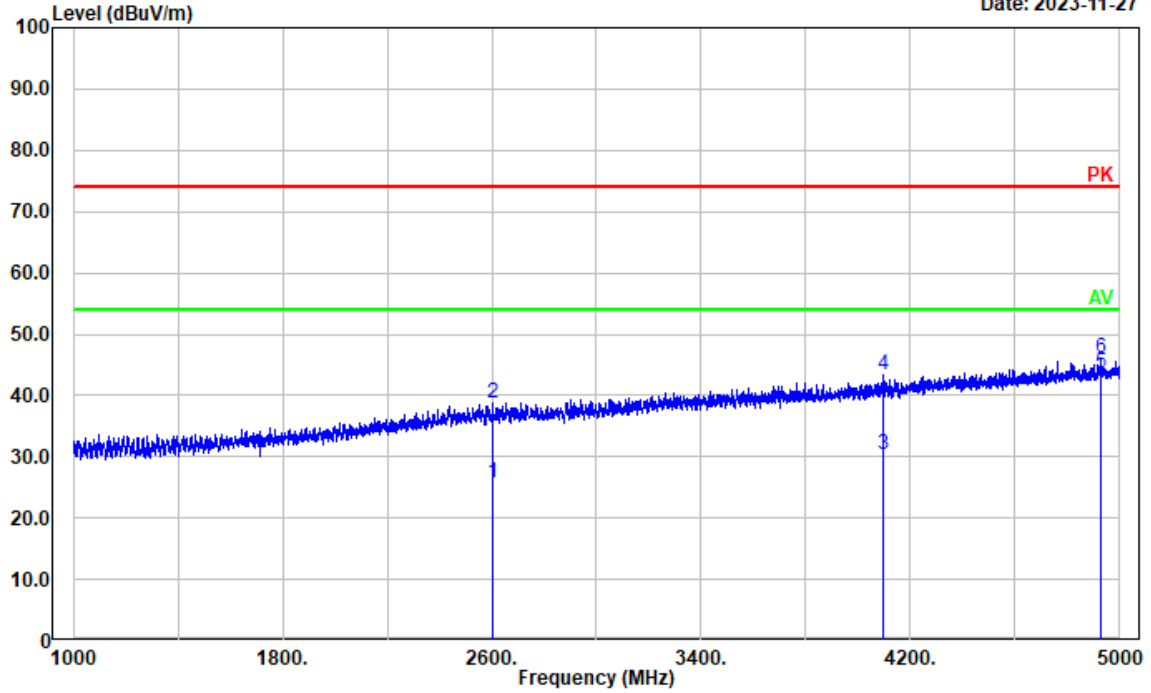

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2603.521	21.05	4.58	25.63	54.00	28.37	Average
2	2603.521	34.28	4.58	38.86	74.00	35.14	Peak
3	4096.619	21.87	8.55	30.42	54.00	23.58	Average
4	4096.619	34.88	8.55	43.43	74.00	30.57	Peak
5	4924.785	31.91	11.67	43.58	54.00	10.42	Average
6	4924.785	34.49	11.67	46.16	74.00	27.84	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(136.0125)
 Polarization: vertical
 Note:

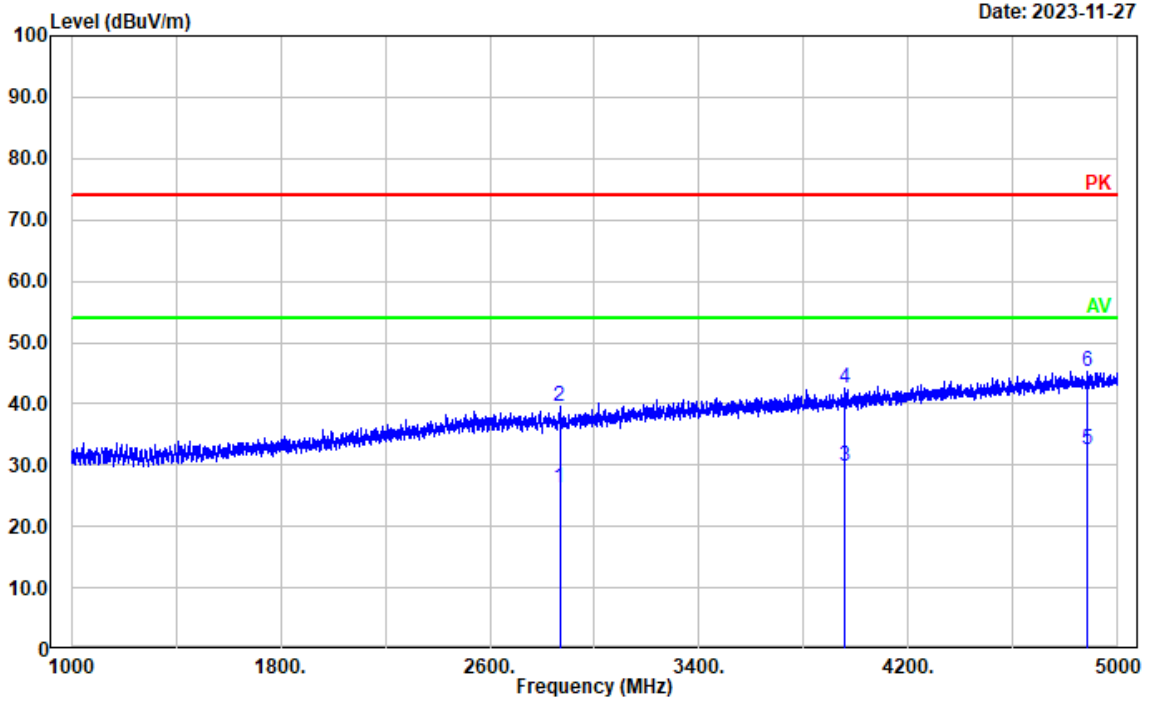


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2866.773	21.27	5.09	26.36	54.00	27.64	Average
2	2866.773	34.37	5.09	39.46	74.00	34.54	Peak
3	3958.992	21.59	8.09	29.68	54.00	24.32	Average
4	3958.992	34.57	8.09	42.66	74.00	31.34	Peak
5	4884.777	20.98	11.49	32.47	54.00	21.53	Average
6	4884.777	33.78	11.49	45.27	74.00	28.73	Peak

Test Mode: M2 (RX 155MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(155)
 Polarization: horizontal
 Note:

Date: 2023-11-27

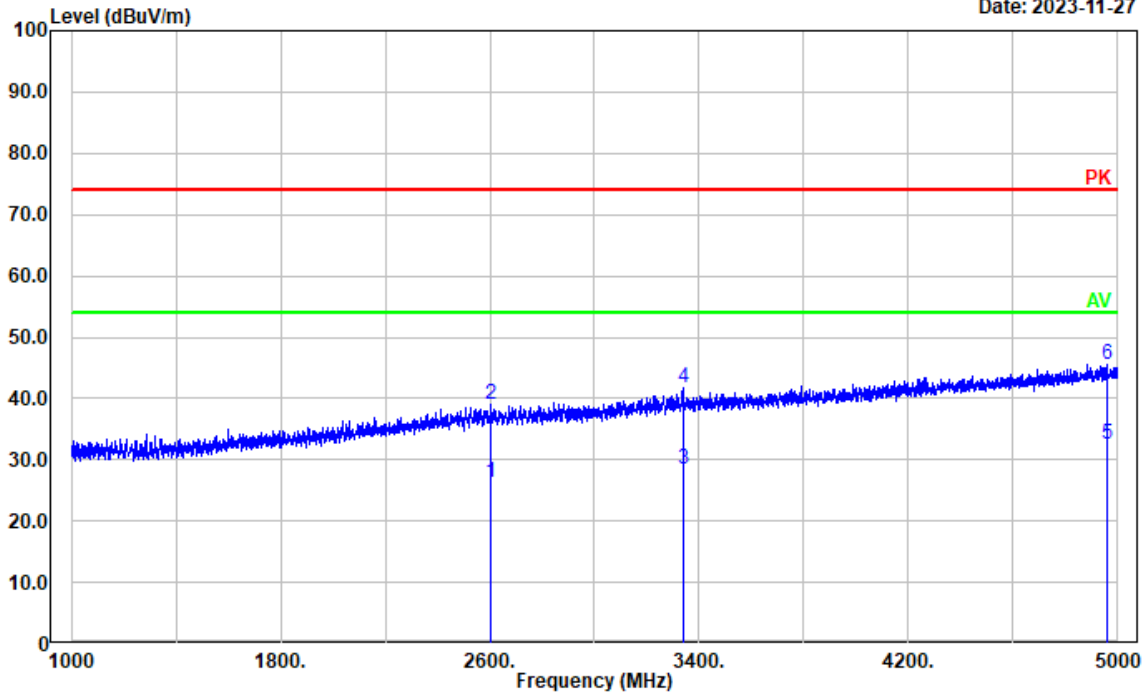

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2605.921	21.77	4.59	26.36	54.00	27.64	Average
2	2605.921	34.51	4.59	39.10	74.00	34.90	Peak
3	3337.267	22.04	6.40	28.44	54.00	25.56	Average
4	3337.267	35.21	6.40	41.61	74.00	32.39	Peak
5	4957.591	20.70	11.77	32.47	54.00	21.53	Average
6	4957.591	33.75	11.77	45.52	74.00	28.48	Peak


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(155)
 Polarization: vertical
 Note:

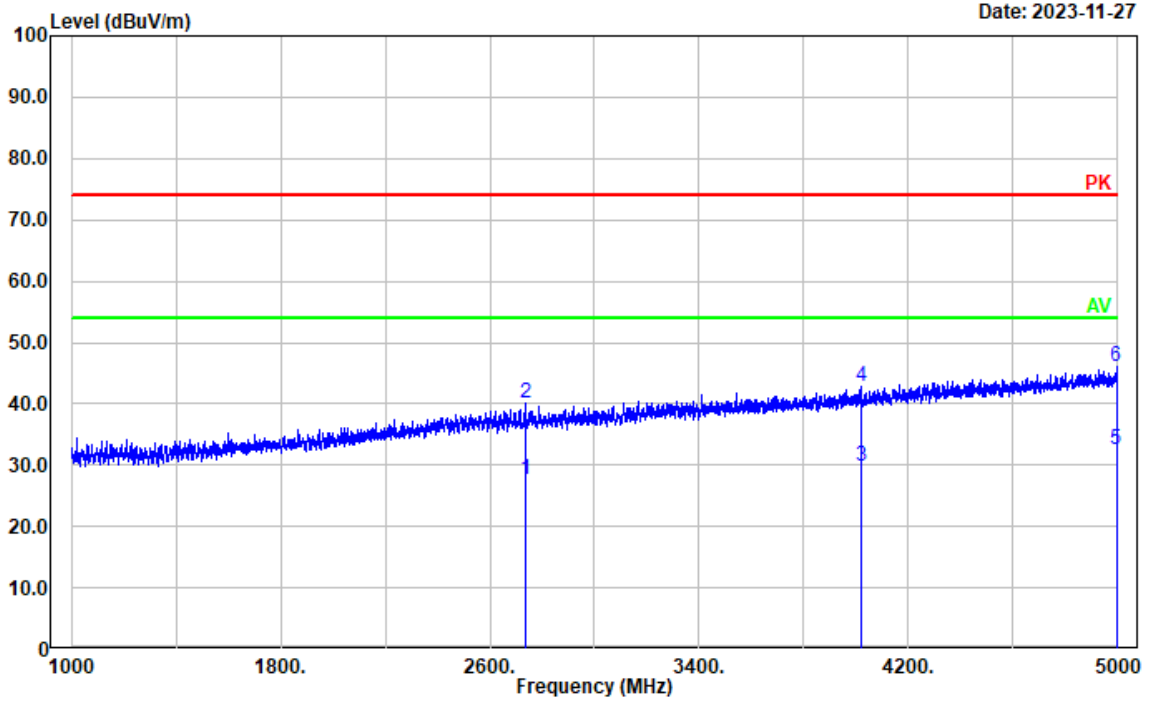

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2736.347	22.69	4.86	27.55	54.00	26.45	Average
2	2736.347	35.16	4.86	40.02	74.00	33.98	Peak
3	4016.603	21.50	8.19	29.69	54.00	24.31	Average
4	4016.603	34.57	8.19	42.76	74.00	31.24	Peak
5	4994.399	20.68	11.79	32.47	54.00	21.53	Average
6	4994.399	34.18	11.79	45.97	74.00	28.03	Peak

Test Mode: M2 (RX 173.9875MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(173.9875)
 Polarization: horizontal
 Note:

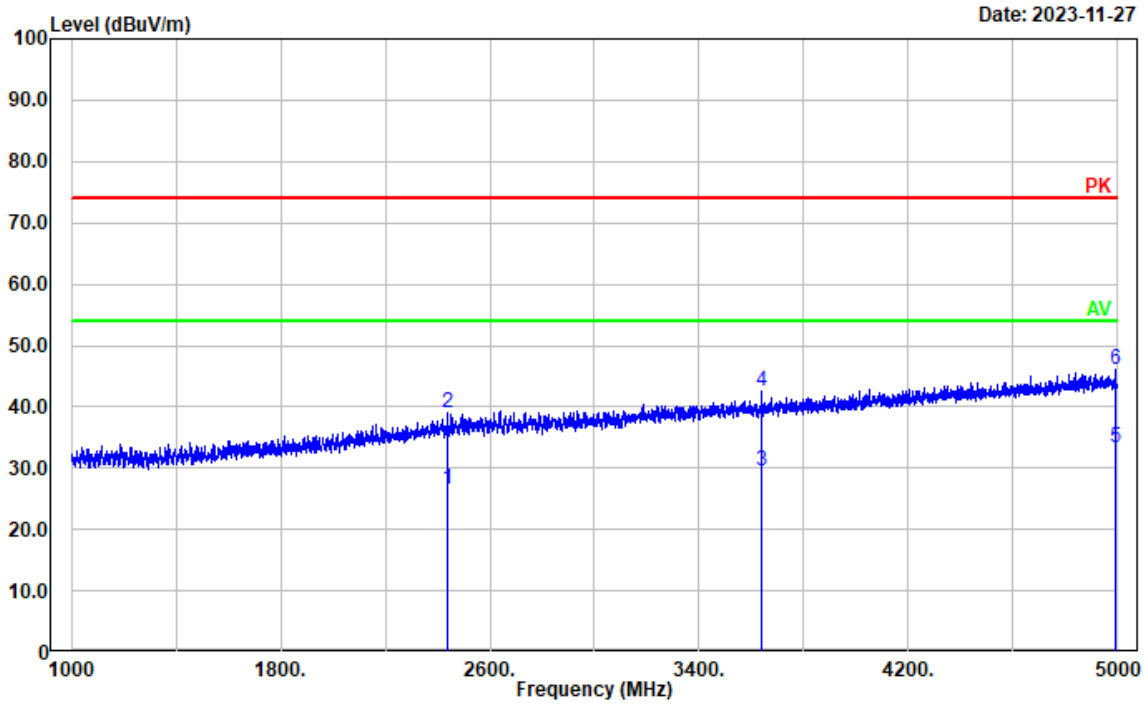

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2438.688	22.54	4.01	26.55	54.00	27.45	Average
2	2438.688	35.11	4.01	39.12	74.00	34.88	Peak
3	3638.128	22.47	7.20	29.67	54.00	24.33	Average
4	3638.128	35.36	7.20	42.56	74.00	31.44	Peak
5	4989.598	21.63	11.78	33.41	54.00	20.59	Average
6	4989.598	34.27	11.78	46.05	74.00	27.95	Peak


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(173.9875)
 Polarization: vertical
 Note:

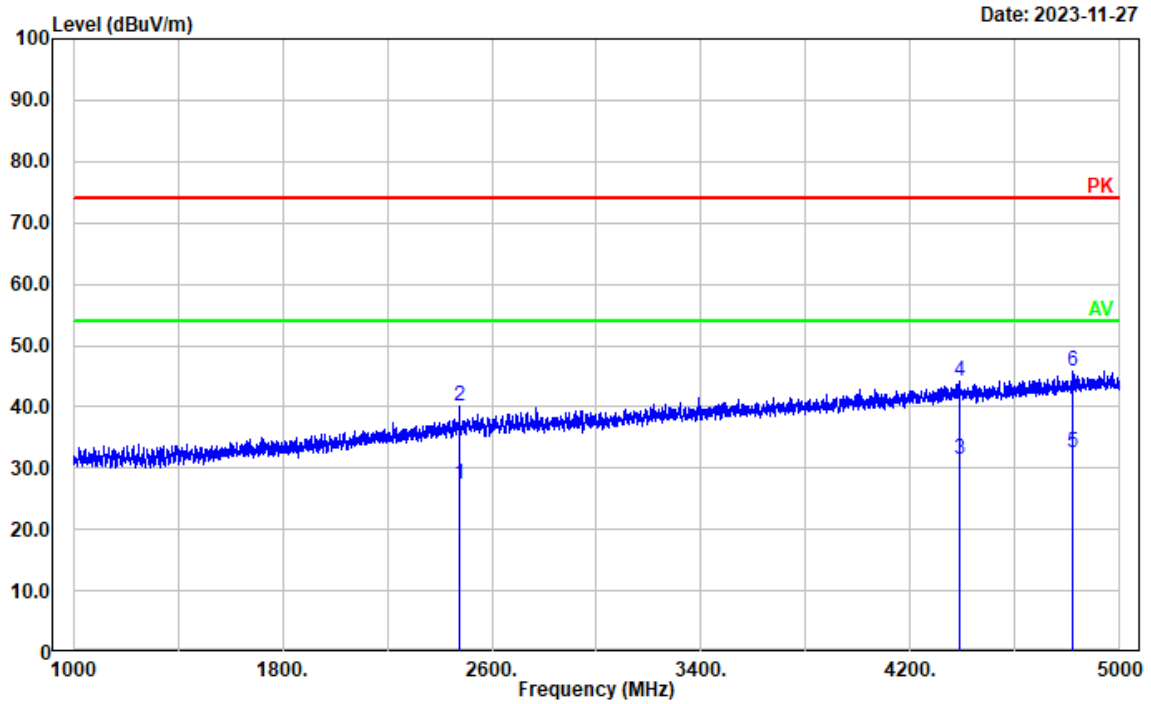

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2474.695	23.31	4.15	27.46	54.00	26.54	Average
2	2474.695	36.06	4.15	40.21	74.00	33.79	Peak
3	4390.278	22.03	9.41	31.44	54.00	22.56	Average
4	4390.278	34.83	9.41	44.24	74.00	29.76	Peak
5	4822.364	21.33	11.25	32.58	54.00	21.42	Average
6	4822.364	34.66	11.25	45.91	74.00	28.09	Peak


Test Mode: M2(RX 220.0125MHz)

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(220.0125)
 Polarization: horizontal
 Note:

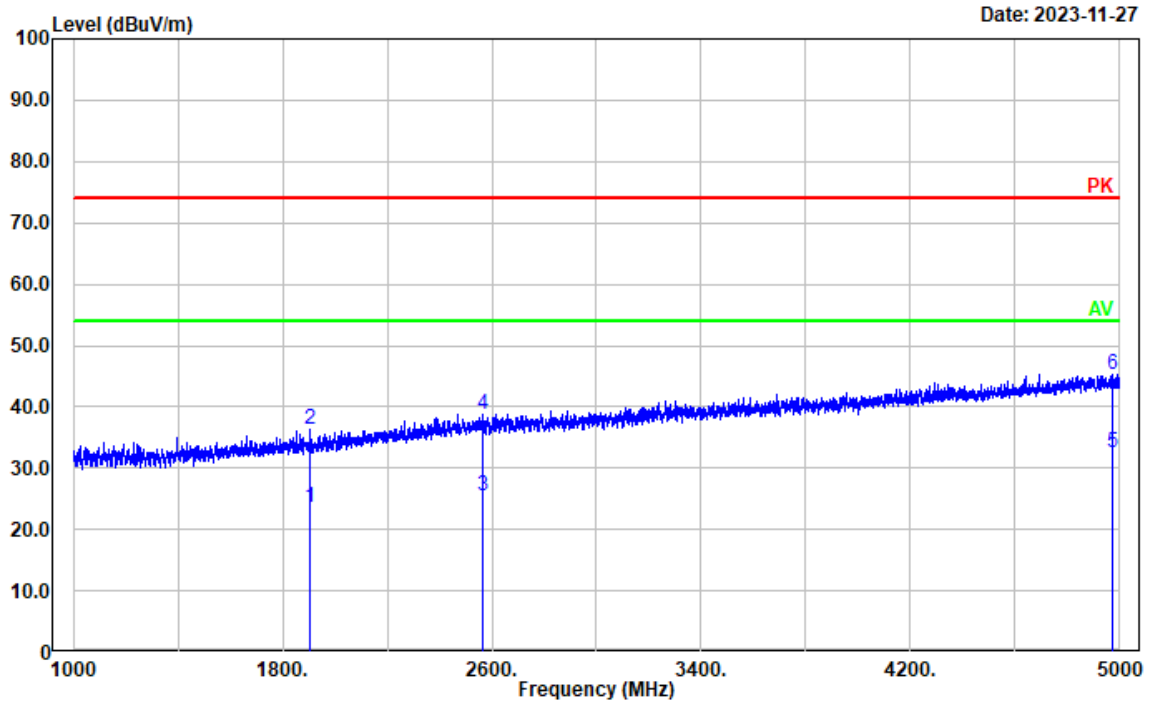

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1905.781	22.43	1.04	23.47	54.00	30.53	Average
2	1905.781	35.18	1.04	36.22	74.00	37.78	Peak
3	2562.713	20.89	4.47	25.36	54.00	28.64	Average
4	2562.713	34.37	4.47	38.84	74.00	35.16	Peak
5	4969.594	20.64	11.77	32.41	54.00	21.59	Average
6	4969.594	33.52	11.77	45.29	74.00	28.71	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(220.0125)
 Polarization: vertical
 Note:

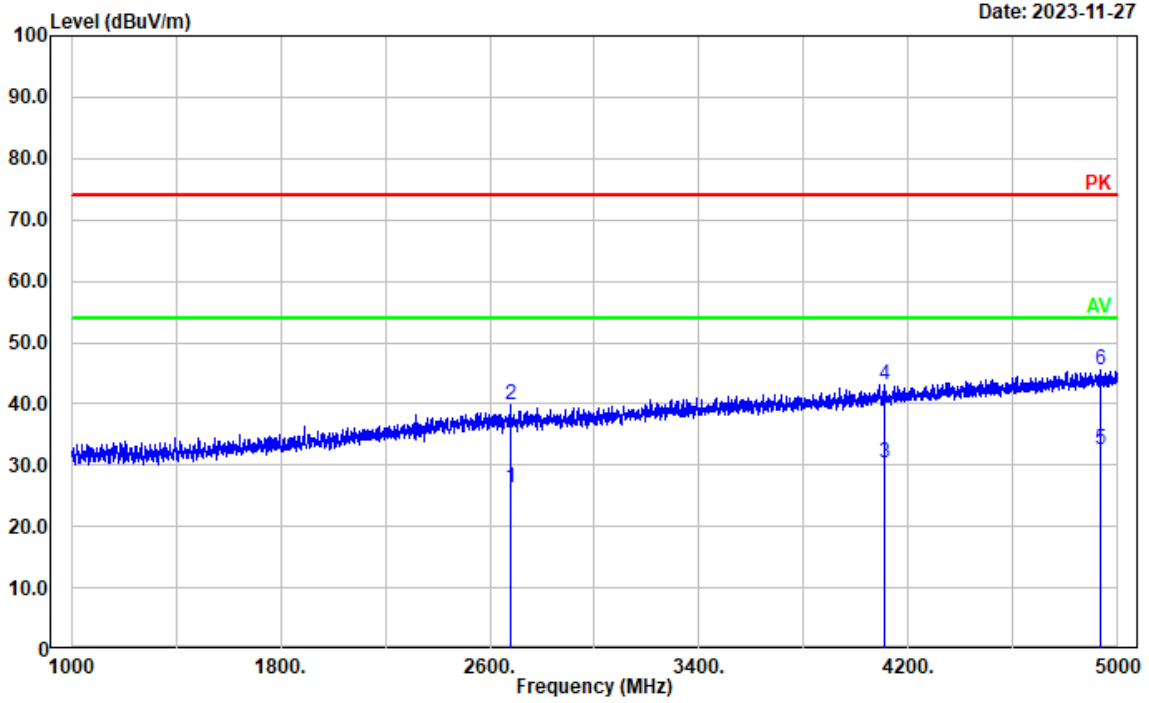


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2680.336	21.67	4.74	26.41	54.00	27.59	Average
2	2680.336	34.98	4.74	39.72	74.00	34.28	Peak
3	4111.022	21.68	8.57	30.25	54.00	23.75	Average
4	4111.022	34.53	8.57	43.10	74.00	30.90	Peak
5	4932.787	20.71	11.70	32.41	54.00	21.59	Average
6	4932.787	33.86	11.70	45.56	74.00	28.44	Peak

Test Mode: M2 (RX 240MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(240)
 Polarization: horizontal
 Note:

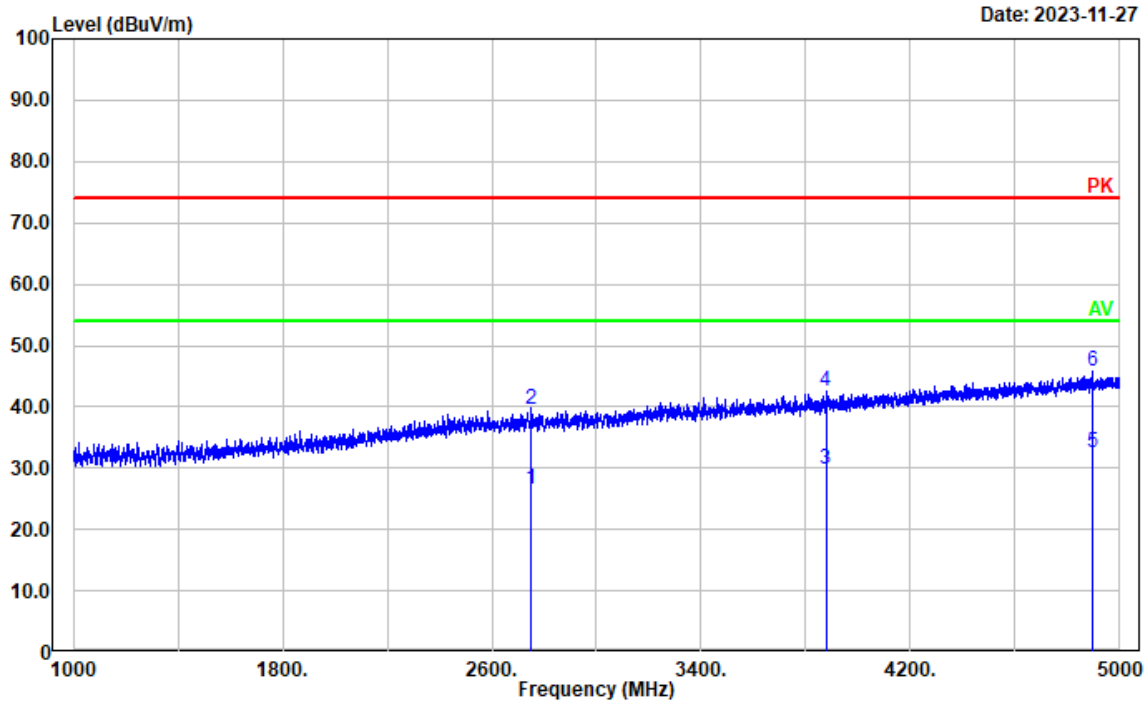

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2751.550	21.75	4.88	26.63	54.00	27.37	Average
2	2751.550	34.82	4.88	39.70	74.00	34.30	Peak
3	3876.575	22.04	7.84	29.88	54.00	24.12	Average
4	3876.575	34.59	7.84	42.43	74.00	31.57	Peak
5	4896.779	20.91	11.56	32.47	54.00	21.53	Average
6	4896.779	34.16	11.56	45.72	74.00	28.28	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(240)
 Polarization: vertical
 Note:

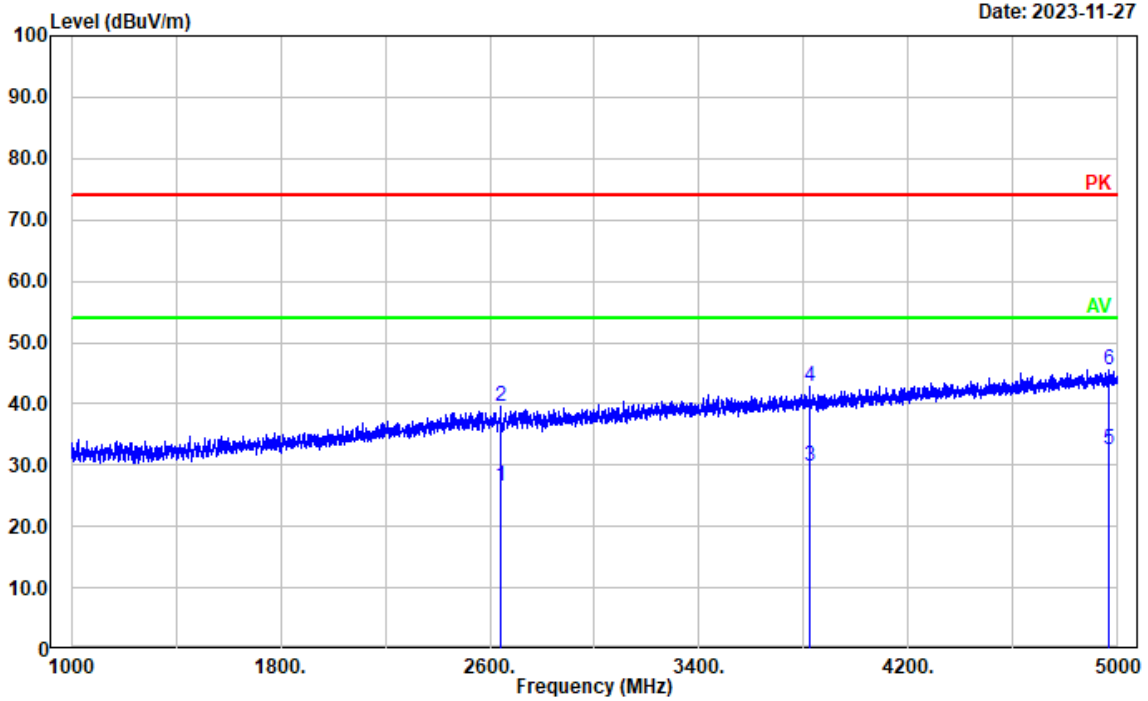


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2640.328	21.93	4.64	26.57	54.00	27.43	Average
2	2640.328	34.93	4.64	39.57	74.00	34.43	Peak
3	3821.364	22.11	7.76	29.87	54.00	24.13	Average
4	3821.364	34.96	7.76	42.72	74.00	31.28	Peak
5	4963.993	20.79	11.77	32.56	54.00	21.44	Average
6	4963.993	33.86	11.77	45.63	74.00	28.37	Peak

Test Mode: M2 (RX 259.9875MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(259.9875)
 Polarization: horizontal
 Note:

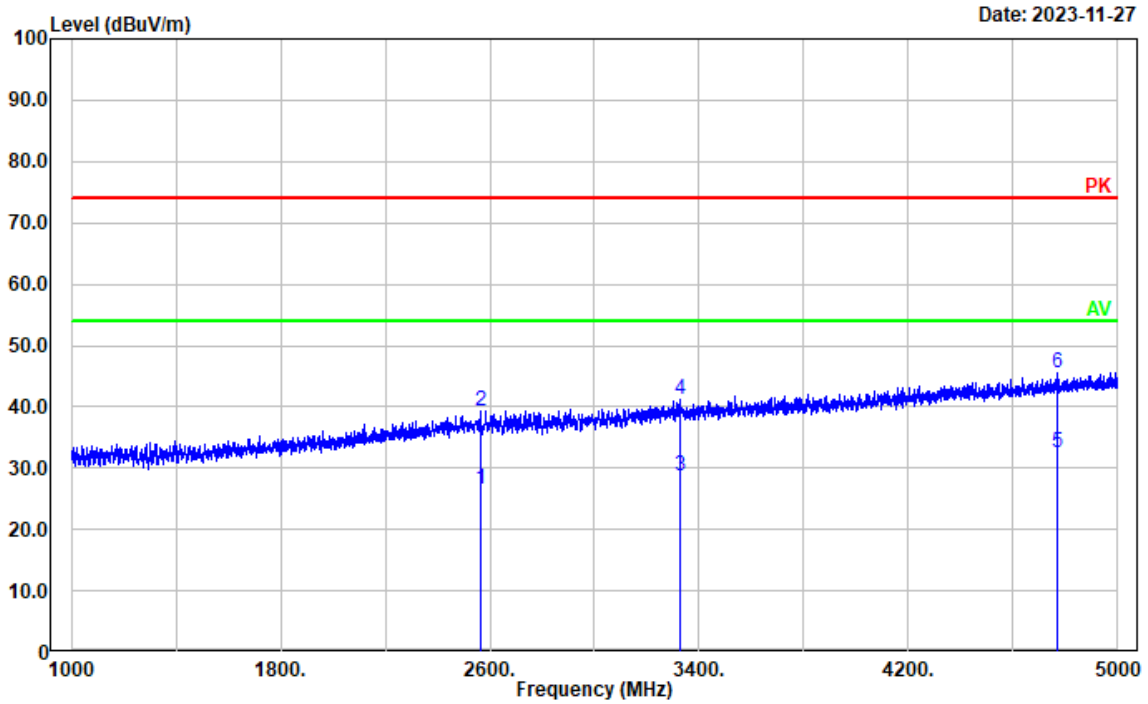

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2562.713	22.08	4.47	26.55	54.00	27.45	Average
2	2562.713	34.72	4.47	39.19	74.00	34.81	Peak
3	3330.066	22.38	6.39	28.77	54.00	25.23	Average
4	3330.066	34.93	6.39	41.32	74.00	32.68	Peak
5	4767.954	21.40	11.01	32.41	54.00	21.59	Average
6	4767.954	34.63	11.01	45.64	74.00	28.36	Peak


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(259.9875)
 Polarization: vertical
 Note:

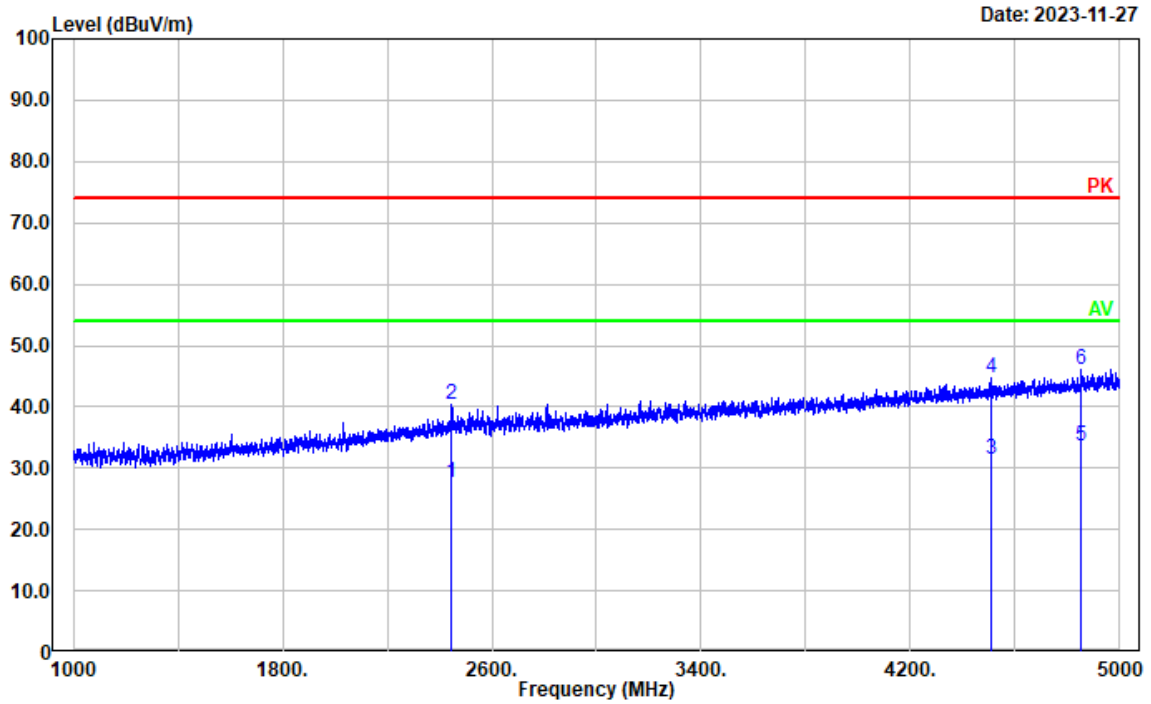

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2446.689	23.51	4.05	27.56	54.00	26.44	Average
2	2446.689	36.23	4.05	40.28	74.00	33.72	Peak
3	4505.501	21.63	9.83	31.46	54.00	22.54	Average
4	4505.501	34.94	9.83	44.77	74.00	29.23	Peak
5	4852.771	22.35	11.34	33.69	54.00	20.31	Average
6	4852.771	34.72	11.34	46.06	74.00	27.94	Peak

Test Mode: M2 (RX350.0125MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(350.0125)
 Polarization: horizontal
 Note:

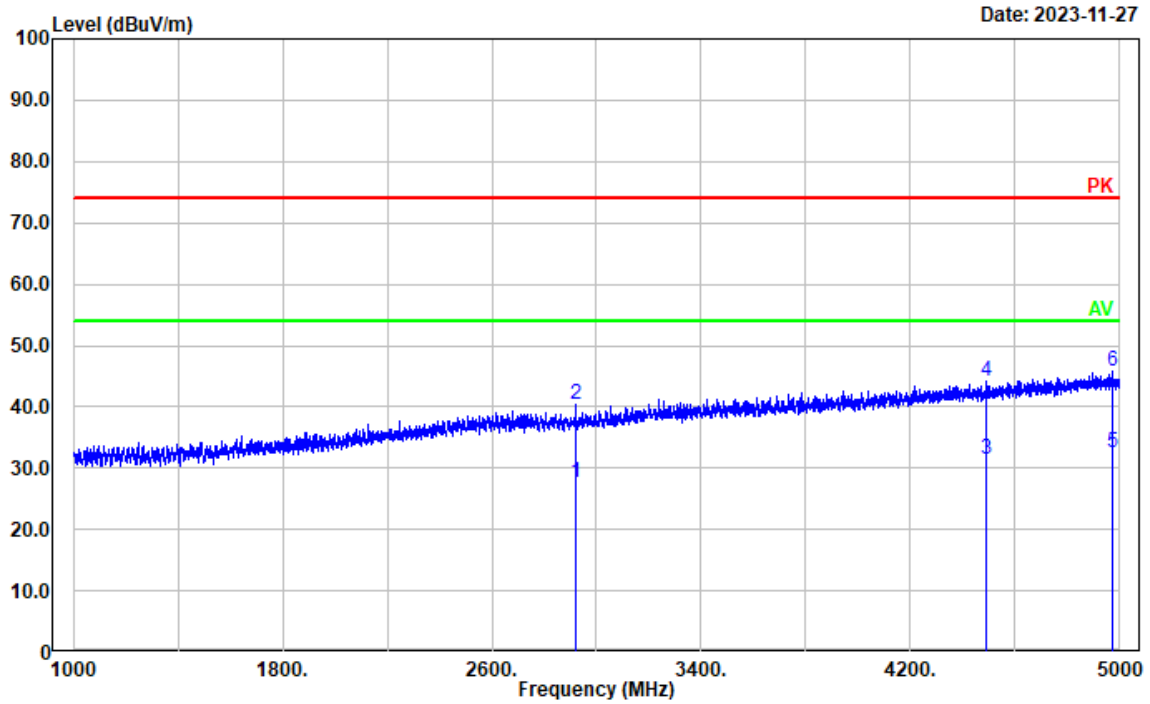

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2918.784	22.45	5.21	27.66	54.00	26.34	Average
2	2918.784	35.20	5.21	40.41	74.00	33.59	Peak
3	4489.498	21.64	9.76	31.40	54.00	22.60	Average
4	4489.498	34.46	9.76	44.22	74.00	29.78	Peak
5	4974.395	20.77	11.78	32.55	54.00	21.45	Average
6	4974.395	33.97	11.78	45.75	74.00	28.25	Peak


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(350.0125)
 Polarization: vertical
 Note:

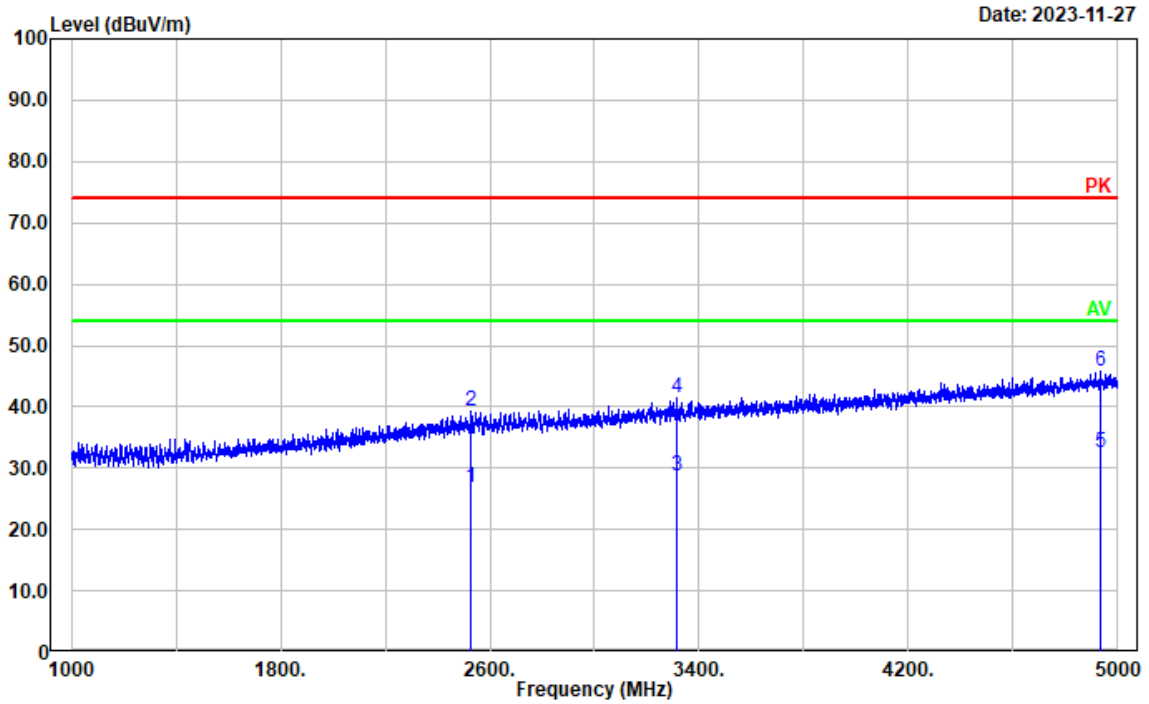

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2529.906	22.39	4.35	26.74	54.00	27.26	Average
2	2529.906	34.97	4.35	39.32	74.00	34.68	Peak
3	3315.663	22.26	6.35	28.61	54.00	25.39	Average
4	3315.663	35.08	6.35	41.43	74.00	32.57	Peak
5	4935.187	20.71	11.70	32.41	54.00	21.59	Average
6	4935.187	34.00	11.70	45.70	74.00	28.30	Peak


Test Mode: M2 (RX370MHz)

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(370)
 Polarization: horizontal
 Note:

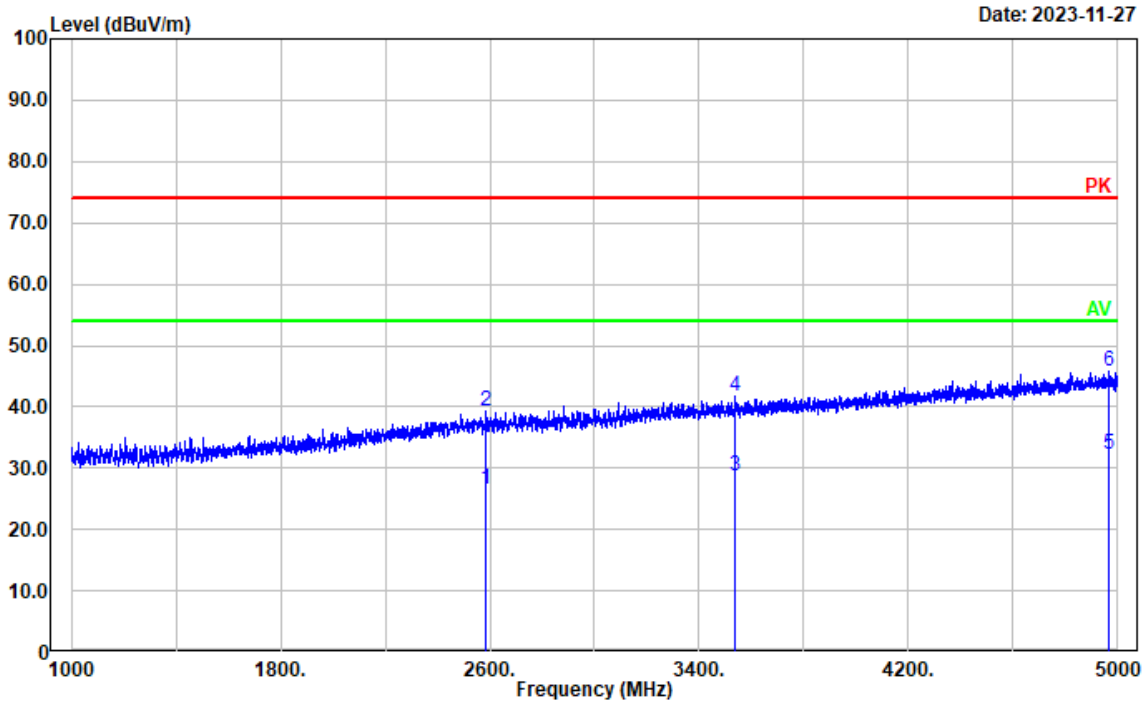

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2585.917	22.04	4.54	26.58	54.00	27.42	Average
2	2585.917	34.67	4.54	39.21	74.00	34.79	Peak
3	3538.108	21.71	7.06	28.77	54.00	25.23	Average
4	3538.108	34.75	7.06	41.81	74.00	32.19	Peak
5	4964.793	20.36	11.78	32.14	54.00	21.86	Average
6	4964.793	34.05	11.78	45.83	74.00	28.17	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(370)
 Polarization: vertical
 Note:

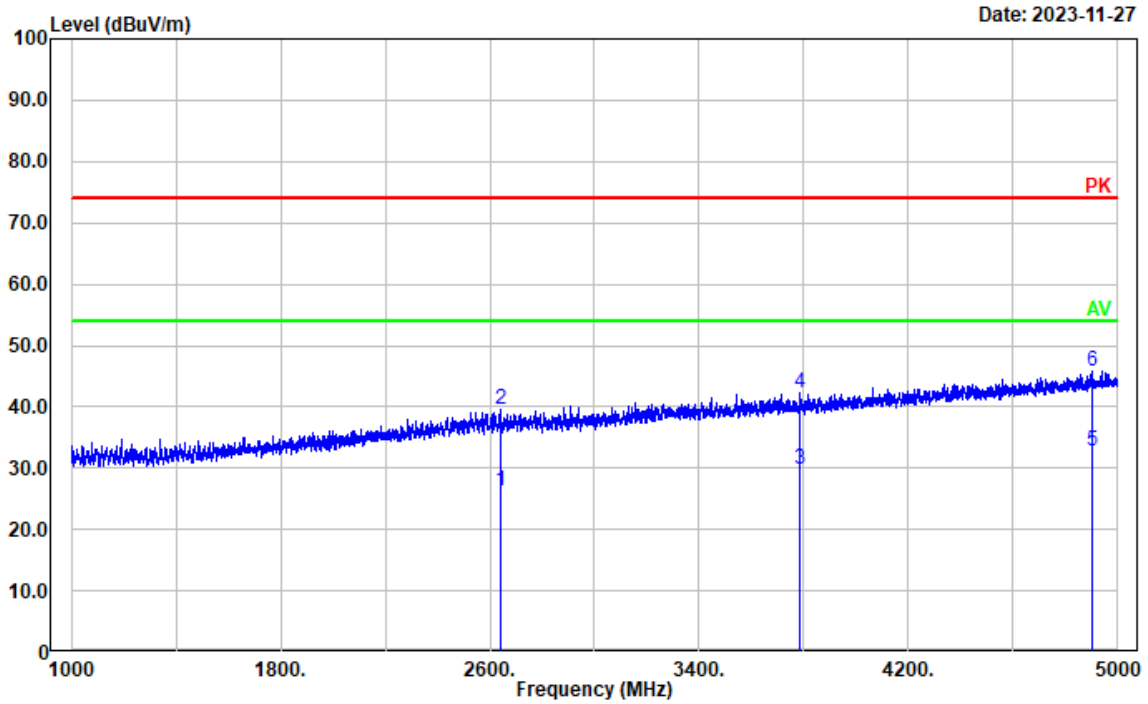


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2638.728	21.72	4.64	26.36	54.00	27.64	Average
2	2638.728	34.96	4.64	39.60	74.00	34.40	Peak
3	3783.757	22.01	7.68	29.69	54.00	24.31	Average
4	3783.757	34.69	7.68	42.37	74.00	31.63	Peak
5	4901.580	21.30	11.58	32.88	54.00	21.12	Average
6	4901.580	34.30	11.58	45.88	74.00	28.12	Peak

Test Mode: M2 (RX389.9875MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(389.9875)
 Polarization: horizontal
 Note:

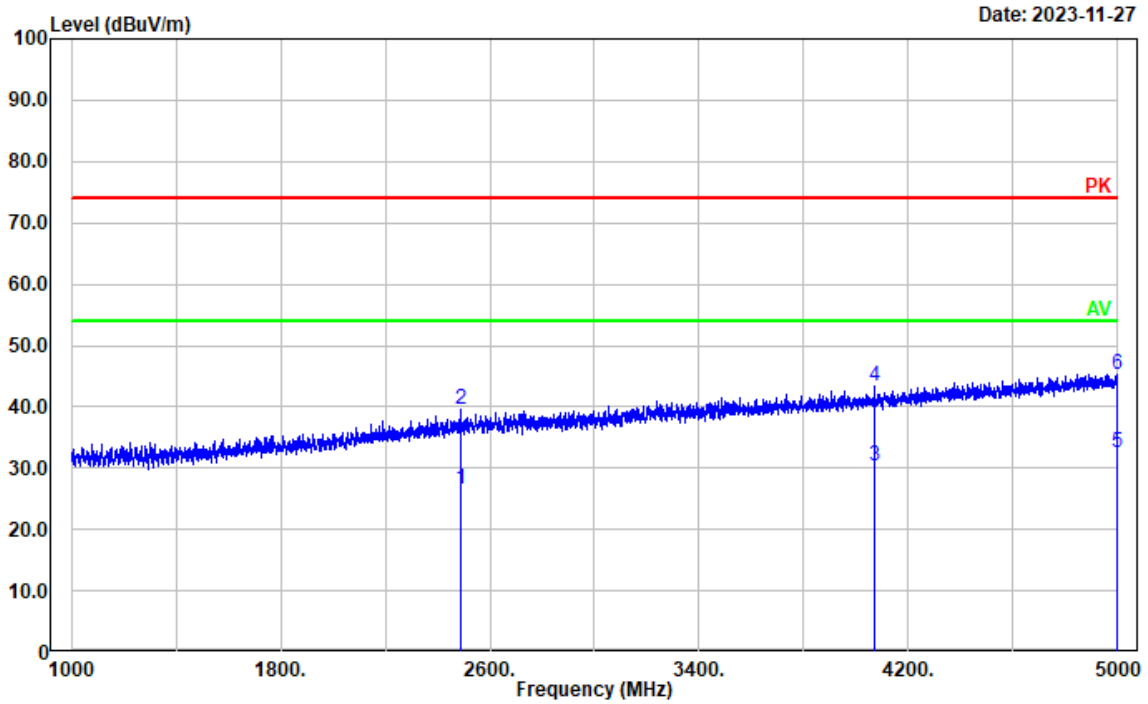

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2487.498	22.40	4.18	26.58	54.00	27.42	Average
2	2487.498	35.39	4.18	39.57	74.00	34.43	Peak
3	4068.614	22.04	8.40	30.44	54.00	23.56	Average
4	4068.614	35.04	8.40	43.44	74.00	30.56	Peak
5	4995.199	20.77	11.79	32.56	54.00	21.44	Average
6	4995.199	33.55	11.79	45.34	74.00	28.66	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(389.9875)
 Polarization: vertical
 Note:

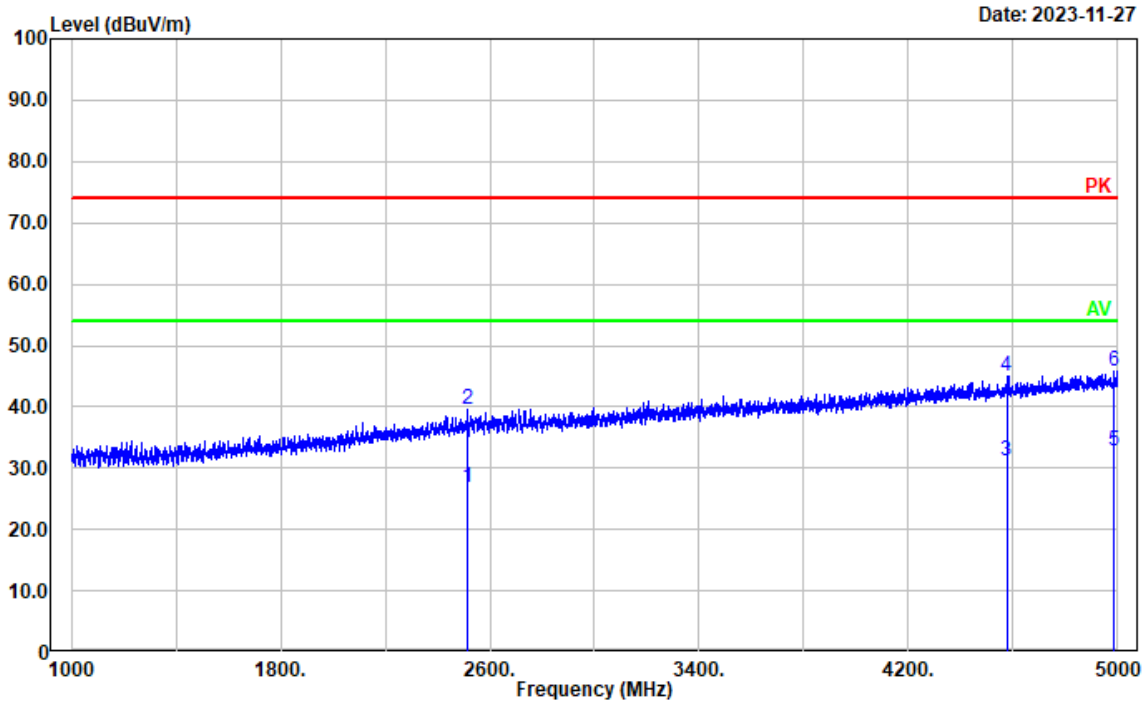


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2513.103	22.46	4.28	26.74	54.00	27.26	Average
2	2513.103	35.28	4.28	39.56	74.00	34.44	Peak
3	4575.115	21.06	10.19	31.25	54.00	22.75	Average
4	4575.115	34.75	10.19	44.94	74.00	29.06	Peak
5	4986.397	20.87	11.79	32.66	54.00	21.34	Average
6	4986.397	34.03	11.79	45.82	74.00	28.18	Peak

Test Mode: M2 (RX400.0125MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(400.0125)
 Polarization: horizontal
 Note:

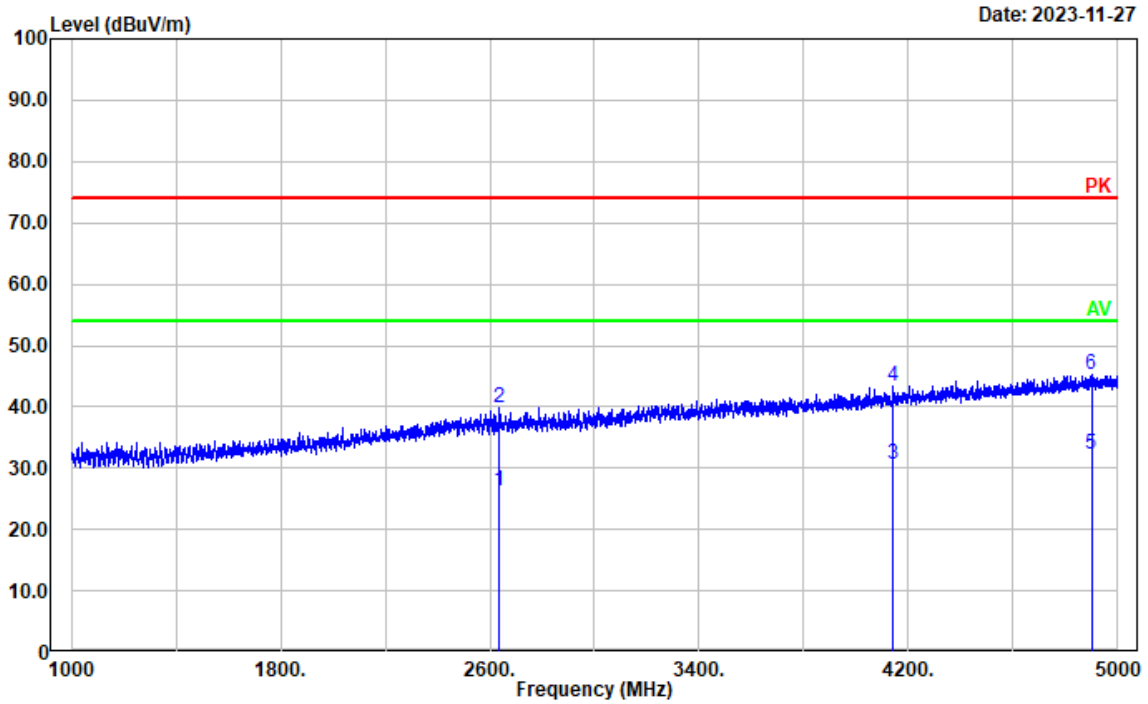

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2637.127	21.76	4.62	26.38	54.00	27.62	Average
2	2637.127	35.19	4.62	39.81	74.00	34.19	Peak
3	4140.628	21.98	8.57	30.55	54.00	23.45	Average
4	4140.628	34.87	8.57	43.44	74.00	30.56	Peak
5	4899.180	20.57	11.57	32.14	54.00	21.86	Average
6	4899.180	33.66	11.57	45.23	74.00	28.77	Peak


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(400.0125)
 Polarization: vertical
 Note:

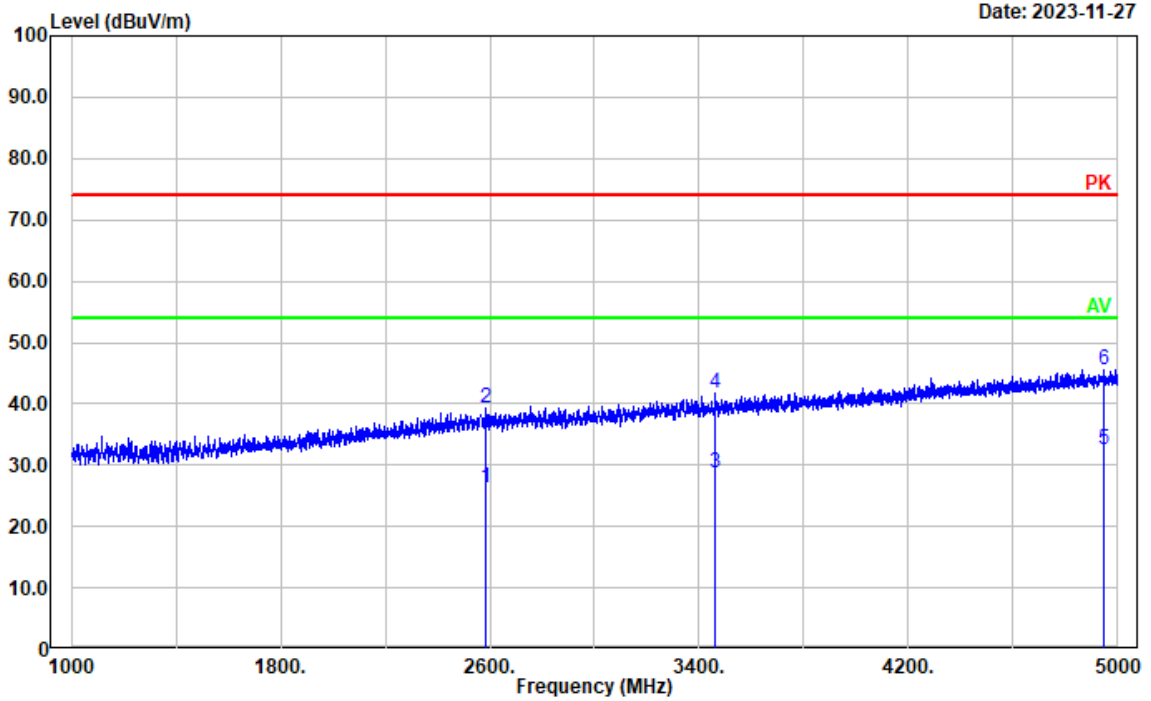

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2586.717	21.84	4.54	26.38	54.00	27.62	Average
2	2586.717	34.83	4.54	39.37	74.00	34.63	Peak
3	3462.093	21.81	6.80	28.61	54.00	25.39	Average
4	3462.093	34.81	6.80	41.61	74.00	32.39	Peak
5	4947.990	20.68	11.76	32.44	54.00	21.56	Average
6	4947.990	33.84	11.76	45.60	74.00	28.40	Peak

Test Mode: M2 (RX 460MHz)

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(460)
 Polarization: horizontal
 Note:

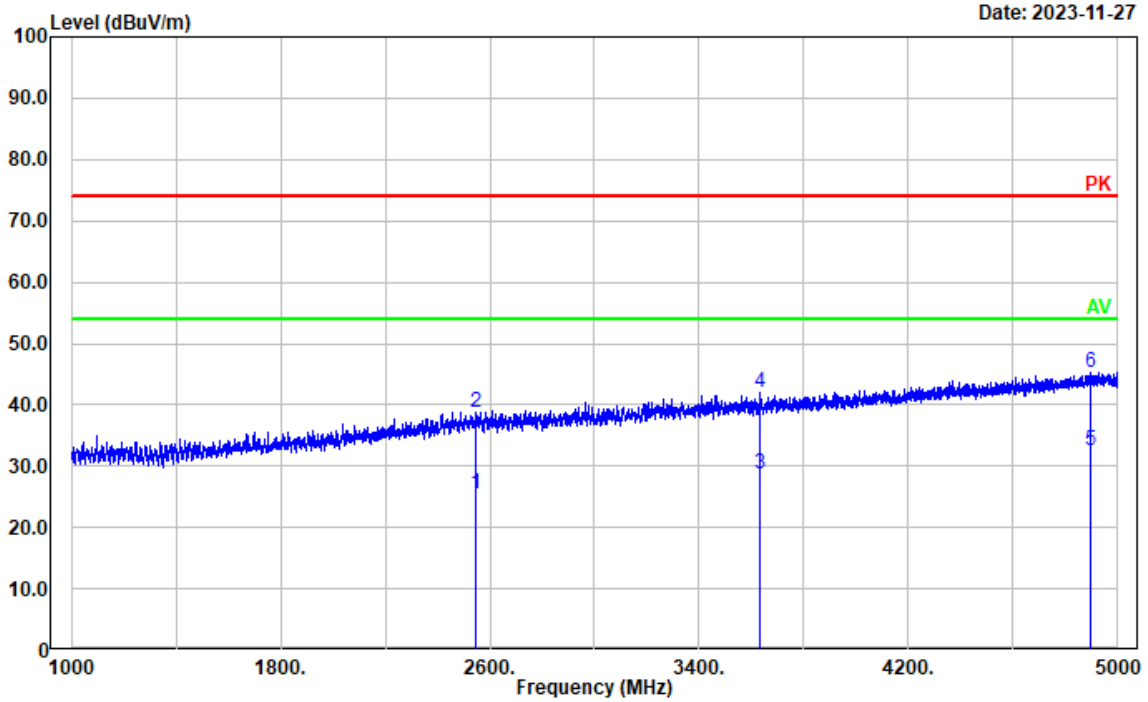


Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2545.109	20.95	4.41	25.36	54.00	28.64	Average
2	2545.109	34.41	4.41	38.82	74.00	35.18	Peak
3	3632.527	21.47	7.20	28.67	54.00	25.33	Average
4	3632.527	34.74	7.20	41.94	74.00	32.06	Peak
5	4895.979	20.89	11.56	32.45	54.00	21.55	Average
6	4895.979	33.68	11.56	45.24	74.00	28.76	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(460)
 Polarization: vertical
 Note:


Date: 2023-11-27

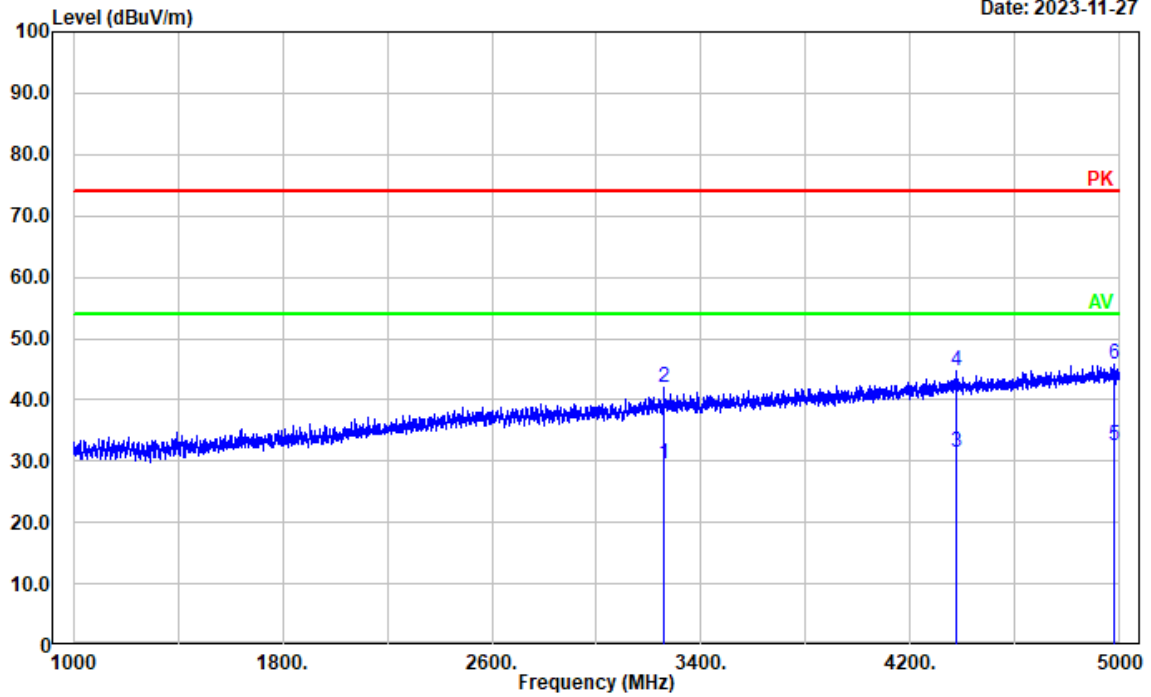

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	3258.852	23.45	6.22	29.67	54.00	24.33	Average
2	3258.852	35.91	6.22	42.13	74.00	31.87	Peak
3	4377.476	22.08	9.38	31.46	54.00	22.54	Average
4	4377.476	35.24	9.38	44.62	74.00	29.38	Peak
5	4979.196	20.72	11.78	32.50	54.00	21.50	Average
6	4979.196	33.90	11.78	45.68	74.00	28.32	Peak

Test Mode: M2 (RX 519.9875MHz)


Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(519.9875)
 Polarization: horizontal
 Note:

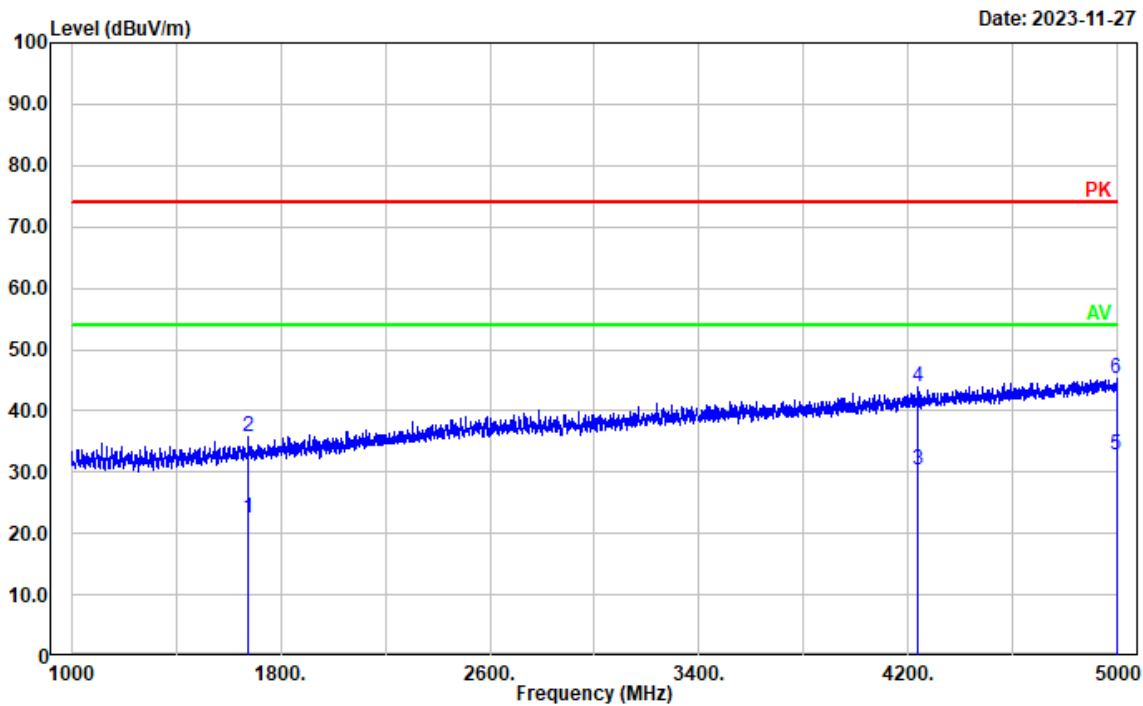

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1676.135	22.46	0.05	22.51	54.00	31.49	Average
2	1676.135	35.71	0.05	35.76	74.00	38.24	Peak
3	4235.847	21.25	8.98	30.23	54.00	23.77	Average
4	4235.847	34.99	8.98	43.97	74.00	30.03	Peak
5	4994.399	20.87	11.79	32.66	54.00	21.34	Average
6	4994.399	33.60	11.79	45.39	74.00	28.61	Peak

Project No.: CR231165351-RF
 Tester: Tao Zhu
 Test Mode: Charging & Receiving(519.9875)
 Polarization: vertical
 Note:

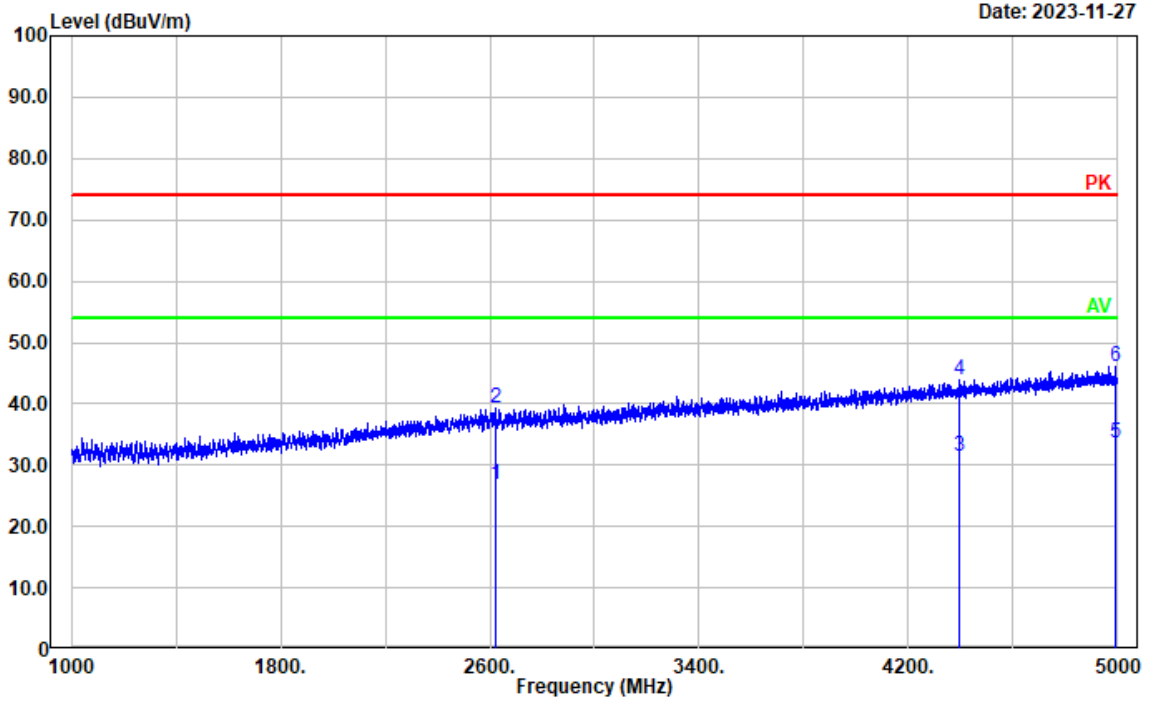

Date: 2023-11-27

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2621.124	22.19	4.62	26.81	54.00	27.19	Average
2	2621.124	34.62	4.62	39.24	74.00	34.76	Peak
3	4393.479	22.03	9.42	31.45	54.00	22.55	Average
4	4393.479	34.60	9.42	44.02	74.00	29.98	Peak
5	4992.798	21.90	11.79	33.69	54.00	20.31	Average
6	4992.798	34.34	11.79	46.13	74.00	27.87	Peak

4.3 Antenna Power Conduction Limits for Receivers

Serial Number:	2D98-1	Test Date:	2023/11/16
Test Site:	RF	Test Mode:	Scanning, Receiving
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	25	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.7
----------------------	----	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2023/3/31	2024/3/30
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Mode: M1

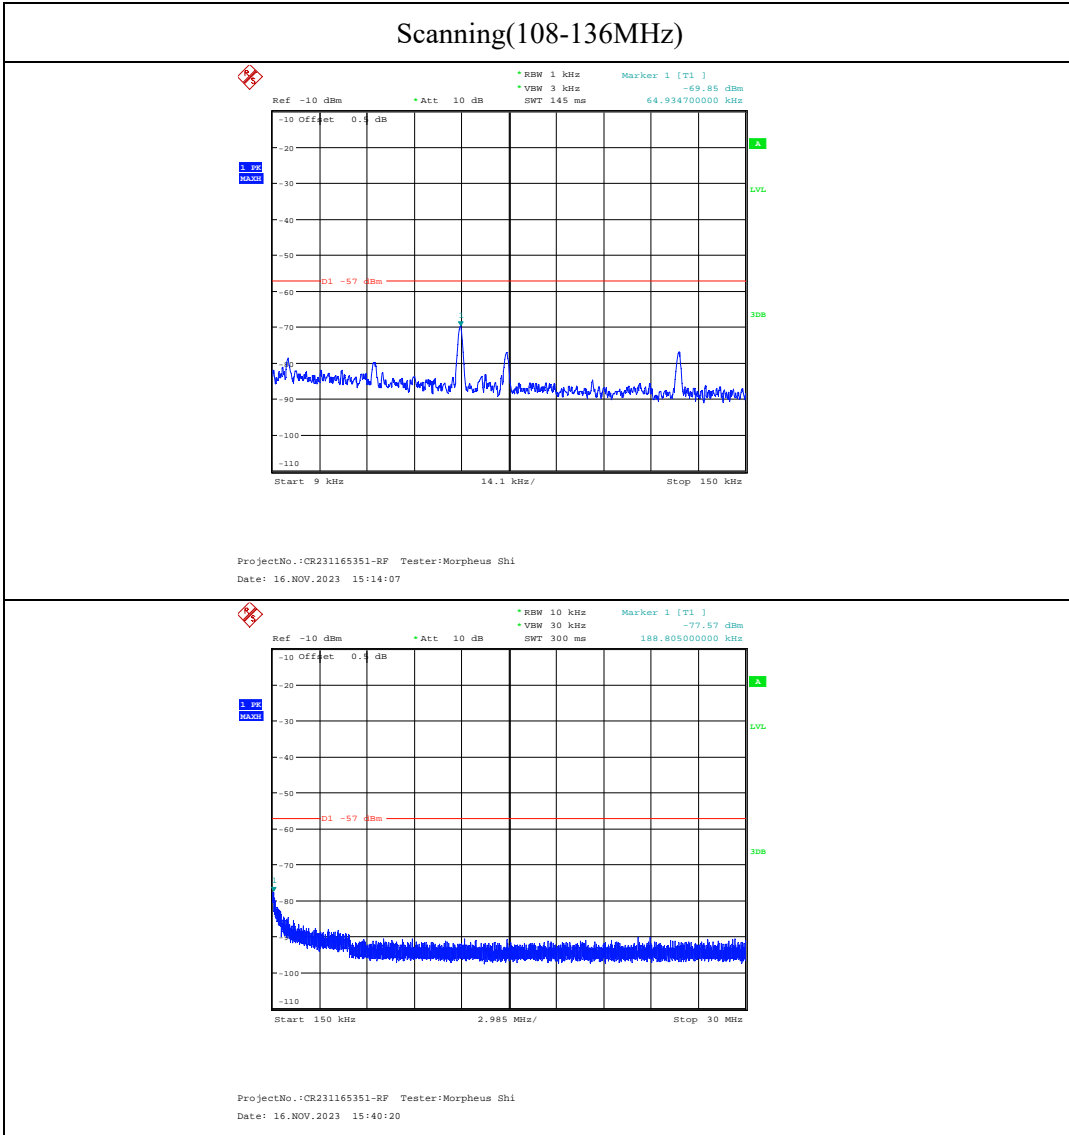

Scanning(108-136MHz)

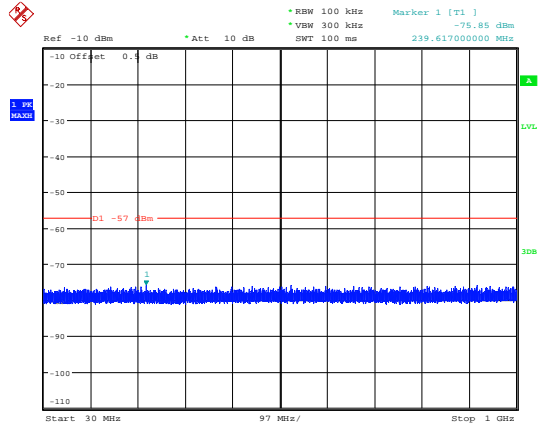


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:17:40

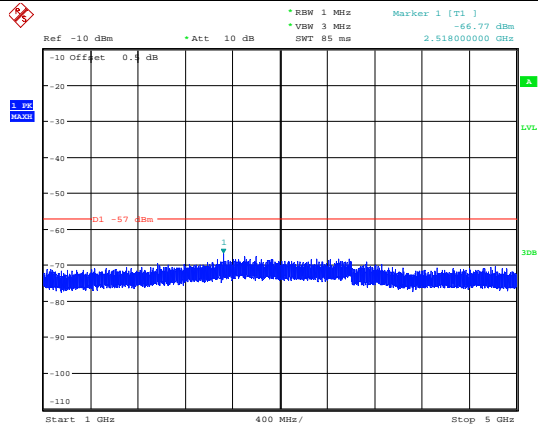


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:37:37

Scanning(136-174MHz)

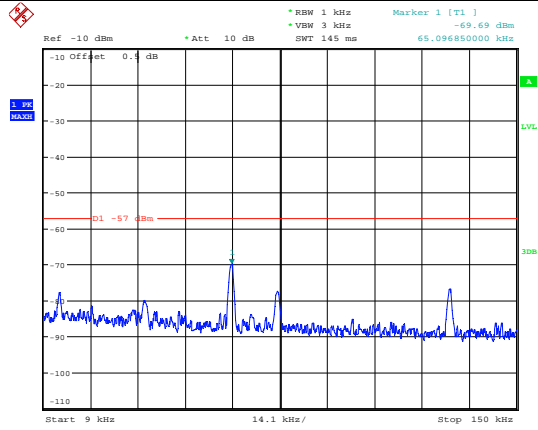


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:14:57

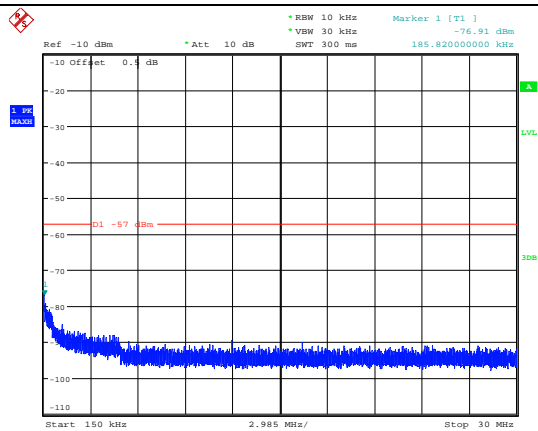


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:41:44

Scanning(136-174MHz)

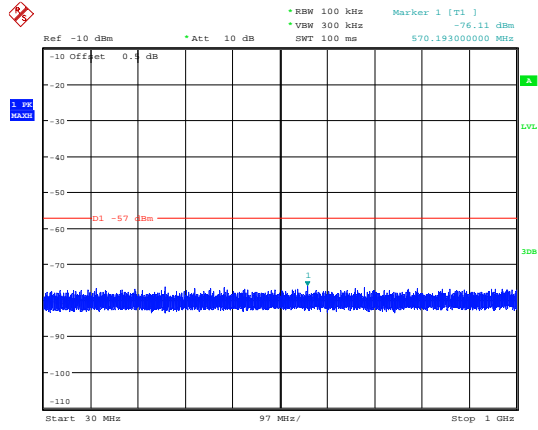


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:18:38

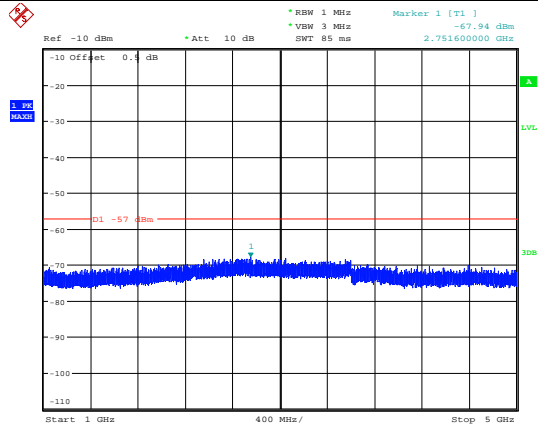


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:39:33

Scanning(220-260MHz)

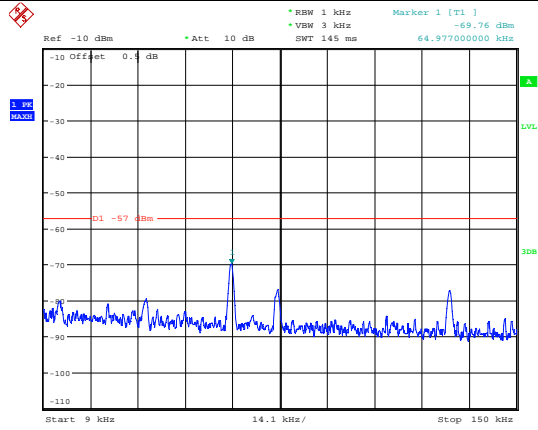


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:15:48

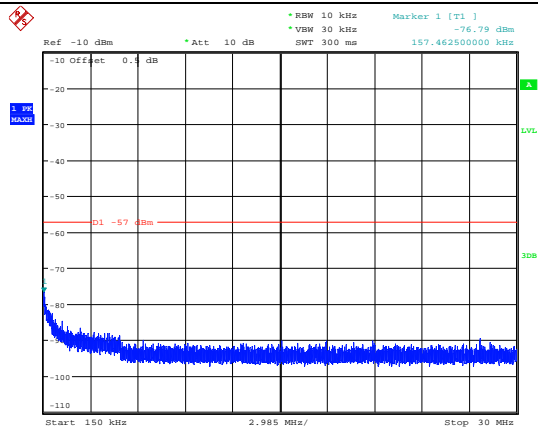


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:43:21

Scanning(220-260MHz)

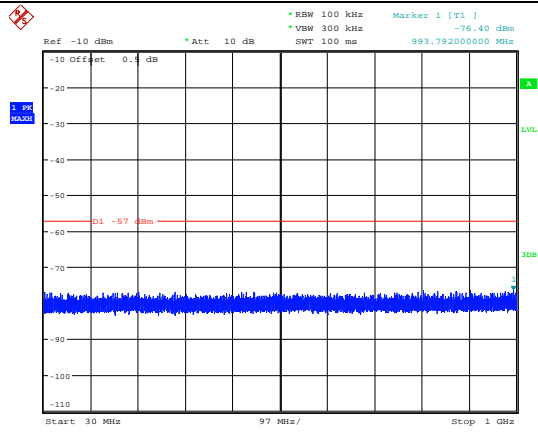


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:19:36

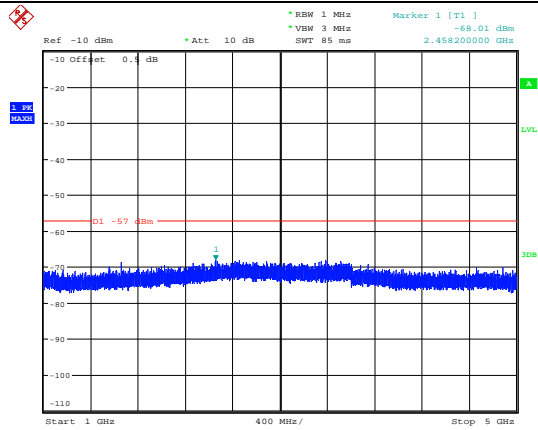


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:40:56

Scanning(350-390MHz)

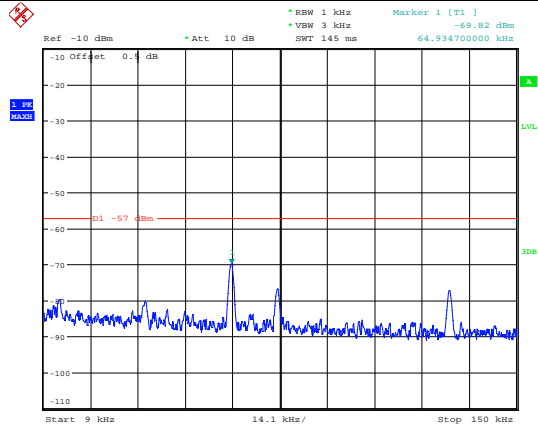


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:16:36

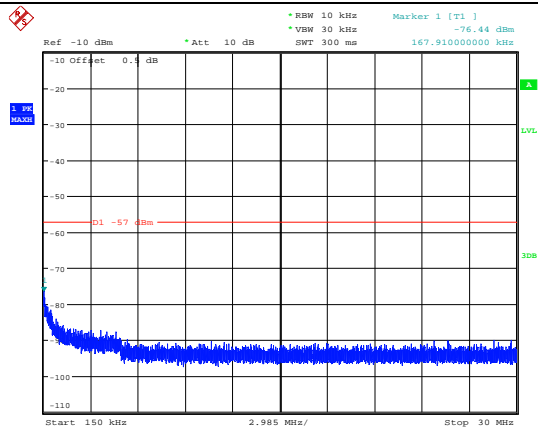


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:45:08

Scanning(350-390MHz)

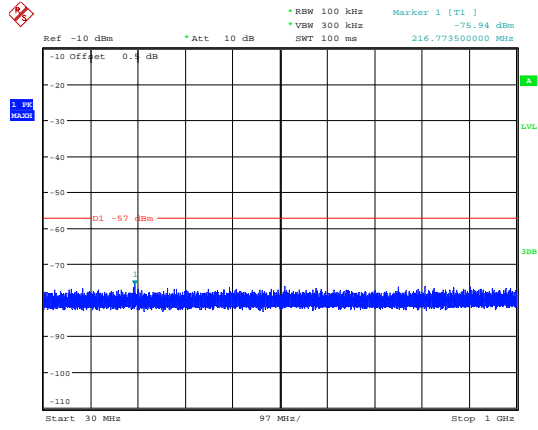


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:20:45

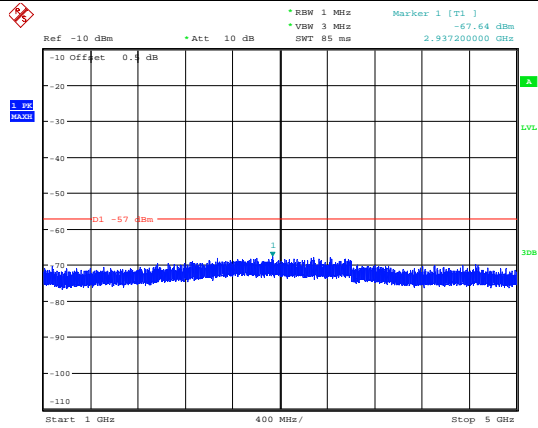


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:44:10

Scanning(400-520MHz)

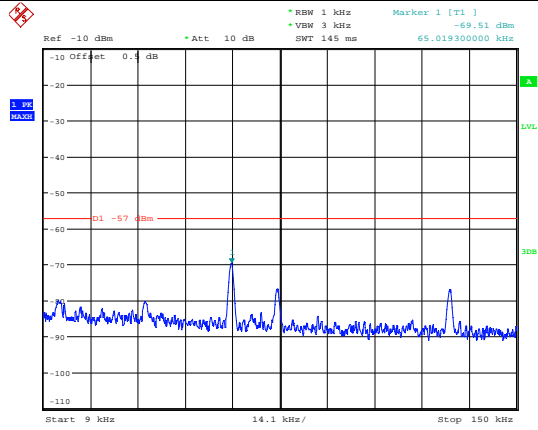


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:17:31

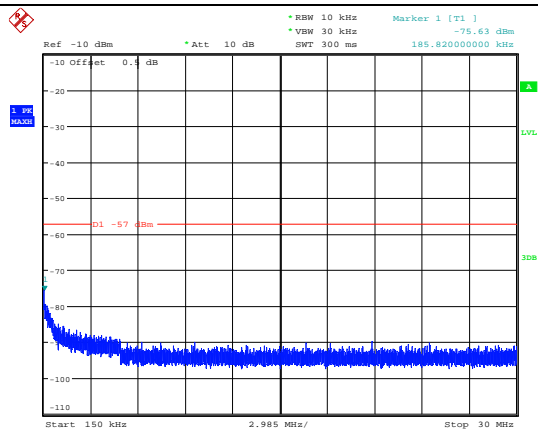


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:46:40

Scanning(400-520MHz)

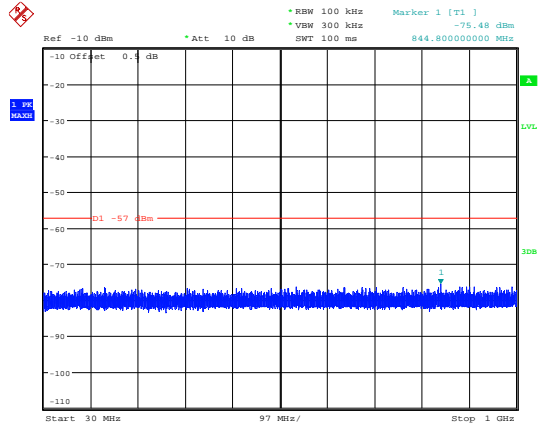


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:21:55

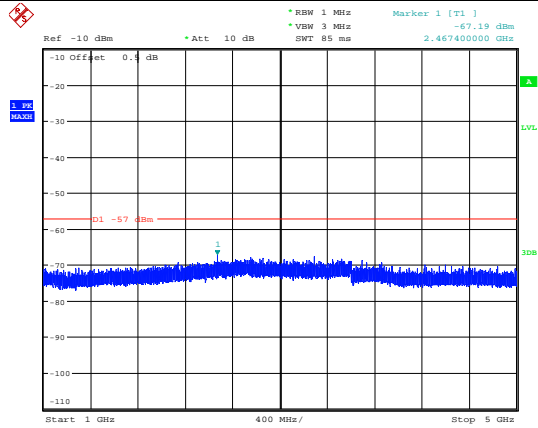


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:45:52


Test Mode: M2

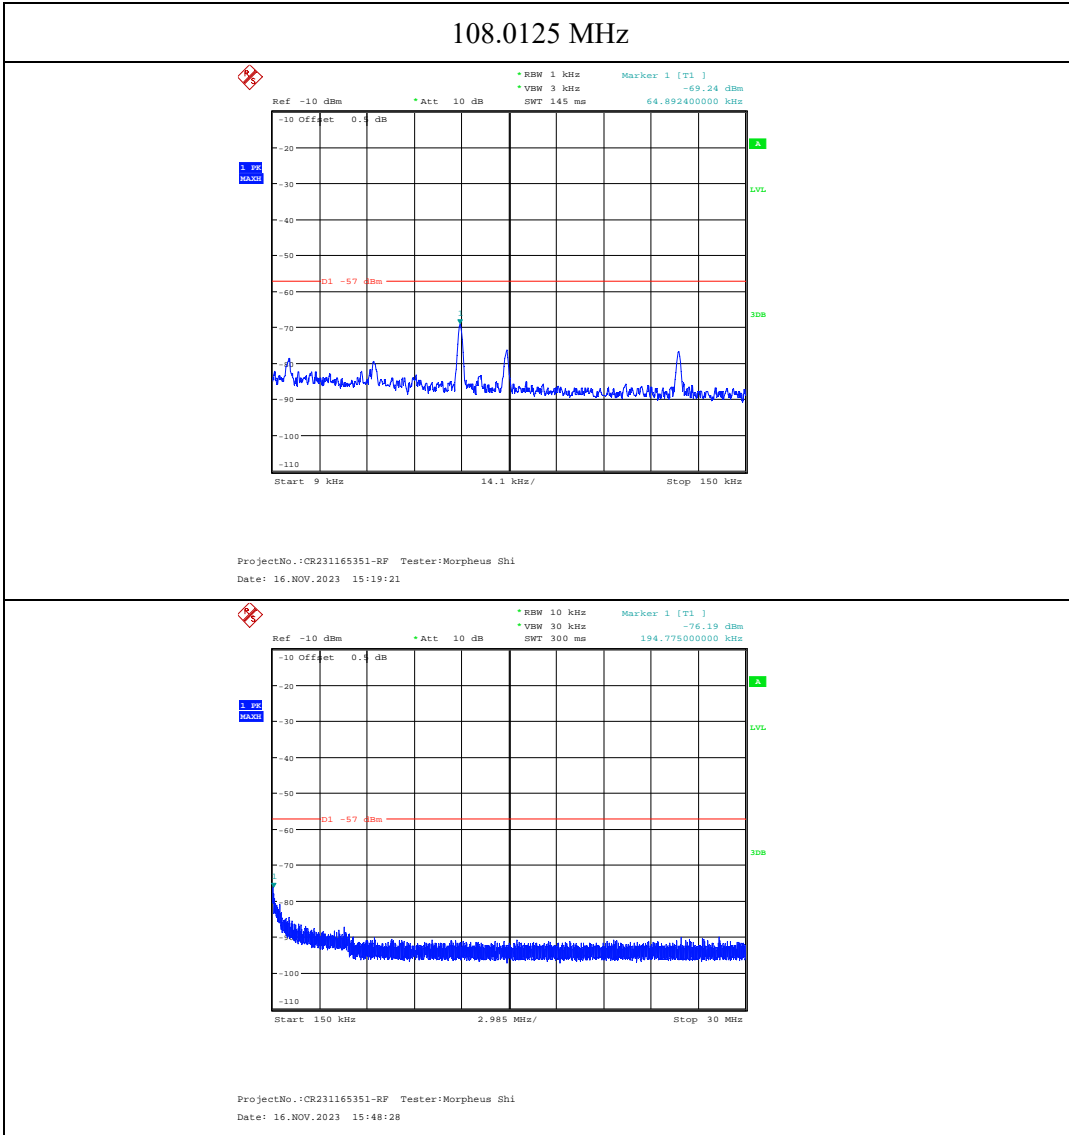

108.0125 MHz

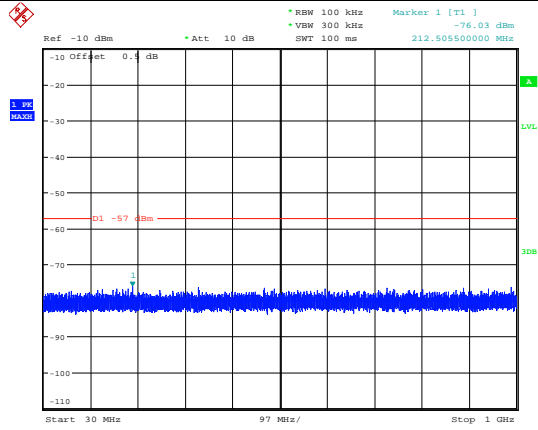


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:22:44

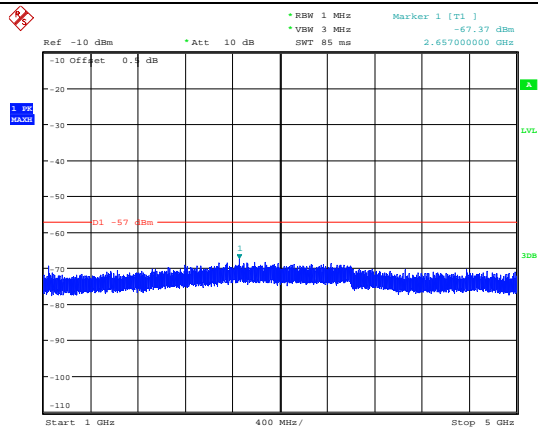


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:46:52

122MHz

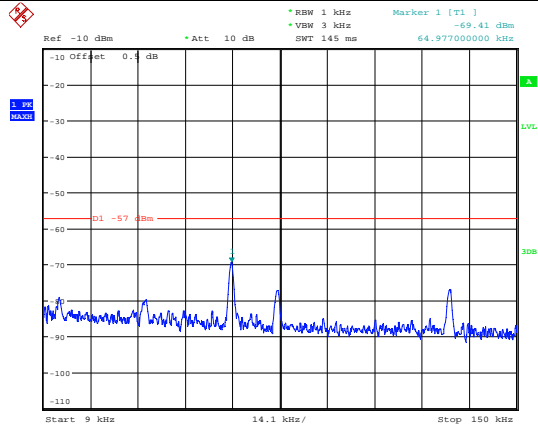


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:20:22

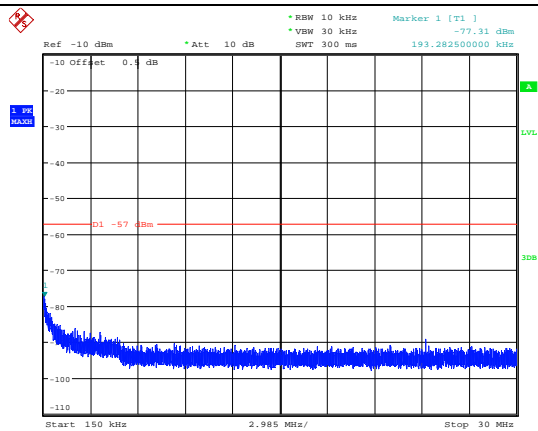


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:49:40

122 MHz

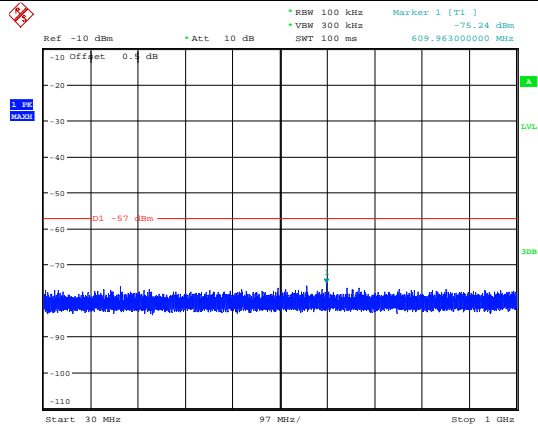


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:23:31

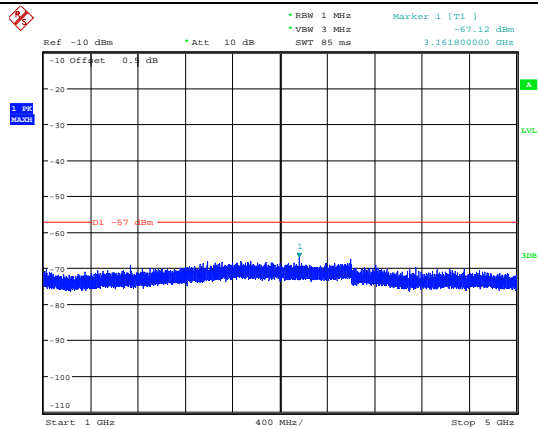


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:50:24

135.9875 MHz

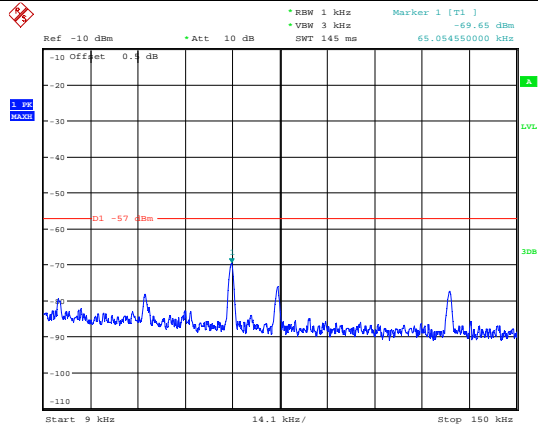


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:21:09

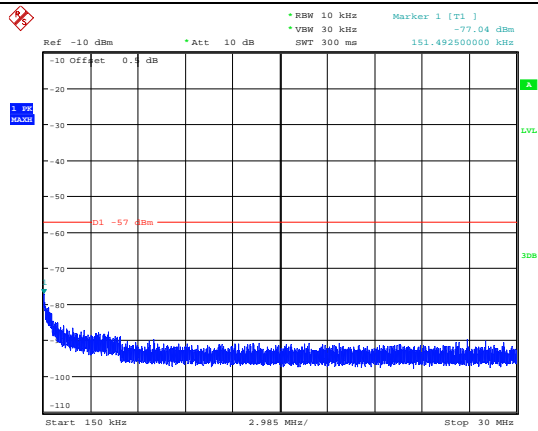


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:50:57

135.9875 MHz

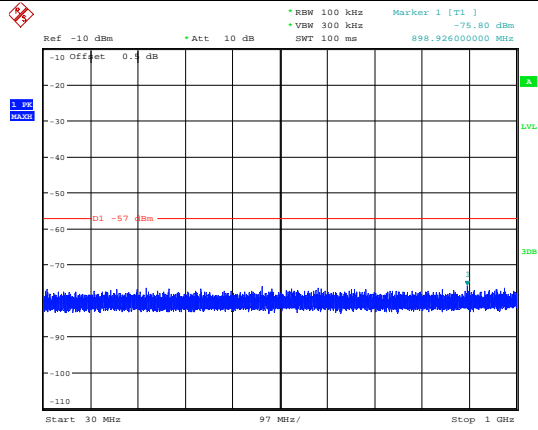


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:24:23

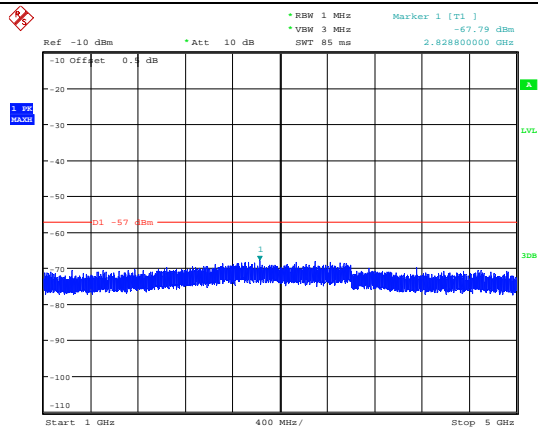


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:51:24

136.0125 MHz

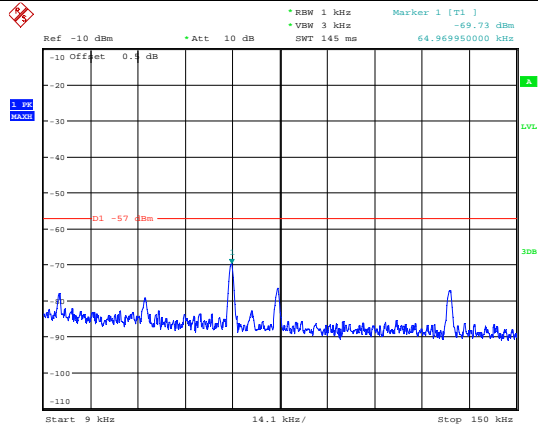


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:21:57

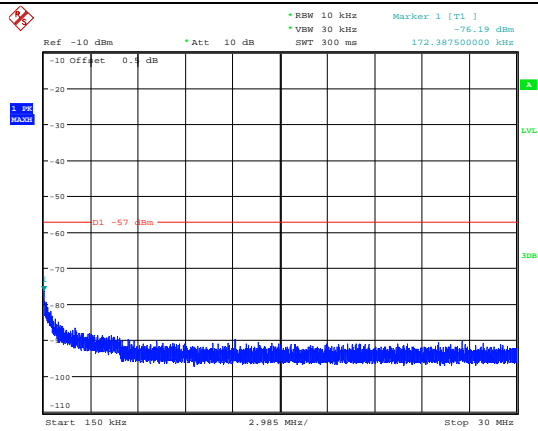


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:52:51

136.0125 MHz

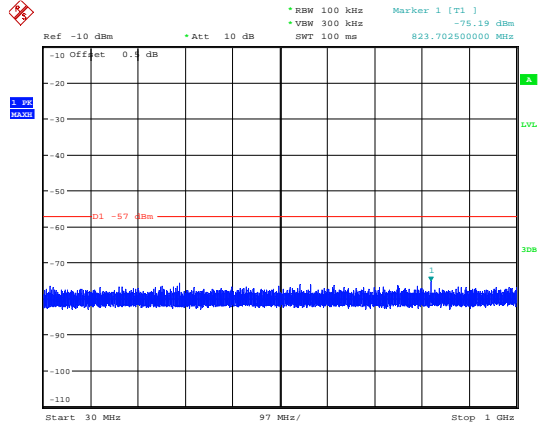


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:25:31

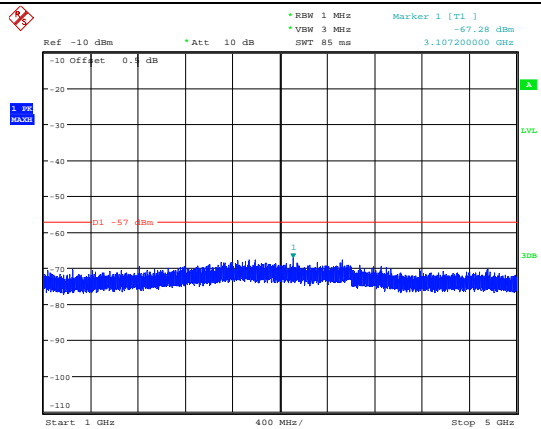


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:52:37

155MHz

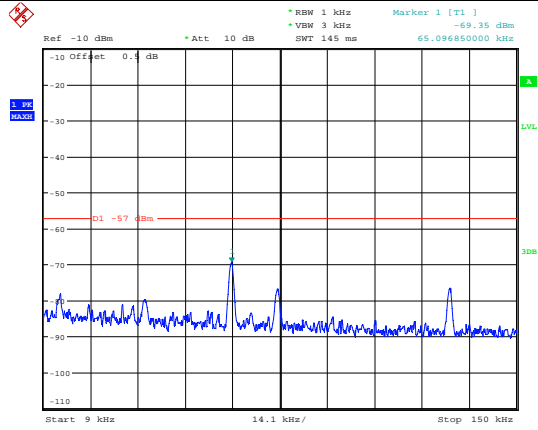


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:22:54

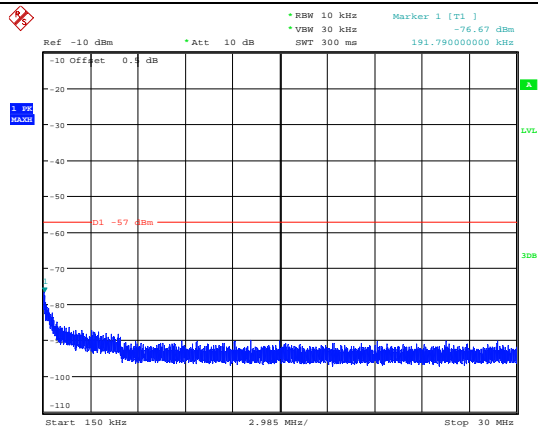


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:54:43

155MHz

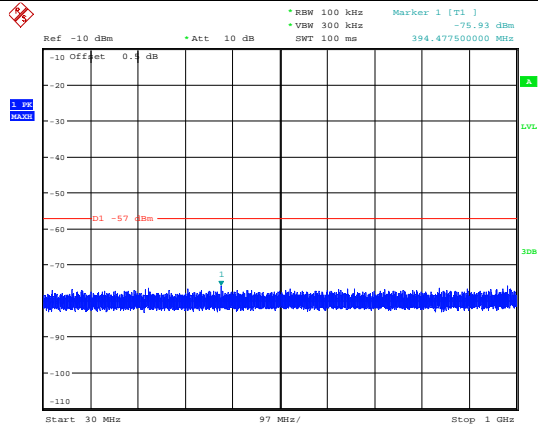


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:26:29

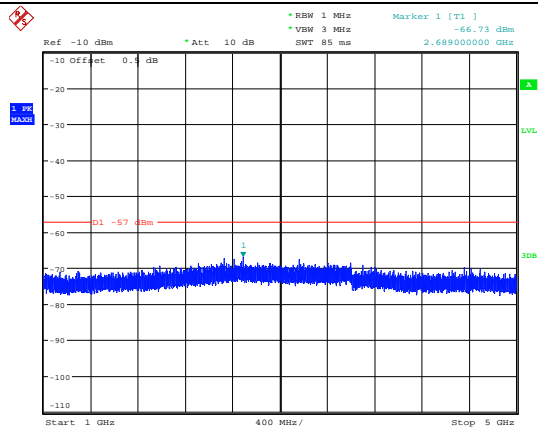


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:53:36

173.9875 MHz

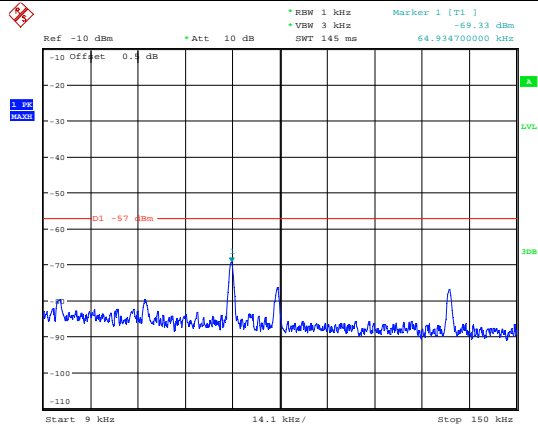


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:23:57

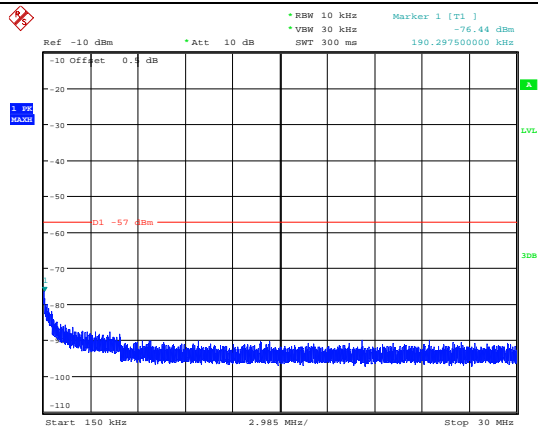


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:56:31

173.9875 MHz

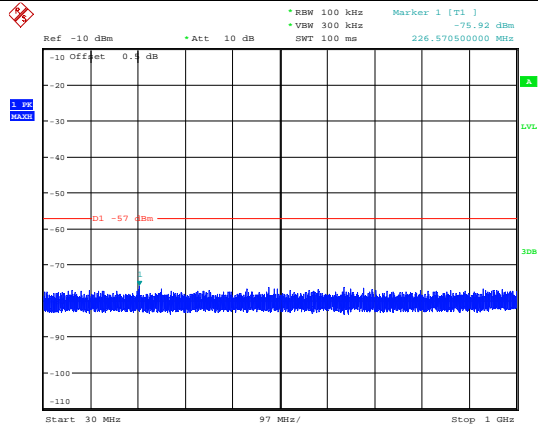


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:27:14

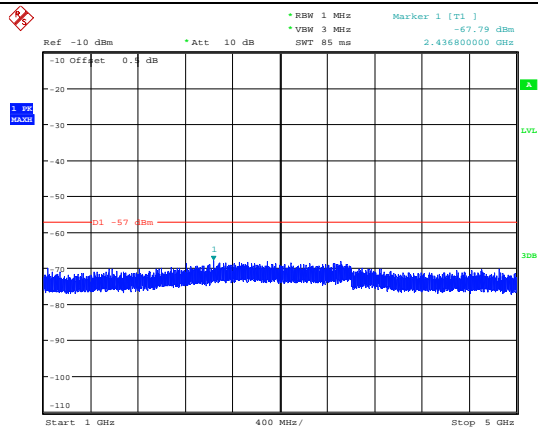


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:54:44

220.0125 MHz

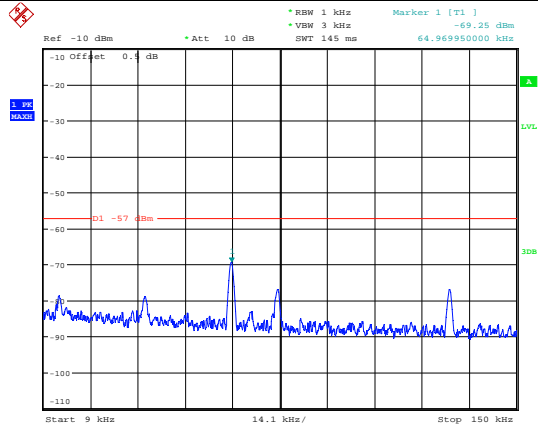


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:24:51

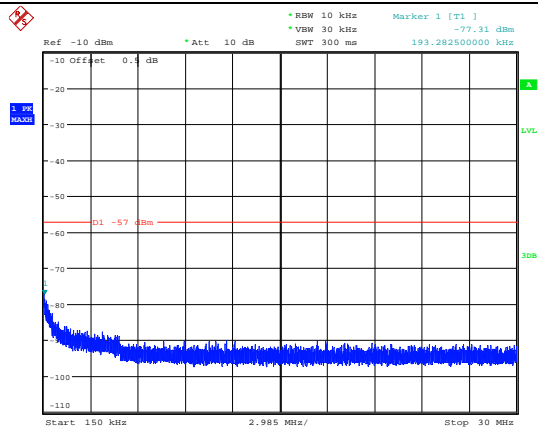


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:57:55

220.0125 MHz

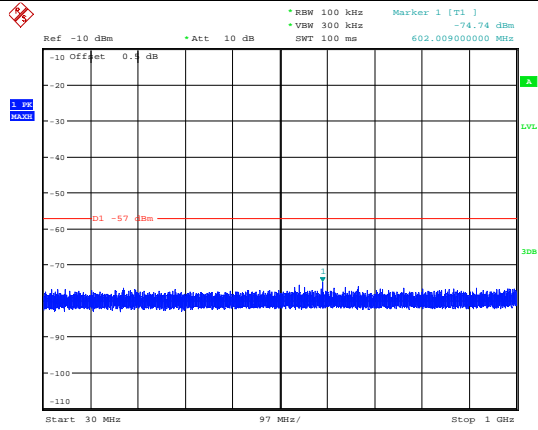


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:28:24

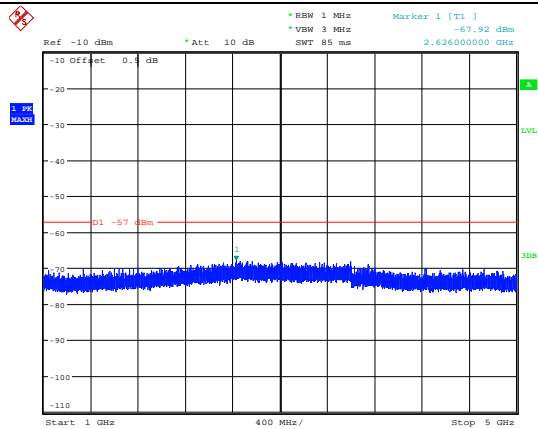


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:56:06

240MHz

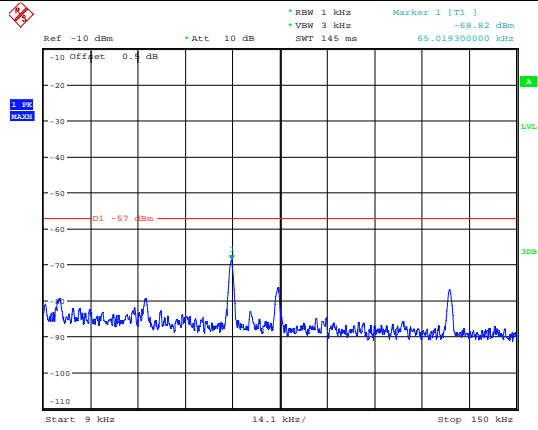


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:26:54

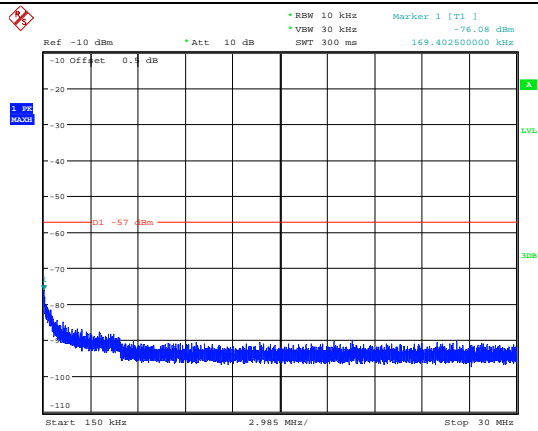


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:59:55

240 MHz

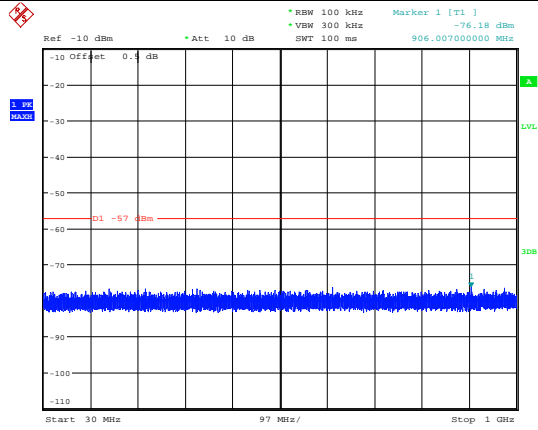


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:29:16

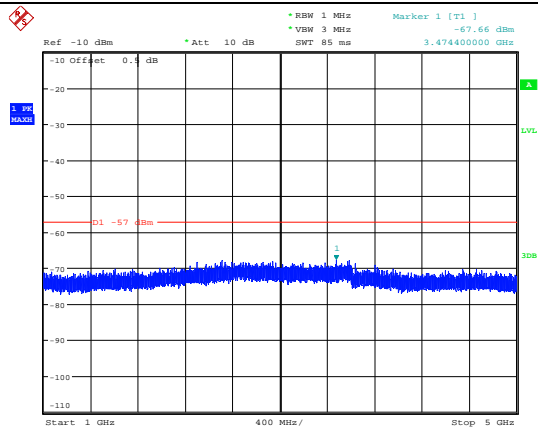


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:58:42

259.9875 MHz

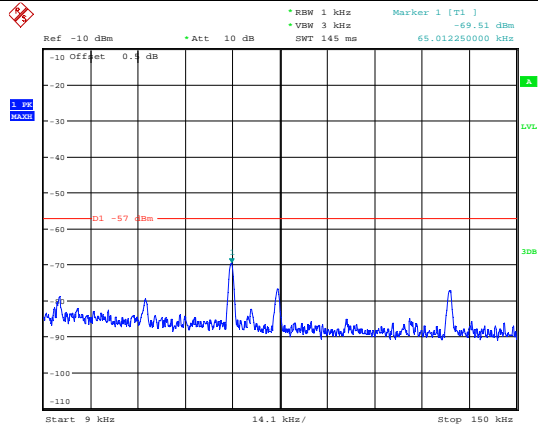


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:28:11

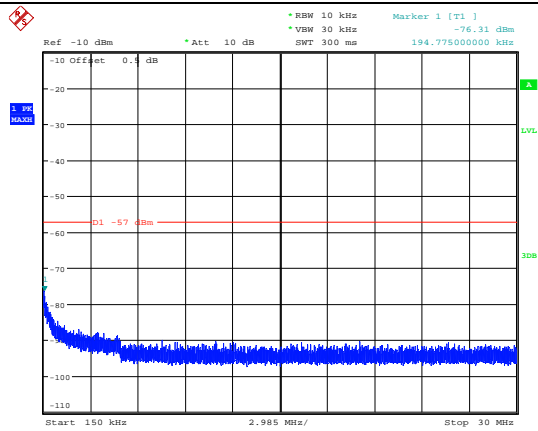


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:01:26

259.9875 MHz

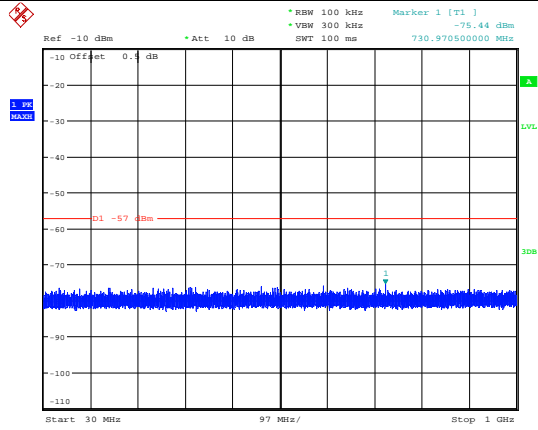


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:30:33

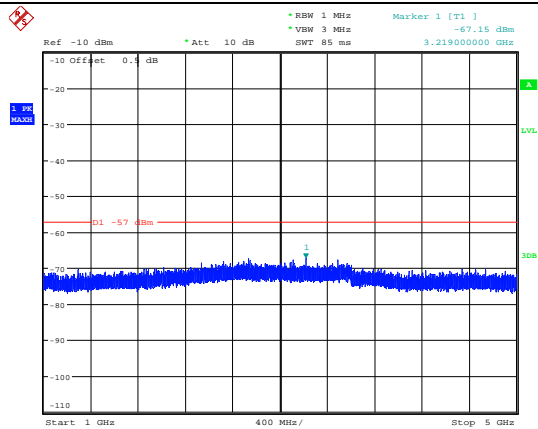


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:00:07

350.0125MHz

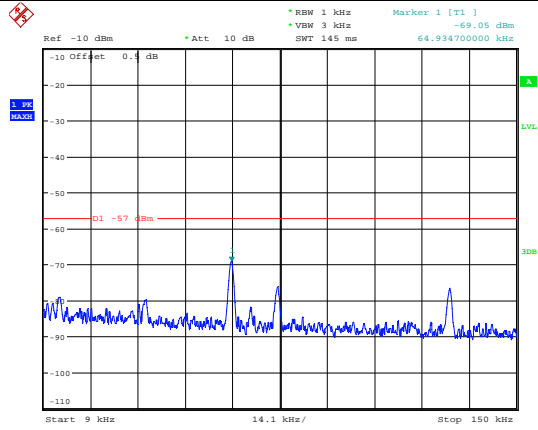


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:29:11

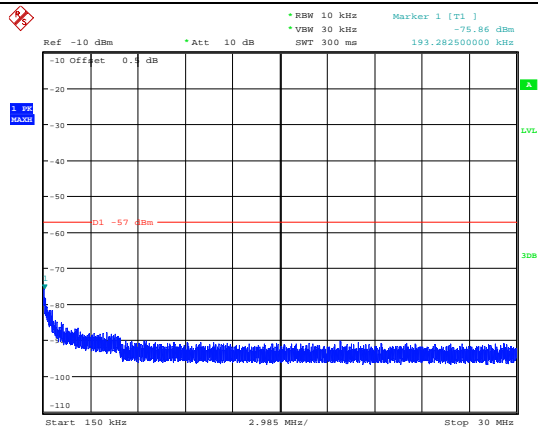


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:03:33

350.0125MHz

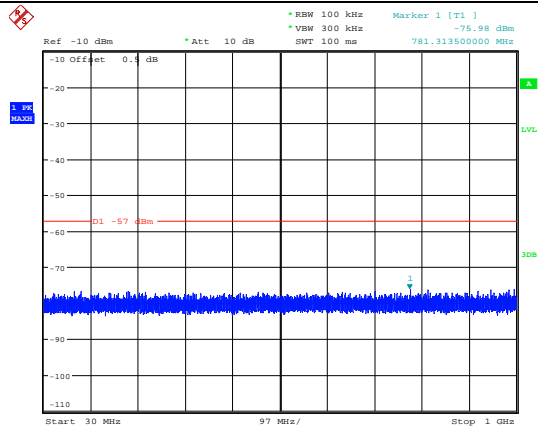


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:31:27

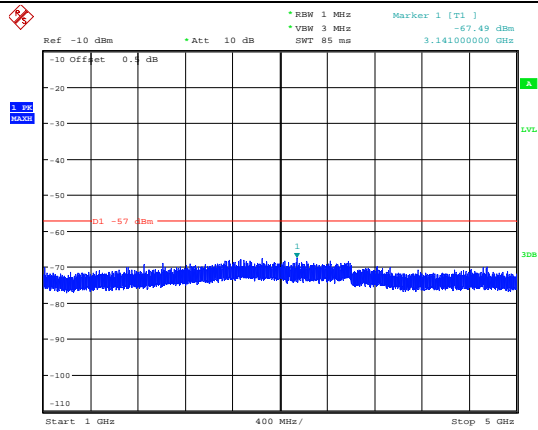


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:01:24

370MHz

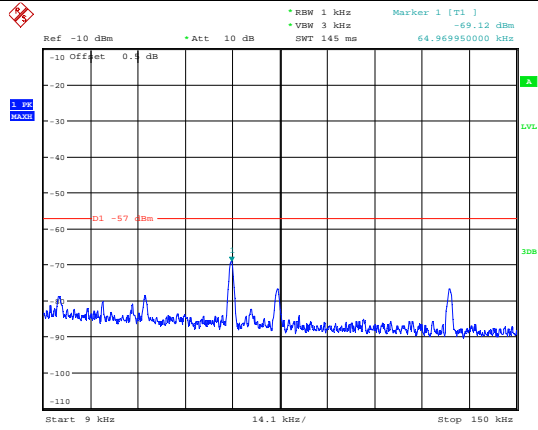


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:30:33

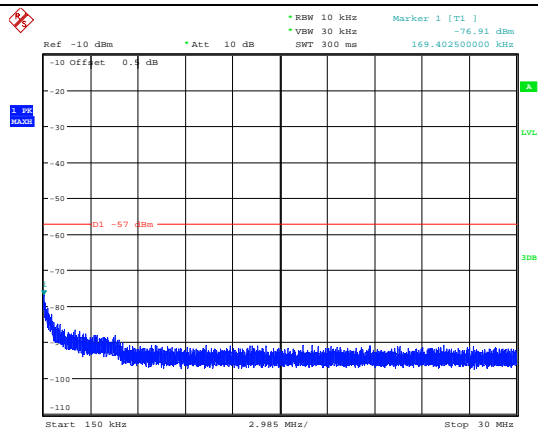


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:04:55

370MHz

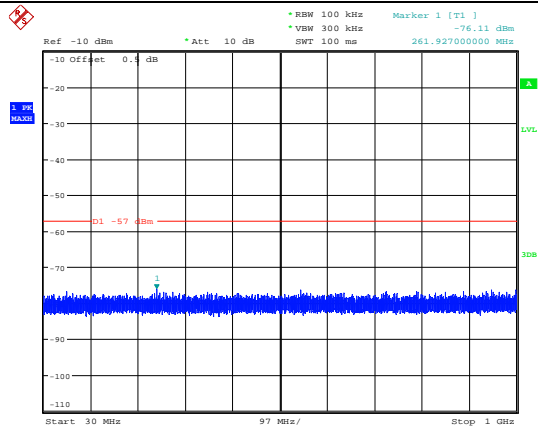


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:32:15

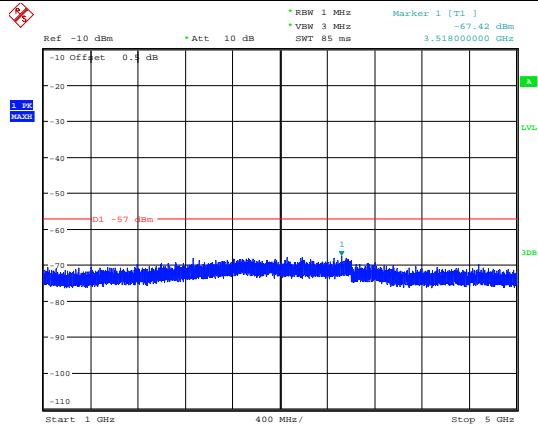


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:04:19

389.9875MHz

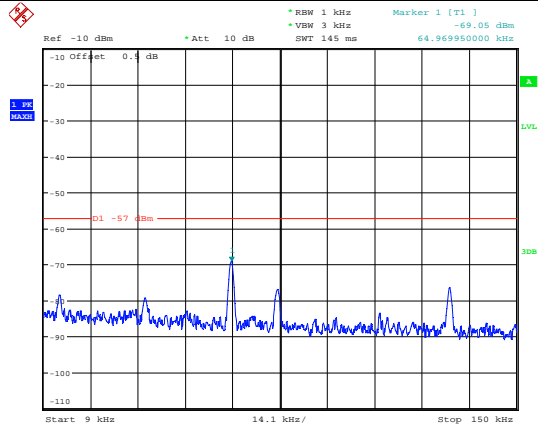


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:32:32

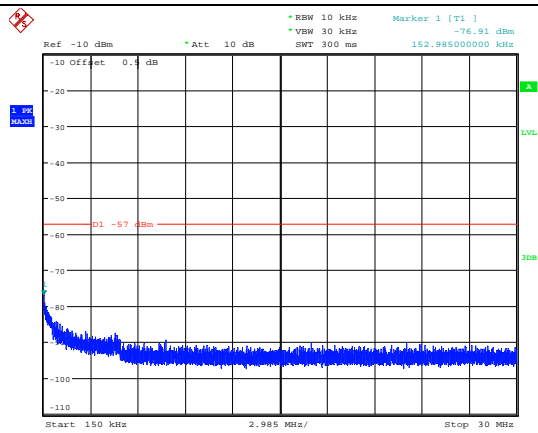


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:06:42

389.9875MHz


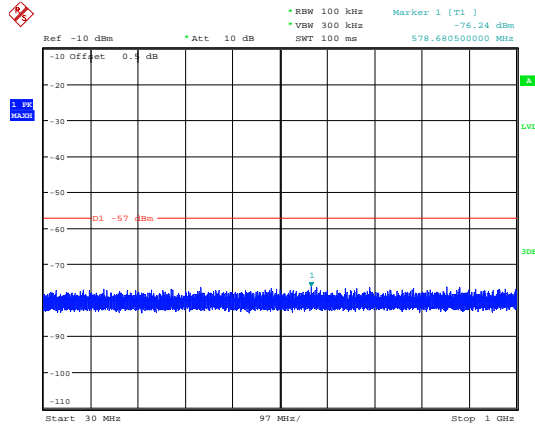


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:33:05


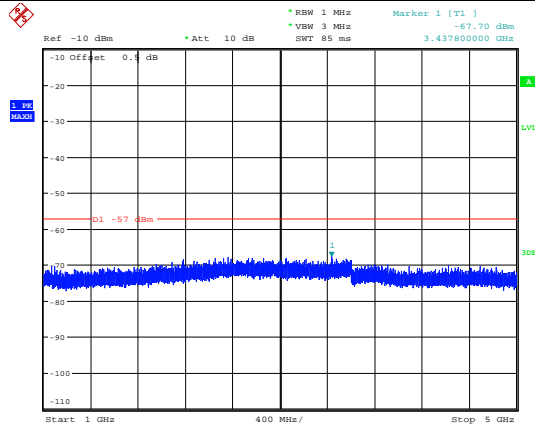


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:05:49



400.0125MHz

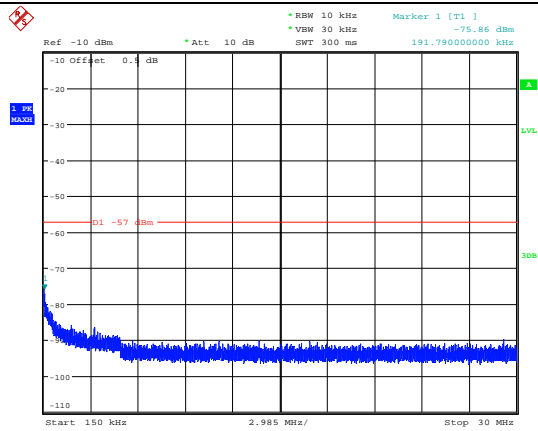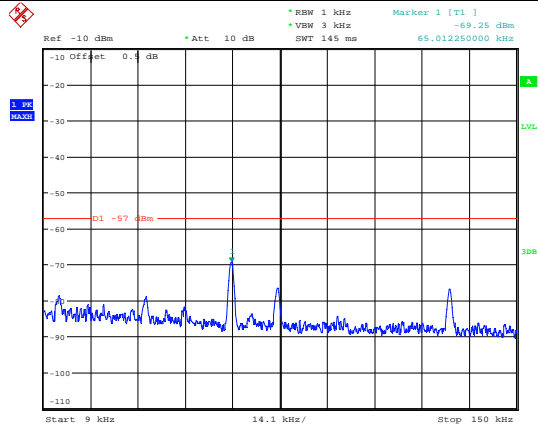


400.0125MHz

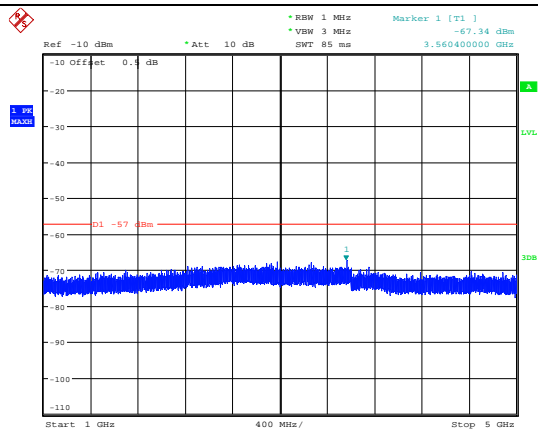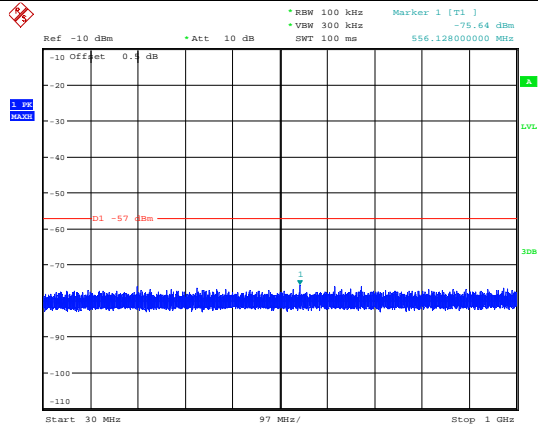


460 MHz

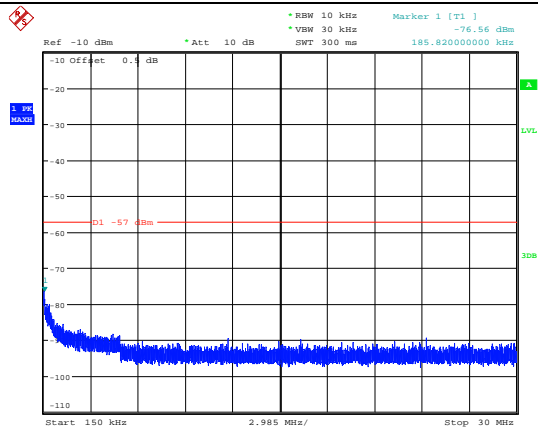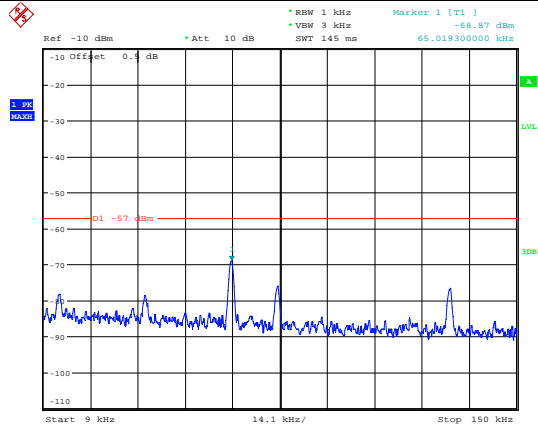

460 MHz

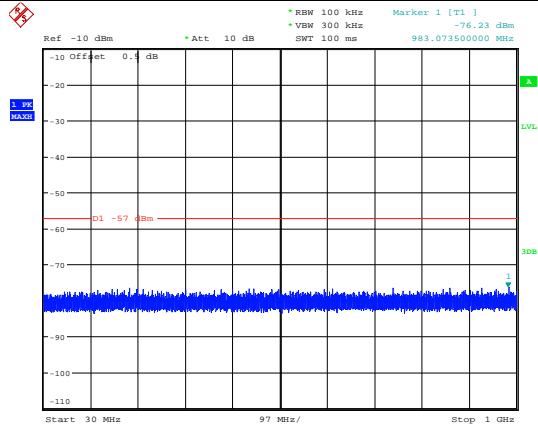


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:34:53

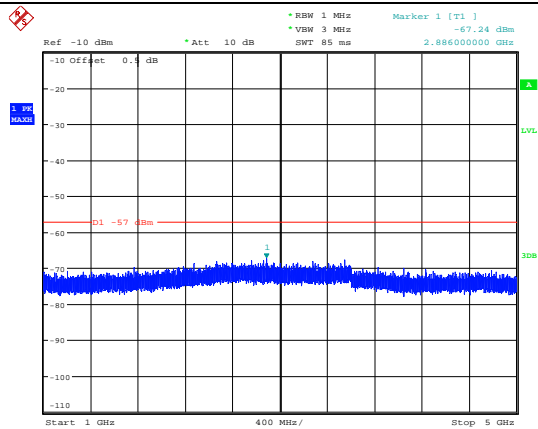


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:07:49

519.9875 MHz

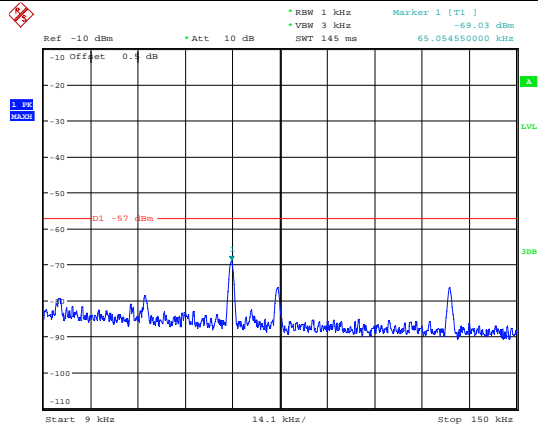


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 15:38:30

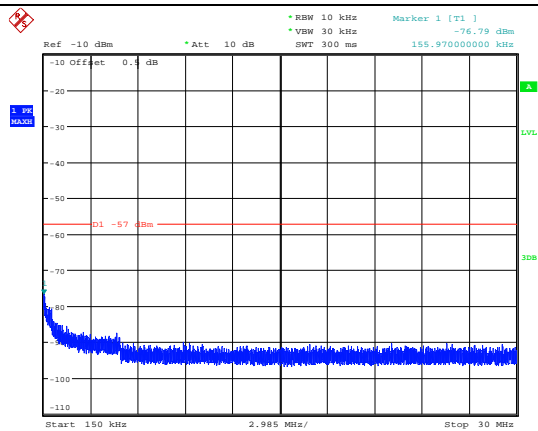


ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:12:35

519.9875 MHz

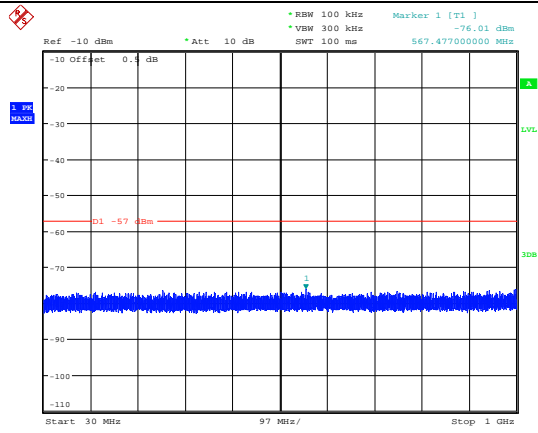

ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 16:36:08

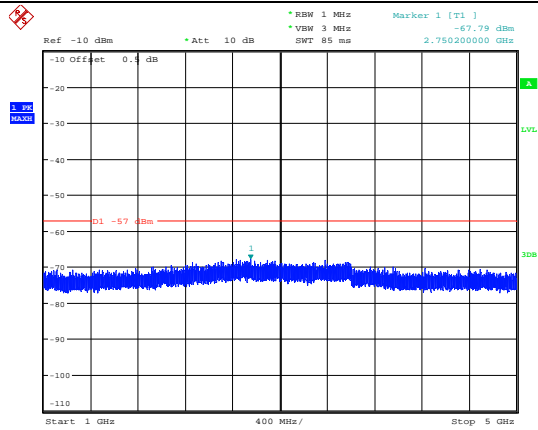

ProjectNo.:CR231165351-RF Tester:Morpheus Shi
Date: 16.NOV.2023 17:10:13

4.4 Scanning Receivers and Frequency Converters Used with Scanning Receivers

Serial Number:	2D98-1	Test Date:	2023/11/16
Test Site:	RF	Test Mode:	Scanning
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.7
----------------------	----	------------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	Each time	N/A
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Mini-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2023/3/31	2024/3/30
Agilent	MXG Vector Signal Generator	N5182B	MY51350144	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Scanning Frequency Range (MHz)	Test Frequency (MHz)	Measurement Result (Worst Case) (dB)	Limit (dB)
108-136,136-174,220-260,350-390,400-520	824, 836, 849, 869,881.5, 894	42	>38

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231165351-EXP EUT EXTERNAL PHOTOGRAPHS and CR231165351-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231165351-00A-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====