


CM-M1&M2 BT ANT SPEC

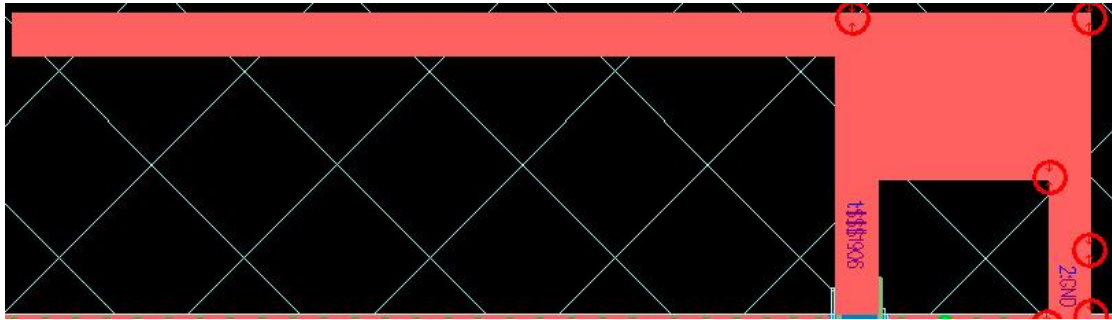

Type: PCB On Board ANT

Length: 20.95mm


Width: 5.8mm

Technology: FR4&Cover Resistance Welding Oil

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

SWR & Return Loss

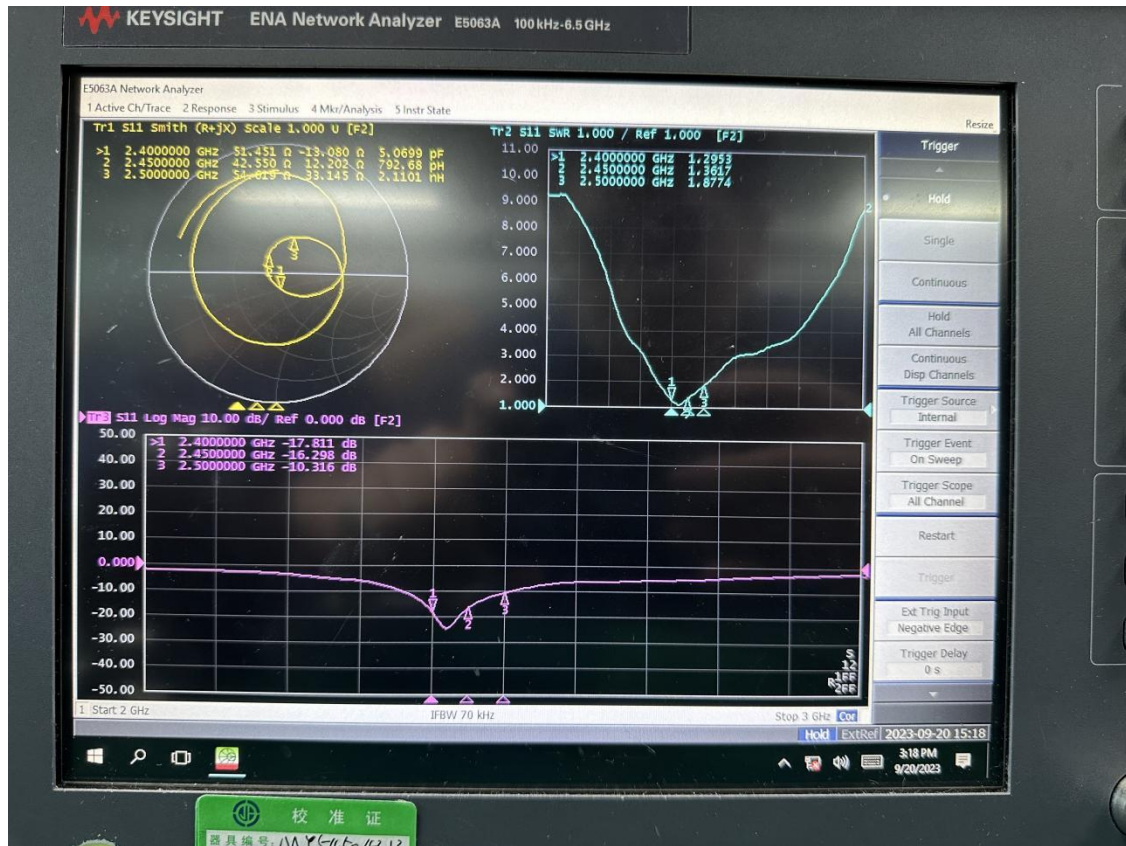

Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	38.53	1.36
2410 MHz	38.32	1.38
2420 MHz	38.52	1.42
2430 MHz	38.55	1.47
2440 MHz	38.47	1.49
2450 MHz	38.57	1.55
2460 MHz	38.21	1.50
2470 MHz	38.45	1.51
2480 MHz	38.44	1.50
2490 MHz	37.69	1.42
2500 MHz	37.51	1.36

