



DAQICONCEPT

JG01
WIRELESS AUDIO LIGHT

USER MANUAL
使用手冊

Safety

Important Safety Instructions

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus(including amplifiers) that produce heat.
- Only use attachment/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally been dropped.


Note: The product label is located on the bottom of the product.



Warning

- Use a 5V 1A adaptor for charging.
- Removal of the built-in battery invalidates the warrenty and may destroy the product.
- Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.
- To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.
- This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- Un-license band: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


In the box

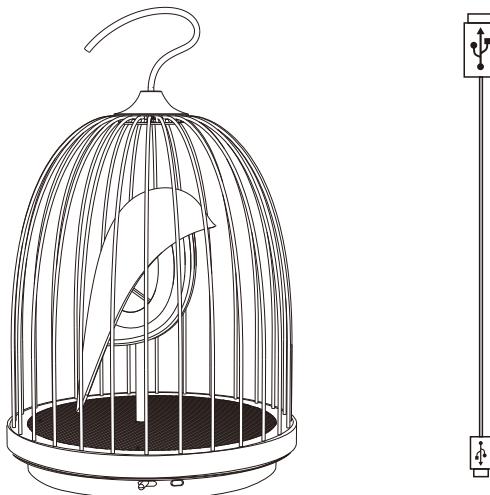

Specifiaction


- Battery lifetime : >16 hrs of music and light
- Battery capacity : Li-ion rechargeable / 4800mAh
- Amplifier power: 5W
- Drivers: One 23.5mm tweeter and one 45mm woofer
- Frequency Response: 20Hz – 20kHz
- Signal-to-noise Ratio: >75dB
- Sensitivity: 82dB/1m/1W
- Dimensions : L18xW18xH28cm (L7.9" x W7.9" X H11.2")
- Weight: 790 grams
- Wireless range: Up to 10m (50 feet). Obstacles may effect range.
- Led light: 3 phase available
- Input: 5V 1A

Part names

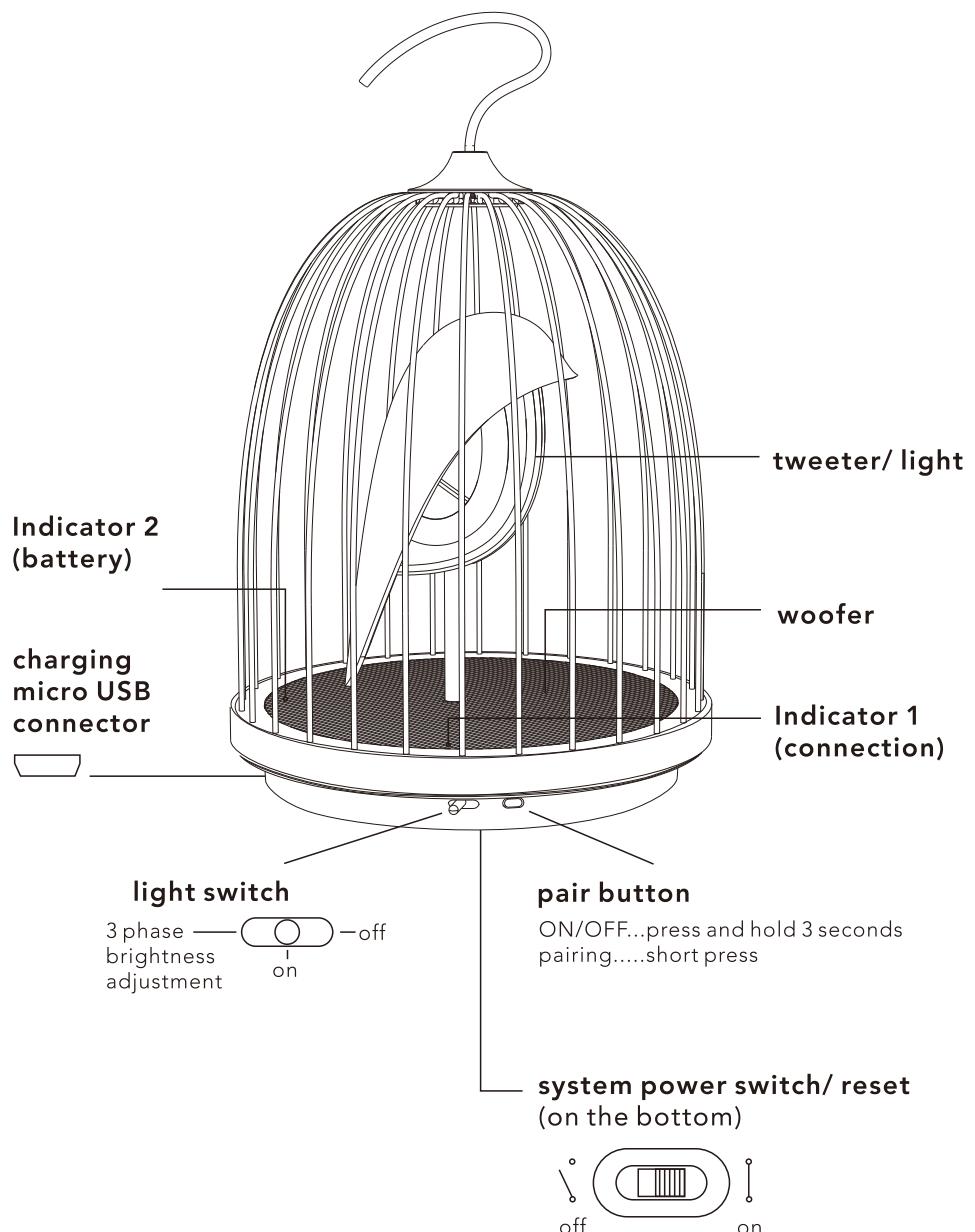


Get Started


- 1 Plug in USB cable to your 5V 1A charging adapter when first use.

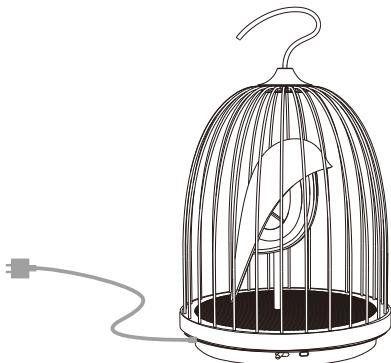


- 2 To turn on the speaker, press pair button and hold 3 seconds until hearing "beep" tone. The white LED indicator is flashing for paring.

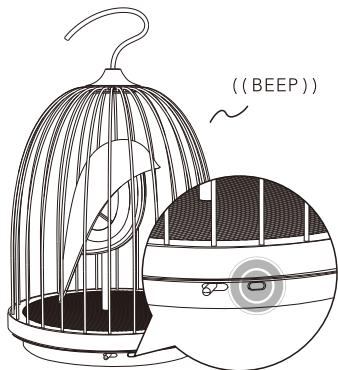

- 3 Go to Bluetooth® settings on your device, search for "JG01-XXX" and click to pair.

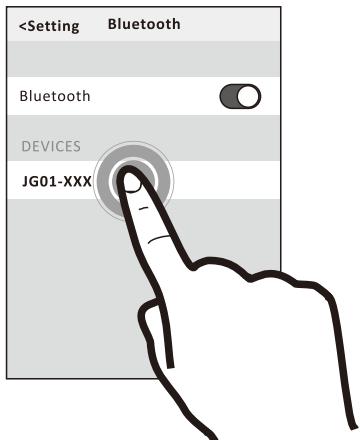

- 4 Slide the light switch to turn on the light and press forward for brightness adjustment.

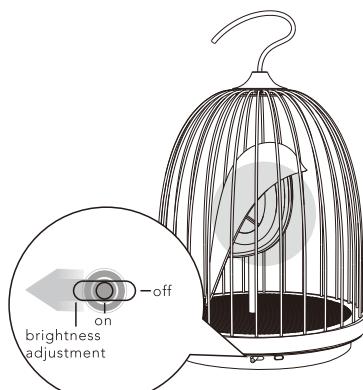

- 5 Let's play music!

Operation

Adding another device to the apparatus

Pair another device to the apparatus by making the apparatus discoverable.

1. Short press pair button on this apparatus , so the indicator 1 blinks white.
2. On your device, turn Bluetooth® on, locate the Bluetooth® device list, and select the device named "JG01-xxx." When the device connects to the apparatus , the indicator 1 turns to solid white.

Speaker memory

The apparatus can remember up to two paired devices. If you pair the apparatus with an additional device, the device least recently connected is no longer paired with the speaker.

Reconnecting a device

When turned on, the apparatus attempts to reconnect with a device in memory starting with the last connected device. If the last connected device is not available, the apparatus connects to the next to last connected device, and so forth. The apparatus searches for a paired device for approximately 16 seconds.

Connection status

Indicator 1- connection

LED status	Description
blinking white	Discoverable and ready to pair with device
solid white	Connected to a paired device
slow blinking	Standby mode

Checking the battery

- 1.Battery performance varies with the content played and the loudness at which it is played. In typical usage, the device battery lasts up to 16 hours.
- 2.When the apparatus is connected, you can checking the battery status on your paired device.(For iOS only)
3. If the battery requires charging, the battery status indicator illuminates and continuously blink orange until the apparatus is connected to power and lights turns to solid orange when begins charging. After full charged, the indicator lights go out.
4. When plug in USB cable, if the battery is already full charged, indicator will show solid orange at least 5 seconds then turn off.

Indicator 2- battery

LED status	Description
blinking orange	low battery, need charged
solid orange	in charging progress

Trouble shooting

Problem	What to do
Can not pair the apparatus with my Bluetooth® device	<ul style="list-style-type: none">• Ensure your apparatus is discoverable (Bluetooth® status indicator blinks white). See "Get to start".• Ensure Bluetooth® is enabled on your device.• Ensure you have selected "JG01-XXX" in the Bluetooth® device list on your device and the connection has been confirmed by your device.• Bluetooth® device may be out of range. Try moving it closer to the apparatus.• If possible, turn off all other nearby Bluetooth® devices or disable their Bluetooth® functionality.• Switch the power on the bottom and reset the apparatus again.
The apparatus indicates a connection but is not playing music	<ul style="list-style-type: none">• Ensure the device you want to hear is connected to the apparatus and playing audio.• Ensure the apparatus is not muted and the volume is turned up.• Turn up the volume on your device.• Your Bluetooth® device may be out of range. Try moving it closer to the apparatus.• Move your device away from any device that generates electromagnetic interference, such as another Bluetooth® device, cordless phone, microwave oven, or wireless router.• If possible, turn off all other nearby Bluetooth® devices or disable their Bluetooth® functionality and reconnect the device you want to hear.• Refer to the user manual, help system, or technical support for your Bluetooth® device to learn how it pairs with other Bluetooth® devices.• Switch the power on the bottom and reset the apparatus again.

Problem	What to do
Sound quality is poor	<ul style="list-style-type: none"> • Your Bluetooth® device may be out of range. Try moving it closer to the apparatus. • Move your device away from any device that generates electromagnetic interference, such as another Bluetooth® device, cordless phone, microwave oven, or wireless router. • Reduce the number of applications running on your device. Running multiple applications can reduce the amount of internal resources available to transmit audio. Closing non-essential applications may improve audio quality. • Try turning off Wi-Fi® on your device to improve audio quality. • Try clearing your device from the speaker by disabling Bluetooth® on your device. Pair your device and the speaker again. ŷ If your device is in your pocket, try placing it in open air, without your body between the device and the apparatus. ŷ Switch the power on the bottom and reset the apparatus again.

More Info

For more information and product details please visit www.daqiconcept.com



Model: JG01
Made in Taiwan



安全性

重要安全提示

1. 閱讀這些指示。
2. 保留這些指示。
3. 注意所有警告。
4. 請遵守所有指示。
5. 不要在水邊使用此裝置。
6. 只能用乾布清潔。
7. 請勿堵塞任何通風口。請按照製造商的說明安裝。
8. 請勿在熱源附近安裝，如暖氣片、熱調節裝置、火爐或可發熱的其他裝置（包括擴音器）。
9. 只能使用製造商指定的附件/配件。
10. 在雷雨天氣或者如果長時間不使用，請拔下裝置插頭。
11. 請向合格的維修人員諮詢。如果本裝置在任何方面受到損壞均需進行維修，例如電源或電源線受損；液體濺入或物體落入設備內；裝置受淋或受潮；不能正常工作或跌落。


備註: 本產品標籤位於產品底部



警告


- 請使用5V 1A的變壓器來充電。
- 未經授權切勿更改產品；否則可能會影響安全性、合規性、系統效能，並可能使保修失效。
依據 低功率電波輻射性電機管理辦法
 - 第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。
 - 第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信規定作業之無線電信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。
 - 本裝置符合 FCC 規則第 15 部分規定。本裝置的工作情況可能出現下列兩種情形：(1) 本裝置不會造成有害干擾 (2) 本裝置必須承受任何接收到的干擾，包括造成裝置工作不正常的干擾。

包裝內含

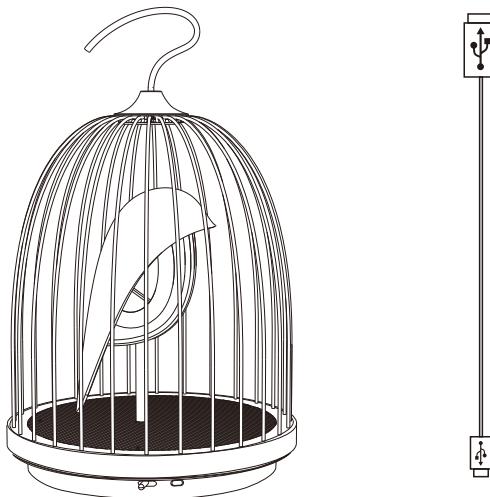


技術規格

- 繢航力：大於16小時 (同時撥放音樂與燈光)
- 電池容量：可充電鋰電池/4800mAh
- 輸出功率：5W
- 規格：23.5mm 高音喇叭 及 45mm 低音喇叭
- 頻率響應：20Hz – 20kHz
- 信噪比：>75dB
- 靈敏度：82dB/1m/1W
- 體積：18x18x28 公分
- 重量：790克
- 連線距離：10米
- LED 燈：三段亮度調整
- 輸入電壓：5V 1A

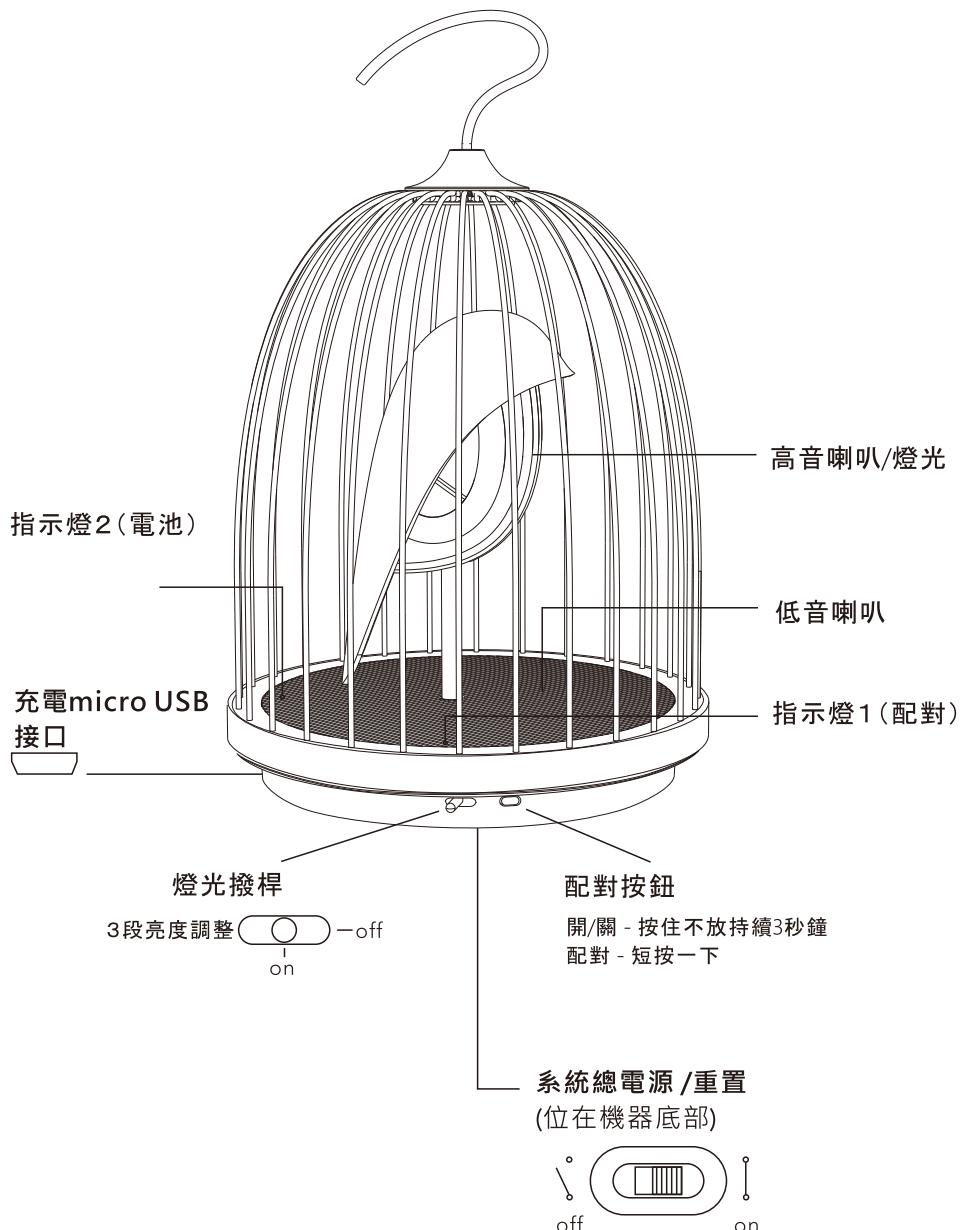


開始使用


- 1 初次使用時,請打開最底部的電源開關,並先將USB線接上一個5V 1A的充電器進行充電。

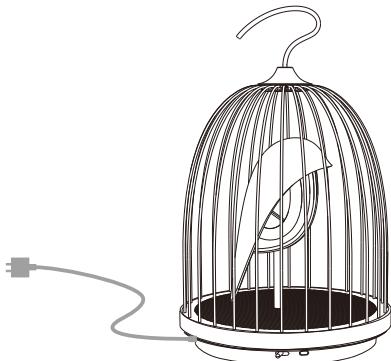


- 2 按下配對按鈕並持續3秒鐘,直到機器發出蜂鳴聲,L E D指示燈1閃爍白光等待配對。

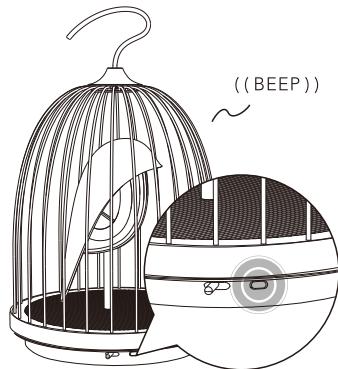

- 3 將您裝置中的藍牙開啟,找到"J G O 1 - X X X"並點選,當聽到機器發出一聲鳥叫聲並且指示燈1轉為持續亮白光,即表示配對成功。

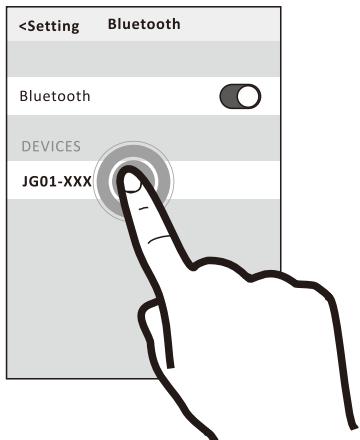

- 4 將燈光撥桿撥向中間即可打開燈光,並可往後撥動調整燈光強度。

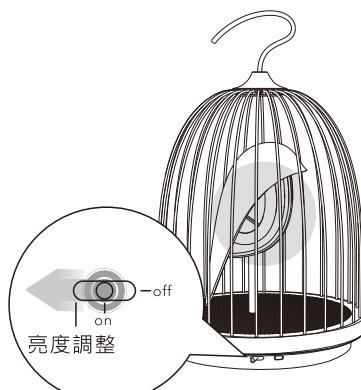

- 5 開始撥放音樂吧!

其他操作

新增其他配對裝置

要新增另外一個裝置和喇叭配對，請先讓喇叭處於搜尋狀態：

1. 短按配對按鈕，指示燈1開始閃爍白光。
2. 在您的藍牙裝置上，選擇"JG01-XXX"。當配對成功後，白光將由閃爍轉變為恆亮。

喇叭記憶容量

此款喇叭可記憶2組不同裝置，如果再新增一個配對裝置，和喇叭較少連結的裝置將不在自動配對。

重新與裝置連接

當喇叭開啟時會自動開始尋找最後配對的裝置配對，如果沒有搜尋到，便會往前一個記憶搜尋，因此當喇叭開啟後會有16秒的時間進行自動記憶搜尋及配對。

連結狀態

指示燈1-連結

LED 狀態	描述
閃爍白光	可搜尋狀態等待配對
白光恆亮	已配對
緩慢閃爍白光	待機中

Checking the battery

1. 電池的續航力，會受撥放音量及內容影響。但以一般使用來說，電池可連續撥放16小時以上。
2. 當本機器與您的裝置連接時，可由您的裝置查看本機的電池狀態。(僅適用於iOS系統)
3. 當機器需要充電時，電池指示燈會持續閃爍橘光，直到插上電源後，指示燈會轉為恆亮橘光。當電力充足後，指示燈便會自動熄滅。
4. 當插上USB充電時，如果本機已是充飽電的狀態，指示燈會亮5秒鐘然後就熄滅。

指示燈2-電池

LED 狀態	描述
閃爍橘光	低電量，待充電
橘光	充電中

障礙排除

問題	該如何解決
無法和藍牙裝置配對	<ul style="list-style-type: none">確認本機處於可搜尋狀態 (指示燈閃爍白光)，詳見"開始使用"單元。確認在您的裝置中藍牙是開啟的。確認您在裝置中的藍牙清單，是選定了"JG01-XXX"配對，並顯示"已連線"。藍牙裝置可能已超出連線範圍，請讓藍牙裝置與本機靠近一些。如果可以的話，關閉附近的其他藍牙裝置，或是關掉他們的藍牙功能。將機器底部的電源重新開啟一次重置。
喇叭指示燈有連結上裝置，但音樂沒有撥放	<ul style="list-style-type: none">確認您要聽音樂的裝置已與本機配對成功。確認喇叭的音量不是靜音且音量已調大聲。在您的裝置中調整音量大小聲。藍牙裝置可能已超出連線範圍，請讓藍牙裝置與本機靠近一些。讓您的裝置遠離其他電子訊號干擾，例如其他無線裝置，無線電話，微波爐，伺服器等等。如果可以的話，關閉附近的其他藍牙裝置，或是關掉他們的藍牙功能。參考使用手冊說明，了解如何將另一個藍牙裝置配對。重開本機，將機器底部的電源重新開啟。

問題	該如何解決
聲音品質不佳	<ul style="list-style-type: none"> • 藍牙裝置可能已超出連線範圍，請讓藍牙裝置與本機靠近一些。 • 讓您的裝置遠離其他電子訊號干擾，例如其他無線裝置，無線電話，微波爐，伺服器等等。 • 減少您的裝置中正在開啟的應用程式，開啟太多的應用程式可能占用您裝置中傳輸音訊的資源，關閉不必要的程式來提升音訊品質。 • 試著關閉您裝置中的WI-FI來提升音訊品質。 • 試著清空您裝置中藍牙清單裡顯示的資訊，重新配對一次。 • 如果您的裝置是在您的口袋裡，試著把它拿到開放的空間，不要讓您的身體在裝置與本機之間。 • 將機器底部的電源重新開啟一次重置。

更多資訊

若想了解更多產品的相關資訊，請參訪 www.daqiconcept.com



型號: JG01

Made in Taiwan

