


GB

Instruction manual

model:9973-DPE01H

' East New York Audio ' Bluetooth Adaptor Amplifier for Headphones

- [1] Bluetooth/play/call button
- [2] volume + / next track button \blacktriangle
- [3] volume - / previous track button \blacktriangleright
- [4] Bluetooth LED / LED for charge indication
- [5] built-in mic. for speaker phone function
- [6] input recharging port – micro USB
- [7] recharge/charge cord
- [8] 2.5mm AUX

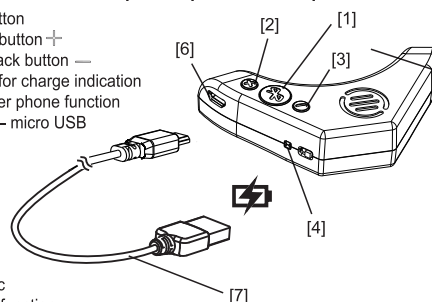


Product Features

- stereo quality music
- handsfree call pick function
- Bluetooth v4.1 wireless

Charging the device

- a) connect the micro USB port with the charging cable;
- b) plug the charging cable USB end with ⚡ marking to a USB port power source;
- c) RED LED lights up, indicates charging;
- d) when speaker is fully charged (approx. 1.5 hrs), LED will turn off

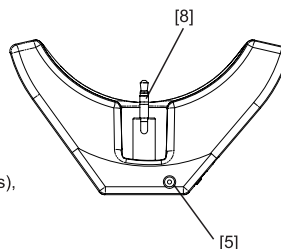

Pairing the device


- a) when slip the switch to LED, the device turns on
- b) wait till LED flashing fast (8x/sec.) to show ready for pairing;
- c) for first time, browse smart phone Bluetooth device list, search and select the one 'East New York Audio';
- d) wait till the blue LED constant lit;
- e) now pairing connection is successful

When you need to disconnect the device

- f) switch off Bluetooth function on your smart phone,
 - g) the device's blue LED will flash slowly (1x/sec.)
 - h) then slip the switch to bottom to turn device OFF, (the pairing memory will be kept there)
- Next time when you turn ON the device again, it will automatically connect to your smart phone again and blue LED lit constant (your smart phone's Bluetooth function also need to be ON and is nearby <5M)

If you need to pair the device with a new smart phone;

- i) switch off Bluetooth function on your smart phone,
 - j) then power on your new smart phone's Bluetooth function.
 - k) after press and hold the middle button 1sec to reset, the device's blue LED will be flashing fast again (8x/sec.), and
- Then you repeat steps as in above a) to e).

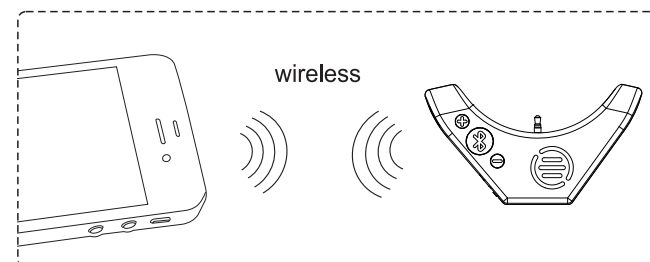

Call-pick function

When device is connected to your smart phone (blue LED lit continuously), whenever there is an incoming call ring, you can press the middle button once on right earphone side to pick up and use the headphones as speaker phone. (press button once again will switch the call to your smart phone)

How to Use / Controls

Adjust volume

During music playback or call, press & hold \blacktriangle to increase speaker volume, or \blacktriangleright reduce speaker volume. You have to press and hold until adjust volume to desire level.

Next-forward / Previous-backward

During music playback, press \blacktriangle once will forward to play next track; press \blacktriangleright once will backward to previous track. You may press multiple times to forward or backward multiple tracks in a jump.

Play/Pause

During music playback, press the middle button once will pause playback, press again to resume play.

Battery low > recharge

There will be some beeping alert sound during playback. Then charge the device as mentioned steps in above section.

Specifications:

dimensions:	W 81.5 x D 45 x H 17.8 mm
product weight:	20.5g
Bluetooth wireless connection	v4.1 +EDR; class II; typ. 8M visible distance; max. 10M
support multiple pairing:	up to 4 devices**
operation voltage	min. 3.7V; max. 4.2V DC
built-in 3.7V Li-polymer rechargeable battery	
battery charging voltage	typ. 5V; max. 5.5V DC (via. USB port)
battery charging current	150mA max. (circuit auto-regulated)
battery charging time	1.5 hour
drain current (power on, no input)	<=15mA
playback/standby time	up to 6 hours (fully charged, volume at 1/3 level)

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Manova International Limited is under license. Other trademarks and trade names are those of their respective owners.

*Design and specifications are subject to change per technical needs, without prior notice

**This speaker supports pairing 'records' up to 4 devices, but NOT 'connection' to 4 devices at the same time

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.
