

Instructions USER MANUAL EV-BT100

Safety Precautions


The correct and safe use of this headset, please read before use
Read this manual, and keep it.

Using headphones should pay attention to the following matters:

1. Requests the reasonable control of the volume and time when using headphones.
2. Do not use the headset in potentially hazardous environments, to ensure safety.
3. Avoid using headphones to listen to music while driving, make or Answering the call, distracting danger.
4. Set the headset in place of reach of children to avoid the children make The risk of improper use.
5. Avoid headphone water in the toilet, so as not to damage the headphones sound or Headphones.
6. continue to increase the volume should be avoided, resulting in around you hear Sound. If tinnitus or turn up the volume too high appears, transferred Suitable volume.
7. When using the headset feels as obvious discomfort, irritation or other non-Adverse reactions immediately stop using it.
8. Avoid storing or using the headphones at a temperature lower than -15°C (5°F) Or higher than 55°C (131°F) environment, or otherwise will shorten the ear Or battery life.

Headphones Overview

Headphones explaining:

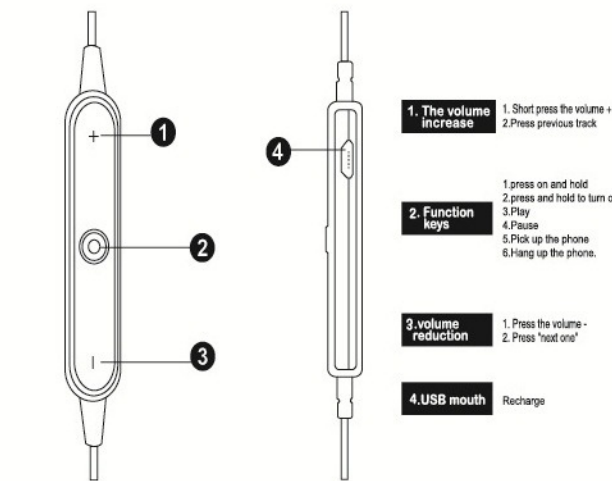

Headphones Package Contents:

- Host x1
- Charging cable x1
- Warranty card x1
- Manual x1

Charging and battery:

Use of this product before charging cable to charge, first check the charging cable is genuine.

Warning: You must use the included charging cable to charge the headset using the charging cable is not supporting may be Damage the headset, and the DC voltage must be 5V, current is more than 100A (5V / 100mA).

The headphones use a built-in non-removable, rechargeable battery. Do not attempt to remove from the headset Battery, so as not to damage the headset.

Technical Specifications

Bluetooth parameters

- Bluetooth version: Bluetooth V4.1
- Support Agreement: A2DP, AVGCP, HSP, HFP
- Frequency: 2.400GHz-2.480GHz

- Operating Range: Up to 10 meters (unobstructed space)
- Talk time: Up to 4 hours
- Music time: up to 4 hours, 80% volume
- Standby time: up to 80 hours
- Charging standard: Micro USB, DC5V, 80mA
- Charging time: about 1.5 hours
- Working environment: -10 to 50°C
- Loudness Frequency: 20Hz-22KHz

Lights

- Pairing state: red and blue lights flashing alternately fast
- Music Status: slow flashing blue light
- Charge status: a long red light
- Charging complete: red lights or long bright blue light
- Low power status: red light and accompanied by a tone

Action Description

Power: Off: Press the pause button switch

Pairing mode: The first time even open automatically enter pairing status
(Or press and hold the multifunction key to enter the match)

Answer / Hang up: Click the multifunction key to achieve incoming calls and hang up

Last Number Redial: Double-click the multifunction key to open the last number dialed

Voice dialing (need phone support): Double-click the volume down button to turn on the

Phone voice dialing

Up / Down song: Click side buttons for the cut songs

Volume up / down small: Press the side volume by about two seconds to realize big / small

Voice calls: answer YES, refused to NO, note (on the Caller ID

After the broadcast will open voice)

Warning Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Bluetooth pairing Step 1

1. Plug Bluetooth headset and mobile phone (or other connected devices)

A distance in the range of 1 meter, the closer the better.

- 2, the headset is on and confirm that pairing state, then

Red and blue lights flashing alternately, for pairing;

- 3, open the user's mobile phone Bluetooth function (or other Bluetooth devices).

And search or scanning, then the phone will search for nearby

Some Bluetooth devices, tap the search to the headset name: XY-01,

And enter the password 0000, after a successful mating connector, headset instructions

Lights turned blue lights flashing, indicating a successful mating connector! Then you can

For listening to music phones, the phone!

Tips:

1. The phone has been successfully paired, in the headset will automatically reboot previous Second paired phone connection, without pairing again!
2. Some phone after pairing connection must manually select the headset service functions, The phone Bluetooth version is 2.1 or later, when paired, no pairing code (0000) You can use headphones.
3. Bluetooth headset pairing time up to 240 seconds, beyond this time will quit Pairing status, if you are still not successful pairing pairing again repeat the above steps.
4. headset will automatically shut down after the unconnected exceed 10 minutes.
5. headset built three kinds of sound effects can be switched.

Bluetooth pairing Step 2

Pairing 2: one for two functions (to connect two Bluetooth devices simultaneously)
1. Make sure the headset is successfully connected the first mobile phone (in the connection status)

- 2, the headset press the headset multifunction button to re-enter pairing status,

Start another Bluetooth-enabled mobile phone and search for Bluetooth devices,

Select XY-01 headset into pairing and connection is successful (refer match

Step 1 of the method)

- 3, and then opens the first Bluetooth-enabled mobile phone, the existing connection memory

The XY-1 headphone tap into the connection, the connection is successful, then the ear

Machine is connected to two mobile phones simultaneously, be one with two functions.

Step PC connection

- First, download and install a generic Bluetooth driver software
- After successfully installed, your computer will have a gray lower right corner Small Icons
- Then plug in the Bluetooth adapter, then the lower right corner of the computer icon Blue, Note: The laptop has no Bluetooth It requires an external Bluetooth adapter, and the adapter must be purchased separately user
- Right-click, select "Show Classic Interface"
- Bluetooth headset off, press and hold the multifunction key until Red and blue lights flashing alternately (the match), then enter the headset is Search Status.

- Right-click on the computer screen, select the "Search Device", then the ear Machine must be in the pairing state (red and blue lights flash alternately), then electricity Brain will search all nearby Bluetooth devices
- Double-click the computer search to the XY-01 Bluetooth Headset
- Right-click on the XY-01 and select 'Bluetooth High Quality Audio', enter the password Code "0000" (initial password is 0000)
- Here, Congratulations on your Bluetooth headset has successfully connected computer, PCs can now listen to music, voice it!

Frequently Asked Questions:

- 1 Bluetooth headset not paired with the phone?
A: Check the headset is in pairing mode or back to even. And check the phone Bluetooth search function Whether it is turned on and check the Bluetooth menu on the device and delete / cancel the headset, the Headset according to the instructions reconnect.
2. Bluetooth headset can not start?
A: Check the headset power.
3. Bluetooth headset can replace the battery?
A: No, this headset is not removable lithium polymer battery.
4. Can I use a Bluetooth headset while driving?
A: You can use communications headset while driving. But it does not recommend using a headset while driving.
5. Bluetooth headset and the phone disconnected at 10 meters?
A: Because Bluetooth is a wireless technology, the subject was on the headset and the connected device Min Sense, please check whether there is an object within range of metal / other effects connected.
- 6, after the headset connected to a computer or mobile phone, can not hear the sound?
A: Check whether the computer output channel is set to Bluetooth audio devices and your computer's Bluetooth Whether to support the A2DP protocol. And check the computer / phone volume.
- 7 Bluetooth headset connected to your phone, you can use the headset to control applications on the phone it?
A: The device application software to set or vary, so individual applications not supported Controlled by the headphones.