

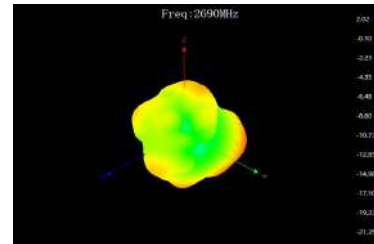
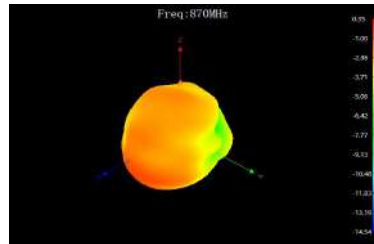
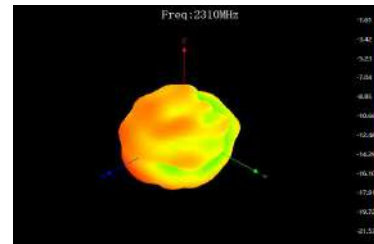
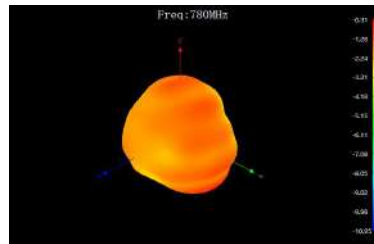
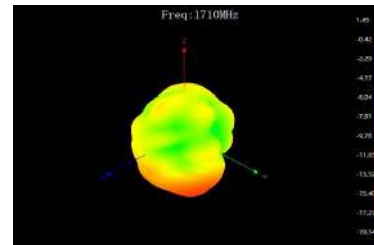











Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi
700	-7.33	18.49	-3.8
710	-7.04	19.77	-3.92
720	-6.63	21.73	-4.17
730	-4.28	37.33	-1.05
740	-4.42	36.14	0.3
750	-4.92	32.21	0.1
760	-5.11	30.83	-1.3
770	-3.94	40.36	-0.68
780	-3.78	41.88	-0.31
790	-3.51	44.57	-0.25
800	-3.6	43.65	-1.58
810	-2.9	51.29	-0.54
820	-3.56	44.06	-0.65
830	-3.9	40.74	-0.28
840	-3.84	41.3	-1.34
850	-2.7	53.7	0.05
860	-3.32	46.56	0.27
870	-3.7	42.66	0.35
1710	-3.81	41.61	1.45
1730	-3.59	43.71	1.59
1750	-3.70	42.67	1.24
1770	-3.30	46.77	1.84
1790	-3.25	47.28	1.35
1810	-3.05	49.51	1.85
1830	-2.99	50.24	1.55
1850	-3.04	49.67	2.27
1870	-2.95	50.73	2.97
1890	-2.83	52.15	3.01
1910	-2.51	56.11	2.99
1930	-2.21	60.08	3.15
1950	-2.20	60.29	4.2
1970	-1.88	64.89	4.53
1990	-2.14	61.13	4.14
2010	-1.91	64.43	4.12
2030	-2.38	57.85	2.87
2050	-2.10	61.67	2.99
2070	-2.55	55.55	1.92
2090	-2.72	53.46	1.99
2110	-3.13	48.65	1.18
2130	-3.29	46.92	1.27
2150	-3.62	43.44	0.73
2170	-3.85	41.24	0.32
2190	-3.90	40.76	0.14
2210	-3.94	40.41	-0.4
2230	-3.91	40.64	-0.39
2250	-3.89	40.82	-0.66
2270	-4.04	39.43	-0.84
2290	-4.08	39.1	-1.18
2310	-4.25	37.59	-1.61
2330	-4.26	37.49	-1.42
2350	-4.45	35.89	-1.44
2370	-4.57	34.95	-1.6
2390	-4.74	33.54	-2.04
2410	-4.84	32.78	-2.19
2430	-4.91	32.3	-1.39
2450	-5.10	30.89	-1.69
2470	-4.96	31.94	-0.64
2490	-5.11	30.81	-1.48
2510	-5.10	30.89	-0.79
2530	-4.91	32.3	-1.3
2550	-4.52	35.28	0.12
2570	-4.25	37.59	0.49
2590	-3.93	40.47	1.85
2610	-3.31	46.62	2.65
2630	-3.25	47.36	2.62
2650	-3.07	49.28	2.53
2670	-3.03	49.83	2.44
2690	-3.18	48.04	2.02

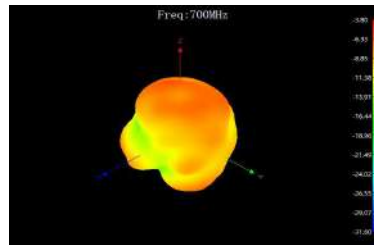

MAIN Antenna

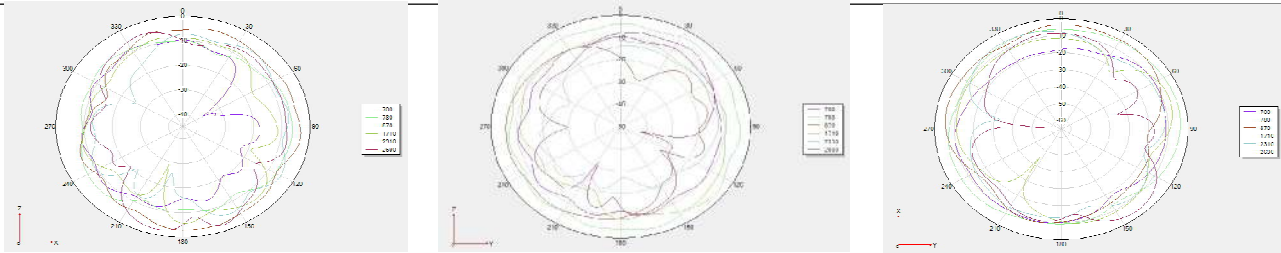










Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi
700	-5.19	30.27	-1.86
710	-5.04	31.33	-1.46
720	-5.05	31.26	-1.69
730	-4.59	34.75	-1.78
740	-5.52	28.05	-2.53
750	-4.92	32.21	-1.78
760	-4.46	35.81	-0.93
770	-3.4	45.71	-0.14
780	-3.54	44.26	-0.04
790	-3.54	44.26	-0.06
800	-3.59	43.75	-1.06
810	-2.77	52.84	0.36
820	-3.2	47.86	0.03
830	-3.46	45.08	-0.14
840	-3.41	45.6	-1.08
850	-2.54	55.72	0.35
860	-3.59	43.75	-0.26
870	-4.27	37.41	-0.82
1710	-5.75	26.61	1.07
1730	-5.6	27.54	0.82
1750	-6.16	24.21	-0.24
1770	-5.91	25.64	-0.07
1790	-6.16	24.21	-0.63
1810	-6.04	24.89	0.01
1830	-5.88	25.82	0.24
1850	-5.87	25.88	0.67
1870	-5.92	25.59	0.37
1890	-6.18	24.1	0.17
1910	-6.15	24.27	0.34
1930	-6.06	24.77	0.59
1950	-6.13	24.38	1.06
1970	-5.65	27.23	1.12
1990	-5.78	26.42	0.91
2010	-5.16	30.48	1.25
2030	-5.3	29.51	0.77
2050	-4.57	34.91	1.37
2070	-4.8	33.11	0.44
2090	-4.8	33.11	0.36
2110	-5.11	30.83	-0.3
2130	-5.02	31.48	-0.43
2150	-5.15	30.55	-0.88
2170	-5.02	31.48	-1.14
2190	-4.71	33.81	-0.49
2210	-4.44	35.97	-0.09
2230	-4.23	37.76	0.48
2250	-4.07	39.17	0.89
2270	-4.15	38.46	1.41
2290	-3.95	40.27	2.19
2310	-3.87	41.02	2.25
2330	-3.57	43.95	3.22
2350	-4.23	37.76	2.39
2370	-3.83	41.4	3.55
2390	-4.1	38.9	3.24
2410	-4.17	38.28	2.77
2430	-3.92	40.55	2.8
2450	-4.01	39.72	2.47
2470	-3.55	44.16	3.43
2490	-3.96	40.18	2.9
2510	-4.32	36.98	3.32
2530	-4.65	34.28	2.53
2550	-4.95	31.99	2.88
2570	-5.41	28.77	1.78
2590	-5.82	26.18	1.92
2610	-5.5	28.18	1.81
2630	-5.7	26.92	1.34
2650	-5.29	29.58	1.29
2670	-4.81	33.04	1.67
2690	-4.55	35.08	1.4

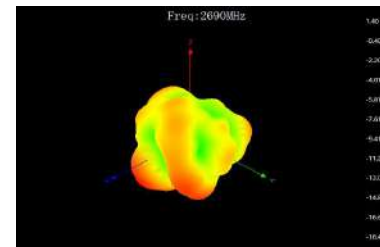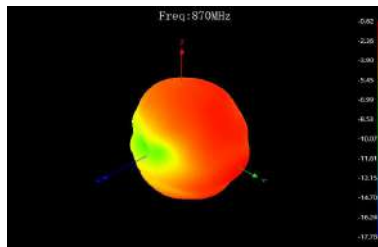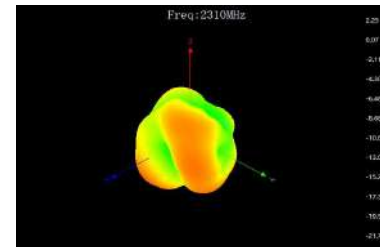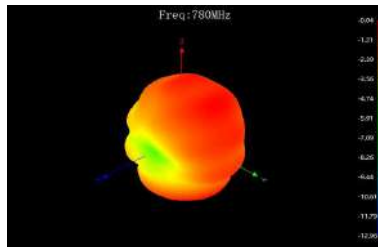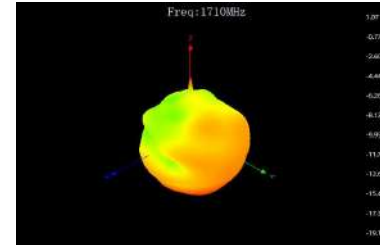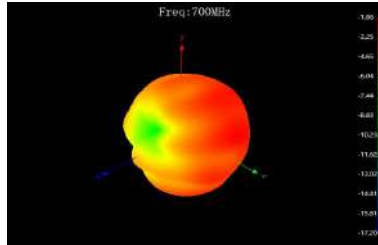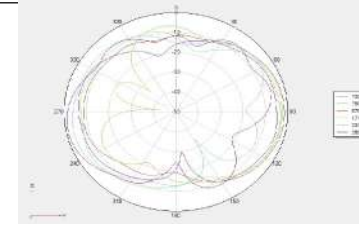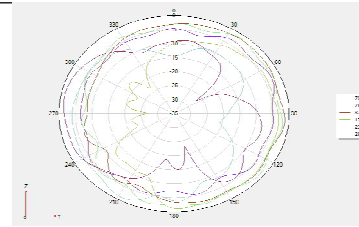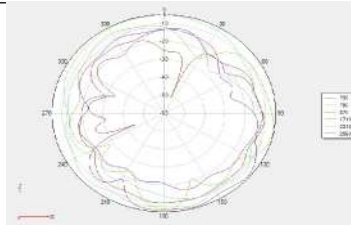

AUX Antenna








Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi
2400	-3.16	48.31	1.99
2410	-3.34	46.34	1.64
2420	-3.26	47.21	2.11
2430	-3.29	46.88	2.26
2440	-3.57	43.95	2.16
2450	-3.49	44.77	1.99
2460	-3.51	44.57	2.3
2470	-3.09	49.09	2.93
2480	-3.6	43.65	2.25
2490	-3.29	46.88	1.96
2500	-3.4	45.71	2.37
5200	-2.39	57.68	8.29
5220	-2.41	57.41	8.06
5240	-1.98	63.39	8.56
5260	-2.28	59.16	8.15
5280	-2.37	57.94	8.17
5300	-2.32	58.61	7.9
5320	-2.51	56.1	7.85
5340	-2.13	61.24	8.32
5360	-2.39	57.68	8.51
5380	-2.19	60.39	8.68
5400	-2.06	62.23	8.92
5420	-2.93	50.93	7.77
5440	-2.69	53.83	8.11
5460	-2.86	51.76	7.89
5480	-2.87	51.64	8.03
5500	-3.19	47.97	7.53
5520	-2.83	52.12	7.85
5540	-2.56	55.46	7.88
5560	-3.1	48.98	7.34
5580	-2.44	57.02	7.87
5600	-3.09	49.09	7.17
5620	-3.5	44.67	6.72
5640	-3.71	42.56	6.69
5660	-4.03	39.54	6.66
5680	-3.9	40.74	7.01
5700	-4.11	38.82	7.19
5720	-3.59	43.75	7.75
5740	-3.72	42.46	7.92
5760	-3.34	46.34	8.24
5780	-3.24	47.42	8.2
5800	-3.54	44.26	7.68

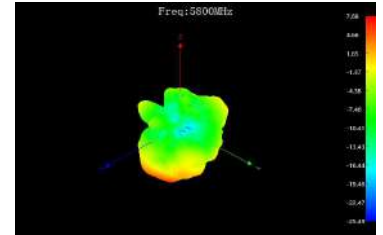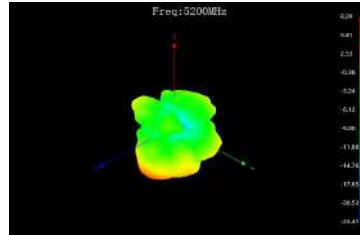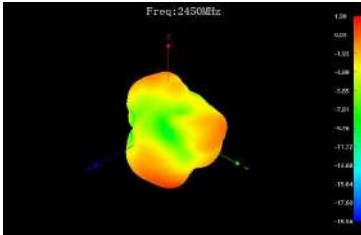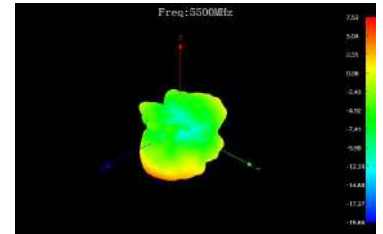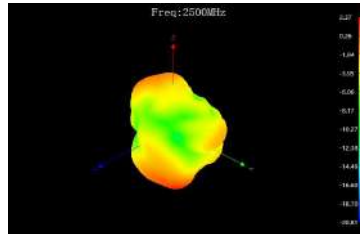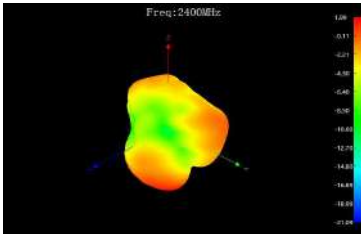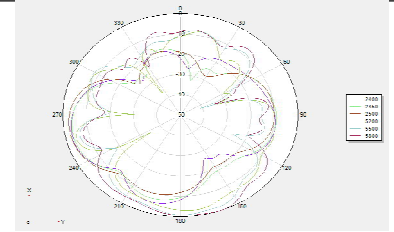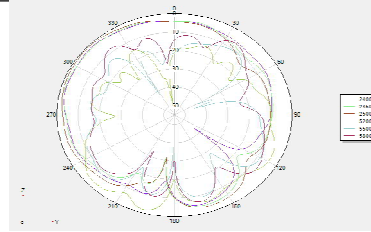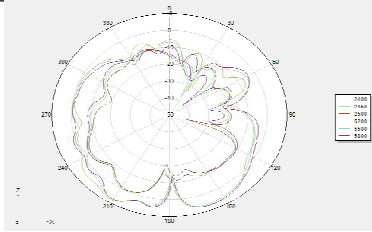

WiFi&BT Antenna



Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi
1500	-13.63	4.34	-8.44
1505	-12.47	5.66	-7.45
1510	-12.59	5.51	-8.21
1515	-11.75	6.68	-6.53
1520	-10.09	9.79	-5.14
1525	-10.32	9.29	-5.05
1530	-8.11	15.46	-3.37
1535	-7.07	19.63	-2.32
1540	-6.59	21.95	-1.38
1545	-5.33	29.29	0.66
1550	-5.12	30.73	0.29
1555	-4.42	36.14	1.56
1560	-3.18	48.06	2.65
1565	-3.62	43.45	1.6
1570	-3.46	45.11	2.77
1575	-3.00	50.13	2.22
1580	-3.36	46.17	1.63
1585	-3.44	45.3	2.02
1590	-4.09	38.99	0.11
1595	-4.77	33.38	0.11
1600	-5.23	30	-0.98

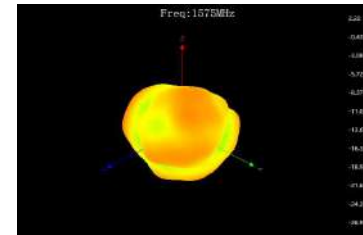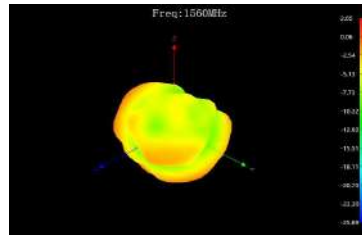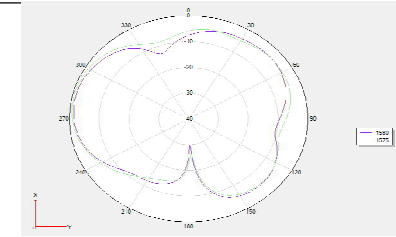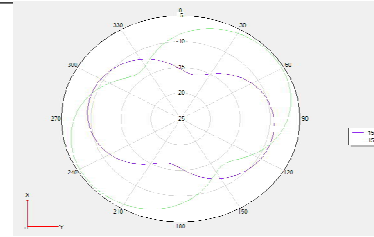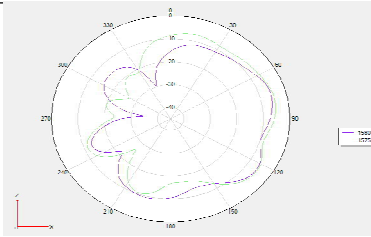

GPS Antenna

