

■ GROUP INTERCALL (up to 4)

Step1. Turn on all devices.




- Press and hold all devices **PHONE/MUSIC** until LED on.

Step2. Setting up pairing No.1 and No.2 .



- Press and hold No.1's **CH2** and No.2's **CH1** until LED red flashes.
- Press No.1's **CH2** once until both devices LED blue flashes.
- Pairing and calling succeed.

Step3. Setting up pairing No.2 and No.3 .

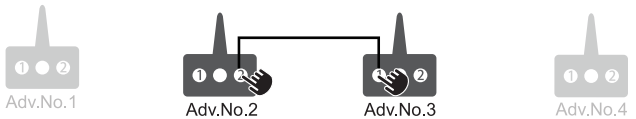

- Press and hold No.2's **CH2** and No.3's **CH1** until LED red flashes.
- Press No.2's **CH2** once until both devices LED blue flashes.
- Pairing and calling succeed.

Step4. Setting up pairing devices up to 4



- Press and hold No.3's **CH2** and No.4's **CH1** until LED red flashes.
- Press No.3's **CH2** once until both devices LED blue flashes.
- All devices' pairing and calling succeed.

▲ NOTICE :

1. After initial pairing setting, devices will memorize pairing. For next use, just turn on the devices and click Channel button once and start to use.
2. Please insert phone jack to all devices before pairing, otherwise it may have echo during intercall. If it occurs, hang up and call out again.

Recommend application use:

- Long distance activity (over 500m) :  Such as kitesurf, surf, snow sports, etc. Recommend having max. 3 people intercall.
- Short distance activity (100m ~ 500m) :  Such as wakeboard, sail, SUP, etc. Allow up to 4 people intercall.


■ RECORD VIDEO & VOICE BY GARMIN ACTION CAMERA (ultra 30)

Step1. Pair with Garmin.




- Enable Garmin's BLUETOOTH search mode.
- While OFF, press and hold (5sec.) **PHONE/MUSIC** until LED blue & red flashes.
- Select "BBT ADV" on Garmin screen.
- Pairing succeed.

Step2. Setting up pairing No.1, No.2, No.3 .

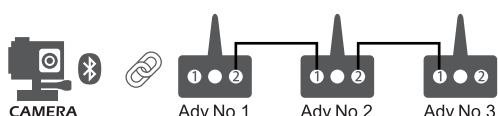

- Please follow the steps in "GROUP INTERCALL"

■ PAIR WITH SMART PHONE

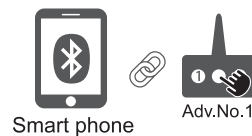

- Enable smart phone's BLUETOOTH search mode.
- While OFF, press and hold (5sec.) **PHONE/MUSIC** until LED blue & red flashes.
- Select "BBT ADV" on phone screen.
- Pairing succeed.


▲ NOTICE :

After initial pairing setting, devices will memorize pairing. For next use, just turn on the devices and will automatically link. (make sure phone's BLUETOOTH is enable.)

■ LIVE COMMUNICATION

(1 smart phone + 2 Advance)

Step1. After pair with smart phone.
Turn on Adv No.2.

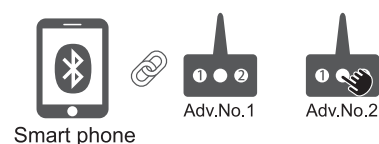


★ Recommend to use at :




*Skype also works, but sometimes depends on its version and setting.

- Press and hold Adv.No.2 **PHONE/MUSIC** until LED on.

Step2. Setting up pairing No.1 and No.2 .

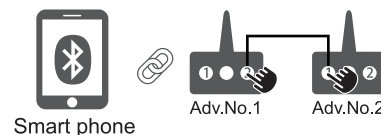


- Press and hold No.1's **CH2** and No.2's **CH1** until LED red flashes.
- Press No.1's **CH2** once until both devices LED blue flashes.
- Pairing and calling succeed.

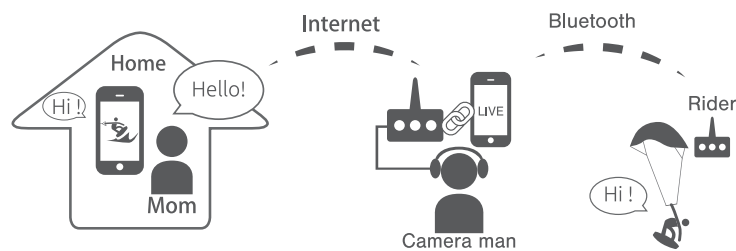


▲ NOTICE :

After pair with smart phone, can intercall with max. 2 Advance devices.

■ RECORD VIDEO & VOICE BY SMART PHONE

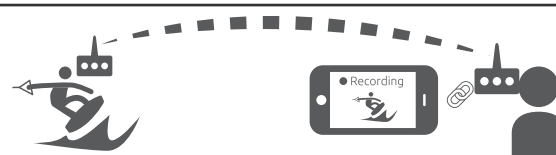

- After pair with smart phone, if you would like to take video and record the voice, must use app "Movie Pro". 


■ RESET

While OFF, press and hold **PHONE/MUSIC** and **Vol+** until LED purple comes out.



■ UPDATE

- Download and install update tool and firmware from our website.
- Plug micro USB in PC. Press and hold **Vol+** & **Vol-** until LED red & blue flashes.
- For more detail : bbtakin.com/update



Scan the QR code to watch pairing video



There are more features will be released. Please follow our website to get the latest information and update Advance's firmware.

Bb TALKIN'

ADVANCE

MODEL : A01R

USER GUIDE

Ver.0001

Thank you for choosing BbTALKIN ADVANCE.

This instruction manual will help you operate this system.
First, read this manual carefully and familiarize yourself
with functionalities before use.

www.bbtalkin.com

▲WARNING

- DO NOT modify or disassemble the device.
- The area you cannot use : in the airplane, near the person with medical devices or equipment such as pacemaker, etc.
- DO NOT expose this device to extreme temperature or humidity place.
- When Advance device gets damaged, stop using immediately.

■ SPECS

Intercall talk time	10 hr
Charge time	2.5 hr
Weight	62 g
Range	1 mile
Water-proof	IPX 7

*must in the waterproof case

■ CHARGING



- AC adaptor 5V± 5% min. 500mA
- Please make sure the device is completely dry before charge.
- Charging cable: Micro USB
- How to know battery status:

The second indicator LED after power ON.

Blue=100%-60%,
Purple=60%-40%
Red=battery low

Battery Charge:
Red=Charging
Blue=Full charged

■ DETAIL

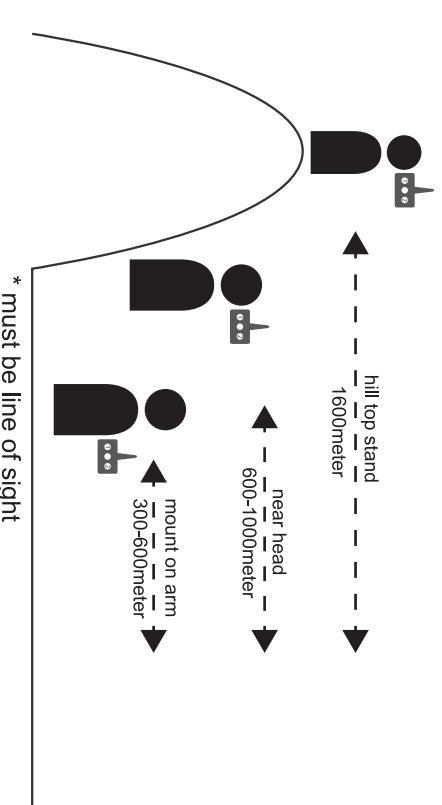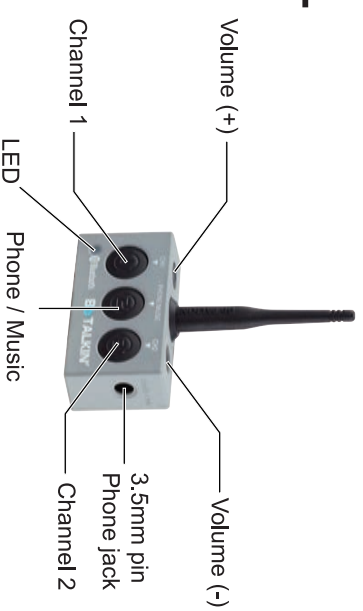

LIMITED WARRANTY

This limited warranty covers defects in materials and workmanship in this product for twelve month (12) months for main device only.
The warranty obligations of BbTALKIN for this product are limited to the terms set forth below.
This limited warranty does not cover any damage, rust, USB part, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping, lightning, power surges, or other acts of nature. This limited warranty does not cover a damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by BbTALKIN to make such repair or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover the cost of shipping, handling, or return shipping of this product. BbTALKIN is not responsible for the cost of shipping, handling, or return shipping of this product. If this product is returned to BbTALKIN or the authorized dealer from which it was purchased or any other party authorized repair BbTALKIN products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. BbTALKIN will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. BbTALKIN will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programmin required for a specific installation of this product.
It may damage your ears, if using too long or high volume sound. BbTALKIN will not be responsible.
Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.
How to Obtain a Remedy under this Limited Warranty
To obtain a remedy under this limited warranty, you must contact either the authorized BbTALKIN reseller from whom you purchased this product or the nearest BbTALKIN service center. You must provide a valid receipt for the purchase of this product. In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized BbTALKIN reseller. If this product is returned under this limited warranty, a return authorization number obtained from BbTALKIN will be required. You may also be directed to an authorized reseller or a person authorized by BbTALKIN to repair the product. If it is decided that this product should be returned directly to BbTALKIN, this product should be properly packed, preferably in the original carton, for shipping. Carbons not bearing a return authorization number will be refused.
Limitation on Liability
THE MAXIMUM LIABILITY OF BbTALKIN UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, BbTALKIN IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special incidental consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.



■ INTERCALL

After pair devices, click either one device **CH** once to call out / hang up the intercall.
Transmitter side: call out / hang up
Receiver side: automatically pick up / hang up

■ HANDSFREE

After pair with phone, incoming phone call :

- Click **PHONEMUSIC** : Pick up / Hang up the phone call
- Click **PHONEMUSIC** twice quickly : Decline a call / Redial

■ MUSIC PLAY

After pair with phone, play and pause music :

- Click **PHONEMUSIC** once to play or pause music.
Forward and Backward :
- Press and hold 2sec. **Vol+** for forward music, **Vol-** for backward.

FCC PART 15.105 INFORMATION:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC PART 15.119 COMPLIANCE INFORMATION:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

FCC 15.21 Information to user.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF Exposure Information

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the EUT transmitting at the specified power level in different channels.

The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this device is on file with the FCC and can be found under the Display Grant section of www.fcc.gov/eot/ea/fccid .

To ensure that RF exposure levels remain at or below the tested levels, use a beltclip, holster, or similar accessory that has no metallic component in the assembly