BLUETOOTH EARBUDS

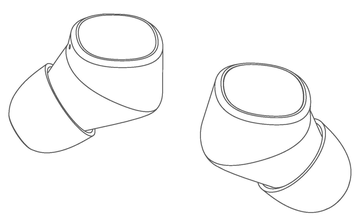

Model: TW76

User Manual

Overview

Chose eartips

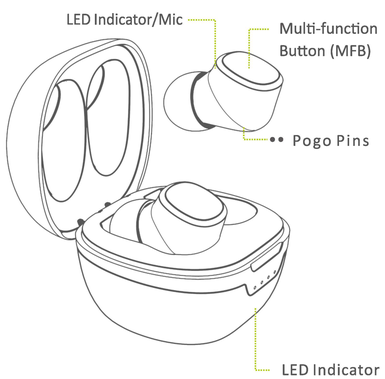

Medium eartips fit for most of the people, recommend to try it for the first time.

Start to Using

First use

Take out both 2 earbuds then re-insert them back into the case to activate the earphones.
Notes: If Earbuds fail to be charged, please charge the case via USB cable(for details, please refer the following step)

How to pair

1. Activating the EarBuds.
2. Take out the EarBuds from the case, they will auto power on and pair with each other.
3. Left EarBud will auto enter into pairing mode while LED light on right EarBud will be turn off.
4. Search for" TW76 "on mobile devices and tap to pair it to both EarBuds.

Resetting

Please try the following steps if fail to connect with the mobile device.

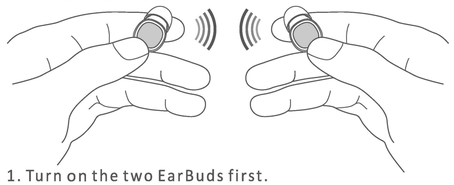

1. Turn on the two EarBuds first.
2. Tap the multi-function buttons for 18s(LED will blink red and white light then turn off).
3. Tap the MFB for 3s to turn on(White LED light blinks) and two Earbuds will auto pair with each other.
4. Left EarBud will auto enter into pairing mode while LED light on right EarBud will be turn off.
5. Search for" TW76 " on mobile devices and connect it it with EarBuds.

Wearing

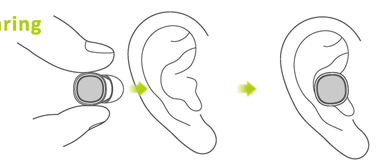

Put the Earbuds into ears lightly with mic towards to the front side.

Charging

a Charging the Earbuds



Insert the EarBuds into the charging case (pogo pins should be well-connected)
LED light will be Red while charging and turns into White(will be last for 30s) once full charged.

b Charging the Case



Note: Then charging case, one light on mean 20% power, two lights on mean 50% power,three lights on means 75% power , four lights on mean full charged

Method 1(Charging cable): Insert the included Type C charging cable into the charging case and connect it to the appropriate power supply.

Method 2 (Wireless) : Place the charging case on the wireless charger.It will charge automatically when put down.

Functions

Power-On

Method 1: Take out the EarBuds from the charging case, it will auto power on.
Method 2: Tap the multi-function buttons for 3s



Power-Off

Method 1: Put the EarBuds back into the charging case, it will auto power off.
Method 2: Tap the multi-function buttons for 5s



Answer/Hang up the call

Tap the multi-function button to answer the call, Tap the button again to hang up.

Decline a call

Tap the multi-function button for 1s.



Switch Audio Output

Under the calling status, Tap the multi-function button for 1s to switch audio output between cellphone and Earbuds.



Mute-on/off

Under the calling status, Tap the multi-function button twice to turn on or off the Mute function.



Play/Pause the music

Tap the multi-function button to play pause the music.



Skip to last song

Tap the multi-function button for 3 times to play last song.



Skip to next song

Tap the multi-function button for 2 times to play next song

Voice Assistant

Under the standby status, tap the multi-function button 2s to activeate the voice assistant (eg. Siri).



Call Redial

Under the standby status, tap the multifunction button 4 times to realize the function of call redial at the end number the phone.

Model: TW76
Transmission Distance: 15 meters
Bluetooth Vision: V5.0
Charging Time: 1 hour
Talking Time: 5 hours
Battery type: li-ion
Mode: HFP、HSP、A2DP 、AVRCP
Battery capacity: 60mAh
Charging Case capacity: 550mAh

Tips

1. Before use it, please read the user manual carefully and keep it for future references.
2. It should be fully charged before first-time use.
3. If it is not being used for over 1 month, please charge it before use it again.
4. Please use the qualified adapter.
5. If it cannot be found by your mobile devices, please check whether it is in pairing mode; if not pairit with mobile devices for a long time, it will exit pairing mode, please re-enter the pairing mode; if a procedure error occurs on mobile devices, please reset it; otherwise, reset the EarBuds.

Warning

1. Never disassemble or modify it to avoid causing any damages or dangers.
2. Do not store it in extreme temperatures (under 0℃ or over 45℃)
3. Keep it away from the kids.
4. Do not use it during thunderstorms.
5. Do not use harsh chemicals or strong detergents to clean it.
6. Keep it dry.

RoHS

MADE IN CHINA

60*86.5mm

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception,
which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different
from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction