

BLUETOOTH SPEAKER USER MANUAL



VB-206
2019.03.22
VERSION 1.1.1


1

Introduction:

Thank you for choosing VB-206 Bluetooth Speaker that is compatible with cell phones, tablets, computers and other Bluetooth-enabled devices.

IPX5 rating means this speaker is splash proof. Water jets being splashed on the speaker from any direction will not cause any harm to the speaker or affect its performance.

Note: This Bluetooth speaker isn't splash proof without the silicone cover, please make sure the silicone cover is intact and closed under wet condition.

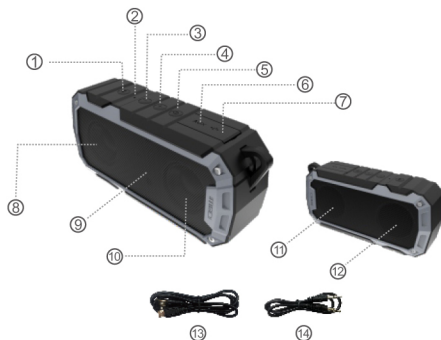

2

Description

- ① Bluetooth Button
- ② LED Indicator Light
- ③ Volume Down- / Previous Track Button
- ④ Volume Up+ / Next Track Button
- ⑤ Power ON/OFF Button
- ⑥ AUX In Port
- ⑦ Micro USB Charging Port
- ⑧ Left Channel Speaker
- ⑨ Microphone
- ⑩ Right Channel Speaker
- ⑪ Diaphragm 1
- ⑫ Diaphragm 2
- ⑬ USB Charging Cable
- ⑭ 3.5mm Aux In Cable

Specification

Bluetooth Version: 5.0
Bluetooth Receiving Range: 10M
Product Size: 175.5*50*78mm
Battery Capacity: 2200mAh
Input: 5V/1A

What's in the box

- 1) Speaker
- 2) 60cm USB Charging Cable
- 3) 3.5mm Aux In Cable
- 4) User Manual

3

Speaker Pairing

If the speaker is on, it will automatically look for the last connected device and automatically connect after finding. If not find within 10s, the speaker will re-enter the pairing mode, or press the Bluetooth button to enter the pairing mode directly. Once connected, a voice will indicate "Bluetooth is connected", and a flashing blue light appears every 5s. If there is no pairing after 10s, speaker will enter the sleep mode, and you can press the button to wake up Bluetooth pairing.

If the device exceeds the connection distance, the speaker will disconnect and go into sleep mode.

The device come back within 10 minutes, the speaker will reconnect.

Auto off: The speaker will automatically shut down if disconnected after 10 minutes.

Disconnect: Long press the Bluetooth button up to 3 seconds to unpair the device and enter into pairing mode.

4

Button

Power Button: Long press the button up to 3s to turn device ON/OFF with a voice indicate "Bluetooth mode"/"Power off". While in music mode, press the power button to pause/play music; When speaker is paired to your phone, press power button to answer the call, and press again to hang up, double press the power button to recall the last call.

"+": short press the button to go to the next track, long press the button to turn up volume.

"-": short press the button to go to the previous track, long press the button to turn down volume.

Once paired, press the Bluetooth button to broadcast the current battery level.

Aux-in Mode

Under this mode the music will only play from the device it is hooked up to. Adjust the volume on speaker and press the power button to mute.

Charging

Charging time 2.5 hours (5V/1A).

There will be an alarm prompt when the battery gets low. While the speaker is charging, the indicator light will turn solid red and will turn off after the speaker is fully charged.

5

Indicator light status

A flashing blue light indicates speaker is ready to pair. Once paired the light will turn solid blue for 3s and then turn off.

When the Bluetooth is connected, a flashing blue light appears every 5s.

While speaker is charging, the indicator light will turn solid red.

Once speaker is fully charged, the light will turn off.

Supplier's Declaration of Conformity

47 CFR § 2.1077 Compliance Information

Unique Identifier Trade Name: MEIDI,

Model No.: VB-206

Responsible Party – U.S. Contact Information

Walmart, Inc., Bentonville, AR72716

Walmrt.com

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

6



Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

7

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

8