×2 Press

Hold 2 sec

Press

Multipoint connection

Voice Assistant

Ambient/ANC/Normal mode

Press


×2 Press

Press

Answer incoming call

Reject incoming call

End current call

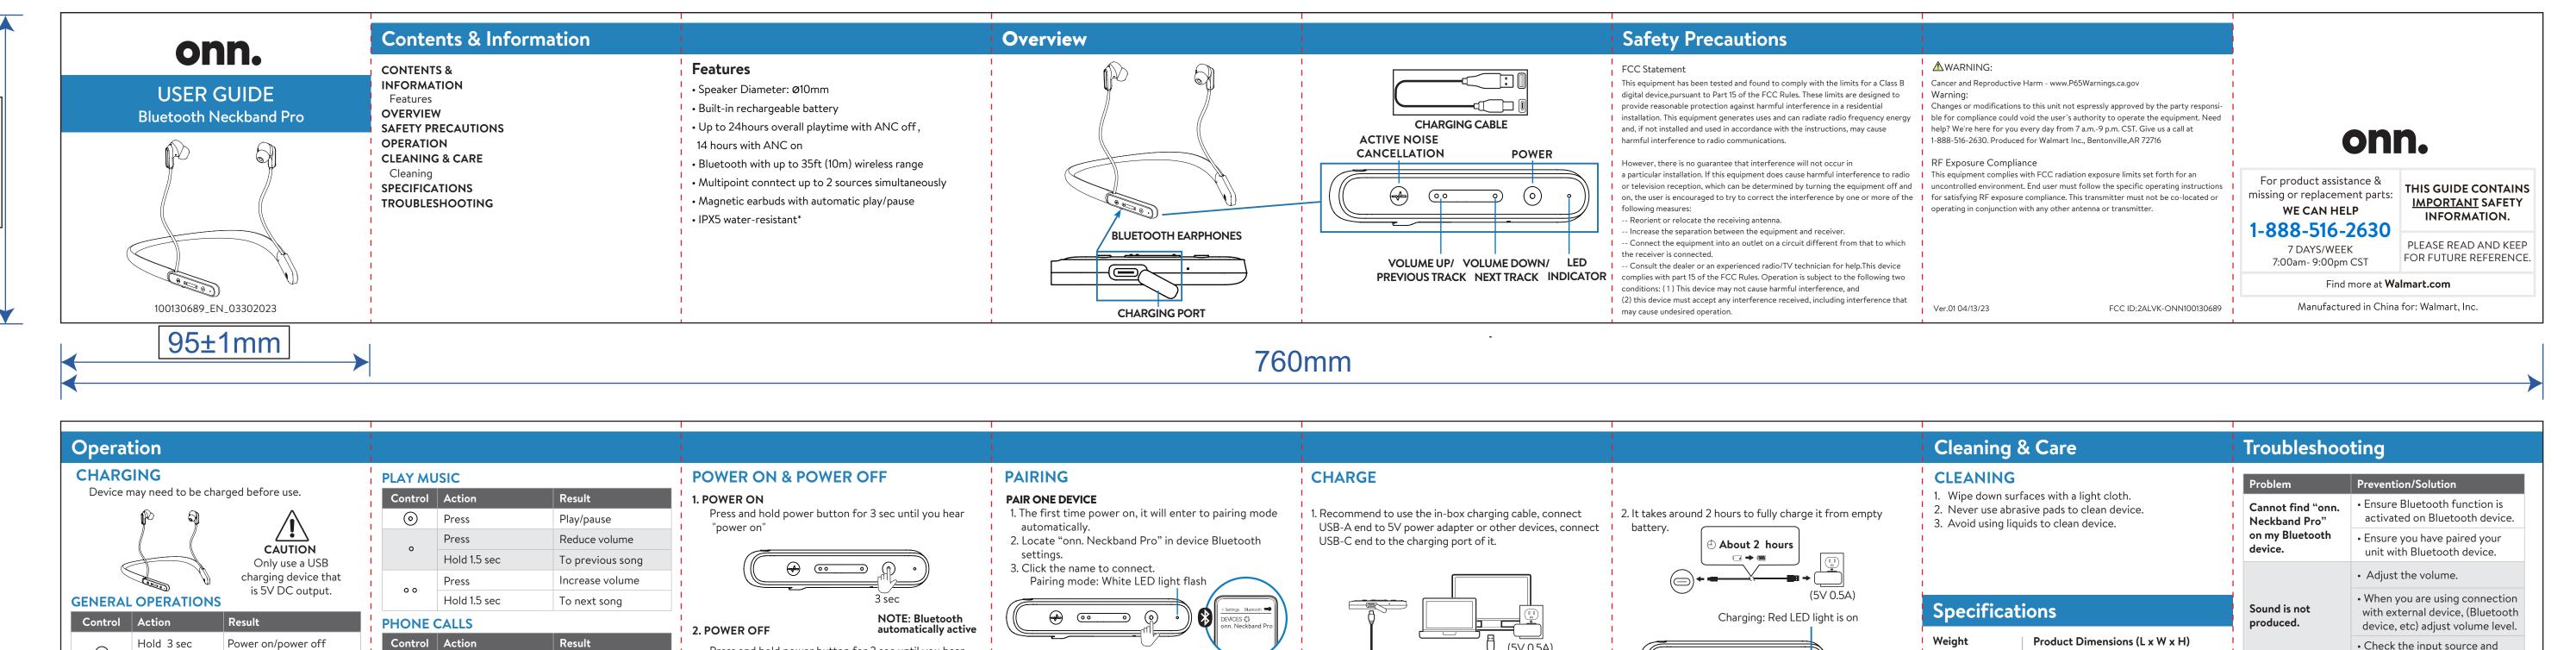

Press and hold power button for 3 sec until you hear

PAIR TWO DEVICES

power button.

1. Activate multipoint connection, by x2 pressing the

2. Now you can search it from your second device.

"power off"

(5V 0.5A)

Fully charged: Green LED light is on

5.89 lb

Color

Rich black

13.75 x 5.9 x 1.0 inches

Check the input source and

Cannot power on • Charge battery

select correct input source.