

## Dear users:

Thank you very much for using our product. This product is a new portable Bluetooth speaker launched by MUZEN, which inherits the company's design philosophy of "Aesthetically pleasing, Great sound, User-friendly and Entertaining", enabling you to connect with music and sound content more conveniently and simply.

This speaker is powered by batteries. For a better experience, you are recommended to charge it for about two hours in the OFF state prior to using it.


EN

JA

繁

 Packing List

Packing List	
1	Main unit x 1
2	Tag x 1
3	Product manual x 1
4	USB cable x 1

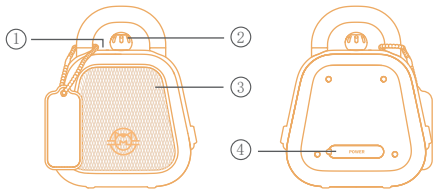 Operation Instructions of the Main Unit


① Bluetooth indicator:

Blinking of the warm white indicator: Bluetooth connection is available. Steady on of the warm white indicator: The device has been connected.

② Power switch/Volume control/Recording control:

Power on: Long press the button for 3 seconds.

Power-off: Long press the button for 3 seconds.

Volume up: Turn the button clockwise.

Volume down: Turn the button counterclockwise.

Recording deletion: Short press the button 3 times to delete the archived recording.



Bluetooth reset: Short press the button 5 times.

Recording: Short press the button 2 times to record for 30 seconds and re-short press the button 2 times to end the recording.

(Note: Please start recording after the prompt tone is over to avoid incomplete recording.)

Recording playback: Short press the button once to play the recording.

③ Speaker: for playing music (\*\* Note: This part is fragile. Please do not press it hard.)

④ TYPE-C charging port: It is located under the clamshell and is used to charge the device.

⑤ Charging indicator: It is located below the clamshell. The red indication is on when the speaker is being charged, and the green indicator is on when the speaker has been fully charged.



## Hardware Parameters

Product model: MW-P9I

Product dimensions: 60.5 mm × 33.6 mm × 72.6 mm

Net weight of the product: 68.2 g

Bluetooth: Bluetooth 5.0

Bluetooth connection distance: 5m ≤ Distance ≤ 10m

Loudspeaker: 4Ω 3W

Amplifier power: 3W

Signal to noise ratio: >70 dB

System frequency response: 120 Hz~20 KHz

MIC use distance: ≤ 0.05m (\*\* Note: This distance applies to quiet surrounding environment.)

Battery: 3.7 V/400 mAh

Charging port: TYPE-C

Charging voltage: DC 5V =1A

## Precautions

To ensure safety, please carefully read and follow the following safety instructions:

1. The manufacturer has the right to modify or adjust the specifications and details of this product without notifying the user.
2. Please use this product in a dry environment.
3. Keep this product away from exposed sources of fire.
4. Be sure to use this product in an environment where the ambient temperature is 0-45 °C. Do not use this product beyond this environmental condition.
5. Do not modify, repair or remove this product without authorization.

Otherwise, you may not enjoy the warranty service.

6. The approval number is displayed on the back of the product.

7. Note that improper battery replacement may cause a risk of explosion. If necessary, please go to a professional maintenance point for battery replacement. After the battery is replaced, you will no longer enjoy the warranty service.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which

the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help  
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



### Warranty Description

We provide one year of free warranty service for the hardware of this product. For service details, please visit [www.muzenaudio.com](http://www.muzenaudio.com) or contact our local distributors.

E-mail: [info@muzenaudio.com](mailto:info@muzenaudio.com)

Manufacturer: Shenzhen Airmart Technology Co., Ltd.

Address: 12/F, Building A, Guangqi Future Center, No.88 Gaoxin South 4th Rd, Yuehai Street, Nanshan, Shenzhen, PRC.

## EN ユーザーの皆様:

JA 繁 お買い上げいただき、ありがとうございます。今回は新しいポータブルBluetoothスピーカー製品を立ち上げ、猫王ラジオに付着している見てよし、聴いてよし、使ってよし、遊んでよし製品体験を一貫して、より便利で簡単に音楽やサウンドコンテンツを楽しくお使いいただけるものと考えます。

バッテリーを使用しておりますので、お手元に届きましたら、より快適にご使用いただくために、オフの状態ですべて充電してからご使用ください。

## 📦 パッキングリスト

パッキングリスト	
1	本体 x 1
2	ハングタグ x 1
3	製品マニュアル x 1
4	データケーブル x 1

## 📖 操作方法



## ①Bluetoothランプ

温白色点滅:Bluetooth接続可能

温白色常時点灯:Bluetoothが接続されています

## ②電源オン&amp;オフ/ボリュームコントロール/録音コントロール

電源オン:ボタン3秒長押し

電源オフ:ボタン3秒長押し

ボリュームアップ:時計回りに回す

ボリュームダウン:反時計回りに回す

録画削除:3回短く押すとアーカイブされた録画が削除されます



Bluetoothリセット:短押し5回

録音:短押し2回、録音機能を入力し、30秒間録音することができ、録音を終了するには、短押し2回。

(ヒント:不完全な録音を避けるために、ウオーニングトーンが終了した後に記録してください)

録音のプレーバック:短い1回、録音のプレーバック機能を書き入れます

## ③スピーカー:音楽再生用

(\*\*:この部分は壊れやすいので、この位置を押さないでください)

④TYPE-C充電ポート:フリップカバーの下にあります

⑤充電ランプ:フラップの下にあり、充電中は赤色、フル充電時は緑色に点灯

 ハードウェアパラメータ

製品モデル:MW-P9I

製品サイズ:60.5mm×33.6mm×72.6mm

重量:68.2g

Bluetooth:5.0

接続距離:5メートル≤距離≤10メートル

スピーカー:4Ω 3W

アンプ出力:3W

ノイズキャンセル:>70dB

システム周波数応答: 120Hz~20KHz

MIC使用距離: ≤0.05m (\*\*注: 静寂な環境でお楽しみいただけます)

バッテリー: 3.7V/400mAh

充電インターフェース: TYPE-C

充電電圧: DC 5V=1A

## 注意事項

安全を確保するために、まず注意事項を注意深くお読みください:

1. 本製品の仕様および部品について、製造者はユーザーに通知することなく軽微な変更または調整を行う権利を留保します。
2. 水気の近くで本製品を使用しないでください。
3. 裸火の近くで使用したり、裸火に接触したりしないでください。
4. この製品の使用環境は: 0~45°C、この環境条件以上で使用しないでください。
5. 本製品を無断で改造、修理、取り外しをしないでください。
6. 承認番号は製品の背面に記載されています。
7. バッテリーが適切に交換されていない場合は、爆発の危険性があることに注意してください、バッテリー交換後、本製品の保証は終了します。故に必要なに応じて、プロの修理ポイントに行ってください。

## 保証

1年間のハードウェア無償限定保証付き。

メンテナンスの詳細については、[www.muzenaudio.com](http://www.muzenaudio.com)またはお近くの代理店までお問い合わせください。

Eメール: [info@muzenaudio.com](mailto:info@muzenaudio.com)

メーカー: 深セン市云動創想科技有限公司

住所: 深セン南山区粤海街道高新区社区高新南四道88号光启未来中心A座12階



## EN 尊敬的用戶：

JA  
繁


非常感謝您使用本公司的產品，此款產品是貓王推出的全新便攜式藍牙音箱產品，秉承了貓王收音機「好看，好聽，好用，好玩」的產品體驗，讓您能夠更方便、更簡單地與音樂和聲音內容輕鬆連接。

本品使用電池供電，為更好的體驗產品，請在拿到本產品時，優先關機狀態下充電兩個小時左右再進行產品使用。

## 包裝清單

包裝清單	
1	主機 x 1
2	吊牌 x 1
3	產品說明書 x 1
4	數據線 x 1

## 主機操作說明

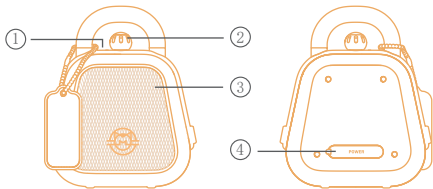

暖白燈閃爍:藍牙可連接

暖白燈常亮:藍牙已連接

②電源開關/音量控制/錄音控制:

開機:長按按鍵3s

關機:長按按鍵3s

音量增大:順時針旋轉

音量減小:逆時針旋轉

錄音刪除:短按3次,刪除存檔的錄音

藍牙重置:短按5次



錄音:短按2次,進入錄音功能,可錄音時長30s,再次短按2次結束錄音

(溫馨提示:請在錄音提示音結束後再進行錄音,避免出現錄音不完整的情況)

錄音播放:短按1次,進入錄音播放功能

③喇叭:用於音樂播放(\*\*註:此部分為易損部件,請勿用力按壓此位置)

④TYPE-C充電口:位於翻蓋下方,用於給設備充電

⑤充電指示燈:位於翻蓋下方,充電過程顯示紅燈,滿電狀態顯示綠燈



## 硬件參數

產品型號:MW-P9I

產品尺寸:60.5mm×33.6mm×72.6mm

產品淨重:68.2g

Bluetooth:5.0版本

藍牙連接距離:5m≤距離≤10m

揚聲器:4Ω 3W

放大器功率:3W

信噪比:>70dB

系統頻響:120Hz~20KHz

MIC使用距離:≤0.05m(\*\*註:周邊環境安靜的情況下)

電池:3.7V/400mAh

充電接口:TYPE-C

EN 充電電壓:DC 5V=1A

JA  
繁

### 重要注意事項

為確保安全,請先詳細閱讀及遵守以下的安全指示:

- 1.本產品的規格及產品細節,生產方有權在不通知用戶的情況下做一些細節修改或調整。
- 2.產品請在乾燥的環境使用。
- 3.產品不應該靠近或接觸裸露的火源。
- 4.本產品正常使用環境為:環境溫度:0-45°C,建議不要在超過此環境條件下使用本產品。
- 5.請勿擅自改裝、修理或拆除此產品,否則,無法享受保修服務。
- 6.核準號顯示於產品背面上。
- 7.注意,如果電池更換不當會有爆炸風險,如有需要請去專業維修點,更換電池後,本產品將不再享有保修服務。

### 產品汙染指數

產品有害物質名稱及含量						
部件	有害物質					
	(Pb)	(Cd)	(Hg)	(Cr VI)	(PBB)	(PBBS)
結構部件	0	0	0	0	0	0
主板	0	0	0	0	0	0
電池	0	0	0	0	0	0
線材	0	0	0	0	0	0
喇叭	0	0	0	0	0	0
螺絲	0	0	0	0	0	0
包裝	0	0	0	0	0	0

本表格依據SJ/T11364的規定編制。  
0:表示該有害物質在該部件所有均質材料中含量均在GB/T26572規定的限量的要求以下。  
X:表示該有害物質至少在部件的某一均質材料中的含量超出GB/T26572規定的限量要求。

EN  
JA  
繁

注:本產品應用環保設計理念,對有害物質進行了有效控制,“X”標識有害物質主要因技術水平限制,無法實現有害物質部件的替代。



本標識內數字標識產品正常使用狀態下的環保使用期限為10年

## 保固說明

提供一年的免費有限硬體保固服務。

有關保養詳情,請瀏覽[www.muzenaudio.com](http://www.muzenaudio.com)或聯絡我們的本地分銷商。

聯繫電郵:[info@muzenaudio.com](mailto:info@muzenaudio.com)

製造商:深圳市雲動創想科技有限公司

地址:深圳市南山區粵海街道高新區社區高新南四道88號光啟未來中心A座12樓

