

# Acoustic AUDIO

by Goldwood™

AA5102



## 5.1 MULTIMEDIA SPEAKER SYSTEM

Thank you for buying this Acoustic Audio System. Prior to first use, please read the manual carefully. If you ever have questions on your system, please contact your authorized dealer and their highly experienced staff will be more than willing to help.

**PLEASE NOTE: THIS UNIT IS SET ON 2.1 MODE UPON STARTUP, PLEASE PRESS THE 5.1 / 2.1 BUTTON FOR 5.1 SURROUND SOUND. TO PROPERLY CONNECT MP3, PC, YOU MUST USE THE ENCLOSED 3.5MM TO RCA CABLE.**

### Package Contents:

- (1) Sub-woofer Cabinet
- (5) Satellite Speakers
- (1) Remote Control
- (1) User Manual
- (3) RCA Cables
- (1) 3.5mm RCA Cable

### Specifications:

- Power Audio : 800 Watts Total System Power
- Drive Units: 3" x 5 full range magnetically shielded satellite speakers and powered sub-woofer
- Frequency Response: 40 - 20,000 Hz
- Power Supply: 110V
- Dimensions (W x H x D):
  - Sub-woofer - 5.5" x 10.75" x 11"
  - Satellites - 3.5" x 3.25" x 5.25"

### Features:

- 5.1 channel multimedia speaker for computer or home system
- Full audio spectrum performances, ideal for your favorite entertainment such as MP3, MP4, CD/DVD movies and digital playbacks
- Specially designed woofer cabinet for bass and resolution
- Comes with remote control and RCA stereo connection cables

## Using The Remote Control

- |                 |                     |
|-----------------|---------------------|
| 1. ST-BY        | 13. 5.1/2.1         |
| 2. SD           | 14. DVD             |
| 3. USB          | 15. AUX             |
| 4. BT           | 16. NEXT ►►         |
| 5. SLEEP +/-    | 17. PLAY/PAUSE ► II |
| 6. PREVIOUS ◀◀  | 18. FR +/-          |
| 7. FL +/-       | 19. CEN +/-         |
| 8. SW +/-       | 20. VOL +/-         |
| 9. SL +/-       | 21. SR +/-          |
| 10. 0-9 NUMBERS | 22. RESET           |
| 11. REPEAT      | 23. DISP +/-        |
| 12. EQ +/-      |                     |




## Remote Control Functions

1. **ST-BY/ON/OFF:** Use the "ST-BY" button to start the system
2. **SD:** Press "SD" to go into SD input mode
3. **USB:** Press "USB" to go into USB input mode
4. **BT:** Press to go to BT mode, connect you bluetooth capable device.
5. **SLEEP +/-:** Press "SLEEP+" and "SLEEP-" to time system to turn off
6. **PREVIOUS ◀◀:** Use "◀◀" to play the previous song
7. **FL +/-:** Use "FL+" and "FL-" to control the volume of the front left speaker
8. **SW +/-:** Use "SW+" and "SW-" to control the volume of the sub-woofer
9. **SL +/-:** Use "SL+" and "SL-" to control the volume of the surround left speaker
10. **0-9 NUMBER BUTTONS:** Use the number buttons to select the desired track
11. **REPEAT:** Use "REPEAT" to repeat the track
12. **EQ +/-:** Use "EQ+" and "EQ-" to turn equalizer on and off
13. **5.1/2.1:** Press "5.1/2.1" to change from 2.1 to 5.1 surround sound
14. **DVD:** Use "DVD" to go into DVD input mode
15. **AUX:** Use "AUX" to go into AUX mode
16. **NEXT ►►:** In USB/SD mode, press "►►" to play the next song
17. **PLAY/PAUSE:** Press "► II" to play or pause the music
18. **FR +/-:** Use "FR+" and "FR-" to control the volume of the front right speaker
19. **CEN +/-:** Use "CEN+" and "CEN-" to control the volume of the center speaker
20. **VOL +/-:** Use "VOL+" and "VOL-" to control the volume of all speakers
21. **SR +/-:** Use "SR+" and "SR-" to control the volume of the surround right speaker
22. **RESET:** Use "RESET" to reset all volume adjustments
23. **DISP +/-:** Use "DISP+" and "DISP-" to adjust the display illumination

**Note: if remote loses function, please replace the 2 AA batteries.**


## Front Panel

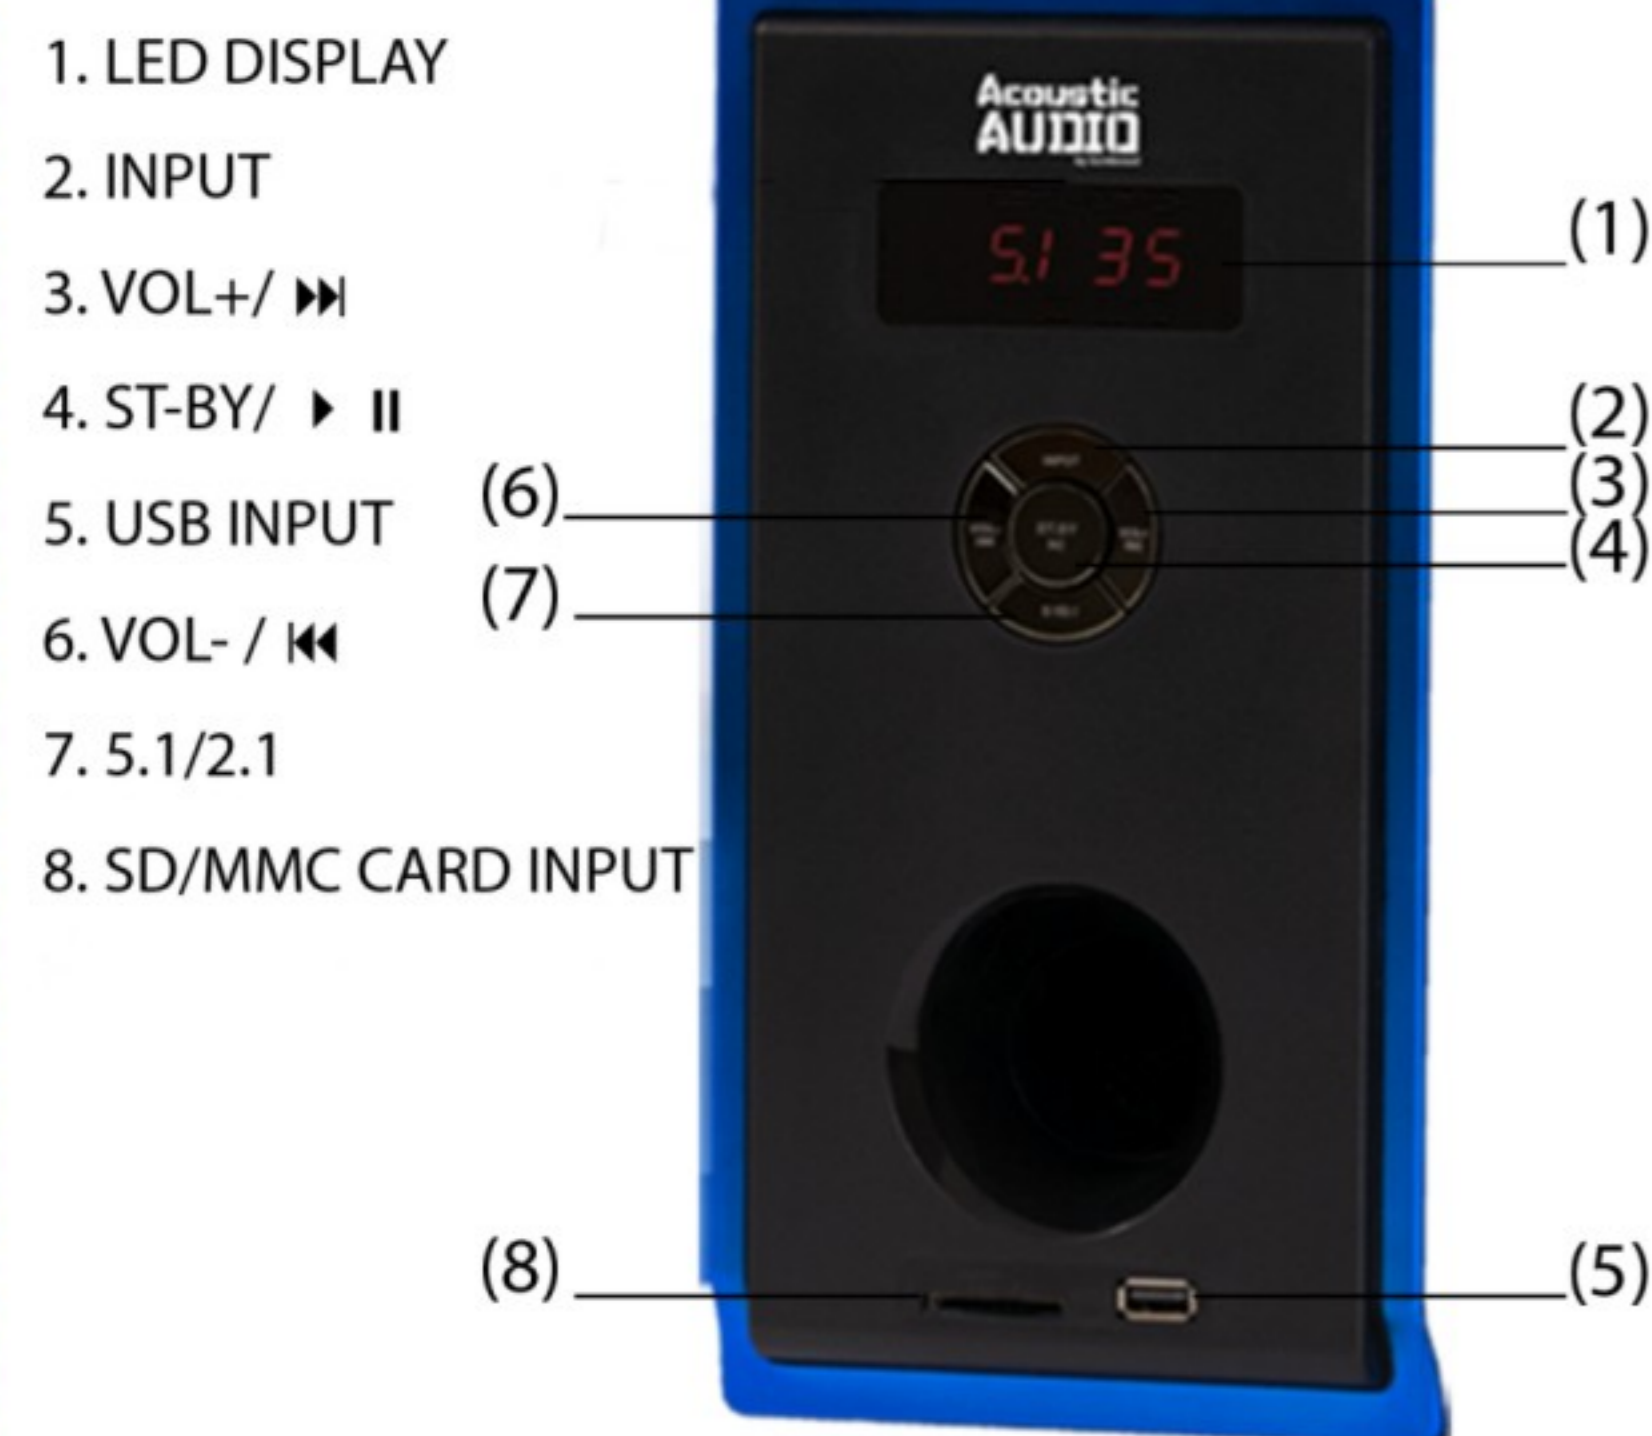

1. LED DISPLAY indicates the chosen input mode, volume level and surround mode.
2. INPUT allows you to switch between input modes. A blue light is illuminated under the chosen mode. The display will read "5.1" in 5.1 surround mode and "2.1" in 2.1 mode as well as the volume level which that particular mode is on.
3. VOL+ / ► allows you to both increase the volume (60dB maximum) and skip to the next song.


4. The system is on Stand By (ST-BY) mode when you switch on the power supply. The LED display will read "----". Press "ST-BY/PLAY/PAUSE" button once and it will default to DVD input mode and the LED display will read "5.1 35"; "5.1" being surround sound mode and "35" being the default volume at 35dB. Change back to "ST-BY" in any mode by pressing and holding the "ST-BY/PLAY/ PAUSE" button. Also use this button to Play or Pause the music.
5. USB INPUT allows you to connect mobile devices, laptops, tablets etc with a USB cord in order to use the remote control or front panel for function.
6. VOL- / ◀ allows you to both decrease the volume (0dB minimum) and go to the previous song in USB/SD mode.
7. 5.1/2.1 allows you to change between 5.1 and 2.1 modes. In 2.1 mode the system will utilize the sub-woofer and 2 front satellite speakers only, and in 5.1 mode it will utilize the sub-woofer and all 5 satellite speakers.
8. SD/MMC CARD INPUT allows you to insert an SD/MMC card with MP3,MP4 and other audible files in order to use the remote control or front panel for function.
9. BLUETOOTH MODE allows you to connect bluetooth capable device to the system. Use Input to get it BT mode.

## Rear Panel

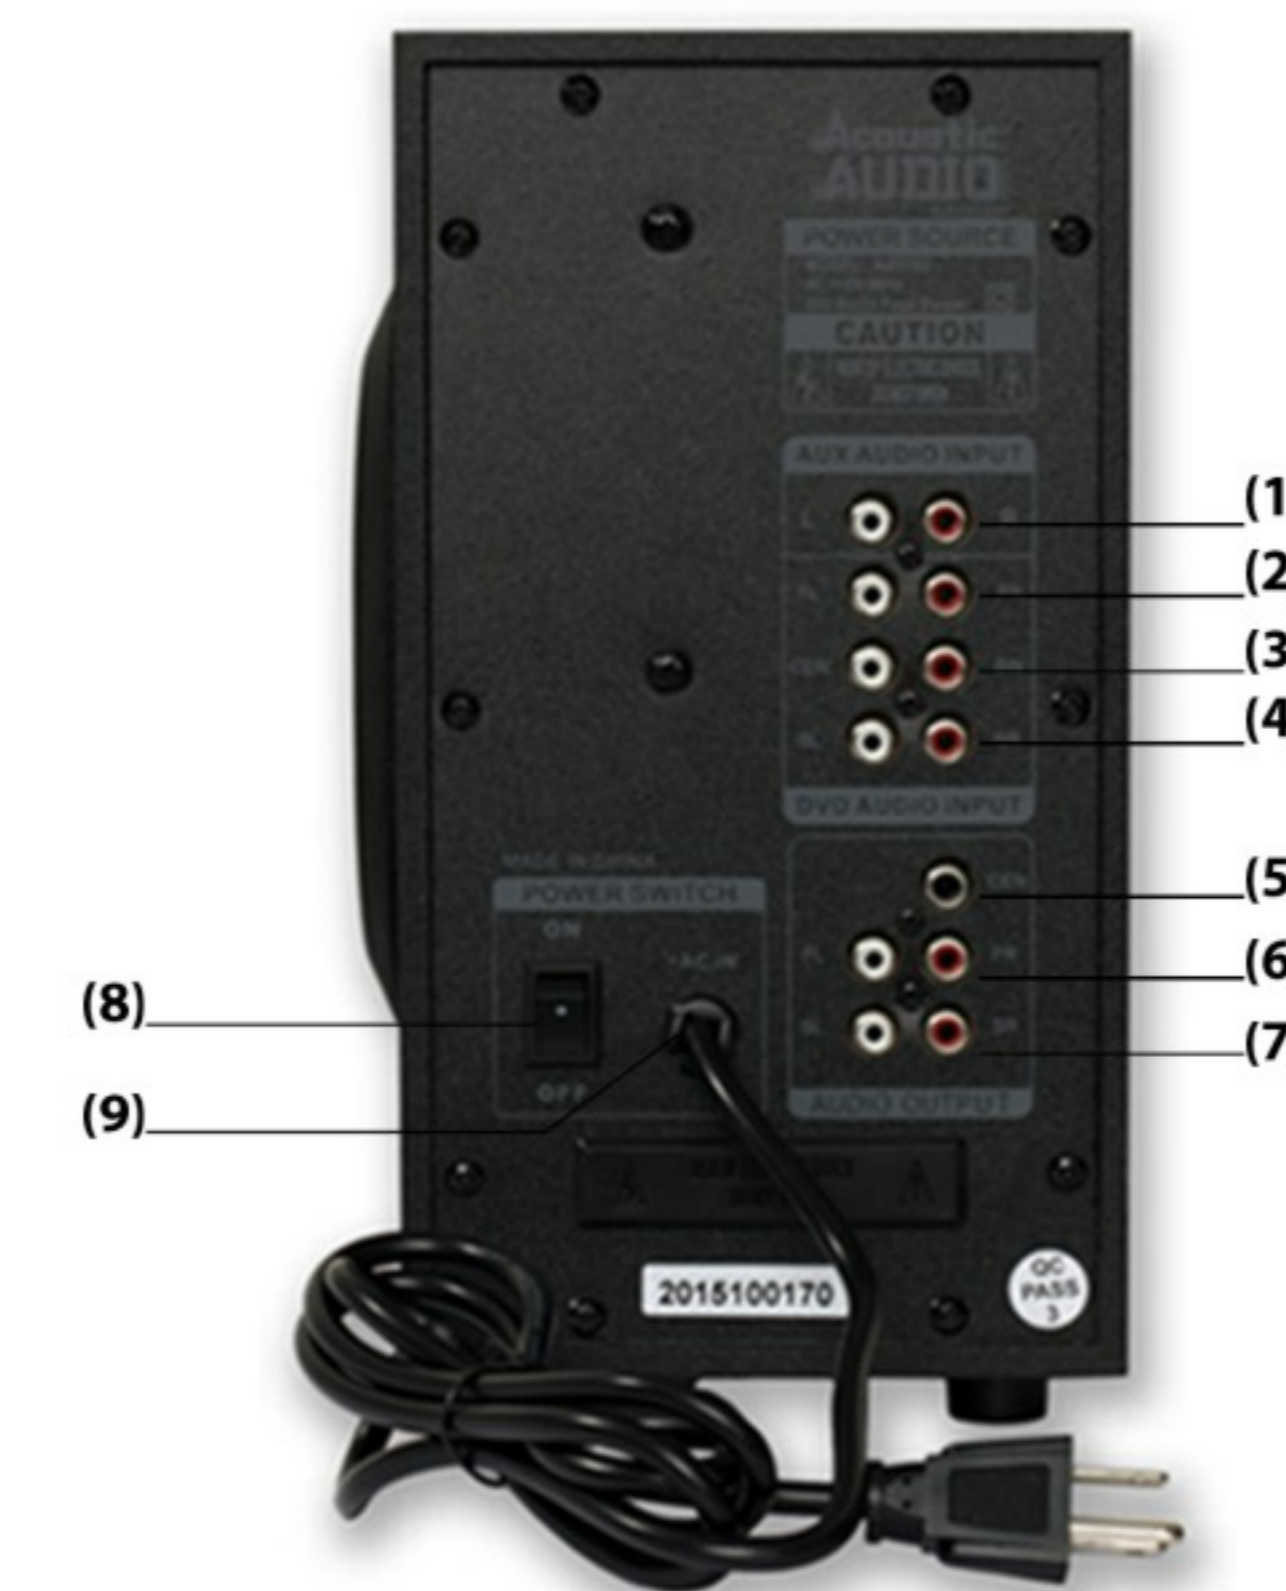

- |                      |                   |
|----------------------|-------------------|
| 1.) AUX Input        | 6.) FL/FR Output  |
| 2.) FL/FR DVD Input  | 7.) SL/SR Output  |
| 3.) CEN/SW DVD Input | 8.) POWER ON-OFF  |
| 4.) SL/SR DVD Input  | 9.) AC Power Cord |
| 5.) CEN Output       |                   |

## System Connections

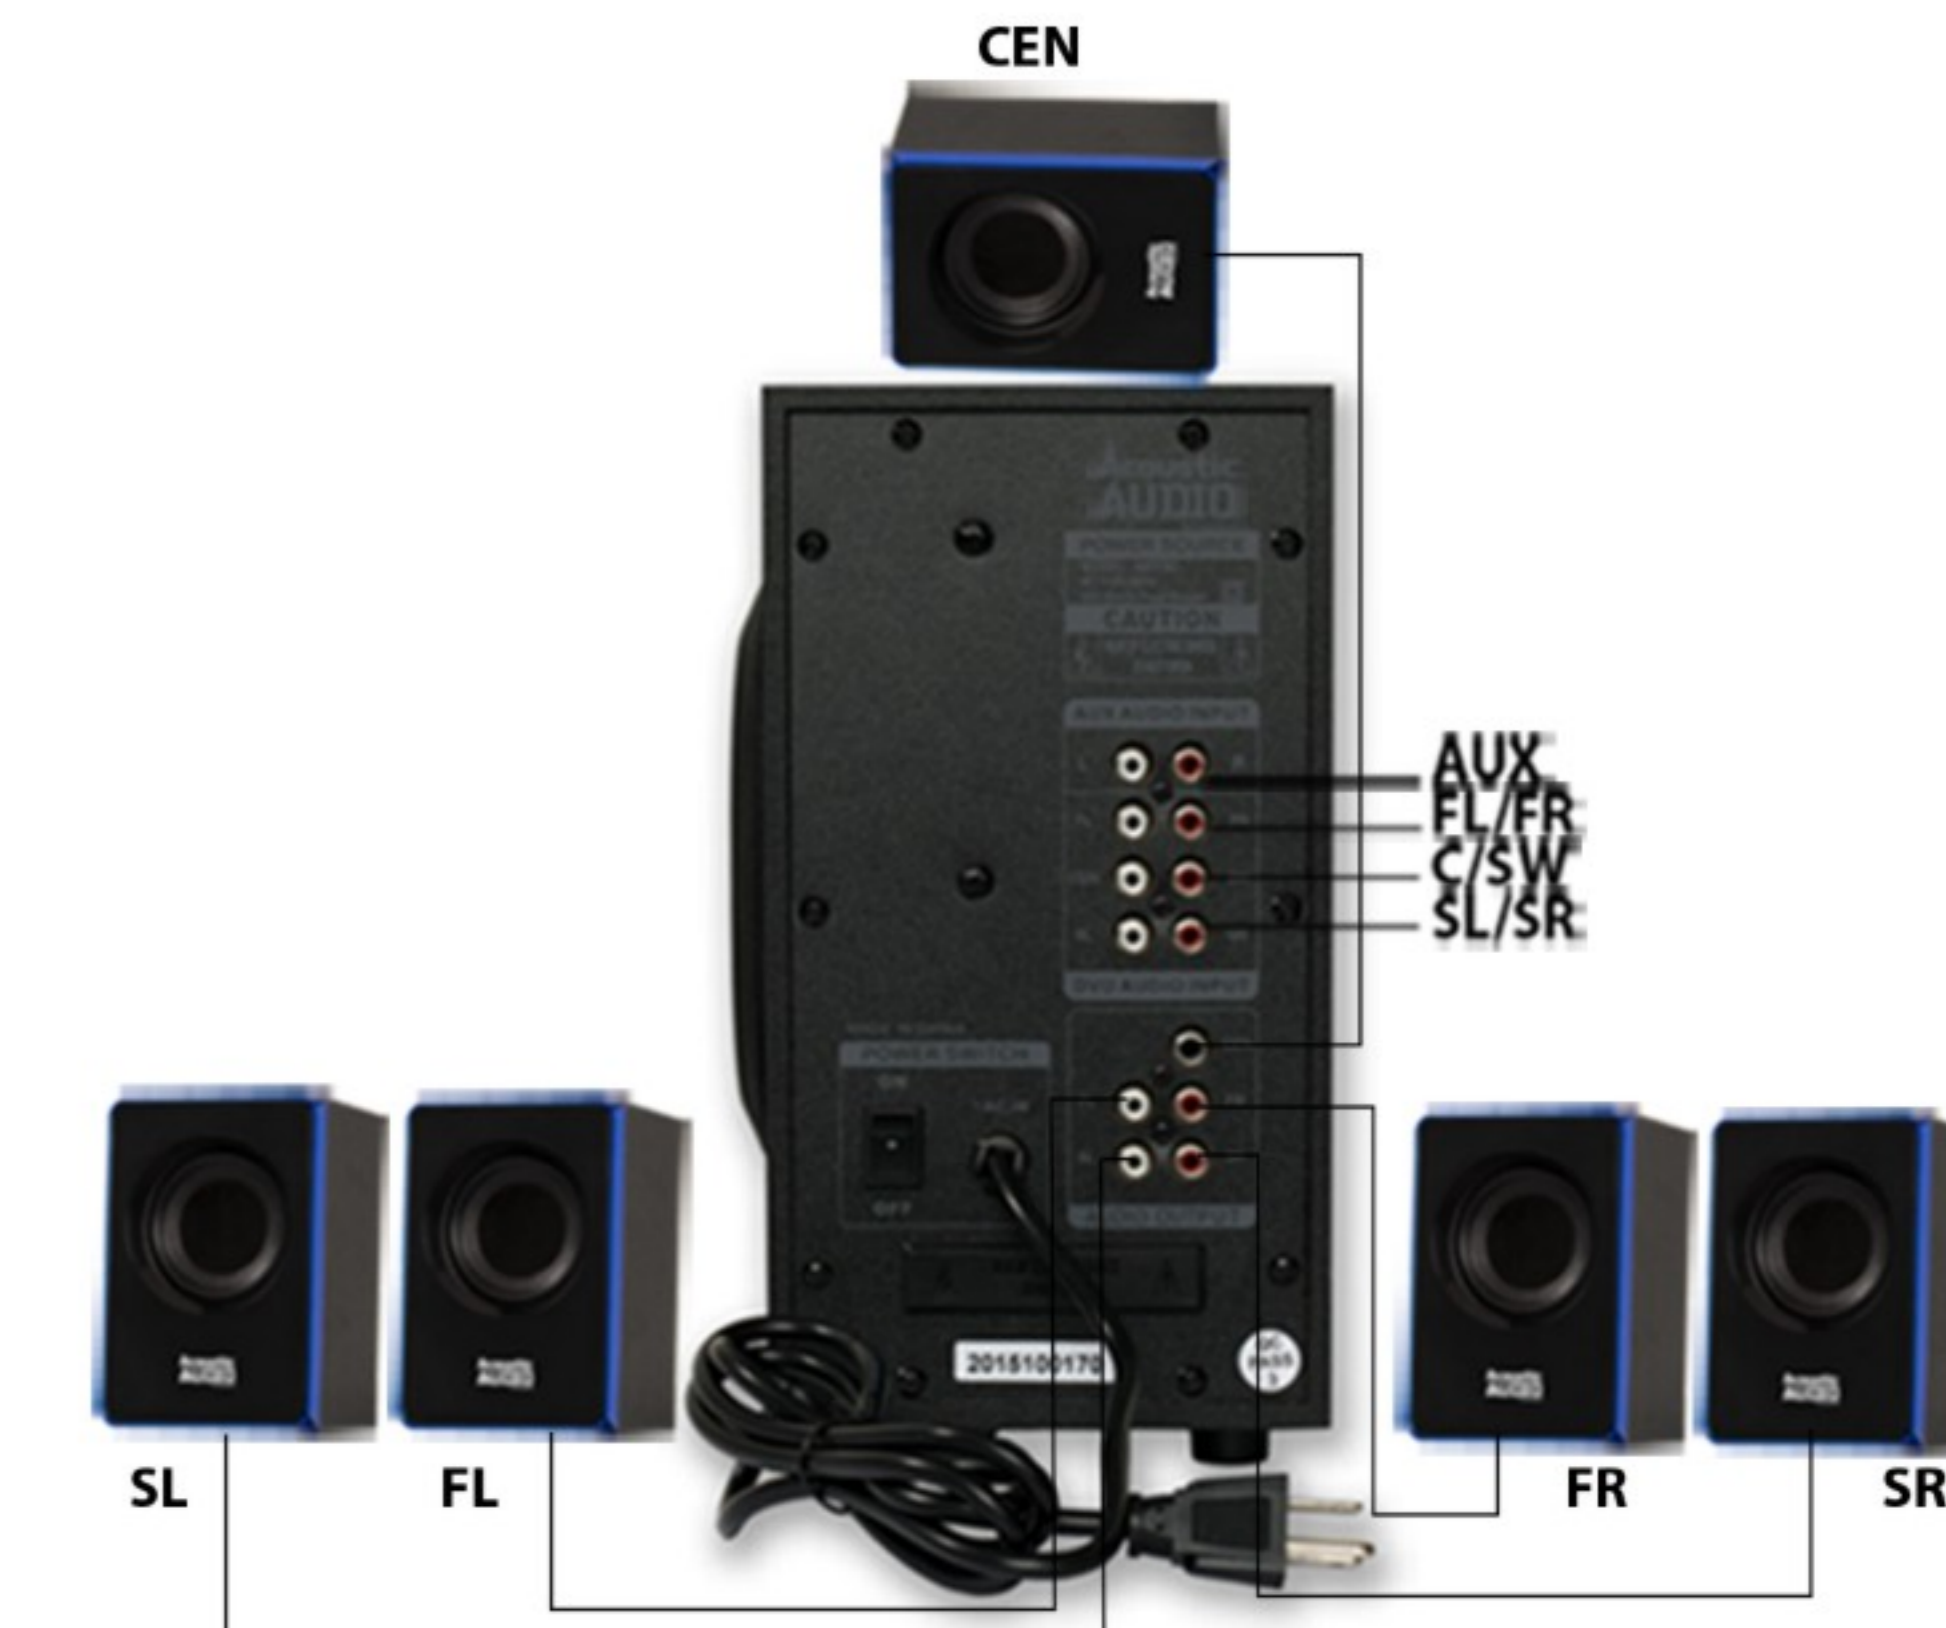

1. Insert all satellite speaker cables into their respective output sockets located at the rear of the sub-woofer. (FL : Front Left Speaker, FR : Front Right Speaker, SL : Surround Left Speaker, SR : Surround Right Speaker, CEN : Center Speaker)
2. For 5.1 surround sound, insert audio cables from your device into the respective DVD speaker sockets located at the rear of the sub-woofer above the satellite speaker sockets.
3. For dimensional sound, insert audio cable into respective AUX socket.
4. For clearer, stronger FM signal, insert antenna cord into Antenna socket.
5. Once you've connected the system in your preferred method, insert the power plug into ~120V wall outlet and switch power to ON.

**Note: Please avoid leaving magnetic objects near the system**

## FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the

following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

\*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.