


# THANK YOU



The **WWX-DZ-BT** is and easy to operate Bluetooth Source Controller with two zones of output that can be linked or controlled independently.


Please take a moment to read the instruction manual & connection guide before starting the installation.

**FCC INFORMATION** This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference in a residential installation.

- Control Volume +/-, Track Fwd/Prev, Pause & Aux In
- Zones can be controlled independently or together
- 3.5mm Zone Output and Aux Input Connections
- Amplifier Remote Turn-on output
- Sealed Construction designed for Marine Applications
- Mounting only requires a 1-1/8" hole

## DIMENSIONS

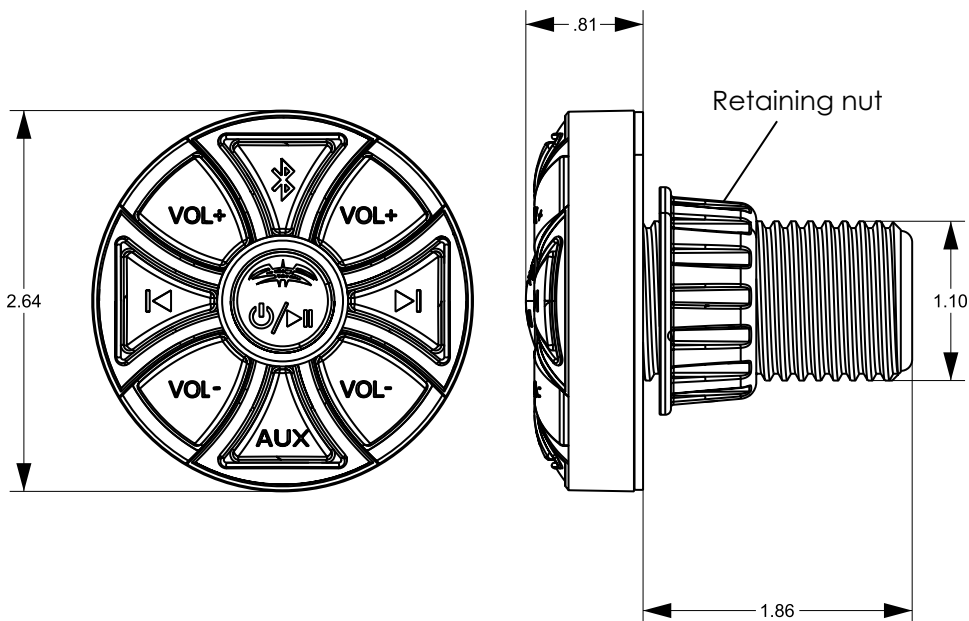

## MOUNTING INSTRUCTIONS

STEP 1: Locate desired location. Please refer to dimensions and check for clearance prior to cutting or drilling.

STEP 2: Drill or cut 1-1/8" hole.

STEP 3: Route wires through hole and then retaining nut.


STEP 4: Hand tighten retaining nut while holding the control panel in desired position.


## BLUETOOTH PAIRING INSTRUCTIONS

STEP 1: Turn on WWX-DZ-BT

STEP 2: If not already paired with another learned device, the WWX-DZ-BT will automatically enter pairing mode, which is indicated by the backlight flashing BLUE.

STEP 3: From your phone's Bluetooth pairing menu, find the WWX-DZ-BT and connect to it.

You are now paired to the WWX-DZ-BT. If you would like to pair to a new device, press and hold the  button which will put unit in pairing mode.

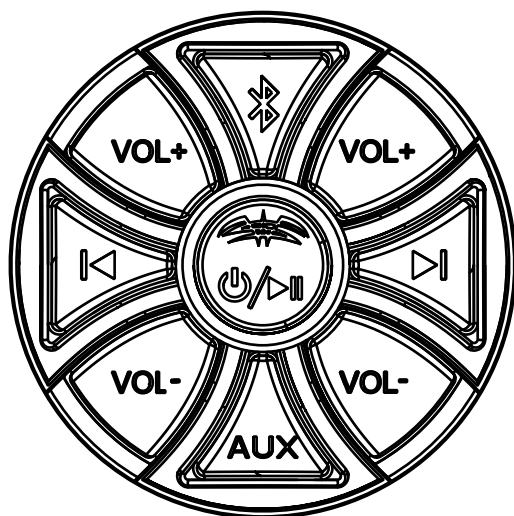

## **POWER/PLAY/PAUSE**

When unit is powered off, press and hold to power on. When unit is on and connected to Bluetooth audio source, short press will play and pause media. Press and hold will power the unit off.

## **BLUETOOTH**

Selects Bluetooth as the source. Also, press and hold to enter into pairing mode

## **AUX AUX INPUT**

Selects AUX Input as the source.

## **TRACK CONTROLS**

Selects Tracks on Bluetooth media device.


## **VOL+ VOL- VOLUME CONTROLS**

Operates audio level of Zones. When zones are unlinked, the volume buttons on the left operate Zone 1 and buttons on the right operate Zone 2. When unlinked, the zone 2 buttons will illuminate RED.

**To Link**, press and hold both **VOL+** at the same time. When linked, the buttons will flash and all four volume buttons will illuminate BLUE. In this state, the volume of both zones will increase and decrease in volume together when either of the volume controls are used. If the zones are at different levels when linked, the difference in levels will be maintained while linked.

**To Unlink**, press and hold both **VOL-** at the same time. When unlinked, the buttons will flash and the zone 2 volume controls will illuminate RED.

# WIRING DIAGRAM

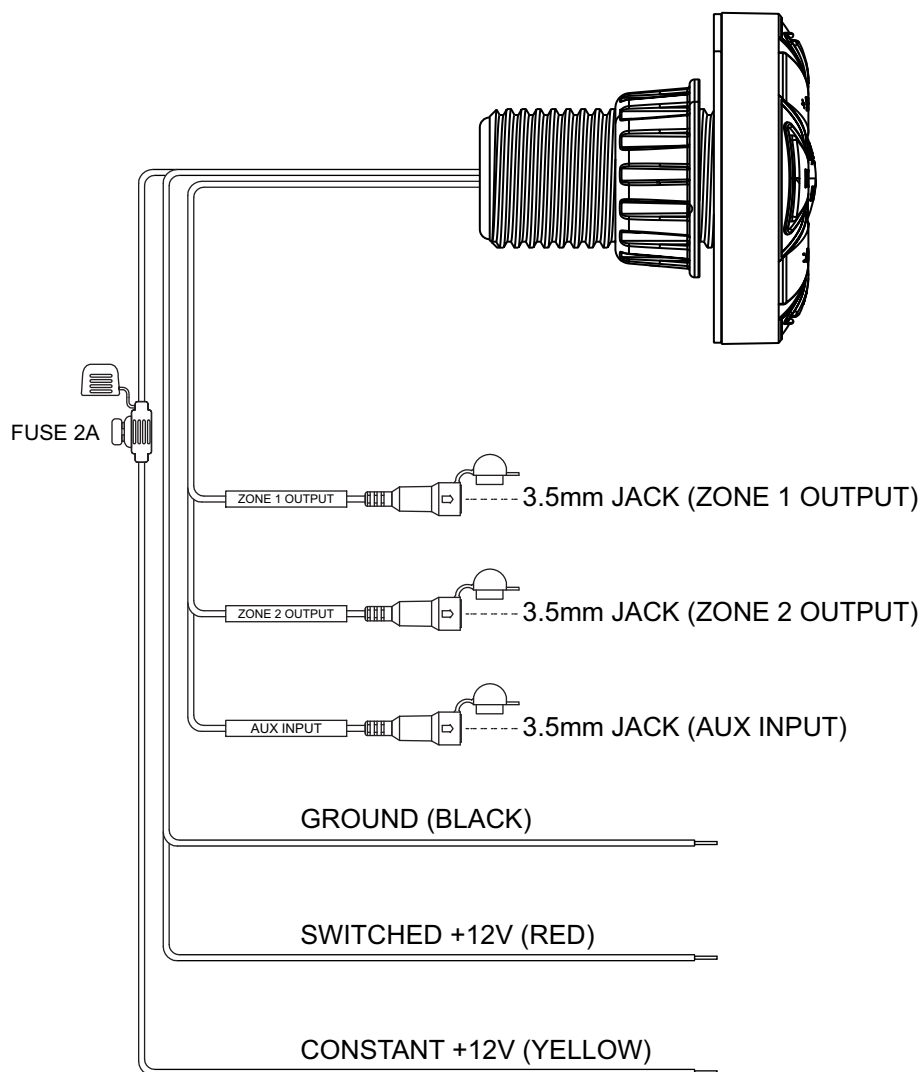

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

#### Radiation Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated without restriction from your body.